THE OMNI-COMPASS OWNER'S MANUAL

The Master Manual:
Its Philosophy, Its Mathematics, Its Mechanism, Its Results, and How to Wire It onto Your Stack

AJ Dubra
Owner and Developer

THE OMNI-COMPASS LLC
October 2026

The Omni-Compass Owner's Manual

The Master Manual: Its Philosophy, Its Mathematics, Its Mechanism, Its Results, and How to Wire It onto Your Stack

October 2026

Copyright © 2026 The Omni-Compass LLC. All rights reserved. No part of this book may be reproduced, stored or transmitted in any form or by any means, except as allowed by the Omni-Compass Evaluation License, without the written permission of The Omni-Compass LLC.

The Omni-Compass LLC reserves the right to change this book, the software it describes and their terms at any time, without notice. Every copy, export and printout of any part of this book carries this page, the LICENSE, the NOTICE and the Disclosures unchanged.

All patents, copyrights and trademarks covering the Omni-Compass engine, its mathematics and its software have been filed in the United States by The Omni-Compass LLC (no filing number is stated, and no grant, registration or approval is claimed). www.omni-compass.com

“Omni-Compass”, the Omni-Compass rose and the related names and marks are trademarks of The Omni-Compass LLC. Other names that appear in this book are the property of their owners and are used only to identify the systems Omni-Compass works with.

License. This book and the software it describes are proprietary and are not open source (SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0). They may be used only to evaluate Omni-Compass and to reproduce its published results, in simulation and on systems the reader owns or controls. Any commercial use, commercialization, monetization, production use, redistribution, hosted or managed service, or incorporation into any product or service requires a written Omni-Compass Enterprise License, signed by The Omni-Compass LLC and paid for. The full terms are printed in Appendix I.

Disclaimer. The software is provided “as is”, without warranty of any kind. Every result in this book carries its evidence class. A modelled result is a statement about a model; a software benchmark is a statement about the software it ran on; only a hardware meter speaks for hardware. Nothing in this book is a promise of a particular saving on a particular system: the only number that applies to a system is the one its own paired runs produce, on its own receipt.

Set in Liberation Serif and DejaVu Sans Mono, the text at 11 pt on a 16.5 pt line. Built from the repository by `docs/book/build_book.py`; the book and the code change in the same commit.

The Omni-Compass LLC · www.omni-compass.com

Contents

Foreword x

Preface xi

Prelude: A Night on the Cluster xiii

Introduction: The Problem, the Idea and the Promise xv

The key: GAIN, EVEN and LOSS xvii

What You Are Looking At xix

Quick Reference: The Card for the Glove Box xxii

Executive Summary xxv

Disclosures, Declarations and Disclaimers xxx

Part One. The Philosophy and the Theory 1

1. What Omni-Compass Is 1
2. The Seat: One Governor over the Muscles 9
3. The Unified Circle Principle 17
4. The Four-Piece Engine 20
5. The Compass 21
6. Basins, Polarity and the Dual-Basin Engine 22
7. The Reflex Rule: One Body, One Brain 23

Part Two. The Mathematics 25

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

8. The Canonical Declaration 26
9. The Engine: Eight Equations and One Control Law 31
10. The Canonical Engine 36
11. The Closed Circle: Why It Cannot Leave Its Compass 41
12. Closing the Circle in the Engine 43
13. The Tracking Theorem 44
14. The Conveyance Law 47
15. Formal Status of the Mathematics 51
16. The Max, Formally: Definitions, Guarantees and Measures 52
17. The Mechanism of Action 59
18. The Engine That Stands: Omni v7 71
19. The Engines and Their Audit 79

Part Three. The Physics: the Compass and the Nervous System 82

20. The Compass: Push, Pull and the Two Forces 82
21. The Physics of a Processor 91
22. The Two-Way Nervous System 92
23. The Nervous System in Detail 98

Part Four. The Body: Muscles, Realms and Organisms 100

24. The Muscles, the Realms and the Seven Organisms 100
25. The Spine: the Base Every Stack Runs On 112
26. The Four Realms 116
27. The Realm Muscles 118
28. The Domain Map 134
29. The Problem Map 140
30. The Seven Organisms and the Benchmark Grid 147
31. The Metrics Catalog 148

Part Five. The Harness and the Wiring 153

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

32. The Plug, the Adapters and the Wire Check . . . 153
33. The Harness . . . 164
34. The Wiring Guide . . . 165
35. Before You Start, and the Eight Levels . . . 169
36. Stack by Stack . . . 179
37. The Integration Manual . . . 205
38. Running the GPU Benchmark . . . 217

Part Six. Operating It **223**

39. The OFF Switch, the Rules, and the Log . . . 223
40. Maintenance, Upgrades and Security . . . 228
41. The Operator Manual . . . 231

Part Seven. Proving It **239**

42. The Receipts, in Their Totality . . . 239
43. How to Read the Results . . . 247
44. The Benefit Sheet: One Number per Benchmark . . . 254
45. The Dossier: Every Result in One Place . . . 267
46. Paired Runs and Receipts on Your Own System . . . 279
47. Evidence Classes and How to Read a Result . . . 284
48. Results to Date . . . 286
49. Wire In, or Watch: The Verdict per Knob . . . 327
50. The Pilot Protocol and Kit . . . 379
51. The GPU Bench . . . 381
52. The GPU Preregistration . . . 388
53. The Realms Preregistration . . . 401
54. The Compass Law on Real Kubernetes: Preregistration . . . 416
55. The Evidence Ledger . . . 450
56. The Claims Register . . . 458

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

57. Comparison with Existing Controllers . . . 475
58. The State of Play . . . 479

Part Eight. Value, License and History **488**

59. Where the Value Comes From . . . 489
60. The Economics of a Receipt . . . 500
61. Due Diligence . . . 501
62. License and Commercial Terms . . . 502
63. Licensing: Questions and Answers . . . 503
64. Third-Party Notices . . . 505
65. The Enterprise License: Standard Terms . . . 506
66. Patents and Trademarks . . . 509
67. Security Policy . . . 511
68. Repository Standards . . . 512
69. Python, C++ and the Seal . . . 514
70. The Founder's Working Notes . . . 515
71. The Road to the Engine That Stands: Omni v5 and v6 . . . 521
72. History . . . 529

Back Matter **539**

Glossary . . . 539
Appendix A. Command Reference . . . 543
Appendix B. File Map . . . 547
Appendix C. The Equations in Full . . . 550
Appendix D. Metrics . . . 553
Appendix E. Troubleshooting . . . 556
Appendix F. Evidence Map . . . 559
Appendix G. The Muscles: What Each Is For, and How It Is Wired . . . 562
Appendix H. Source of the Engine . . . 763

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Appendix I. The License 1171

Index 1183

Contact 1204

List of Figures

Every figure is drawn from the code it pictures, by one of two kits (`docs/book/figures.py`; `docs/book/schematics.py` for the wiring schematics, block diagrams, flowcharts, timing diagrams, state machines, the receipts charted from their own tables and the grids), and printed where the text first needs it; the same drawings stand beside the text on GitHub, in `docs/book/figures/`. A chart of a receipt is read by the reading key: it pictures the table and adds nothing to it.

Figure 1. Block diagram: the verdict's paired trial around a slow knob 3

Figure 2. State machine: the governor's modes 4

Figure 3. One pedal, no brake: the modes and the two switches 5

Figure 4. The compass band, its cushions, and the smoothing of the force 7

Figure 5. The engine's six states, their couplings and the control law 33

Figure 6. The double well of the alignment and the cubic potential of the stress 34

Figure 7. Block diagram: from the observations through the engine to the authority 35

Figure 8. Modelled trace: the engine's six states answering a pressure pulse 37

Figure 9. One decision of the governor, from the senses to the audit 38

Figure 10. Block diagram: the compass law as a closed loop on one muscle 83

Figure 11. Curve: the damping gain the law sets from a muscle's response time 86

Figure 12. Grid: the force over the band position and its rate of change 87

Figure 13. Modelled trace: the compass law answering a load step on one muscle 90

Figure 14. Logic diagram: the nervous system's authority to add and to give back 93

Figure 15. Flowchart: the release gate, reasons 1 to 4 95

Figure 16. Flowchart: the release gate, reasons 5 to 8 and the release 96

Figure 17. Grid: the families of the spine and of the Physics / Robotics / Autonomous realm 102

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Figure 18. Grid: the families of the Compute / AI / Cloud realm 103
Figure 19. The seven organisms on the spine 105
Figure 20. Grid: the families of the Energy / Facility / Industrial realm 106
Figure 21. Grid: the families of the Distribution / Specialized realm 107
Figure 22. The three loads: an organism's own load, the climb and the line 108
Figure 23. Grid chart: the seven organisms at every size and run count, modelled 109
Figure 24. Grid chart: the seven organisms at every size and run count, with the real cluster inside 111
Figure 25. The two-way plug: one wire out, one wire in 154
Figure 26. Flowchart: the wire check, steps 1 to 4 157
Figure 27. Flowchart: the wire check, steps 5 to 7 and the verdict 158
Figure 28. State machine: the life of one muscle under the plug 159
Figure 29. The muscle SDK's runtime: what happens to one command 161
Figure 30. Flowchart: the implementer's eight phases and their gates 170
Figure 31. Wiring schematic: Kubernetes in the cluster, levels 2 to 4 172
Figure 32. The eight levels of an installation 174
Figure 33. Flowchart: the verdict's trial on one step 178
Figure 34. Timing diagram: a give-back trial from reference to verdict 179
Figure 35. Wiring schematic: a managed cloud cluster, the machines alone 182
Figure 36. Modelled trace: one pedal over a burst, machines against demand 183
Figure 37. Flowchart: parking and waking a machine in the cloud 185
Figure 38. Wiring schematic: a database behind its connection pooler 186
Figure 39. Wiring schematic: three independent simulators, each on its own native controller 188
Figure 40. Wiring schematic: a message broker's consumer group 191
Figure 41. Wiring schematic: a cache's memory ceiling 193
Figure 42. Wiring schematic: a drone swarm's cruise override 194
Figure 43. Wiring schematic: a database's storage-engine cache 196
Figure 44. Flowchart: the direction rule of a cache knob 198
Figure 45. Wiring schematic: a buffer pool resized online in the server's own chunks 199
Figure 46. Wiring schematic: the machine's frequency governor under the processor's meter 201

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Figure 47. Wiring schematic: the data center under the servers 203

Figure 48. Timing diagram: the governor's clocks against the native controllers' own 224

Figure 49. Flowchart: the three ways a governor stops 225

Figure 50. Timing diagram: the hand-back after a reset, a kill and a death 226

Figure 51. Deployment diagram: the governor on a managed cluster 229

Figure 52. Flowchart: one paired run, native against Omni-Compass on top, the pairs 280

Figure 53. Flowchart: one paired run, from the pairs to the three-run table 281

Figure 54. Flowchart: from the audit to the receipt, the table and the one number 285

Figure 55. Wiring schematic: the response-time feed and the line 288

Figure 56. Receipt chart: Omni-Compass on top of Goldilocks and the VPA's recommender, the judged rows 291

Figure 57. Receipt chart: on top of Goldilocks, the rows shown and not judged 292

Figure 58. Receipt chart: Omni-Compass on top of KEDA's HTTP add-on, the judged rows 293

Figure 59. Receipt chart: on top of KEDA's HTTP add-on, the rows shown and not judged 294

Figure 60. Receipt chart: Omni-Compass on top of KEDA on the CPU target and requests in flight, the judged rows 295

Figure 61. Receipt chart: on top of KEDA on the CPU target and requests in flight, the rows shown and not judged 296

Figure 62. Receipt chart: Omni-Compass on top of CruiseKube, the judged rows 297

Figure 63. Receipt chart: on top of CruiseKube, the rows shown and not judged 298

Figure 64. Receipt chart: the capacity test at four caps 299

Figure 65. How a receipt came to be: the governor's inputs beside the service's outputs 300

Figure 66. Flowchart: one tick of the grid conductor 302

Figure 67. The load schedules of the cloud sets: two bursts and the real day 303

Figure 68. Receipt chart: the seven organisms under the three loads 309

Figure 69. Chart: the benefit sheet, one number per benchmark, the newer half 311

Figure 70. Chart: the benefit sheet, one number per benchmark, the older half 312

Figure 71. Wiring schematic: a graphics card, two wires 384

Figure 72. Block diagram: the two wires of a card as an antagonist pair 386

Figure 73. State machine: the two-wire card governor 387

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Figure 74. Flowchart: the toy gate before any engine change runs for real 499

Foreword

I built Omni-Compass to sit on top of what already exists. Kubernetes, the GPU driver, the building controller, the battery inverter, the robot's servo loop: those are muscles, and they are good muscles. What none of them has is one brain that reads all of them at once, holds each of them inside its safe range, and puts every setting back exactly where it found it when it stops. That brain is Omni-Compass.

Every machine already has a controller. Kubernetes has its autoscaler. A graphics card has its firmware. A building has its thermostat loop, a battery has its charge controller, a power grid has its tap changers, and a robot has its servo. Engineers spent decades making these controllers safe, and they are. But each one was built to watch one thing and to protect that one thing. None of them sees the whole body. None of them knows that the cooling loop is holding back the processor, or that the autoscaler is adding machines the database cannot feed. So each one plays it safe in the middle of its range, because playing it safe is its whole job. The headroom between the middle and the edge is paid for every hour and almost never used.

That gap is what I set out to close. Omni-Compass is a **supervisory governor**: one brain over the muscles you already run. It never replaces them and it never competes with them. It reads them, it decides, and it writes one setting at a time through a two-way plug: one wire in, one wire out. Before it writes anything, it takes a snapshot. When it stops, every setting goes back to that snapshot.

Why a compass. A compass always points home. Every muscle has a safe band, and the compass holds the muscle inside that band, with a cushion of 5% at each edge. It works with two forces that pull against each other, one toward more and one toward less, and it moves smoothly, never hammering. A system that is closed, bounded and pulled toward a center cannot run away. That one idea is the root of the whole engine, and the first part of this book explains it.

The rule I will not bend: do no harm. Omni-Compass must never cause a LOSS against the system's own native controller. Where it cannot bring a muscle a gain, that muscle stays native. This is not a promise on paper. It is a trigger in the code (`omnicompass/verdict.py`), checked on the muscle itself, step after step. A step that costs the muscle more for each piece of work is undone.

The max is the default. Most tuning tools try to shave a little off. Omni-Compass rides the edge instead: every muscle runs up to its own limit, read live from the system, never past it and never below what native gives. The energy it takes to do more work is **power given**, shown beside the work, the speed and the wear it bought. It is never called a loss. Anyone can turn the dial down from the max. Nobody has to.

One pedal. I wanted it to drive like an electric car. Push the pedal for more, lift off for less. Lift off all the way and the settings drift back toward native. Reset hands everything back. If the governor ever crashes, its lease

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

runs out and the plug walks every setting home, step by step. The kill switch is separate and instant, and it exists for security, not for daily driving.

How I want it judged. Every benchmark in this book has exactly two arms: native, and Omni-Compass on top of native. There is no third arm and no other name. Every result was run three separate times, under rules written down before the first run, and every row is shown, losses included. Each reading is one word, **GAIN**, **EVEN** or **LOSS**, decided by what the gauge is for. A result from our own model is labeled as a model; a result from live software is labeled as live software; only a meter speaks for hardware. Where we lost, the book says so, and we went to find out why. Nobody outside The Omni-Compass LLC has reviewed or approved these results, and every table says that too.

What this book holds. This manual is the whole of it: what the governor is, the mathematics it runs on, how its nervous system reads and writes, how it is wired to each kind of machine, how to turn it on one level at a time, how to switch it off, and how to prove on your own system what it does. Keep it with the code. When the code changes, this manual changes in the same commit.

On this edition. This edition is written for the referee and the underwriter as much as for the engineer. Every result in it was run three separate times on a frozen, fingerprinted engine, under rules written before the first run, and is reported with every loss beside every gain. Where a number is from a model it says so; where a test could not see an effect it says so; where something has not been shown it says so, in its own section. Nothing in this manual asks to be believed on our word: every table names the runs it was made from, every run's raw files are in the repository, and every table can be rebuilt from them by the tool it names.

Where to begin. Read the front matter first. It tells you what you are looking at before it asks you to touch anything. Then wire it one level at a time, watch it before you let it write, and judge it by your own receipts.

AJ Dubra Founder, The Omni-Compass LLC

Preface

This is the Owner's Manual, the master: everything about Omni-Compass in one book, for whoever owns or licenses it and so must know the whole mechanism. I wrote it so that the owner understands what they hold: not only which wire goes where, but why the governor behaves the way it does, where its law comes from, how it is built, and how to prove on their own system what it does for them. The Operator's Manual is the shorter book for the people who run it.

The book is in eight parts, and it can be read in two ways.

You are	Read
CEO, board member, investor	the Foreword, the Prelude, the Introduction, the Executive Summary, Part One, the Results to Date, and Part Eight

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

You are	Read
CTO, architect, head of platform	Parts One to Four, then the eight wiring levels in Part Five, then Part Seven
The engineer wiring it	everything, in order. Do not skip the wire check or the watch level
Data-center, facility or energy operator	the Quick Reference card, Part One's chapter on the reflex, Part Five (levels five to seven, the processor and the data center under the servers), Part Six
Site reliability engineer, on call	the Quick Reference card, Part Six (the switches and the log), the troubleshooting appendix
Auditor, diligence team	Part Two (the mathematics), Part Seven (the proof), Appendices C, F and H
Procurement and counsel	the Disclosures, the license in the back matter, Part Eight

Part One, the philosophy and the theory, sets out the closed circle: a system that is closed, bounded and pulled toward a center cannot run away, and everything it does is a return. **Part Two, the mathematics,** gives the eight equations and the control law that make the circle exact, with the theorem, the declaration and the audits that hold them fixed. **Part Three, the physics,** brings the law into the machine: the compass, push and pull, the band and its cushions, the physics of a processor, and the two-way nervous system. **Part Four, the body,** lays out the muscles, the spine, the four realms and the seven organisms. **Part Five, the harness and the wiring,** is the universal plug and the step-by-step work of wiring Omni-Compass onto a stack. **Part Six, operating it,** is the OFF switch, the rules and the log. **Part Seven, proving it,** is every rule written before a run and every result after it. **Part Eight** is value, the license, the seal and the history.

Conventions. `Code` is a command, file or switch exactly as typed. "Native" means a system as it runs today, without Omni-Compass. "Muscle" means any machine, service or controller Omni-Compass can read and set. "Knob" or "lever" is one setting on a muscle. "The band" is a knob's or a service reading's safe range. A step that writes to a system is marked **WRITES**. Every result carries its evidence class: T for a theorem, V for verification of the code, S for our own models (modelled), L for live software, P for a physical meter.

Some chapters gather documents that were written as the work went on, each at the moment its result came in. They are kept as they were written, because the record of how a result was reached is part of the proof. Where two chapters give different figures for the same thing, the later run and the State of Play govern.

The standards every page of this manual keeps. A referee or an underwriter reading this manual should expect, and will find, the following discipline throughout, because it is the discipline the repository enforces on itself:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1. **Two arms, always.** Every benchmark compares native against omni, the same system with Omni-Compass on top, on the same machines, with the same work at the same moments. Omni-Compass is never run standalone and never compared as a competitor to the controller it sits on.
2. **Preregistered, then run.** The arms, the knob, its cover, the gauges, their directions and the readings are written down and committed before the first counted run (`docs/*_PREREGISTRATION.md`). Rules are frozen on one tuning case that is shown and never counted, then applied unchanged to untouched cases. Any amendment made after a result has been seen is written into the preregistration with its time and reason, and the table that carries the result says so.
3. **Three separate runs, one rule.** Every result is run three times as separate GitHub runs (A, B and C) on the same frozen engine, and every judged row reads exactly one of: GAIN in all three of our runs, LOSS in all three of our runs, no difference beyond the noise (with the count of runs in which the interval crossed zero), or the runs disagree. Nobody outside The Omni-Compass LLC has reviewed or approved these results, and every three-run table says so.
4. **Every row, losses included.** A row that went against Omni-Compass is in the table beside the rows that went for it. When Omni-Compass loses, the first suspect is our own wiring, native setup or scoring; when that is fixed, the test is run again and the loss stays in the record. A benchmark may be left unpublished; it is never published with rows cut.
5. **Nothing read across engines.** The engine is frozen and fingerprinted (`OMNI_V1.json`, `OMNI_V2.json`, `OMNI_V3.json`, `OMNI_V5.json`, `OMNI_V6.json`, `OMNI_V7.json`). Any change to a rule, gain, guard, preset or muscle makes the next version, and every result is run again on it. Every table made by rule checks the engine of each run it reads and refuses to mix them.
6. **The raw files live with the code.** Every finished run's files are copied into `results/live/raw/run-<id>/` with one SHA-256 manifest per repetition, and every table names the runs and the commit it was made from. Anyone with the repository can recompute every table from the files it names.
7. **Do no harm.** Omni-Compass moves a knob only where a paired trial on the muscle itself shows the muscle never behind for it (the verdict, `omnicompass/verdict.py`, with its 2% allowance). Where it cannot improve a knob, that knob stays native, and the result says "nothing for Omni to move".

Prelude: A Night on the Cluster

This is a story, not a result. It follows one night on one cluster to show, in plain order, what each part of this book does. The shop, the times and the settings are made up for the story. The measured results are in the chapters on proof, each with its evidence class.

9:00 p.m. The shop is quiet. An online store runs on Kubernetes. Its native controllers are the ones almost everybody uses. The Horizontal Pod Autoscaler watches the average processor load and adds copies of the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

web service (pods) when that load passes its target. The cluster autoscaler adds machines when the pods no longer fit. A careful engineer picked their settings months ago, for the worst day she could imagine, and she picked them well. Tonight the cluster runs on its floor of two machines, and every customer gets an answer in a blink.

A week earlier, Omni-Compass went on in watch mode. For seven days it read every gauge and wrote nothing. It learned how fast each pod starts, how the response time moves when the load moves, and where each setting's safe band lies. Then the team ran the wire check: every reading came from the place it claimed, every lever moved the thing it claimed, and every write was read back. Only then did they turn it to govern. Every setting it would touch was saved in a snapshot first.

9:40 p.m. The sale starts. In two minutes the requests double. The native autoscaler does exactly what it was built to do, but it is built to wait: it needs the average load to climb, then it needs a decision, then each new pod needs time to start. While it waits, customers wait. With Omni-Compass on top, the compass sees the response time slide toward the edge of its band and into the cushion. It pushes. It raises the autoscaler's floor of pods, a setting the autoscaler already respects, so new pods start before the average catches up. It does not fight the autoscaler and it does not go around it. It moves one setting, through the plug, and reads it back.

10:15 p.m. The database starts to strain. More web pods mean more connections to the database, and the database has a limit of its own. A controller that watches only the web service would keep adding pods and deepen the jam. Omni-Compass sees the whole body. One body, one brain: before it takes the next step for the web service, it checks what that step would do to every other part. The step that would push the database past its own cushion is refused. Nothing is pushed into a loss to buy a gain somewhere else. The web service holds where the database can still keep up, and the queue drains instead of growing.

11:30 p.m. The rush fades. The pedal lifts. Omni-Compass does not drop everything at once, because a sudden drop is how systems stumble. It eases each setting back toward native along a smooth curve. The extra machines go away as the work goes away. The energy the cluster used during the rush shows up in the report as power given, beside the work it bought and the minutes customers did not spend waiting.

1:00 a.m. Idle. The pedal is lifted all the way. The cluster sits on its floor of two machines again, exactly where the engineer left it. Omni-Compass keeps reading every second. Staying native is its live decision, made again each second, not a verdict from some earlier run.

3:12 a.m. Something breaks. An upgrade restarts the machine that runs the governor, and Omni-Compass stops in the middle of its work. Nobody is awake. Nothing bad happens. The governor's lease runs out, and the plug walks every setting back to its snapshot, step by step. The native controllers keep running as they always have, because they never stopped. When the governor comes back, it starts from what it reads, not from what it remembers.

7:00 a.m. The morning report. On a live system, the proof does not come from a feeling that the night went well. It comes from paired runs: the same work, run once on native and once with Omni-Compass on top, and compared gauge by gauge. Every gauge gets one word. Time waited that fell reads **GAIN**. Work done that

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

rose reads **GAIN**. A difference inside the noise reads **EVEN**, and the report says so plainly. A gauge that moved the wrong way reads **LOSS**, and it stays in the report until its cause is found and fixed. The energy spent on extra work reads **power given**, never a loss.

What the night shows. Every part of that night is a chapter of this book:

- the watch mode and the wire check are in the chapters on wiring, level by level;
- the band, the cushions and the two forces are in the chapters on the compass;
- one body, one brain is the reflex rule, in the first part;
- the snapshot, the lease and the kill switch are in the chapters on operating it;
- the paired runs and the three words are in the chapters on proof.

Read the rest of the front matter before you touch a wire. It tells you what you are looking at and how to read what it tells you.

Introduction: The Problem, the Idea and the Promise

The problem. Production systems are governed by many local feedback loops: horizontal autoscalers, firmware power and clock governors, building-management loops, battery-management systems, connection pools, servo controllers. Each loop is tuned in isolation, against its own setpoint, with margins sized for a worst-case disturbance. Three costs follow, and every operator pays them:

- **Reaction latency.** Reactive loops act on lagging, averaged signals. A Kubernetes Horizontal Pod Autoscaler recomputes its desired replicas from averaged utilization on a sync period (15 seconds by default) and damps its decisions with stabilization windows; new pods then need time to schedule and start. Queues form before capacity arrives.
- **Static over-provisioning.** Worst-case margins persist through the far more common nominal regime. The operating point sits well inside the safe region, and the headroom between it and the constraint boundary is paid for and rarely used.
- **Uncoordinated coupling.** Loops share resources: power, cooling, connections, memory, network. One loop's correction is another loop's disturbance. More web replicas saturate the database's connections; more cooling pushes a power feed toward its limit.

Operators close these gaps by hand, with fixed settings and runbooks. That is safe, and it leaves the region between the nominal operating point and the safe boundary unused nearly all of the time.

The idea. Close one supervisory loop around the native loops. Omni-Compass treats each setting a native controller already exposes (a replica floor, a power cap, a clock ceiling, a temperature setpoint, a pool size) as

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

an actuator, each native telemetry stream as a measurement, and governs the whole body from above. Every decision period it runs five steps:

1. **Sense.** It reads each muscle's own gauges through the plug: utilization, response-time percentiles, queue depth, temperature, power, state of charge.
2. **Normalize.** It places each reading in its band as a compass position, from 0 (calm) to 1 (the line), with a 5% cushion at each edge.
3. **Decide.** The compass law turns that position into one bounded increment per actuator: two antagonist forces, push and pull, each with its own gain, combined through a smooth saturating response (tanh), so the command is continuous, bounded and never chatters. The increment is clipped to the actuator's cover, the hard range nothing can leave.
4. **Actuate.** It writes the increment through the plug, idempotently, and reads the value back to confirm the write landed.
5. **Verify.** The verdict compares the muscle with and without the step in a paired trial on the muscle itself, judged on the muscle's own cost per unit of work; the body guard checks every coupled muscle against its own cushion. A step that fails either test is reverted.

What Omni-Compass is not.

- It is **not a replacement** for your controllers. Native keeps running underneath, always. Omni-Compass only moves settings that native already exposes and respects.
- It is **not a black box**. Every decision is written to a log, with the reading that caused it and the setting it changed.
- It is **not a one-time tuning script**. It decides again every second, and staying native is one of its decisions.
- It is **not a cost-cutter first**. It gives power where the power buys work or speed, and it shows that power beside what it bought.

The promise, in three parts.

1. **Do no harm.** A step stays only where the muscle takes no LOSS from it, measured on the muscle itself. Where Omni-Compass cannot bring a gain, the muscle stays native.
2. **Everything comes back.** Every setting is saved before the first write and restored when Omni-Compass stops. If the governor crashes, its lease runs out and the settings walk home on their own. A separate kill switch stops everything at once.
3. **Every claim is checked.** Each benchmark compares two arms, native and Omni-Compass on top of native, on the same machines with the same work. Each runs three separate times. Each reading is one word, GAIN, EVEN or LOSS, decided by what the gauge is for. Each result carries its evidence class: **P** for a physical meter, **L** for live software, **S** for our own models. A model is never shown as proof of hardware.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What it governs. The catalog names 1,107 muscles in 70 families, the settings that operators everywhere already turn by hand: machine pools and replicas, power caps and clock limits, cache sizes and connection pools, cooling setpoints and battery reserves, robot speeds and drone-swarm settings, and many more. They are grouped into four realms (compute, AI and cloud; physics, robotics and autonomy; energy, facility and industry; distribution and specialized systems) and run together as seven organisms, from the spine alone (the muscles every stack runs on) and one realm alone up to the whole tower at once. The muscles in the catalog are modelled (class S). The real controllers it has been run on top of, such as Kubernetes and the databases, are live software (class L). The chapter that follows the key, "What You Are Looking At," shows which is which. Appendix G lists every one of the 1,107 muscles: what it is, what Omni-Compass reads from it, what it moves, the organisms it belongs to, and its own card, the factory setting it runs on; and for each of the 70 families, how to wire it on any stack: the native controller that owns it, the wire out (what is read, and where), the wire in (what is written, and where), the restore, and whether that wire has run live in this repository or only on a model (`docs/wiring_recipes.csv`).

What you need before you wire it.

- **A license for any use beyond evaluation.** Production use requires a signed, paid Omni-Compass Enterprise License.
- **Read access first.** Omni-Compass starts in watch mode: it reads and computes, and writes nothing.
- **The wire check.** Every reading must come from where it claims, every lever must move what it claims, and every write must read back. Nothing writes until the check passes.
- **Your own service line.** The response time or other limit your service must meet comes from your own service objectives, not from ours.
- **Paired runs on your own system.** The only number that applies to your system is the one your own paired runs produce, on your own receipt.

How to read what follows. Next comes the key to the three words, then "What You Are Looking At," which shows what a hooked-up system looks like and how to read its report. The Quick Reference card is the page to keep beside the system. The Executive Summary gives the results in brief, and the Disclosures make every declaration once. After that the book turns to the theory, the mathematics, the physics, the body, and only then to the wiring, the operation and the proof. Read in that order, nothing in the wiring chapters should surprise you.

The key: GAIN, EVEN and LOSS

Every judged reading in Omni-Compass is one of three words: **GAIN**, **EVEN** or **LOSS**. Better, same and worse are not used anywhere. The word is decided by what the gauge is for, never by the plus or minus sign of

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

its number: who sets the aim differs from one system to the next, and each gauge's aim is written in its preregistration before the runs.

Word	What each letter stands for	Its sense in underwriting	What it means in a table
GAIN	**G** Growth (asset appreciation); **A** Advantage (risk reduction); **I** Improvement (margin expansion); **N** Net-positive (profitable outcome)	surplus and positive variance	the gauge moved toward its declared aim against native: more work done, a shorter wait, fewer misses or failures, or a resource cut
EVEN	**E** Equalized (zero variance); **V** Verified baseline (expected norm); **E** Equilibrium (balanced risk); **N** Neutral (no net change)	the break-even baseline: equilibrium	native and Omni could not be told apart: the same, or no difference beyond the noise; a knob native already runs at the top of its range is EVEN, at its limit on native
LOSS	**L** Leakage (capital drain); **O** Off-track (adverse selection); **S** Setback (claim liability); **S** Subpar (negative variance)	actuarial deficit and exposure	the gauge moved away from its declared aim: less work done, a longer wait, more misses or failures

How the sign of a number becomes a word:

- **Time waited, missed or failed** (a response time, time over the line, failed requests): a fall is GAIN, a rise is LOSS.
- **Work done** (work inside the line, throughput, a hit rate): a rise is GAIN, a fall is LOSS.
- **A resource spent or held** (energy, machines, memory, processor time, a bill, wear on a part): a fall is a **cut**, and a cut is GAIN. A rise is **power given**: what Omni put in to buy the work and the speed shown beside it. Power given is always shown and never hidden, and it is never called a loss (the founder's order of 12 October 2026: the max rides every muscle's edge; it never shaves).
- So a minus can read GAIN (a response time cut 65%, a bill cut 30%) and a plus can read LOSS (failed requests up).

Some preregistrations name their outcome with a label written before the runs (for example SUPERIOR WITHIN GUARDRAILS in the card protocol). The label stays as it was frozen, and every table shows it with its word first: TOWARD ITS AIMS reads GAIN; BOTH WAYS reads GAIN AND LOSS; AWAY FROM ITS AIMS reads LOSS; SAME AS NATIVE reads EVEN (the same as native); AT ITS LIMIT ON NATIVE reads EVEN (at its limit on native); SUPERIOR WITHIN GUARDRAILS reads GAIN (within the guardrails); ENERGY IMPROVEMENT WITH SERVICE TRADEOFF reads GAIN AND LOSS (energy cut, service traded for it); SERVICE IMPROVEMENT WITH ENERGY TRADEOFF reads GAIN, power given (service GAIN, energy given for it); NONINFERIOR / INCONCLUSIVE reads EVEN (inside the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

noise, within the guardrails); NOT ESTABLISHED reads EVEN (not established: inside the noise, a guardrail crossed on the mean). A run that breaks its own validity checks reads INVALID and carries no word.

A reading counts only when it holds the same way in all three of our runs, A, B and C, with every 95% interval clear of zero: "GAIN in all three of our runs". The other readings are **EVEN, no difference beyond the noise** (in a run the interval includes zero, so native and Omni could not be told apart: that is the result), **the runs disagree** (clear runs pointing different ways: the test is unstable there and is looked into) and **shown, not judged** (a gauge declared in advance as shown only, such as the knob's own setting).

Why these three words: they are the words of underwriting and actuarial work, where every outcome is graded as surplus, break-even or deficit, and each letter spells out the same rule. Omni-Compass is there to add (GAIN), never to take (LOSS), and to hand a muscle back to its own native setting where it cannot add (EVEN). Its first rule is do no harm, so **LOSS should never appear**: where it does, the row stays in the table, its cause is found and fixed (our own wiring first, then native's setup, then the scoring) and the test is run again.

Disclosure and disclaimer: GAIN, EVEN and LOSS, and the letters behind them, are The Omni-Compass LLC's own convention for reading its own results. The underwriting senses explain the words; they are not an actuarial, financial or insurance opinion, and no outside body defined, reviewed or approved them. A reading states what our own runs measured against native under the declared aims, not a promise about any other system; every number stands beside its word, so a reader can judge it by any other convention. Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

What You Are Looking At

What Omni-Compass is. Omni-Compass is a supervisory governor. It is never a controller of its own and never a replacement for one: it sits on top of the controllers a system already runs (the Kubernetes autoscaler, a database's connection pool, a GPU's firmware, a building's battery controller, a power grid's tap changer, a robot's servo) and moves only the settings those controllers already expose to an operator, through one wire in (what it reads) and one wire out (what it writes). Everything the native controller does, it still does. Pull the plug and every setting walks back to where the operator left it (the lease); the kill switch returns them at once.

What "native" means. Native is the same stack, the same muscles, the same machines and the same work, run the way everybody runs it today: the shipped controllers at their shipped or operator settings. Every benchmark has exactly two arms, native and omni, where omni is that same native stack with Omni-Compass on top. Nothing else differs between the arms, so whatever differs in the result is what Omni-Compass did.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What a muscle and an organism are. A muscle is one setting a native controller exposes (a pool's size, a power cap, a clock ceiling, a replica count, a battery's charge rate) together with the gauges that show what it does. Most companies build deep control for one field, and a fleet manager such as Meta's Twine schedules one kind of work (containers) over a very large fleet. Omni-Compass's proposition is different in kind: cross-sector governance, one governor over the shared functional needs of otherwise separate realms. An organism is a stack of muscles from many sectors governed as one body: the four realms (Compute / AI / Cloud; Physics / Robotics / Autonomous; Energy / Facility / Industrial; Distribution / Specialized), the four stacked together, and the whole tower of 1,107 distinct muscles in 70 families. The benchmark of an organism tests what happens when those muscles share one governor and interact.

What has been measured, and how. The breadth of the map and the breadth of the evidence are stated separately:

- **1,107 muscles are catalogued** (`realms/catalog_v5.csv`). Each has a plant model, our own model of that kind of system: evidence class **S** until the muscle is wired to real software or hardware and measured.
- **26 knobs are measured on real, unmodified software** (class **L**): real Kubernetes (9), PostgreSQL behind PgBouncer (3), MySQL (4), MongoDB (4), Apache Kafka (3) and Redis (3), each A, B and C.
- **39 knobs are measured inside independent, published simulators** (class **S**, but not our own models): power grids (pandapower with SimBench), buildings and batteries (CityLearn), robot arms (MuJoCo Menagerie), drone swarms (gym-pybullet-drones).
- **Organisms with a real cluster inside**: the modelled organism (S) drives a real Kubernetes cluster (L). "100 copies" means a hundred copies of the modelled organism around one real cluster, not a hundred physical clusters; the number of real machines is always stated beside it.
- **A physical meter** (class **P**) speaks for hardware energy; the GPU's own meter and the processor's RAPL counters are the meters used. Modelled energy is never presented as metered.

What you see when it is hooked up. Every result arrives as a receipt with the same shape: the two arms side by side, every gauge of the system (the work done, the response times, the misses and failures, the machines and energy spent), the paired change with its 95% interval, and one word per gauge, GAIN, EVEN or LOSS (the key, above). A three-run table repeats the test three times, A, B and C, on the same frozen engine, and a word counts only when all three runs agree. Over a benchmark sit three summaries: the Omni index (one number for all real tests together), the benefit sheet (one number and one word per benchmark) and the wiring page (for each knob: write, watch, or the operator's choice).

How to read a report, in order.

1. **The engine and the evidence class.** The header names the engine fingerprint (`python3 tools/omni_version.py`) and the class (P, L or S). A result is never read across engines, and S is never read as proof about real equipment.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. **The work and the service rows first**: work done, response times, time over the line, failed requests. These say what the system delivered. A GAIN here is the point of the governor; a LOSS here is the first thing to look for.
3. **Then the resource rows**: machines, energy, memory, connections. A cut is a GAIN. A rise is **power given**: what Omni-Compass put in to buy the work and speed above it. Read the two together: power given that bought nothing is the cost to fix.
4. **Then the noise.** EVEN, no difference beyond the noise, is a result, not a failure. The runs disagree means the test is unstable there and is looked into.
5. **Then the clock and the machine.** Where the test machine itself is the limit (its processor saturated, native alone failing a large share of requests, a run behind its window's clock), the report says so; a test machine's limit is never reported as the governor's result, and the test is rebuilt so the machine no longer decides it.
6. **Every row is shown**, LOSS included. Nothing is cut from a table because it went against Omni-Compass.

How the brain tells GAIN from LOSS. The governor does not read a plus or a minus sign as good or bad. Before it moves anything, every gauge it reads is declared with its aim, and the aim decides the word: for time waited, missed or failed (a response time, time over the line, failed requests) a fall is GAIN; for work done (work inside the line, throughput, missions flown) a rise is GAIN; for a resource spent or held (energy, machines, memory, a bill, wear) a fall is a cut, and a cut is GAIN, while a rise is power given, kept only when it buys work or speed shown beside it. Less energy for the same work is GAIN; more speed for the same machines is GAIN; more work for the same energy is GAIN. In the engine this is done in two places. The verdict (`omnicompass/verdict.py`) lets a muscle's setting move only between native and the deepest step a paired trial on that muscle has shown costs its own work nothing (each piece of work no slower, within the measurement's resolution); a step that costs more is undone at once and not tried again for a while, and where no step passes the muscle stays native, which is EVEN. Inside an organism, the body's guard (the reflex rule, `docs/FORMAL_V5.md`) then refuses any step that pushes another part of the body past its cushion, so no GAIN in one muscle is bought with a LOSS in another.

Wiring it: who, what, when, where, why and how. Read this before the wiring chapters; a governor wired without it may run and still not be the mechanism.

- **Why.** To get more work, faster, with fewer misses, from the machines and the energy already paid for, by letting one brain move the settings native controllers already expose, in the direction each gauge's aim asks, and only while no other gauge pays for it. If nothing can be gained, the purpose is met by leaving native alone.
- **What.** Two things per muscle and nothing else: one wire in (the gauges that show the muscle's state and its work, read live from the system, never typed into code) and one wire out (the one setting native already exposes to an operator, with its hard range read from the system). The brain, the compass, the verdict and the lease are in the engine; the wiring never re-implements them.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Where.** On top of the native controller, never in place of it: on the autoscaler's target and ceiling, not on the pods; on the pool's size, not on the queries; on the card's power limit, not on its firmware. Every muscle of the stack is wired into the same brain, so the body is judged as one.
- **Who.** The operator who owns the system grants each wire, decides which knobs Omni may write and which it only watches, and keeps the kill switch. The governor writes only what it was granted; the native controller keeps doing its own job.
- **When.** Watch first: the governor reads every wire and writes nothing until the wire check passes and paired runs on the operator's own system show the receipt. Then one level at a time (the eight levels, Part IV). It reads and decides once a second, all the time; staying native is a live decision, made again every second, never a setting left on.
- **How.** The plug snapshots each setting once, at the start; the brain reads every gauge, places each muscle on its compass, tries one step on one muscle at a time inside a body, keeps it only if the verdict shows a GAIN and no LOSS, and hands every setting back to the snapshot on reset, on the lease after a crash, or at once on the kill switch. The proof is the receipt: native and Omni on the same work, every gauge, three runs, every row shown.

What the end result is. A system fully hooked up runs native exactly as before, with one governor reading every gauge of every muscle once a second and moving, muscle by muscle, only where a paired trial has shown a GAIN with no LOSS anywhere in the body; where it cannot help, the muscle stays native, which is EVEN, not a failure. The intended outcome, stated as the claim the receipts test: more work, faster, with fewer misses, on the same or fewer machines, with every unit of power given shown beside what it bought. Whether a given system gets there is answered only by its own receipts.

Quick Reference: The Card for the Glove Box

Keep this page where the people who run the system can reach it, the way a driver keeps the card in the glove box. Every line is explained in the section named beside it; nothing on this page replaces those sections.

What it is. A supervisory governor on top of the controllers you already run. It never replaces them: it moves only settings they already accept, inside a band you set, and hands every setting back when it stops (sections 1.1 and 8).

The two names. *Native* is your system as it runs on its own. *Omni* is the same system with Omni-Compass on top. There is no third arm and no other name (section 1.1).

The modes (section 1.3).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Mode	What it does	When
Off (manual)	nothing; native runs alone	before installing, and whenever you choose
Watching	reads every gauge and logs what it would do; writes nothing	the first level of every installation (level 1)
Autopilot	one pedal: push for more, lift off for less, idle (lifted all the way) and reset, by its law	after the watch level has passed
Cruise	machines in service up to the pool's own top while a known queue waits	batch work

One pedal, like an electric car's. *Push*: capacity added at once as traffic climbs, never held back. *Lift off*: capacity eased off a step at a time, handed back toward native, never below idle. *Idle*: the pedal lifted all the way, the floor of two machines in service, ready for the next burst. *Reset*: every setting handed back to where native had it, read back, and the record removed.

The ways it stops, and what each leaves behind (Chapter 39).

You want to, or it happens that	Do this	What is left
a run ends	nothing: the reset runs by itself at the end of every run	every setting at the operator's value, read back
stop everything at once, for any security reason	`python3 tools/omni_switch.py off`	every governor hands back and exits; none starts again until `python3 tools/omni_switch.py on`
stop one muscle	its kill file, or `OMNI_KILL=1`	that muscle handed back; the others run on
Omni-Compass dies without handing back (killed, crashed, hung)	nothing: the watchdog's lease hands back for it	every setting back at the operator's value, measured at 7 to 11 seconds in 30 of 30 repetitions (section 3.5)

The eight levels of an installation (section 9.3). Take them in order; go to the next only when the pass holds.

Level	What it touches	Pass
0	nothing: `python3 verify.py`	`VERIFICATION: PASS`
1	nothing: watch mode, with a read-only identity	zero writes, and readings your operators agree with

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Level	What it touches	Pass
2	the pods, through your autoscalers (**WRITES**)	p95, p99 and failed requests never behind native, over paired runs
3	the machines, through the release gate and the verdict (**WRITES**)	fewer machines in service, with no LOSS on any service gauge
4	the replica decision itself (an option, not a step)	as level 3
5	a GPU box, two wires: the clock ceiling and the power limit (**WRITES**)	work per energy up or equal; no request more than 2% slower at the median, p95 or p99
6	the processor's clock and power on bare metal (**WRITES**)	energy per unit of work down, no LOSS on any service gauge
7	site power and the supply-air setpoint (**WRITES**)	the site meter's energy down, every rack inlet inside its band, no LOSS on any service gauge (section 10.11)

Before any level that writes: run the wire check (section 8.4), start in watch, and keep the master switch in reach.

Warning signs, and the first thing to do.

You see	First	Then read
a service slower or failing more with Omni than without	`python3 tools/omni_switch.py off`: the system is native again	section 8.5, wired right or wired wrong
a setting at a value Omni-Compass did not write	nothing: it stops writing that lever by itself (one writer)	section 7.2
a meter that is blind or late	nothing: blind means hold; it moves nothing it cannot see	section 7.3
your results point the other way from the published ones	presume the wiring first, not the law	`DISCLOSURES.md`, Chapter 9

Who to call. Licensing, pilots and the Omni-Compass Enterprise License: The Omni-Compass LLC, main office infrastructure, toll-free direct 1-888-339-9551, system route asset 1-888-DEX-YLL-1, landline 321-746-4411 registered in Florida, www.omni-compass.com. Security reports: the process in `SECURITY.md`, never a public issue.

What the letters of the number mean. Read in order, DEX-YLL-1 is the way the engine runs:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

DEX	YLL	1
Data Exchange: the input. In software, data exchange is how one system's readings reach another. Here it is the two-way plug, one wire in and one wire out: the system's own readings come in, Omni-Compass's settings go out.	**Yield Limit Line**: the boundary. In engineering science, the yield limit is the most load a material can carry and still spring back unharmed; past it, the damage is permanent. Omni-Compass runs every muscle up to its own yield limit line, read live, and never past it.	**1**: the output. In code, 1 is true, the finished state; in science, 1 is unity, the whole. Here it is one closed loop: one body, one brain, every result read back and the next step decided from it.

Read as one sentence: Omni-Compass takes the system in through a Data Exchange (DEX), runs every setting up to its Yield Limit Line (YLL) and never past it, and closes it all into one loop (1). Science and software people read each part on sight.

Executive Summary

What it is. Omni-Compass is a supervisory governor. It sits on top of the controller a system already has, the Kubernetes autoscaler, the GPU's firmware, the cooling loop, the battery inverter, the robot's servo, the grid's tap changer, the database's connection pooler, the message broker's consumer group, the cache's memory ceiling, and it moves only the settings those controllers already accept. It reads each muscle's own meter, computes one bounded force per muscle from a single smooth law, and holds the service in the middle of its safe band rather than far below its limit. The native controller keeps running exactly as shipped; Omni-Compass sets what it already exposes, and when Omni-Compass stops, every setting goes back to the value it read once before its first write. It is never standalone and it never competes with the controller underneath it.

What it does for you. Every running system keeps room "just in case": machines sized for the worst minute of the day, a pool of connections held open for a load that comes once an hour, a consumer group sized for the quiet hours and then overrun at the peak, a cache ceiling set once and left. By default Omni-Compass turns that room into more work, faster: the max, every muscle run up to its own limit, read live, never past it and never below native, the energy it takes shown as power given beside the work and speed it bought. On the dial, anyone can tune it down to the same work with less. The two are the same measurement read from two sides (section 3.4): a third more work from what is already installed is a quarter off the bill.

Where things stand, read from the result files. Written by `python3 tools/summary.py --fix` from the files it names; `verify.py` fails a push in which this block no longer matches them. Nothing in it is

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

typed by hand. The live results run on the engines named in their own tables, and every one of them runs again on the newest engine.

- **The engine on this checkout:** omni-v7, fingerprint d6d467b824c585f1 (46 files).
- The muscles and the seven organisms on engine omni-v7 at the max (evidence class S, our own models; run 2026-10-16 04:34 UTC, commit 1637d32cd26c, 1107 muscles; source: results/realms_v5/REALMS_V5.md):
  - every muscle alone, over its loads: EVEN 580, GAIN 527
  - the organisms under the normal load: the spine: GAIN (fewer misses), misses -0.145 pp, power given +0.011%; Compute / AI / Cloud: GAIN (fewer misses), misses -0.070 pp, power given +0.009%; Physics / Robotics / Autonomous: GAIN (fewer misses), misses -0.121 pp, power given +0.010%; Energy / Facility / Industrial: GAIN (fewer misses), misses -0.118 pp, power given +0.000%; Distribution / Specialized: GAIN (fewer misses), misses -0.067 pp, power given +0.002%; the four stacked: GAIN (fewer misses), misses -0.092 pp, power given +0.000%; the whole tower: GAIN (fewer misses), misses -0.051 pp, power given +0.000%
  - the organisms under the climb load: the spine: GAIN (more work + fewer misses), misses -0.632 pp, power given +0.039%; Compute / AI / Cloud: GAIN (more work + fewer misses), misses -0.390 pp, power given +0.046%; Physics / Robotics / Autonomous: GAIN (more work + fewer misses), misses -0.317 pp, power given +0.021%; Energy / Facility / Industrial: GAIN (fewer misses), misses -0.217 pp, power given +0.000%; Distribution / Specialized: GAIN (more work + fewer misses), misses -0.460 pp, power given +0.026%; the four stacked: GAIN (more work + fewer misses), misses -0.349 pp, power given +0.000%; the whole tower: GAIN (fewer misses), misses -0.094 pp, power given +0.000%
  - the organisms under the line load: the spine: GAIN (fewer misses), misses -0.371 pp, power given +0.038%; Compute / AI / Cloud: GAIN (fewer misses), misses -0.205 pp, power given +0.045%; Physics / Robotics / Autonomous: GAIN (fewer misses), misses -0.250 pp, power given +0.030%; Energy / Facility / Industrial: GAIN (fewer misses), misses -0.117 pp, power given +0.000%; Distribution / Specialized: GAIN (fewer misses), misses -0.142 pp, power given +0.006%; the four stacked: GAIN (fewer misses), misses -0.176 pp, power given +0.000%; the whole tower: GAIN (fewer misses), misses -0.051 pp, power given +0.000%
- The grid (source: results/grid_v5/GRID.md): Across the grid: modelled, 36 of 36 squares of 10 and 100 runs GAIN (fewer misses); the 18 single runs: 18 with fewer misses; work +0.000%; power given +0.000% to +0.065%; with the cluster inside, 54 squares: 18 single repetitions (no reading); of the 36 of 10 and 100 repetitions, by gauge: "organism time over the line (% of steps)" GAIN in 36, LOSS in 0, "time over the response line (% of samples)" GAIN in 36, LOSS in 0, "response time (ms), 95th percentile" GAIN in 26, LOSS in 2, "energy (Wh)" GAIN in 26, power given in 0, "energy, parked workers still on at idle power (Wh)" GAIN in 26, power given in 0, "organism energy (J)" GAIN in 0, power given in 22, "organism work per energy" GAIN in 0, LOSS in 22, "failed requests (%)" GAIN in

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

18, LOSS in 0, "response time (ms), 99th percentile" GAIN in 12, LOSS in 2, "HPA replicas, mean" GAIN in 4, power given in 5, "pods started" GAIN in 3, power given in 0; off the clock in 3; invalid in 0.

- The Omni index (evidence class L, real machines, every measure the same in all three of our runs; the three-run tables of omni-v3, each named in its table): +5.2% GAIN on the resource reading (work, speed, machines, energy), +12.5% GAIN on the service reading (work and speed alone). Source: results/OMNI_INDEX.md.
  - Real Kubernetes (GitHub): +31.8% GAIN
  - Real database cache (MongoDB under YCSB, GitHub): +1.7% GAIN
  - Real database (PostgreSQL behind PgBouncer, GitHub): +0.9% GAIN
  - Real messaging (Apache Kafka, GitHub): +0.1% GAIN
  - Real cache (Redis, GitHub): +0.0% EVEN
  - Real database buffer pool (MySQL under sysbench, GitHub): +0.0% EVEN

On the engine that stands (omni-v7): 4 of 26 benchmarks so far. Every other row is that engine's own result, named in its Engine column, and runs again on the engine that stands (`scripts/reruns.txt`); results are never read across engines.

Benchmark	Engine	Its one number	Its word	Class
Real Kubernetes, a service rightsized by Goldilocks and the VPA's recommender, Omni-Compass on top, ten pairs, three runs	omni-v7	+18.0%	GAIN, power given	L
Real Kubernetes, a service rightsized by CruiseKube applying its own recommendations, Omni-Compass on top, ten pairs, three runs	omni-v7	+0.0%	EVEN	L
Real Kubernetes, With its add-ons: KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top, ten pairs, three runs	omni-v7	+78.3%	GAIN, power given	L
Real Kubernetes, With its add-ons: KEDA on the CPU target and the live requests in flight, Omni-Compass on top, ten pairs, three runs	omni-v7	+44.8%	GAIN, power given	L
Every real test together: the Omni index	omni-v3	+5.2%	GAIN, power given	L

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Benchmark	Engine	Its one number	Its word	Class
The six organisms with the real cluster inside, 10 and 100 copies	omni-v3	+5.3%	GAIN, power given	L, the cluster; S, the organism around it
The big organisms with the real cluster inside, 1,000 copies on Azure	omni-v3	+155.0%	GAIN	L, the cluster; S, the organism around it
The 945 modelled muscles as one tower, every muscle written at once	omni-v3	+0.3%	GAIN	S
Robustness: the two-hour run	omni-v3	+0.0%	EVEN	L
Robustness: the governor killed outright mid-run	omni-v3	+8.6%	GAIN	L
Robot arms (MuJoCo), the three untouched robots	omni-v3	+3.8%	GAIN	S
Redis, the cache's memory ceiling	omni-v3	+0.0%	EVEN	L
Real Kubernetes, steady work	omni-v3	+30.5%	GAIN	L
Real Kubernetes, faults	omni-v3	+36.6%	GAIN	L
Real Kubernetes, demand that wanders	omni-v3	+37.0%	GAIN	L
Real Kubernetes, all four at once	omni-v3	+41.7%	GAIN	L
Real Kubernetes, a queue of jobs	omni-v3	+16.5%	GAIN	L
Real Kubernetes, a public day of demand (Google 2011)	omni-v3	+46.4%	GAIN	L
Real Kubernetes, a noisy neighbour	omni-v3	+0.0%	EVEN	L
Power grids (SimBench), both load models	omni-v3	+5.8%	GAIN, power given	S
PostgreSQL, the pooler's pool size	omni-v3	+0.9%	GAIN, power given	L

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Benchmark	Engine	Its one number	Its word	Class
MySQL, the buffer pool's size	omni-v3	+0.0%	EVEN	L
MongoDB, the storage engine's cache size	omni-v3	+1.7%	GAIN	L
Kafka, the consumer group's size	omni-v3	+0.1%	GAIN	L
Drone swarms, the three untouched cells	omni-v3	+5.9%	GAIN	S
Buildings and batteries (CityLearn), the districts with batteries	omni-v3	+0.8%	GAIN AND LOSS	S

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

What has not been shown, said plainly. An energy or cloud-bill saving on real machines. Energy on kind is a declared model, because the machines are containers on one runner. Azure's bill on a 4-worker fleet read no difference beyond the noise on every gauge, which is the honest reading of a fleet too small to show one machine; the 40-worker fleet that can show one is preregistered and has been refused by Azure's own cluster capacity in its region, each refusal recorded. Every earlier GPU result ran on a controller since replaced and is obsolete; the card runs again on rented hardware at one named commit. Each of these is an open item in Chapter 48, not a footnote.

How it stays safe. It watches before it writes. It records every original setting before it acts and reads back every write. It never writes past a knob's cover. It gives everything back the moment service crosses the wall or a sense goes blind. It stops writing a knob the instant anyone else touches it. It moves a slow knob only after a paired trial on the muscle itself shows no more than 2% cost. One OFF switch returns every setting to its original value; a watchdog with a lease does the same if the governor is killed outright; and a separate kill switch, for security only, turns the whole harness off in one human hand.

How you know. Every run produces receipts: native against omni on the same system, the same load and the same clock, each gauge with its 95% interval, the raw files archived beside the code and fingerprinted. Results are labelled by a rule written before the run, counted only when all three of our runs agree, and reported with every loss in the table.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Disclosures, Declarations and Disclaimers

This page is the one place every declaration about Omni-Compass is made. The README, the manual, the book, every guide and every report point here. Where any other page seems to say more than this page, this page governs.

Rights

1. Omni-Compass, its engine, its mathematics, its software and its documentation are the property of The Omni-Compass LLC. All patents, copyrights and trademarks covering them have been filed in the United States by The Omni-Compass LLC. No filing number is stated here, and no grant, registration or approval is claimed.
2. The software is licensed for evaluation and simulation only (`LICENSE`). Running it in production, on any system beyond evaluation, or in any product or service, requires a signed, paid Omni-Compass Enterprise License.
3. Names of other companies and products (NVIDIA, Kubernetes, Red Hat OpenShift, Amazon EKS, Google GKE, Microsoft AKS, Karpenter, Lambda and others) are the property of their owners. They identify the systems Omni-Compass was tested with or connects to. No affiliation, endorsement or certification by any of them is stated or implied.
4. All rights reserved. The Omni-Compass LLC reserves the right to change the software, the documentation, the results and the terms at any time, without notice. Every copy, fork, export, report, archive or printout of any part of Omni-Compass carries the README's notice, `LICENSE`, `NOTICE` and this page unchanged. The Omni-Compass LLC, www.omni-compass.com

What a result is, and what it is not

1. Every result carries its evidence class: **T** a theorem, **V** verified in code, **S** our own models (modelled), **L** live software (real Kubernetes on GitHub's machines), **P** a physical meter (a real card's own power meter). A model is a statement about the model. A software benchmark is a statement about the software and machine it ran on. Only a meter speaks for hardware.
2. The models were written by the same people who wrote the law. They show how the mechanism behaves; they are not an independent test.
3. On Kubernetes in kind every machine stays powered, so energy there is a declared model, not a meter.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

4. Every comparison is paired: the same seed, load and clock with and without Omni-Compass, in an order rotated by repetition. Intervals are 95% intervals over the paired repetitions. Ratios across seeds are summarised as geometric means. Labels are assigned by code from rules written and committed before the run (`docs/GPU_PREREGISTRATION.md`, `docs/REALMS_PREREGISTRATION.md`, `docs/K8S_COMPASS_PREREGISTRATION.md`), never by hand.
5. Losses and failed runs are kept beside the wins (`docs/EVIDENCE_LEDGER.md`, `results/live/`, git history). The first real-card run, for example, saved energy (+3.6% work per energy, proven) and made the slowest answers 58.5% slower; it is published as it happened.
6. No result is a promise of a saving on any other system. No dollar figure in this repository is a measured result. Nothing here is a vendor certification, a safety certification, legal advice or investment advice.

The rule Omni-Compass keeps on every muscle

Omni-Compass sits on top of a muscle that already works. By default it moves the muscle's settings toward more work, faster, up to the muscle's own limit and never past it (the max); on the dial anyone can tune it down toward the same work with less (the tune-down). Either way it keeps a step only where the muscle is never behind native for it: a step that costs the muscle more for each piece of work, or loses more than **2%** in any measure (work done, response time at the median, p95 or p99, time over the service line, or the machine's own cost of running Omni-Compass), is undone. A resource spent that rose is **power given**, shown beside the work, the speed and the wear it bought, never called a loss. Where no move passes that test, Omni-Compass leaves the muscle exactly as it runs alone.

The factory tune. The engine in this repository is presented as The Omni-Compass LLC tuned it and ships it: a self-running engine, set at the factory. Every muscle in the catalog is wired, and each runs on the setting found for it: its own card where one was found on development seeds and kept under the strict rule (364 muscles, `realms/muscle_cards_v5.csv`), the engine's own setting for every other muscle, all frozen and fingerprinted by version (`python3 tools/omni_version.py`). Muscles differ: no single setting is right for every muscle, family, sector, domain or realm, and none is presented as universal. Every published result is this factory tune. As with any engine, a licensee may then add on, retune, upgrade or tune down any muscle or any combination of muscles (the dial, the cards, the bands and the service lines are all exposed); a changed tune is the licensee's own configuration, and its results are its own, not the published ones. On a live system the verdict (`omnicompass/verdict.py`) measures it with paired trials on the muscle itself before every step. Every result reports each measure, and where one read LOSS at all, by however little, the result says so and by how much.

The wiring declaration

THE PUBLISHED BENCHMARKS ARE THE RECORD OF WHAT OMNI-COMPASS DID ON THE SYSTEMS, LOADS AND ENGINE THEY NAME, EACH WITH ITS EVIDENCE CLASS. WHERE A RESULT ON ANY OTHER SYSTEM DIFFERS FROM THEM, OR ANYTHING LOOKS WRONG, THE FIRST PRESUMPTION IS THE WIRING, THE SETTINGS, OR HOW

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

OMNI-COMPASS WAS IMPLEMENTED OR READ, NOT THE LAW. CHECK THOSE FIRST (THE MANUAL'S "WIRED RIGHT OR WIRED WRONG") BEFORE DRAWING ANY CONCLUSION ABOUT OMNI-COMPASS.

Omni-Compass acts only through the wires it is given. It reads the meters it is pointed at and moves the settings it is allowed to move. If a reading is the wrong one, slow, or blind; if a lever is the wrong one, already owned by another controller, or given a range (cover) that is wrong for the machine; if a band or a service line is set for a different workload; then Omni-Compass will do exactly what its law says with the wrong information, and the result will not be the published one.

Therefore:

1. **It cannot be slapped on.** Every installation goes through the levels of the manual in order (chapter 6), starting read-only, and every writing level begins with the wire check (manual, section 4.4) and a watch arm that must equal native.
2. **If your paired receipts differ from the published benchmarks in direction** (service LOSS, or no saving where one was shown), **the first presumption is wiring, not the law.** Confirm the installation with the checks in the manual's section 4.5 (*Wired right or wired wrong*) before drawing any conclusion about Omni-Compass.
3. **This has happened to us, and is published.** On the first real card (NVIDIA A10, 2026-10-02) the governor read being busy as trouble, set its power lid under the card's own working draw and allowed the clock under the card's own working clock; the card served bursts more slowly and the slowest answers were 58.5% slower. The cause was found in the card's own samples and corrected (`docs/GPU_PREREGISTRATION.md`, amendments 6 and 7). That is what a wiring fault looks like, and how it is found.
4. Omni-Compass never writes outside a lever's cover, never fights another writer (it stops and leaves that lever alone), reads back every write, and returns every lever to the value it read before its first write when it stops or when the OFF switch is used. These protect the machine; they do not make a wrong wiring right.

Safety and responsibility

1. Run watch mode first; run the wire check before any write; keep the master OFF switch (`python3 tools/omni_switch.py off`, the whole harness at once) in reach at every level, and use it at the first sign of anything wrong, a suspected breach included.
2. Omni-Compass is a supervisory governor. The machines' own controls (firmware, autoscalers, safety systems) stay in place and keep their own protections; Omni-Compass sets only values they already accept.
3. Do not connect Omni-Compass to safety-critical systems (vehicles, medical devices, grid protection, life safety) except as a modelled study, and never without the qualified review those systems require.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

4. The software is provided "as is", without warranty of any kind, as stated in `LICENSE`. The operator is responsible for its use on their systems.

Changes to the work and to this page

1. The software, the law's settings, the benchmarks, the results, the documents, the licensing terms and this page may change at any time, without notice. The version in the repository's `main` branch at a given commit is the version that commit describes; `RELEASE_MANIFEST.json` and `python3 verify.py` identify it.
2. Statements about work in progress, planned features, expected results and future runs are expectations, not promises. Where a result has not yet been measured, the documents say so (`docs/STATE_OF_PLAY.md`, `docs/DOSSIER.md`, Chapter 32).
3. A signed Omni-Compass Enterprise License governs its own terms for its own term.

Privacy and data

Omni-Compass contains no telemetry. It sends nothing to The Omni-Compass LLC or anyone else, and makes no network connection of its own except to the systems an operator points it at. Its logs and receipts stay on the operator's machines.

Where everything is

Question	Page
What has been measured, and how strongly	`docs/STATE_OF_PLAY.md`, `docs/DOSSIER.md`, `docs/EVIDENCE_LEDGER.md`
The rules written before each run	`docs/GPU_PREREGISTRATION.md`, `docs/REALMS_PREREGISTRATION.md`, `docs/K8S_COMPASS_PREREGISTRATION.md`
How to wire it, level by level, and how to confirm it is wired right	`docs/OMNI_COMPASS_MANUAL.md` (chapters 4 and 6), the book `docs/OMNI_COMPASS_MANUAL.pdf`
The license, in plain answers, and third-party components	`LICENSE`, `LICENSING_FAQ.md`, `ENTERPRISE_LICENSE.md`, `NOTICE`, `THIRD_PARTY_NOTICES.md`, `PATENTS.md`, `TRADEMARKS.md`, `SECURITY.md`, `.github/CLA.md`
The muscles, what each is for and how it is wired	`docs/MUSCLE_CATALOG.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Question	Page
Proof the code is the code that ran	`python3 verify.py`, `RELEASE_MANIFEST.json`, `results/SEAL.json`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

PART ONE

The Philosophy and the Theory

Where Omni-Compass comes from: the closed circle, the four pieces, the compass, the basins and the reflex. The engineering in the rest of the book is this idea made exact.

CHAPTER 1

What Omni-Compass Is

A governor on a steam engine does not build the engine and does not turn the shaft. It watches the speed and moves the throttle so the speed stays in a band. Omni-Compass is that, for every machine you run.

It is a process on a host. It reads meters, steps a bounded mathematical law, and writes only the levers it has been given. It is not the chip, not the GPU driver, not Kubernetes, not the building controller. Those keep running exactly as they do today; Omni-Compass sets the values they already accept.

Three facts about that process fix what the rest of this manual can and cannot claim. First, it is **one process per stack**, a controller (`omni_controller/controller.py` on a cluster; the harness's own controller on a database or a cache) that wakes on a fixed period, reads the stack's own gauges through the stack's own interface, decides, writes through the same interface, and reads back what the device took; it has no agent inside the pods, no kernel module, no hook in the request path, so it can add latency to nothing it does not govern. Second, every lever it may touch is **named before it starts**, read once into a snapshot, and handed back to that snapshot when it stops, is killed, or loses a sense; a lever it was not given it cannot reach, because the plug for it does not exist. Third, it has a **watching mode** in which it reads and decides and writes nothing, and every rollout begins there (Chapter 35): the first thing an operator learns about Omni-Compass on their own stack is what it would have done, in a log, with the stack untouched.

What follows from those three is the shape of the evidence in Part VI. Because the native controller keeps running underneath, every benchmark is the native stack against the same native stack with Omni-Compass on top, and never Omni-Compass against anything else. Because the levers are the stack's own settings, every gain is one the operator could have reached by hand, if they had been able to read every gauge every few seconds and move every knob without ever being wrong; the claim is not a new mechanism but a steady hand on the mechanisms that exist. And because the process is small and separate, its own cost (CPU on the host, reads of the API) is measured in every run and counted against it where it shows.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Always on top of a native controller

The first design decision, and the one every other follows from, is that Omni-Compass is **supervisory**. It never replaces the controller a system already has, never bypasses it, and never runs in its place. The Kubernetes Horizontal Pod Autoscaler keeps scaling pods on its own CPU target; Omni-Compass moves that target inside a range the operator allows. The cluster autoscaler keeps adding and deleting machines; Omni-Compass marks machines idle and lets the autoscaler do the deleting. The card's firmware keeps boosting the clock and enforcing its power limit; Omni-Compass sets the ceiling the boost may reach and the limit the firmware enforces. PgBouncer keeps handing connections to clients; Omni-Compass sets its pool size through the pooler's own console. Kafka's consumer group keeps rebalancing partitions on its own; Omni-Compass changes how many consumers are in the group, which is what an operator does. Redis keeps evicting by its own rule; Omni-Compass sets the ceiling that rule works under.


This matters to a referee for a precise reason: every benchmark in this manual has exactly two arms, **native** (the system with its own controller, as shipped and as the operator set it) and **omni** (the same system with Omni-Compass on top). There is no third arm in which Omni-Compass replaces the controller, and no comparison in which Omni-Compass is a rival to it. A gain is therefore always "what the governor added on top of what the native controller already did", and a loss is always "what the governor cost on top of it". Nothing in the record is an argument against any native controller; every native controller in this manual is a good controller that the governor sits on.

Do no harm: the verdict

The second design decision is that Omni-Compass must never cause a LOSS. This is not a slogan printed on a report; it is a trigger inside the engine. Before Omni-Compass moves a slow knob (a machine given back, a card's clock ceiling, a robot axis's speed, a drone's cruise override), it runs a **paired trial on the muscle itself** (`omnicompass/verdict.py`): the muscle's own cost per piece of work is measured at native and at one step past the deepest step already allowed, under the same traffic, with at least thirty pieces of work on each side. From v7 the trial is read in the reports' own words: on the logarithm of each piece of work's cost, the change $d = \text{mean ln c[trial]} - \text{mean ln c[ref]}$ carries its 95% interval $d \pm 1.96 \cdot \sqrt{(s^2[\text{ref}] / n[\text{ref}] + s^2[\text{trial}] / n[\text{trial}])}$, and with $\tau = \ln 1.02$ the 2% allowance in the same units, an interval wholly above zero is a LOSS and the step is refused whatever the allowance says; while the interval's half-width exceeds τ the trial measures on, up to three times its minimum; and a GAIN or EVEN step is allowed only if its median cost and its mean-log change are both no more than 2% above the reference and above the cost first measured at native. On modelled noisy costs ($\sigma = 0.25$) this allows a step that truly costs 3% more 28% of the time instead of the medians' 40%, one that costs 5% more 14% instead of 26%, and a free step 60% instead of 63% (`docs/OMNI_V7.md`, Chapter 59; class S). The engines before v7 read the medians alone (`judge="median"`). A refused step is not tried again for a set number of decisions. Where no step passes, the verdict reads **left native**, the knob is never moved, and the result for that muscle says "nothing for Omni to move". This is why, in the robot-arm benchmark, two of four arms were left entirely native and are reported as

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

such, and why in the real Kubernetes tests machines were kept whenever one machine fewer made the requests slower in the trial. Gains are not capped; the allowance caps only what may be spent to get them.

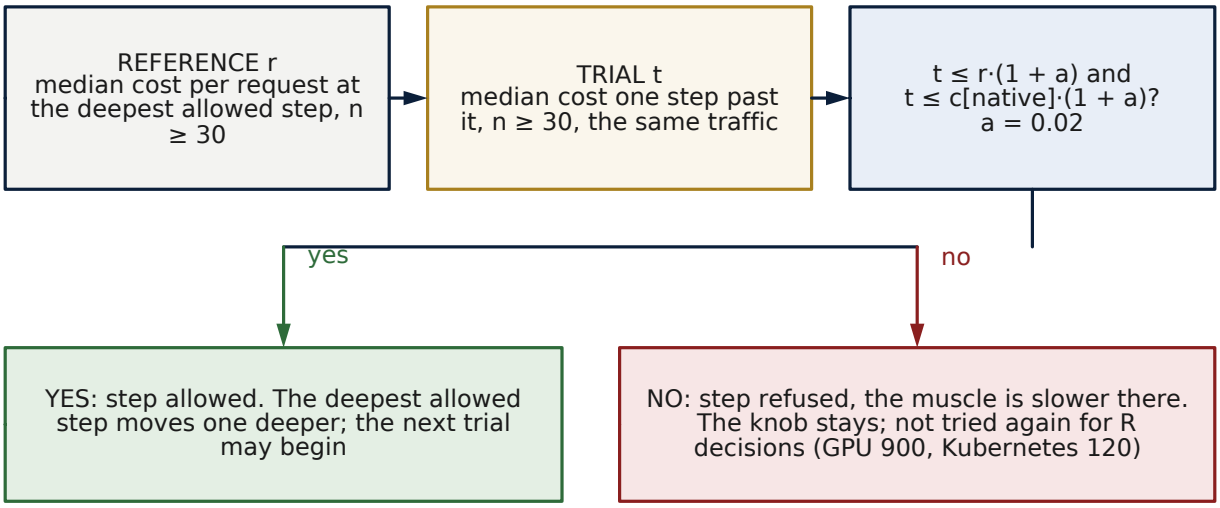

The verdict stands over every slow knob (the machines, the clock ceiling, a cache's notch): a step that costs the muscle's own work more than the allowance is refused, and steps cannot add up beyond it. A trial runs to its full measurement and is never ended by the calm it causes.

Figure 1. Block diagram: the verdict's paired trial around a slow knob. The reference r is the median cost per request at the deepest step already allowed, n ≥ 30; the trial t is the median one step past it under the same traffic, n ≥ 30. The step is allowed only if t ≤ r·(1 + a) and t ≤ c[native]·(1 + a) with a = 0.02; otherwise it is refused, the knob stays, and the step is not tried again for R decisions (900 on a card, 120 on Kubernetes). Steps cannot add up beyond the allowance, because every step is judged against the native cost too.


The same principle, applied after the fact to every published result, is the page of wiring verdicts (`docs/WIRING_VERDICTS.md`, section 16.6b): every knob in every table is given one of three words from the table itself, **write** where a gauge is GAIN in all three of our runs and none LOSS or power given in all three of our runs, **watch** where nothing is GAIN in all three of our runs (the knob stays native and Omni only reads it, one wire out and no wire in), and **operator's choice** where gains and losses are both the same in all three of our runs. Omni-Compass is wired out of every muscle; it is wired in only where it has earned it.

The pedals, the modes and the two switches

Omni-Compass drives a system the way a self-driving car drives itself: it feels, gauges and adjusts, with nobody in the seat. The vocabulary is used the same way everywhere in this repository (`docs/MECHANISM_OF_ACTION.md`, "The pedals"):

- **Off (manual).** Omni-Compass is not driving; native runs alone. This is the native arm of every benchmark.
- **Watching.** Omni-Compass reads every gauge and logs the decision it would take, and writes nothing. Any difference between a watching arm and native is the cost of its being there (its CPU, its reads) plus

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

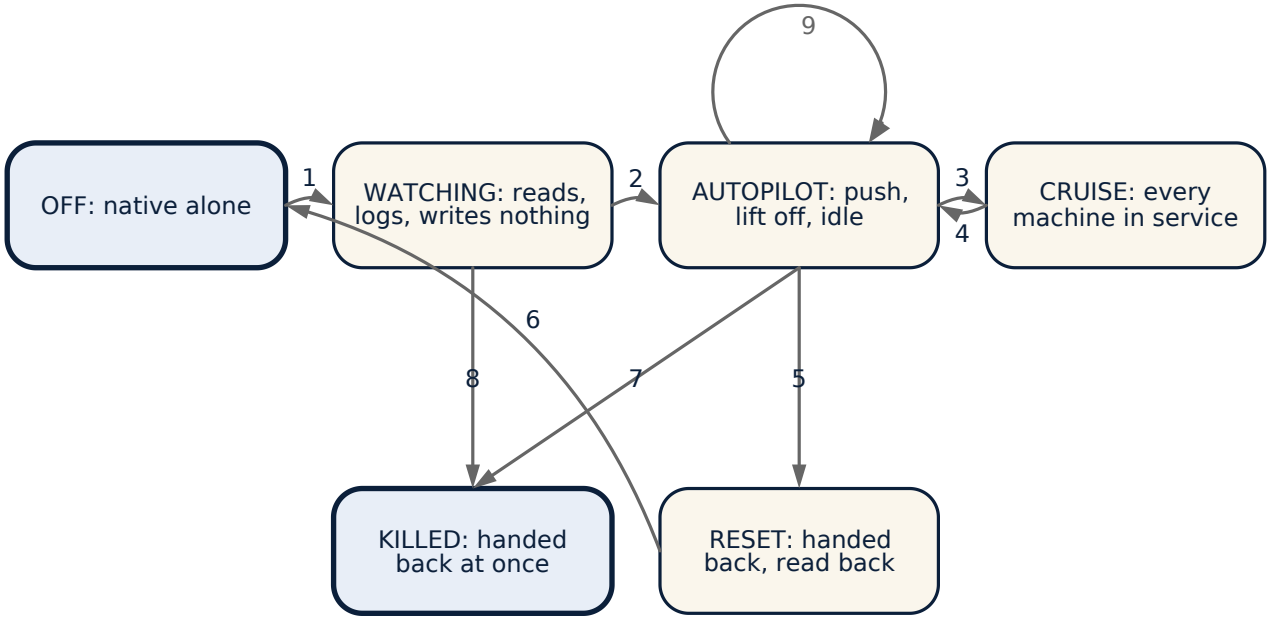

1 level 1 · 2 the wire check passed; level 2 and up · 3 pods waited 2 decisions · 4 the line empty 2 decisions · 5 the reset file: the end of a run · 6 exit 0 · 7 the kill switch, from any mode · 8 the kill switch · 9 idle at once when demand is at zero

Figure 2. State machine: the governor's modes. OFF is native alone; WATCHING reads and logs and writes nothing; AUTOPILOT pushes, lifts off and idles; CRUISE holds every machine in service while pods have waited two decisions; RESET hands every setting back and reads it back at the end of a run; KILLED hands everything back at once, from any mode, on the kill switch. The numbered transitions are read in the key under the diagram.

noise, never a decision; a watching arm that writes anything fails its run. Watching is the first level of every rollout (Chapter 35).

- **Autopilot.** One pedal: **push** (traffic climbs and capacity is added at once, never held back), **lift off** (traffic falls and capacity is eased off a step at a time, handed back toward native, never below idle), **idle** (the pedal lifted all the way: calm traffic, the engine at its floor of two machines in service, ready for the next burst), **reset** (every setting the governor ever wrote is handed back to where native had it, read back, and the record removed; every benchmark arm ends with a reset and checks it).
- **Cruise.** For work that comes as a pile: when pods have waited for a place for two decisions in a row, machines go into service up to the pool's own top (read live: every machine of a fixed pool at once, a growing pool a step a decision) and stay there, without second-guessing, until the line has been empty for two decisions. In cruise the governor also stops its five-second floor reads, because every machine is already in service and the reads would only cost CPU on the machines the queue is using.
- **Idle at once.** When the work is done and demand is at zero (the service at its autoscaler's own floor, wanting no more, at half its target or less), the pedal is lifted all the way in one move, straight to idle, with every safety check still holding.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **The kill switch.** Separate from all of the above, and for **security only**: one switch in a human hand (`python3 tools/omni_switch.py off`, `omnicompass/master.py`) turns Omni-Compass's governing off across the whole machine at once, for anything rogue, or for anyone trying to drive a system through Omni-Compass's brain. Every governor hands back and exits; none starts while the switch is off. The reset is the end of a run; the kill switch is the end of trust.

The floor of two machines is an operator's number; lifting off never takes a system below it, however far the pedal is lifted. There is no ceiling: every machine the operator has is usable, and the protection is the band inside each machine.

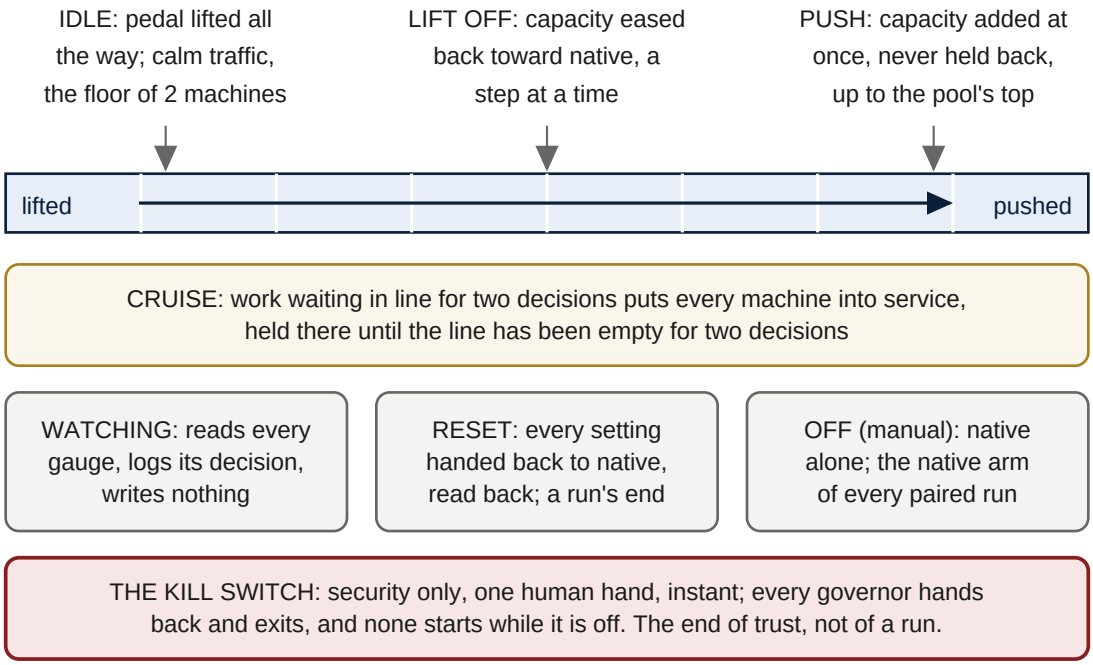


Figure 3. One pedal, no brake. Pushing the pedal adds capacity at once; lifting it eases capacity back toward native a step at a time, never below idle, the floor of two machines. Cruise holds every machine in service while a known queue waits. Watching reads and logs but writes nothing; reset hands every setting back to native and reads it back at the end of a run; off is native alone. The kill switch stands apart from all of these: for security only, in a human hand, instant. After a crash the lease walks every setting back to native on its own.

Nothing is hardwired

Omni-Compass carries no table of per-stack special cases. One law (Chapter 20) is written once and runs on every muscle through one plug (Chapter 32). The gains differ from muscle to muscle only through the muscle's declared physics: its response time, its decision period and its cover. Where a rule was found not to work, it was removed, not switched off and left in the code: the engine files are frozen and fingerprinted, and `verify.py` fails if any of them changes. A reader who finds a behaviour in a result can find the exact lines that produced it, and will find no second path.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The rule has a practical consequence for anyone comparing Omni-Compass with a tuned controller. A tuned controller carries, somewhere, a number that someone chose for one stack: a cool-down of five minutes, a target of 70%, a step of two replicas. Each of those numbers is a bet that the stack will behave tomorrow as it did when the number was chosen, and each is one more place where a reader has to ask whether the result was the law or the tuning. Omni-Compass has a handful of such numbers, the centre of the band, the 5% cushions and the 2% do-no-harm line, and they are the same on every muscle, written once in the law and declared in every preregistration. Everything else the law needs (how fast the muscle answers, how often it may be moved, how far it may go) is read from the muscle's own declaration in the catalog (`omnicompass/muscles.py`) or from the native controller's own settings at the start of the run, never typed in by hand for a benchmark. When a benchmark needs a line, a cover or a chunk size (the MySQL pool moves in the server's own 128 MB chunks, the Redis ceiling in notches), the number comes from the stack being governed and is written in the preregistration before the first counted run, where a referee can see that it was not chosen after seeing the result.

The second consequence is how the repository changes. A guard or a gain that turned out not to help is not left in the code under a flag, because a flag is a second path that a later reader has to reason about and a later test has to cover. It is removed, the removal is written in the changelog, and the fingerprint moves to the next engine version (Chapter 15), so that no result taken on the old path is ever read against the new one. The three fingerprints that exist, v1, v2 and v3, are the whole history of such changes.

The word

The law is a **compass**: a band with a cushion at each wall, pushed to its middle by two antagonist forces, smooth, never hammering. The repository uses that word and no other for it. Earlier dated records that used another word are kept word for word, as records are; the current law is `omnicompass/compass_law.py`, `CompassLaw`.

The word was chosen for what the law does, not for decoration. A compass has a needle, a centre it is drawn back to, and a card marked at the edges; it does not slam to a wall and stay there, and it does not chatter when the hand holding it is steady. The law has the same three parts. The **band** is the range the gauge is allowed to travel, from 0 to 1 once the reading is placed on it, with the operator's line at the top. The **cushions** are the last 5% at each wall, 10% of the band in all: a reading inside a cushion is already too close to a wall, and the law treats it as such before the line is touched rather than after. The **centre**, 0.5 by default, is where the needle comes to rest, and two forces bring it there: a **pull** proportional to the distance from the centre, gentle near it and harder up the walls, like a spring; and a **push** proportional to the speed at which the reading is moving, meeting whatever is shoving it (a load rising, heat building) with an equal and opposite force and doubling as the friction that stops the needle sloshing past the centre (the gain is chosen for critical damping: it glides to the centre and stops, with no overshoot and no ringing). Past the upper wall the pull goes to its full force at once, and the down side may not act until the reading is back inside the band: the law fails up, never down. The force itself is `A × tanh(raw / A)`: near the centre it behaves as a spring, in proportion to the distance, and far from the centre it bends over and flattens into its maximum `A`, the law's authority, so that no

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

reading, however far out, can make the law ask for more than one full step. That flattening is what "never hammering" means in code: there is no reading that produces a jump, and two readings a decision apart produce two forces a small amount apart. Section 6 gives the rules in full and Appendix C the equations; the reader who only needs the picture can keep the needle, the centre and the two cushions in mind and will not be misled by anything later.

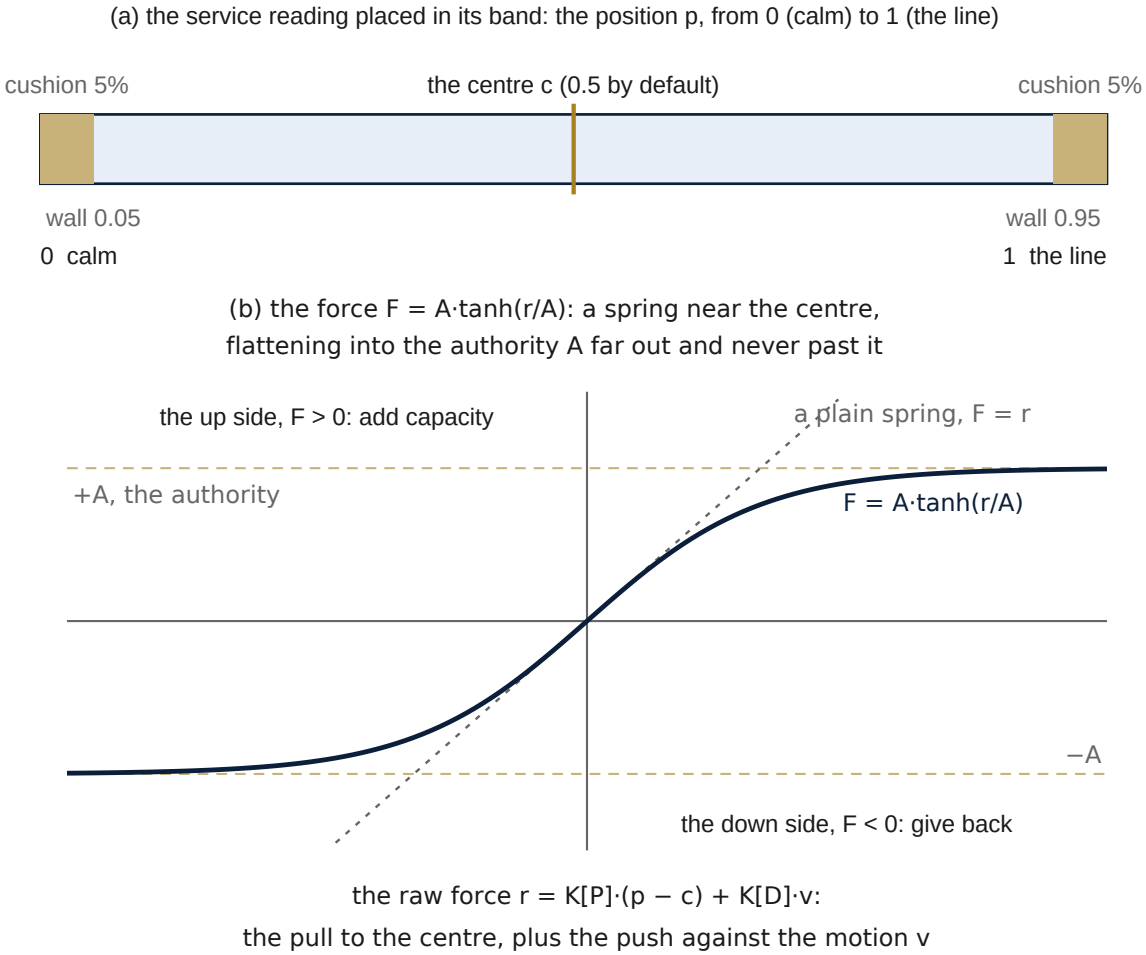


Figure 4. The compass band and the smoothing of the force. (a) The service reading placed in its band as a position p from 0, calm, to 1, the operator's line; the walls at 0.05 and 0.95 leave a cushion of 5% at each edge, and the centre c is where the needle comes to rest (0.5 by default; on a service 0.3 at the max and 0.4 at the tune-down).

(b) The force F = A·tanh(r/A) against the raw force r = K[P]·(p − c) + K[D]·v, the pull toward the centre plus the push against the reading's motion: near the centre a spring, far out a curve that flattens into the authority A and never passes it. Past the upper wall the up side goes to A at once, and the down side may not act until the reading is back inside the band.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What it sets, muscle by muscle

Every muscle keeps its own control, and Omni-Compass sets what that control already accepts:

Muscle	Its own control (kept)	What Omni-Compass sets
Kubernetes service	the HPA	the HPA's CPU target; replica floors
Kubernetes node pool	Cluster Autoscaler / Karpenter / MachineSet	how many machines stay in service (park and wake)
NVIDIA GPU	the card's firmware (boost, power and thermal limits)	the clock ceiling (up wire) and the power limit (down wire)
CPU	the kernel's frequency governor	the frequency ceiling
Data hall, building	the chiller and air handler loops	the supply-air setpoint; units in service
Battery site	the inverter	the reserve level; the peak ceiling
Robot joint, vehicle axis	the servo loop	speed and effort limits
Process loop, feeder	the PI controller	the setpoint inside its band
Database behind a pooler	PgBouncer's pool, the DBA's fixed setting	the pool size through the pooler's own console
Database's storage engine	MongoDB's WiredTiger cache, the operator's fixed setting	the cache size through the server's own console
Message broker	the consumer group at the operator's count	how many consumers are in the group
Cache	the operator's memory ceiling and eviction rule	the memory ceiling through the cache's own console
Substation	the tap changer's own controller	the tap position, one whole tap per move
Drone	the shipped autopilot	the cruise override inside the autopilot's limits

When Omni-Compass stops, every one of those values goes back to what it was before Omni-Compass acted: not to the last value it wrote, but to the value it read once, before its first write.

Where it sits among the systems already in use. The autoscalers, the node provisioners, the GPU and CPU power managers and the commercial optimizers are muscles, or optimizers over a few kinds of muscle; Omni-Compass is the governor on top of them: one law that reads every muscle in a body and writes each one's own knob under the limits they share. Running several of those systems at once does not make one governor, because each still decides on its own reading. The five systems named most often (IBM

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Turbonomic, Karpenter, NVIDIA's GPU power software, the Energy Aware Runtime, the Cluster Autoscaler with the commercial layers above it), nine open-source pieces with their licenses and where each can be benchmarked, and who owns Omni-Compass and on what terms it is seen, are set out in *The Seat: One Governor over the Muscles* (`docs/THE_SEAT.md`); the distinction between one governor and a collection of tools is stated formally in *The Max, Formally* (`docs/FORMAL_V5.md`, Definition 2 and Proposition 1).

CHAPTER 2

The Seat: One Governor over the Muscles

This page states where Omni-Compass sits among the systems that already run computers, power and machines, what each of those systems is, who owns what, and what is still to be shown. Every statement about another system is read from that system's own publication or repository, on the date given; every statement about Omni-Compass is read from this repository's code and results. Where a statement is wrong or out of date, it is corrected from the maker's own publication.

1. The claim, in one sentence

Omni-Compass is a **supervisory governor**: one control law that reads every muscle in a body at once and writes each muscle's own knob, inside the envelope its native controller already allows, under the limits the muscles share, while every native controller keeps running underneath, unchanged. It is never standalone and never a replacement for the is").

What makes it one governor and not a collection of tools is stated formally in `docs/FORMAL_V5.md` (Definition 2 and Proposition 1): the knob it writes on one muscle depends on what every other muscle is doing, through the lines they share (a battery site's grid connection, a room's cooling). A collection of separate tools cannot have that property, however many run at once: each decides on its own reading and writes only its own knob.

2. Muscles and governors

A **muscle** is a controller of one kind of knob on one kind of system: how many machines, how many replicas, a power limit, a frequency, a temperature setpoint, a cache size. A **governor** decides, for the whole body at once, what each muscle may do. The systems in common use are muscles, or optimizers over a few kinds of muscle; Omni-Compass sits on top of them and calls them.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2.1 The five systems named most often

System	Maker	Source	What it controls (its maker's description)	Kind	Omni-Compass with it
IBM Turbonomic	IBM	closed, commercial	resource actions across layers: sizing, placement and scaling of workloads and hosts	an optimizer over several kinds of muscle, not one control law	on top of the muscles it drives, or compared on the customer's own system in paired runs; it cannot be run here
Karpenter	AWS; its core is a Kubernetes SIG Autoscaling project (`kubernetes-sigs/karpenter`)	open source (Apache-2.0)	provisions and removes nodes for pending pods	node-provisioning muscle	on top: Omni-Compass decides when nodes are needed ahead of demand; Karpenter provisions them (register row 68, on a cloud)
System	**Maker**	**Source**	**What it controls (its maker's description)**	**Kind**	**Omni-Compass with it**
NVIDIA's GPU power-management software (power profiles and the dynamic power tools above the driver)	NVIDIA	closed (user-space software on top of the driver; the Linux kernel and its NVIDIA modules are a separate layer)	power limits and power profiles on NVIDIA GPUs	power-limit muscle	on top: Omni-Compass writes the card's clock ceiling and power limit through the driver's own tool (`nvidia-smi -lgc`, `-pl`; `om`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

System	Maker	Source	What it controls (its maker's description)	Kind	Omni-Compass with it
					`ni_controller/gpu_compass.py`), inside the envelope the card allows; the receipt is the chip-level energy run (section 5)
Energy Aware Runtime (EAR)	Barcelona Supercomputing Center	open source (EPL-2.0, `github.com/eas4dc/EAR`)	CPU frequency selection per application and node, energy accounting, and a global energy manager for supercomputers	energy muscle with its own optimizer at node and job level	on top, on bare metal with access to the CPU's power registers (register row 87)
Cluster Autoscaler, with commercial layers such as ScaleOps and Cast AI	the Kubernetes project; the vendors	Cluster Autoscaler open source (Apache-2.0); the commercial layers closed	adds nodes when pods cannot be placed, removes them when unneeded; the commercial layers sell optimization on top	node muscle, and optimizers above it	on top of the Cluster Autoscaler (register row 68); the commercial layers are compared on a customer's system, as Turbonomic

Run all five at once and there are still five systems, each reading its own gauges through its own interface and writing its own knobs. Nothing among them makes one decision for the whole body under the limits the muscles share. That is the seat Omni-Compass is written for.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2.2 Open-source pieces that can be benchmarked with Omni-Compass on top

Read from each repository on 12 October 2026 (its README, its license file and its last commit). The license is the file in the repository, not a description of it.

Project	Repository	What it is, in its own words	License found	Last commit	Kind	Where it can run	Register
Kepler	`sustainable-computing-io/kepler`	"a Prometheus exporter that measures energy consumption metrics at the container, pod, and node level in Kubernetes clusters"	Apache-2.0	2026-10-12	a meter, not a controller	a machine with the processor's power registers (RAPL), through the meter kit (`docs/METAL_KIT.md`); on GitHub's virtual machines Kepler 0.10 and later run only a fake development meter	row 79
Goldilocks	`FairwindsOps/goldilocks`	"a utility that can help you identify a starting point for resource requests and limits" (built on the Vertical Pod Autoscaler's recommender)	Apache-2.0	2026-09-18	a recommendation tool over a muscle (VPA)	GitHub's machines (kind)	row 80

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Project	Repository	What it is, in its own words	License found	Last commit	Kind	Where it can run	Register
CruiseKube	`truefoundry/cruisekube`	"an intelligent Kubernetes resource optimization controller that automatically monitors, analyzes, and applies resource recommendations"	**Business Source License** (source-available, not open source)	2026-08-06	a rightsizing muscle	GitHub's machines (kind), for evaluation under its license	row 81
Climatik	`Climatik-Project/Climatik-Project`	a power-capping operator for Kubernetes (its README is the operator template, unfinished)	Apache-2.0	2024-09-10	power-capping muscle, early stage	a machine with power control (GPU)	row 82
Kubernetes Power Manager (AMD EPYC)	`AMDEPYC/kubernetes-power-manager` (a fork of Intel's `intel/kubernetes-power-manager`)	"a Kubernetes Operator ... to dynamically request adjustment of worker node power management settings applied to cores allocated to the Pods"	Apache-2.0	2025-11-07	CPU power muscle	bare metal with the processor's power controls	row 83

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Project	Repository	What it is, in its own words	License found	Last commit	Kind	Where it can run	Register
PEAKS	`sustainable-computing-io/peaks`	"Power Efficiency Aware Kubernetes Scheduler" (its README is meeting notes; the design is in its docs)	Apache-2.0	2024-10-23	a scheduler, early stage	GitHub's machines (kind) once it runs	row 84
Adaptive GPU Power Capping	`tanish111/Adaptive-GPU-Power-Capping`	the code for the paper "Adaptive GPU Power Capping: Balancing Energy Efficiency, Thermal Control and Performance" (HPDC '25): a learned model choosing GPU power caps	**no license file** (no right to reuse the code without the authors' permission)	2025-04-29	a research power-capping method	a rented GPU; compared from the paper's own method unless the authors grant use	row 85
NVIDIA Power Manager	`NVIDIA/nvidia-power-manager`	"Nvidia power management app."	Apache-2.0	2026-07-13	platform power muscle (NVIDIA server platforms)	NVIDIA server hardware	row 86

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Project	Repository	What it is, in its own words	License found	Last commit	Kind	Where it can run	Register
Energy Aware Runtime	`eas4dc/EAR`	"an energy management framework for super computers"	EPL-2.0	2026-09-28	energy muscle and optimizer (HPC)	bare metal with the CPU's power registers, under a batch scheduler	row 87

Already benchmarked or registered: the Kubernetes HPA (every Kubernetes set), KEDA and its HTTP add-on (done, three runs), Karpenter, the Cluster Autoscaler and the Vertical Pod Autoscaler (register row 68).

None of these projects is described by its makers as one law deciding for the whole body. That is a statement about their public descriptions on the date above, not a proof that nothing else exists anywhere.

3. How a benchmark with each of them is built

The same way as every benchmark here: the project, installed as its makers ship it, is the native; Omni-Compass on top of it is the other arm; both arms see the same work; the rules are written before the counted runs, frozen on one tuning case and run three times (A, B, C); every row is reported, losses included (`docs/HOW_TO_READ_THE_RESULTS.md`). A meter (Kepler) is not an arm: it reads both arms the same way, so its numbers sit beside the arms' own gauges.

Order (one or two at a time): Goldilocks with the Vertical Pod Autoscaler, and Kepler as the shared meter, on GitHub's machines first; CruiseKube next under its license's evaluation terms; the GPU and platform power pieces in the Lambda kit; EAR and the processor power managers on bare metal when a machine with power registers is rented.

Built so far: **Goldilocks** (register row 80; `scripts/kind_addons_goldilocks.sh`, workflow `kind-goldilocks`, `docs/GOLDILOCKS_PREREGISTRATION.md`), run three times on the card version (`results/live/V5_GOLDILOCKS.md`): the service faster in all three of our runs, machines the same, 1.9% to 2.6% more energy on the declared model, every row shown. **CruiseKube** (register row 81; `scripts/kind_addons_cruisekube.sh`, workflow `kind-cruisekube`, `docs/CRUISEKUBE_PREREGISTRATION.md`), beside KEDA's HTTP add-on, since CruiseKube leaves alone a service whose autoscaler scales on CPU: a trial run proves the wiring and records its chart's SHA-256 for the pin, then three counted runs.

As muscles in the organisms (the founder's order of 12 October: "expand my organisms"): each of the nine is also a muscle of the catalog (`realms/catalog_v5.csv`, ids 2172 to 2181), modelled on the plant its knob turns and placed in the spine family that knob belongs to, so each is in all four realms, the four stacked and the whole tower: Kepler's energy reading driving a pool's target, Climatik's inference power cap, EAR's

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CPU frequency policy and global energy budget, CruiseKube's and Goldilocks's request rightsizing, the Kubernetes Power Manager's core profiles, PEAKS's power-aware placement, the learned GPU power cap and NVIDIA's platform power budget. A model of a knob is not the project itself (class S); the project's own benchmark is the live test of it.

4. Who owns Omni-Compass, and on what terms it is seen

- **The copyright in Omni-Compass belongs to The Omni-Compass LLC.** Contributions are accepted only on the terms of `.github/CONTRIBUTING.md`, which assign their rights to The Omni-Compass LLC.
- **The source is visible under the Omni-Compass Evaluation License (`LICENSE`): evaluation and simulation use only.** It is not an open-source license. Any commercial use, commercialization, monetization, production use, redistribution or hosted service requires a signed, paid Omni-Compass Enterprise License. Seeing the source grants no right beyond the Evaluation License.
- **Two licenses from one owner.** The owner of a copyright may grant it under more than one license at once (an evaluation license to everyone, a paid enterprise license to a customer), may set the terms of each new version, and may assign the copyright. Copies already received keep the terms they were received under.
- **All patents, copyrights and trademarks covering the Omni-Compass engine, its mathematics and its software have been filed in the United States by The Omni-Compass LLC.**
- This section states how the repository is licensed; the license texts (`LICENSE`, `NOTICE`, `DISCLOSURES.md`) govern.

5. What is shown, and what is still to be shown

What is shown, and by which kind of evidence, is set out receipt by receipt in `docs/THE_RECEIPTS.md`. In one line: on real software (class L), Omni-Compass on top of native has given faster service and more work inside the response line on the same machines, and memory back on databases at the same service, with no row LOSS in all three runs on the real stacks; on our own models (class S) no muscle alone is behind native.

The decisive receipt still to be produced is a physical one (class P): the chip's own energy meter on a real GPU, native against Omni-Compass on top, on the same clock and with the same membership as the Kubernetes runs. Every earlier card result ran on a controller since replaced and is obsolete. The run is the founder's, on rented cards, at one exact commit, after the CPU side is done (`docs/GPU_RUN_GUIDE.md`, `docs/GPU_PREREGISTRATION.md`). Until it lands, no energy saving on real machines is claimed. The seat is claimed by design and by the receipts on this page; it is held when the receipts cover it.

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 3

The Unified Circle Principle

Omni-Compass begins with one idea: a system that is closed, bounded and pulled toward a center cannot run away, and everything it does is a return. I call this the closed circle. This chapter states the principle as I hold it, in its mathematical form, and then says plainly which parts of it the software uses and which parts belong to the wider theory the software grew out of.

The statement

```
dX/dt = G(X),        X(0) in Omega, a subset of R^n
G(X) . n(X) <= 0     on the boundary of Omega
grad L(X) . G(X) <= 0
=>  lim (t -> infinity) X(t) in M*, a subset of F
```

Read line by line:

1. **dX/dt = G(X).** The state X moves according to one law G. There is no outside hand: every change comes from the law and the state it is in.
2. **X(0) in Omega.** The state starts inside the admissible region Omega: the set of states that are physically and operationally allowed.
3. **G(X) . n(X) <= 0 on the boundary.** At the wall of Omega, the flow never points outward (n is the outward normal). Nothing that starts inside can cross out. In control theory this is the Nagumo condition: Omega is forward invariant.
4. **grad L(X) . G(X) <= 0.** There is a function L, the energy of the compass, that never increases along the motion. This is a Lyapunov condition.
5. **=> X(t) settles in M*.** Together, an invariant container and a non-increasing energy force every path into the set M* where the energy stops falling: the bottom of the compass.

The power of the statement is that it does not depend on the particular disturbance. Every input up to the size the container is built for has the same answer before it is asked: the state stays inside and returns. That is what I mean when I say that a closed circle holds the answer to every question that can be put to it.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Closure, admissibility, boundedness

The theory sets five requirements on any law that claims to close the circle:

Requirement	Meaning	In the engine
Finite deviation	the distance from the admissible state has a ceiling, abs(E) <= E[max]	the deviation state E drains faster than it can fill
Finite curvature	the landscape the state moves on has no infinite slopes or pits	the drive is bounded by tanh; the authority is clipped
Global conservation	what flows in is matched by what flows out	the drain and the bath's friction match the drive
Recurrence	a disturbed state returns arbitrarily close to where it was	convergence to the target pole at rate K[P]
One law	every subsystem obeys the same law, no special cases	one engine, one compass, every muscle

The closed circle tested

The canonical evolution law has four parts: deviation is damped nonlinearly and coupled to alignment and to the basin; alignment relaxes toward unity and responds to deviation; the basin's curvature evolves with internal structure; damping absorbs excess growth and redistributes energy. Bounded random noise is permitted; divergence is not. A cycle is identified when the system returns arbitrarily close to a prior state within a bounded tolerance under noise. The state advances stepwise under a stable numerical integrator with boundedness checks. Under parameter sweeps the test is always the same three checks: no divergence, bounded, recurring.

Symmetry and conservation in the closed circle

Every conservation law is the shadow of a symmetry (Noether). The closed circle carries four:

Symmetry	Conserved	In Omni-Compass
Temporal (the law does not change with time)	energy	the same law governs every decision; the receipt compares like with like
Spatial (the law does not depend on where)	momentum	the same law governs every muscle in every realm
Rotational	angular momentum	the compass is symmetric about its center; the engine is symmetric between its poles

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Symmetry	Conserved	In Omni-Compass
Internal alignment	alignment invariance	the alignment state is pulled to its pole whichever pole it is

Around them sit the boundary conditions of the circle: maximum deviation (the boundary limit), topological closure (bounded wholeness), nonlinear dynamics (complex interactions), resonant reversal (feedback return), energy-momentum conservation, and cross-scale invariance (scale-independent patterns).

Scale invariance

The theory claims that one bounded nonlinear action has the same form at every scale: cosmological (curvature geometry, compression and expansion, thermodynamic cycling), galactic (rotation curves, mass-energy distribution), stellar (gravitational compression, fusion equilibrium, radiative transport), atomic (electron displacement, orbital coherence, radiative damping) and quantum (localized deviation wells, bounded oscillation, finite amplitude). The universal criteria for such a law are that it operates at every scale and preserves bounded deviation, finite curvature and recurrence. The state vector carries the same meaning at every scale: E the deviation magnitude, U the coherence or flow alignment, S the structural curvature or basin geometry, B the redistribution or damping.

The lineage of unification

Each step in the history of physics unified two things that had been separate: geometry formalized structure; motion was unified across earth and sky; astronomy revealed recurrence; fields replaced action at a distance; curvature unified gravity, though singularities remained; symmetry came to govern the quantum realm. The closed circle is offered as the next step: unity without divergence, a single bounded law with no singularity and no runaway.

What is tested and what is theory

The software uses the engineering core of this principle, and every part of that core is checked:

- The six-state engine, its bounded control command held through the integration step, and the convergence of its alignment state to its pole are proved (`docs/TRACKING_THEOREM.md`) and tested against a C++ twin.
- The invariance and boundedness of each engine state were checked state by state (Chapter "Closing the Circle").
- The compass law pulls every muscle's service reading to the middle of its band under a bounded, smooth force, and its behavior is measured in simulation and on real software.

The wider claims - one law across every physical scale, the cosmological and quantum readings, the candidate unified action - are the theory from which Omni-Compass was built. They are stated here so that the engineer

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

understands where the design comes from. They are not claims that the software has measured, and no result in this book depends on them.

CHAPTER 4

The Four-Piece Engine

The engine is built in four pieces, stacked like the stages of a press, each feeding the next:

Piece	Name	What it establishes
1	Foundational Engine	the base laws, the states and the boundaries: a closed, bounded, nonlinear adaptive engine with a four-state dynamical structure (misalignment, alignment recovery, coherence potential, path interaction), bounded convergence and persistence with decay, intrinsic feedback and stabilization, and an empirical validation framework for recovery
2	Geometric Response	geometric alignment and response dynamics: a geometric coherence field, a unified potential governing geometric deformation, and the propagation mechanism of that response
3	Coherence Evolution	coherence through response and adaptation: the coherence-response envelope, the system response field, and the coupling of coherence state with response propagation
4	Unified Master Field Law	one coherent field structure: it integrates pieces 1-3 into one closed dynamical structure with a unified potential governing all subsystems, bidirectional propagation between engine state, geometry and response, bounded convergence across the whole system, and no external authority: all evolution emerges from internal coupling

The four pieces compress every domain through one center core. The compression process has four stages: the domains unordered; compression in progress; coherence achieved; return to equilibrium. The result has four properties: coherent, bounded, admissible, stable - one law, one return, one cycle.

The 24 domains. The theory gathers 24 domains into four quadrants around that core:

Quadrant	Domains
1. Foundational structures	Newtonian gravity; Maxwell electromagnetism; Einstein relativity; Schrodinger quantum mechanics; Shannon information

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Quadrant	Domains
	theory; Dirac quantum field theory
2. Dynamics and symmetries	Noether symmetry laws; Hamiltonian dynamics; Lagrangian mechanics; thermodynamics; topology; differential geometry
3. Coherence evolution	gauge field theory; fluid dynamics; field theory; discrete mathematics; solid-state physics; plasma physics
4. Complex systems and integration	astrophysics; consciousness and information integration; biological systems and self-organization; universal mathematical structure; systems theory and complex adaptive systems; the unified Omni-Compass domain (the unified admissible state)

In the software, the four pieces appear as the engine's state equations (piece 1: deviation, alignment, memory and basin), the basin potential and its flow (piece 2), the bath that absorbs and redistributes (piece 3), and the one governor that couples every muscle to one law with no outside authority (piece 4).

CHAPTER 5

The Compass

The Omni-Compass rose is the whole mechanism drawn as one picture.

The ring. Twenty-four letters, the complete Greek alphabet from Alpha to Omega: the complete set, nothing missing, one letter for each domain. On a ring the end runs back into the beginning: after the last letter the ring returns to Alpha. That is the closed circle: identity, return, cycle.

The four points. Four letters are lifted out of alphabetical order and set on the four points of the rose:

Point	Letter	Mark	Meaning in the engine
North	Alpha, the first	+	the positive pole of the alignment's double well, U = +1
South	Omega, the last	-	the negative pole, U = -1
East	Beta	>	the drive coming in (the beta terms that fill the deviation)
West	Gamma	<	the coupling that carries energy out to the bath, where friction absorbs it

The north-south line is polarity; the east-west line is flow in against flow out. A system stays inside its circle exactly when what flows out can always match what flows in.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The inner marks.

Mark	Meaning	In the mechanism
+ and -	the two polarities	the two poles of the double well
> and <	push out, pull in	the antagonist pair: the up force and the down force
the double arrow	exchange both ways	the two-way wire: read in, write out
the up-tack	the ceiling	the cover: nothing goes past the top
approximately-equal	the wave, the tolerance	the band and its cushion: hold near the center
the star	the guiding star	the target the needle points to

The center. The spiral at the middle is the attractor: every path winds inward to one point.

Opposite letters. Across the center, zeta faces xi: both are the engineer's symbol for the damping ratio, and a damping ratio of one is the critical glide to the center with no overshoot. Lambda faces psi: the eigenvalue and the wave function of the eigenvalue equation.

CHAPTER 6

Basins, Polarity and the Dual-Basin Engine

Geometric funneling and basin formation

A basin forms in three stages. While the driving tension T is low, curvature is weak and there is no dominant basin: flows spread outward. As T increases, curvature concentrates and a positive feedback loop begins. Then a stable geometric funnel forms: self-reinforcing curvature, finite depth, bounded deviation, with the boundary abs(E) <= E[max] respected. Structure emerges from fluctuation through curvature concentration and feedback.

In the engine, the basin state S rolls down its potential Phi(S) to a stable bottom; in the compass, every muscle's service reading is pulled into the bottom of its own funnel.

Polarity

Two like charges repel without anyone pushing them: the force comes from the shape of the field. A wall built of like polarity at the edge of a band pushes the state back harder the closer it comes (as one over the distance squared), and two such walls cancel at the center, where the state comes to rest. This is the boundary condition of the closed circle written as a force: the field itself points inward at the wall.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The repulsion does not create energy: the field stores what it took to bring the charges together. What is gained in the computer is that the force is computed rather than spent: the brain computes it at no physical cost, and the machine's energy is saved because its knob no longer fights itself.

A symmetric pair of repelling walls was tested on the modelled GPU card. It raised work per energy but also raised the time spent past the service line, because the lower wall pushed capacity away when the card was calm. It was removed. The upper wall alone remains a candidate.

The dual-basin engine

The dual-basin engine is a recursive transform with five stages:

1. **Compression.** Two outer basins of positive polarity draw matter and energy inward in a spiral; rotation organizes the flow; compression increases toward the center.
2. **Saturation.** At the center, two cores of negative polarity meet back to back; the basin structure S reaches its critical value and the curvature reaches its maximum.
3. **Transition (ignition).** Where the cores touch, the transition operator T(X) = sigma(S - S[c]) T(X) activates: compression halts and redistribution begins.
4. **Redistribution.** Two axial jets carry the excess out along the axis, with opposite helicity to the inflow.
5. **Reset and recurrence.** The domain relaxes and the cycle repeats.

The core mathematics is a bounded flow: dX/dt = G(X, t) with abs(G(X)) <= C[G], a curvature envelope K(X) <= K[max], and a redistribution term that activates only at saturation. The state X = (E, U, S, B) stays in its admissible domain, whose horizon boundary is forward invariant (the Nagumo condition again).

For an engineer, the transform reads: pull toward the center (compression); a wall where the muscle saturates; and, when one muscle saturates, move the excess to its siblings rather than hammering it (redistribution). The first two are built into the compass. Redistribution across muscles is designed and not yet built; it is on the roadmap.

CHAPTER 7

The Reflex Rule: One Body, One Brain

A body does not decide in advance how much force a muscle will need. It sends a signal, the muscle moves, the nerves report what the movement did, and only then does the brain choose the next signal. Nothing in that loop is a forecast. The decision is made on the reaction, after the reaction, and from the reaction. The founder's order of 10 October 2026 puts the whole of it in one sentence: what the brain sends to a muscle has to coincide with what the muscle sends to itself and where it is at. This chapter is the theory of that sentence, and the reason it is the whole mechanism rather than one more rule beside the others.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The reflex, not the forecast

The compass of the earlier chapters is a force: where a reading sits in its band, how hard the two opposing forces push it back toward the middle, and how smoothly. A force alone does not say when it may become a new setting. A governor that turns every urge straight into a move is a governor that guesses, and a guess made on a machine that is already working is a guess paid for by that machine. The reflex rule closes the gap: a new setting is earned by a trial on the muscle itself, and the trial is read from the muscle's own reaction. The urge proposes; the reaction disposes.

A trial runs to its end

The rule that taught this was broken in a measured run. On 10 October the message broker's consumer group was given a spend trial: one more consumer, then measure. The extra consumer drained the waiting messages so fast that the service went calm at once, and the harness of that day ended the trial the moment the calm arrived, before the measurement it existed to take. Every spend was abandoned by the success it caused. A trial that can be ended by the calm it creates can never prove that it was worth it. Hence the first rule: a trial runs to its full measurement and is never ended by the calm it causes; only the wall, a service reaching its line, or the engine's own time limit ends it early. In the one repetition of that day in which the brain allowed the third consumer early, the whole of the earlier gain came back at a fraction of the spend: the slowest five percent of messages from 2,450 ms to 57 ms, the queue from 3,375 waiting messages to 253, the work done inside the line up 17%, with 2.5 consumers on average where the earlier law had spent six to eight. The gain is real and cheap; what was missing was a fair trial of it.

No forcing: the need and the urge

A spend is tried only when the muscle's own reading says there is something to buy: messages waiting, a cache missing, clients queued at a pool. A give-back is tried only when the whole body is calm. The compass force is the urge, smooth and bounded; the muscle's own condition is the need. The brain never moves a muscle because it wants to. It moves it because the muscle has shown that a move can pay, and then only by trial.

One body, one brain, one tick

A muscle judged alone can be read GAIN by pushing its neighbour away from its own: a cache that takes memory from the database beside it, a consumer that takes processor time from the service it feeds. So the brain reads the whole body first, every muscle's state, every service's speed and work, the host's processor, memory and energy where a meter exists, and judges the body's cost: the Omni index's own arithmetic over all the work, all the speed, all the machines and all the resources. On top of the body's total stands a guard for every part. A step is refused if any one service read LOSS beyond its cushion, even when the total improved. Pushing one thing to a LOSS to move another toward its own is refused by rule, not by luck.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

One trial at a time, nothing permanent, the wall belongs to the body

If two muscles move together, the brain cannot tell which one caused what it feels. Inside a body, one new trial runs at a time, granted to the muscle asking loudest whose own condition holds; every other muscle keeps acting inside what it has already proven, so nothing is frozen and only new trials wait their turn. Every allowed step is tried again on the recheck and pulled back when it stops paying, and a muscle at native is asked again whenever its signal returns: native is where the brain stands when it has not yet been shown a reason, never a verdict. And if any service reaches its line, the trial stops, that step is undone, and every force in the body lifts off. The wall is the body's, not the muscle's.

Why this is the closed circle again

The Unified Circle Principle says that a system closed on itself, bounded, and pulled toward its center cannot run away: everything it does is a return. The reflex rule is that principle carried into time. The loop is closed through the system's own reaction; every excursion is bounded by the trial's limits, the cover and the wall; and every allowance is pulled back to native unless the body keeps proving it. The compass holds each reading in the middle of its band. The reflex holds each decision in the middle of what has been shown.

What it means for the evidence

Omni v3, the engine on main, already tries a slow knob on the muscle itself before it moves it, and the live harnesses carry the same verdict around every live knob. Omni v4 is the engine written to make the rule hold on every wire by construction: one body that every muscle's wire passes through, the trial's rules inside the verdict, and no wire that can write around them. Because that changes the engine, v4 carries its own fingerprint, the package version follows it, and every result in this book is run again on it. No result is read across engines.

PART TWO

The Mathematics

Eight equations, one control law, and the proofs, audits and declarations that hold them fixed.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 8

The Canonical Declaration

Every report the engine has ever produced opens with the same declaration. It is the birth certificate of the mechanism: what the engine is, which equations it runs, what every symbol means, which parameters it samples, how a run is born, conveyed and certified, and what the engine is allowed to say about itself. This chapter sets it down in full so that anyone who reads the rest of this book can always come back to the source.

The identity of the engine

The Omni-Compass Unified Governing Convergence Control Core Engine. One canonical eight-line mathematical core, called Piece I, integrated by fourth-order Runge-Kutta (RK4) and exercised by Monte Carlo. Around that core sit the benchmark suites: the public enterprise manager mechanism benchmark, the one-stack-normalized global megastack, fragmented stack governance over matched scenarios, and the enterprise evidence suite covering cause, fail-safe, scale, muscle, security and economics. All of them run on bare metal, on premises, private, public, hybrid and edge alike, because the core does not care where it runs.

The equation form (authoritative, eight lines)

```
(1) dE/dt   = -α_E E + β_int(t) + β_ext(t) + v_eff
(2) dU/dt   = μ U(1 - U²) - (dE/dt)/E_max - λ_U U + u,      |u| ≤ U_AU
    ↪ THORITY
(3) dI_U/dt = 1 - U - σ₁ E - δ S - λ_I I_U
(4) v_eff   = χ(t) c · tanh(λ₀ + λ₁(U - U_t) + λ₂ S),       χ(t) = cos
    ↪ (ω_B t / 2)

(5) Φ(S)    = ½ α_s S² + ¼ β_s S³ - δ S
(6) dS/dt   = F_state(S) = -∂Φ(S)/∂S = δ - α_s S - ¾ β_s S²
(7) B'' + (ω_B / Q_B) B' + ω_B² B = γ_c δ S                  [continu
    ↪ ous]
(8) R_B[n] = D²_h B[n] + (ω_B / Q_B) D⁻_h B[n] + ω_B² B[n] - γ_c δ S[n
    ↪ ] = 0    [discrete audit]
```

Line (1) is the error, the energy of misalignment: it decays at its own rate, it is pushed by forces from inside and outside, and it is pushed by the effective velocity of the system. Line (2) is coherence, the alignment index: it lives in a double well with two homes at +1 and -1, it is pulled down by any rise in error, it leaks, and it is the one line the governor touches, through the control u, which is never allowed beyond its authority. Line (3) is the information channel that keeps the record of how far coherence has been from home. Line (4) is the effective velocity, saturated so that it can never exceed the limiting speed c, and multiplied by the spinor

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

phase. Lines (5) and (6) are the potential of the coherence state and the flow it creates, downhill. Line (7) is the bath, the field that every real system sits in, driven by the state. Line (8) is the bath written on the grid the computer actually steps on: it is an audit of the numbers, not a second bath.

The control law

```
σ        = nearest_signed_basin(U₀)
u_m      = sat(-f_U(x_m, t_m) + K_P (σ - U_m), ± U_AUTHORITY)
x_(m+1)  = RK4_h(x_m; u_m),   u_m held across all four RK4 stages
```

The nearest signed basin is declared at Step 0, before the first microstep. The control cancels the natural drift of coherence and adds a proportional pull to the declared home, then it is clipped at its authority. It is held fixed through the four stages of each RK4 step. There is no post-step overwrite of the state and no projection onto the basin. Whatever the engine reaches, it reaches by the flow of its own equations.

The symbol chart

Symbol	Meaning
E	Error, the misalignment energy
U	Coherence, the alignment index
I[U]	Information, the internal-coherence channel
S	Coherence state potential
B	Bath field
B'	Bath field time derivative
α	Feedback rate
β[int] (t)	Internal forcing function
β[ext] (t)	External forcing function
k	Coherence logistic damping gain
σ_1	Coupling of error into the information channel
δ	Linear coherence coupling parameter
λ_0	Saturation bias
λ_1	Saturation gain
λ_2	S-state coupling gain
U_t	Target coherence state
c	Limiting velocity

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Symbol	Meaning
E[max]	Per-trajectory error-rate normalization scale
α_S	S-potential quadratic coefficient
β_S	S-potential cubic coefficient
Φ(S)	Potential field function
F[state] (S)	Canonical S-state flow
ω[B]	Bath frequency
Q[B]	Bath quality factor
γ[c]	Bath coupling gain

The coupling architecture of Piece I

The closed feedback core is E, U and S: error drives coherence, coherence and the state drive the velocity, the velocity drives error. The information channel I[U] and the bath B with its derivative are driven response channels: they listen to the core and record it, and the core does not depend on them. γ_1 is reserved for compatibility and is inactive in the Piece I derivatives. The bath law uses ω_B^2 B, so ω[B] carries the units of angular frequency. Line (7) advances B and B' continuously by RK4. Line (8) evaluates the discrete residual with D^2_h B[n] = (B[n+1] - 2B[n] + B[n-1]) / h^2 and D^-_h B[n] = (B[n] - B[n-1]) / h.

The spinor closure

The spinor extension introduces the phase θ(t) = ω[B] t and multiplies line (4) by χ(θ) = cos(θ/2). At 0 degrees the factor is +1, at 360 degrees it is -1, and at 720 degrees it is +1 again. A full turn of the bath reverses the sign of the velocity; only two full turns bring it home. The standard 20-step run evaluates the part of the phase it reaches, and a dedicated evidence test checks the 0, 360 and 720 degree periodicity on its own.

The signed basins

The canonical Monte Carlo sampler draws the starting coherence U(0) symmetrically on [-1, +1]. The nearest signed basin at Step 0 is declared the target before the first microstep. That keeps the eight-line equation exactly as written while making every governed run exercise capture into both +1 and -1. A separate dual-basin suite throws runs across from one basin to the other under disturbance and watches them recover.

Birth, conveyance and certification

Step 0 is the sampled state before integration. Step 1 is the first completed macro step. A run has at most 20 macro steps of 10 micro steps each, at a time step of 0.1. A step is in basin when U lies within 0.10 of +1 or -1.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Born in basin.** A run that starts inside a basin at Step 0 is born in basin for life. Step 0 counts as the first observation of its streak. It is confirmed conveyed after Steps 0 to 4 stay in the same basin. It is never called self-tuned, and it stays under the same regulation for all 20 macro steps.
- **Self-tuning.** A run that starts outside both basins is self-tuning applied from Step 1. The same nearest-basin law is active on every trajectory, born or not, over the whole 200-microstep horizon. The category never switches the regulation off.
- **CONVEY-5.** Five consecutive same-basin observations. The first is the conveyance entry step, the fifth is the confirmation step. The latest streak may start at Step 16 and confirm on Step 20.
- **CERT-10.** Ten consecutive same-basin observations. The latest streak may start at Step 11 and complete on Step 20. The code asserts both bounds before it runs and checks every emitted row against them.

Conveyance is an event, not an ending. No run may be both born in basin and self-tuned. Stability is judged on the history, not on one snapshot.

The Monte Carlo declaration

Setting	Value
Initial U distribution	Uniform on [-1, +1], symmetric
Monte Carlo runs	500
Macro steps per run	20
Micro steps per macro step	10
Integration time step	0.1
Basin centers	+1 and -1
Basin tolerance	0.10
Stability window	5
Conveyance cutoff step	20

The full horizon is always executed. A run is classified as a failure if it crosses the divergence threshold at any recorded state, or if it exhausts the horizon without CONVEY-5.

The parameter sets

Group	Parameter	Value or range
Core	α	4.2
Core	β[int]	0.0 to 1.0
Core	β[ext]	0.0 to 1.0
Core	E[max]	1.0 to 10.0, sampled once per trajectory

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Group	Parameter	Value or range
Core	k	1.7
Information and coupling	σ_1	0.38
Information and coupling	δ	0.01 to 1.0
Information and coupling	γ_1	1.35, reserved, inactive in the derivatives
Information and coupling	$\gamma[c]$	1.0
Saturation and phase	c	0.5 to 5.0
Saturation and phase	λ_0	-2.0 to 2.0
Saturation and phase	λ_1	0.1 to 3.0
Saturation and phase	λ_2	0.0 to 2.0
Saturation and phase	U_t	0.5
Saturation and phase	$\chi(t)$	$\cos(\omega[B]\, t / 2)$ when the spinor closure is on
S-state potential	α_s	0.05 to 0.25
S-state potential	β_s	0.05 to 0.25
Bath	$\omega[B]$	0.1 to 5.0
Bath	Q[B]	0.5 to 10.0
Noise and drift	D	0.0
Noise and drift	μ	0.0

The mechanism-bound reporting doctrine

Every table, grid, chart, scorecard, classification and conclusion the engine emits must be computed from what it actually executed: the trajectory rows, the recorded state histories of E, U, I[U], S, B and B', the sampled parameters, the RK4 derivative evaluations, the basin entry and dwell histories, the line (8) residuals, the solver comparisons, the ablations, the disturbance and stress runs, the compute benchmark event records, and the enterprise benchmark ledgers.

No decorative grade, inferred score, hand-assigned quality category or presentation-only number is allowed to stand as an engine result. Prose may point to the exact source and the edge of the claim. It may not manufacture evidence, put a grade where a measurement belongs, or present a grid the mechanism never ran as though it had. That doctrine runs through every page of this book.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Availability and the rights boundary

Time is of the essence. Omni-Compass is available from The Omni-Compass LLC for controlled technical evaluation, research collaboration, pilot integration, strategic engagement and separately licensed commercial deployment. The same rights boundary applies at every level of use: inspection, local execution, simulation, research, benchmarking, observe-only, shadow mode, supervised control, bounded autopilot, hybrid control, direct-to-muscle control, production, embedding, hosted service, productization, monetization, redistribution and derivative work.

Public access does not make Omni-Compass open source. Commercial use of any kind requires a separately executed written license. The instrument is a license, not a sale and not a transfer of ownership. For planning only, the introductory benchmark is 10% of independently verified and contractually accepted value captured; the base and the amount are specific to each company, the terms are expected to rise as validation and adoption grow, and only a signed agreement creates any obligation.

CHAPTER 9

The Engine: Eight Equations and One Control Law

The engine (`omnicompass/core.py`, frozen and fingerprinted) carries a six-part state x = (E, U, I[U], S, B, Ḃ):

State	Meaning	Physical picture
E	deviation: how far the system is from where it should be	a tank that fills with stress and drains on its own
U	alignment, between the two poles -1 and +1	a ball in a double well: two stable poles, a hill between them
I[U]	memory of misalignment	an integrator that remembers and slowly forgets
S	basin structure	a ball rolling to the bottom of its landscape
B, Ḃ	the bath	a spring with friction that absorbs and settles energy

The eight equations (Appendix C gives them in full):

1. dE/dt = −α[E] E + β[int] + β[ext] + v[eff]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. $dU/dt = \mu\, U\,(1 - U^2) - (dE/dt)/E[max] - \lambda[U]\, U + u$, with $|u| \le 25$
3. $dI[U]/dt = (1 - U) - \sigma_1\, E - \delta\, S - \lambda[I]\, I[U]$
4. $v[eff] = \cos(\omega[B]\, t / 2)\, c\, \tanh(\lambda_0 + \lambda_1\,(U - 0.5) + \lambda_2\, S)$
5. $\Phi(S) = \alpha_s\, S^2/2 + \beta_s\, S^3/4 - \delta\, S$
6. $dS/dt = -d\Phi/dS$
7. $d^2B/dt^2 = \gamma[c]\, \delta\, S - (\omega[B]/Q[B])\, dB/dt - \omega[B]^2\, B$
8. R[B]: a finite-difference audit of (7), never fed back

The control law. $u = clip(-fU + K[P]\,(\sigma - U), -25, +25)$, where f[U] is the drift of U with the command at zero, σ is the target pole and K[P] = 12. The first term cancels whatever is shoving U (the push); the second pulls U to its pole, harder the farther it is (the pull). The command is held unchanged through every stage of the fourth-order Runge-Kutta step and U is never rewritten afterwards. Inside the authority limit, U converges to its pole at rate K[P]; this is proved (`docs/TRACKING_THEOREM.md`).

What each equation does, in words

The six numbers describe the whole system the way a physician's six vital signs describe a patient, and each equation says how one of them moves.

- **Equation 1, the deviation tank.** *E* is how hard the system is being driven: queues, overload, power, heat. It drains on its own at a fixed rate (α[E] = 3.487) and is filled by two pressures, internal (queue and overload, β[int]) and external (power, heat, network, staleness, security, β[ext]), plus a drive term v[eff] that is bounded by a hyperbolic tangent. However extreme the observation, the engine's response rate is capped at c = 1. This is the saturation, the "speed limit" that no input can exceed.
- **Equation 2, the alignment.** *U* is how healthy and settled the system is, and it lives in a double well: two stable poles at +1 (healthy) and −1 (failed) with an unstable ridge at 0. A rising deviation pushes *U* out of the healthy well; the bounded command *u* pulls it back. The cubic term $\mu\, U\,(1 - U^2)$ is what makes the walls of the well push back harder the farther *U* strays.
- **Equation 3, the memory.** *I[U]* grows while *U* is below its pole, is reduced by deviation and stress already being dealt with, and leaks at λ[I] = 0.719. It is the engine's memory of unrelieved pressure: a system that has been stressed for an hour is not the same as one stressed for a second, and this integrator is what knows the difference.
- **Equation 4, the drive.** The bounded drive v[eff] mixes the alignment and the stress through a tanh, with a slow cosine of the bath's frequency on top, so the drive breathes rather than pushes constantly.
- **Equations 5 and 6, the stress.** *S* rolls downhill in a cubic potential to its stable root. It is the slowest restoring force: structural stress from heat, power, network, security and staleness that builds and relaxes over minutes rather than seconds.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

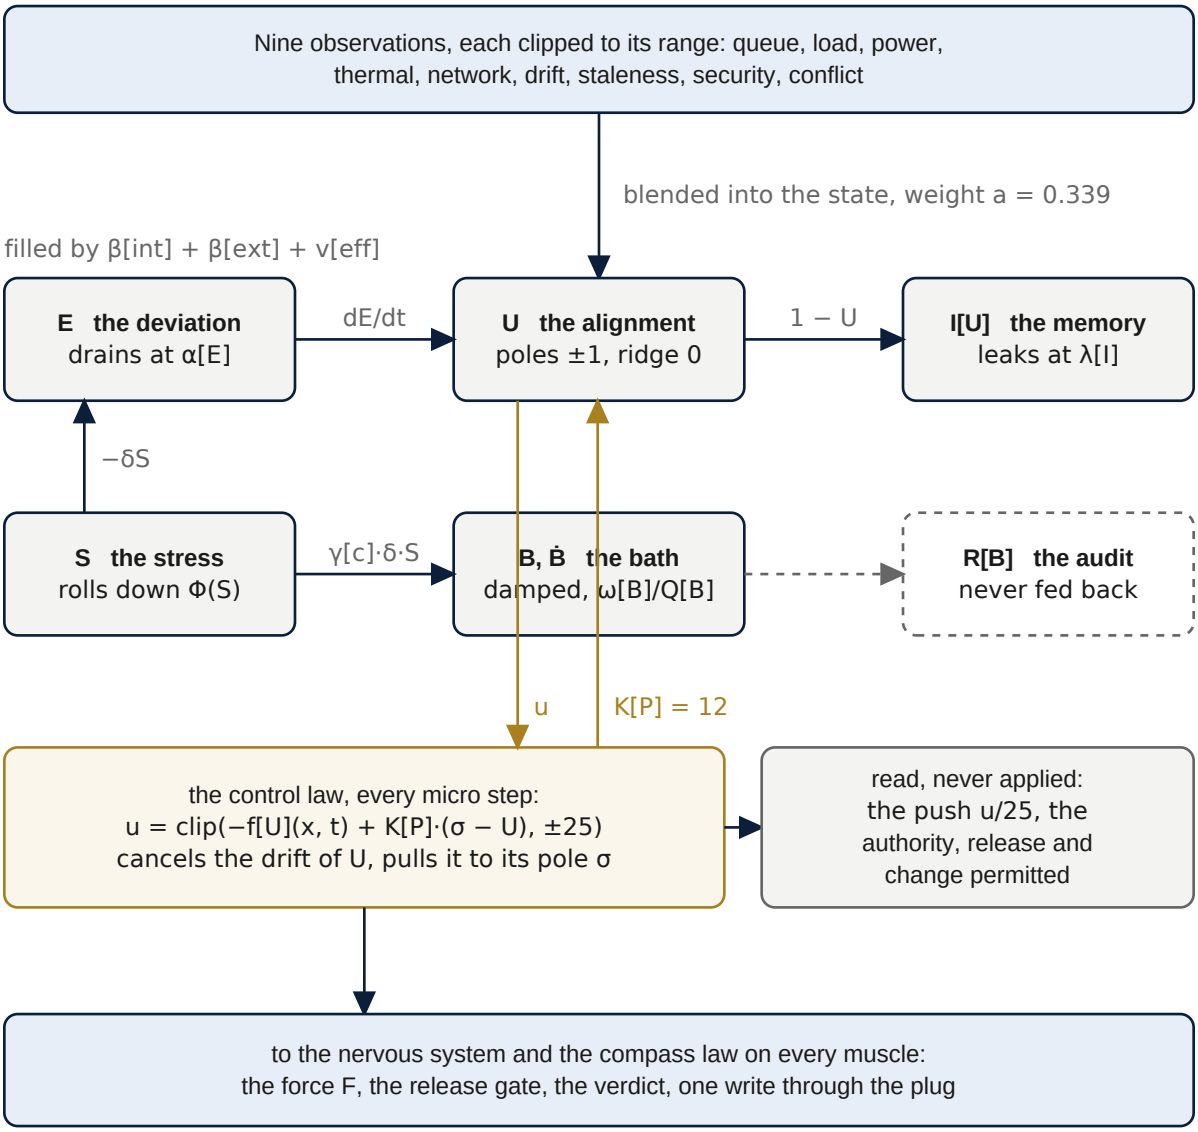


Figure 5. The engine's six states and the control law. Nine clipped observations are blended into the state x = (E, U, I[U], S, B, Ḃ) with weight 0.339 and the state moves one macro step. The deviation E drains at α[E] and is filled by the two pressures and the bounded drive v[eff]; its rate of change pushes the alignment U, a double well with poles at ±1; the need 1 − U accumulates in the memory I[U], which leaks at λ[I]; the stress S rolls down its cubic potential Φ(S), drives the bath B through γ[c]·δ·S and enters E and I[U] through −δS; the audit R[B] re-checks the bath and is never fed back.

The control law u cancels the drift of U and pulls it to its pole at rate K[P] = 12; it is read, never applied to a knob: the push u/25, the authority and the release permission go to the nervous system and the compass law.

- **Equation 7, the bath.** A damped harmonic oscillator (natural frequency ω[B] = 1, quality Q[B] = 2.5) driven by stress. It turns stress into a smooth, lagged tide, and it is the only second-order element in the engine; its friction is what settles the whole.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Equation 8, the audit.** The bath equation is re-checked numerically every step with a finite difference, and the check is recorded and never fed back: an instrument on the engine, not a part of it.


(a) the alignment U, a double well:

$V(U) = \mu(U^4/4 - U^2/2)$

(b) the stress S, a cubic potential:

$\Phi(S) = \alpha_s S^2/2 + \beta_s S^3/4 - \delta S$

(α_s 0.12, β_s 0.10, δ 0.5: the engine's defaults)

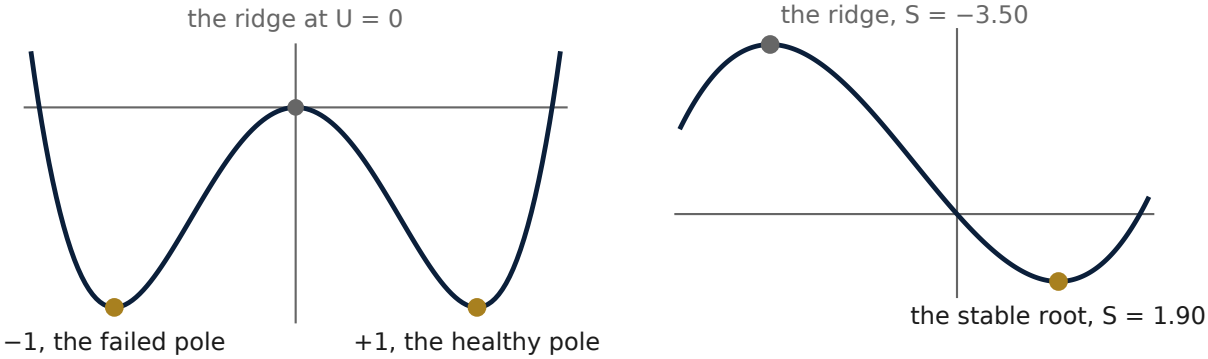

$dU/dt = \mu U(1 - U^2) + \ldots$

the ball rolls to the nearer pole

$dS/dt = -d\Phi/dS$: S rolls to the stable root;

the landscape is open below the ridge

Figure 6. The two landscapes inside the engine. (a) The alignment U lives in a double well, $V(U) = \mu(U^4/4 - U^2/2)$, with stable poles at +1 (healthy) and −1 (failed) and an unstable ridge at 0; the drift $\mu U(1 - U^2)$ rolls the ball to the nearer pole. (b) The stress S rolls down the cubic potential $\Phi(S) = \alpha_s S^2/2 + \beta_s S^3/4 - \delta S$; with the engine's default parameters the stable root is at S = 1.90 and the ridge at S = −3.50, below which the landscape is open (its closure is given in the chapter Closing the Circle in the Engine).


Integration is classical fourth-order Runge-Kutta, ten micro-steps of 0.01 per macro step, and the C++ twin matches the Python to 3.6×10^{-15} on 500 reference trajectories (Chapter 69).

From telemetry to state, and from state to action

Each decision, the telemetry is normalised to nine observations: queue, load, power, thermal, network, drift, staleness, security and conflict. An observed state is computed from them by fixed weights (`omnicompass/adapter.py`, `observe_vector`), the engine's state is blended toward it with weight 0.339, and the state is then evolved by one macro step of the equations. From the state, the governor evaluates the control's push, u(x)/25, which is a number between −1 and +1 that says how hard the engine is pulling toward health; a target utilisation that falls as the memory and the deviation rise; whether a release (giving something back) is permitted at all, which is only while the push reports convergence and the band and dwell allow; and whether change is permitted, which requires *U* above its gate and no security block. All of this is written to the audit every decision (`docs/MECHANISM_OF_ACTION.md`, Chapter 59 to 6, and `python`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`tools/mechanism.py`, which reproduces the measured numbers in `results/MECHANISM_OF_ACTION.json`).

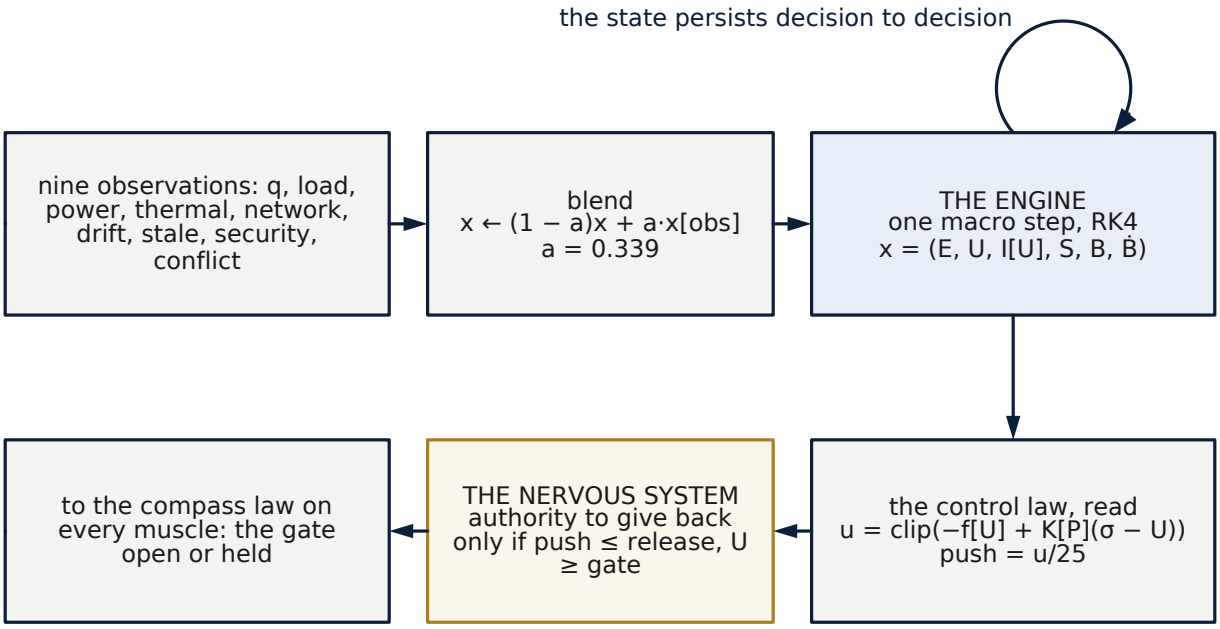

The engine is the body's physiology; it grants the authority and feeds the release gate. The compass law is the hand on each lever; u is evaluated and never applied to a knob. Every line of this chain is in the audit record of every decision.

Figure 7. Block diagram: from the observations through the engine to the authority. The nine clipped observations are blended into the state x = (E, U, I[U], S, B, Ḃ) with weight a = 0.339; the engine moves one macro step (RK4) and its state persists from decision to decision; the control law u = clip(−f[U] + KP) is read, never applied to a knob, and its push u/25 goes to the nervous system, which grants the authority to give back only while push ≤ release and U ≥ gate. What leaves the chain is the gate's state, open or held, to the compass law on every muscle.

The nine observations are worth naming in plain words, because every later number is a weighted sum of them (`omnicompass/adapter.py`, `observe_vector` and `assimilate`). **Queue** is the work waiting as a share of the work being served; **load** is utilisation against the stack's own target; **power** and **thermal** are the electrical and heat stress against their limits; **network** is the same for the wire; **drift** is how far the levers stand from where native had them, so that a governor that has pushed far from the operator's settings reads as more stressed than one that has not; **staleness** is the age of the readings, which rises when a sense goes quiet; **security** is the hold flag; and **conflict** counts other hands seen on the levers. Each is clipped to a declared range before it is used, so no single runaway reading can swamp the others. The stress the engine assimilates leans most on the queue (a weight of 0.25) and on load above 85% of target (0.18), then power, heat, network and drift in that order, with conflict and staleness last; the utilisation it blends toward falls with the queue first (0.27) and with power and heat next. The weights are fixed numbers in the frozen engine, the same on every stack, and a reader who wants to know why a decision read the body as stressed can recompute the sum from the audit line, which records all nine observations. What the weights encode is a judgement made once: that

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

work waiting is the first sign of a body in trouble, that a lever far from native is itself a mild stress, and that a reading one cannot trust is a reason for caution rather than for action.

Where the engine sits, and where the compass law sits

A reader meeting the engine and then the compass law (Chapter 20) may ask which of the two moves the knob. The answer, in the live controllers, is this: the **compass law** sets each knob, the **verdict** narrows where the law may go, and the **engine** grants the authority, feeds the release gate and the nervous system, and is audited every decision (`omni_controller/controller.py`, its docstring). The engine is the organism's physiology: how stressed it is, how long it has been, whether it is settling. The compass law is the hand on each lever. The engine's own control law u is evaluated, not applied to a knob directly: it is the push the nervous system reads to decide whether giving anything back is permitted now. This separation is why the engine could be frozen with its proofs untouched while the compass law was written as its own, separately tested law, and why `verify.py` seals both.

One decision, followed through, shows the order. The controller wakes on its period and reads its senses: the service gauge (a response time, a statement latency, a consumer lag), the resource gauge (machines, connections, memory) and the knob's current value read back from the device. The **engine** takes the normalised observations, blends its state toward them and evolves one macro step; from the state it reports whether the body is converging, what authority the organ has earned and whether a release is permitted at all (section 4.2). The **compass law** then reads the service gauge as a position in its band and computes the force (Chapter 20): positive, and the direction rule asks for capacity in proportion; negative, and it asks for one notch back, but only if the engine's release gate is open, the resource is demonstrably idle and the dwell has passed. The **verdict** stands over the slow knobs: a knob the paired trial has not cleared at the 2% line is not moved at all and stays native. What survives all three is one write to the **plug**, read back from the device, and one line in the **audit** that records the senses read, the engine's state and push, the force, the gate's reasons and the value sent and taken. In the kill test's first repetition (section 7.1) this produced 114 such lines and 42 writes: every decision that wrote nothing is in the record with the reason the gate held, which is the point of writing all of it down.

CHAPTER 10

The Canonical Engine

One engine runs Omni-Compass, and every result in this repository comes from it. This page names it, gives its equations exactly as the code computes them, and names every other form as a variant. Where any document, manual, chart or filing states the equations differently, this page and the file it fingerprints are what the software runs.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

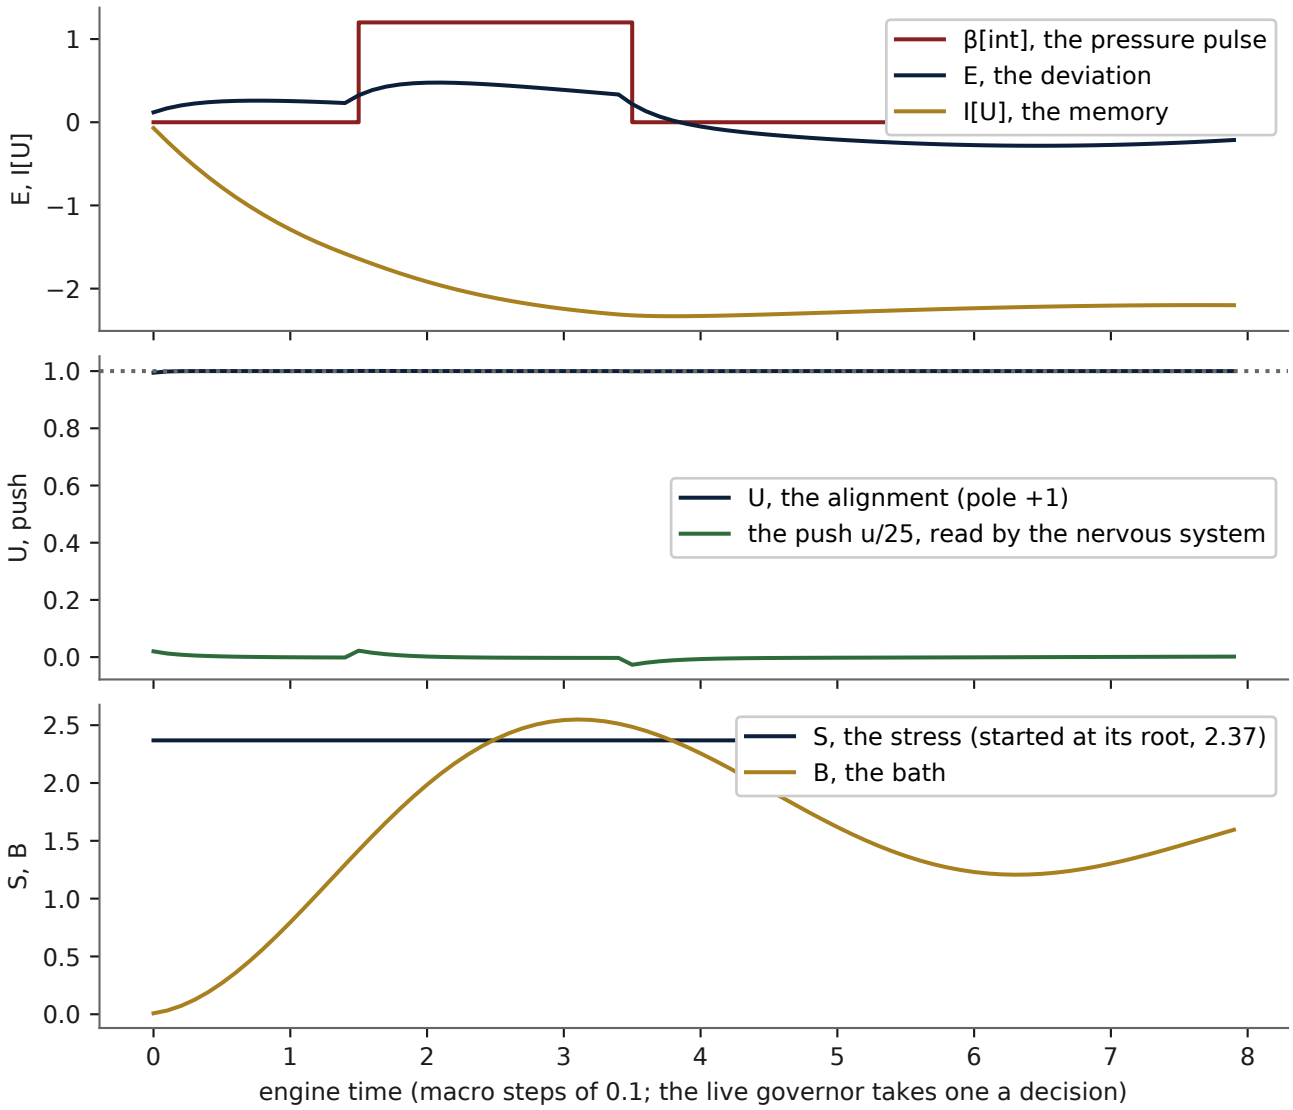


Figure 8. Modelled trace: the engine's six states answering a pressure pulse (class S: omnicompass/core.py with the control law on, the stack's parameters, started at the stress root). An internal pressure β[int] = 1.2 is applied from macro step 15 to 35: the deviation E rises and drains, the memory I[U] accumulates the need, the alignment U holds at its pole while the push u/25 is read by the nervous system, and the bath B fills from the stress S.

1. The canonical engine: `symmetric_verified`

Name	`symmetric_verified` (`omnicompass/configurations.py`, `DEFAULT`)
Code	`omnicompass/core.py` (Python), `cpp/src/core.cpp` (C++ twin, sealed in `results/SEAL.json`)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

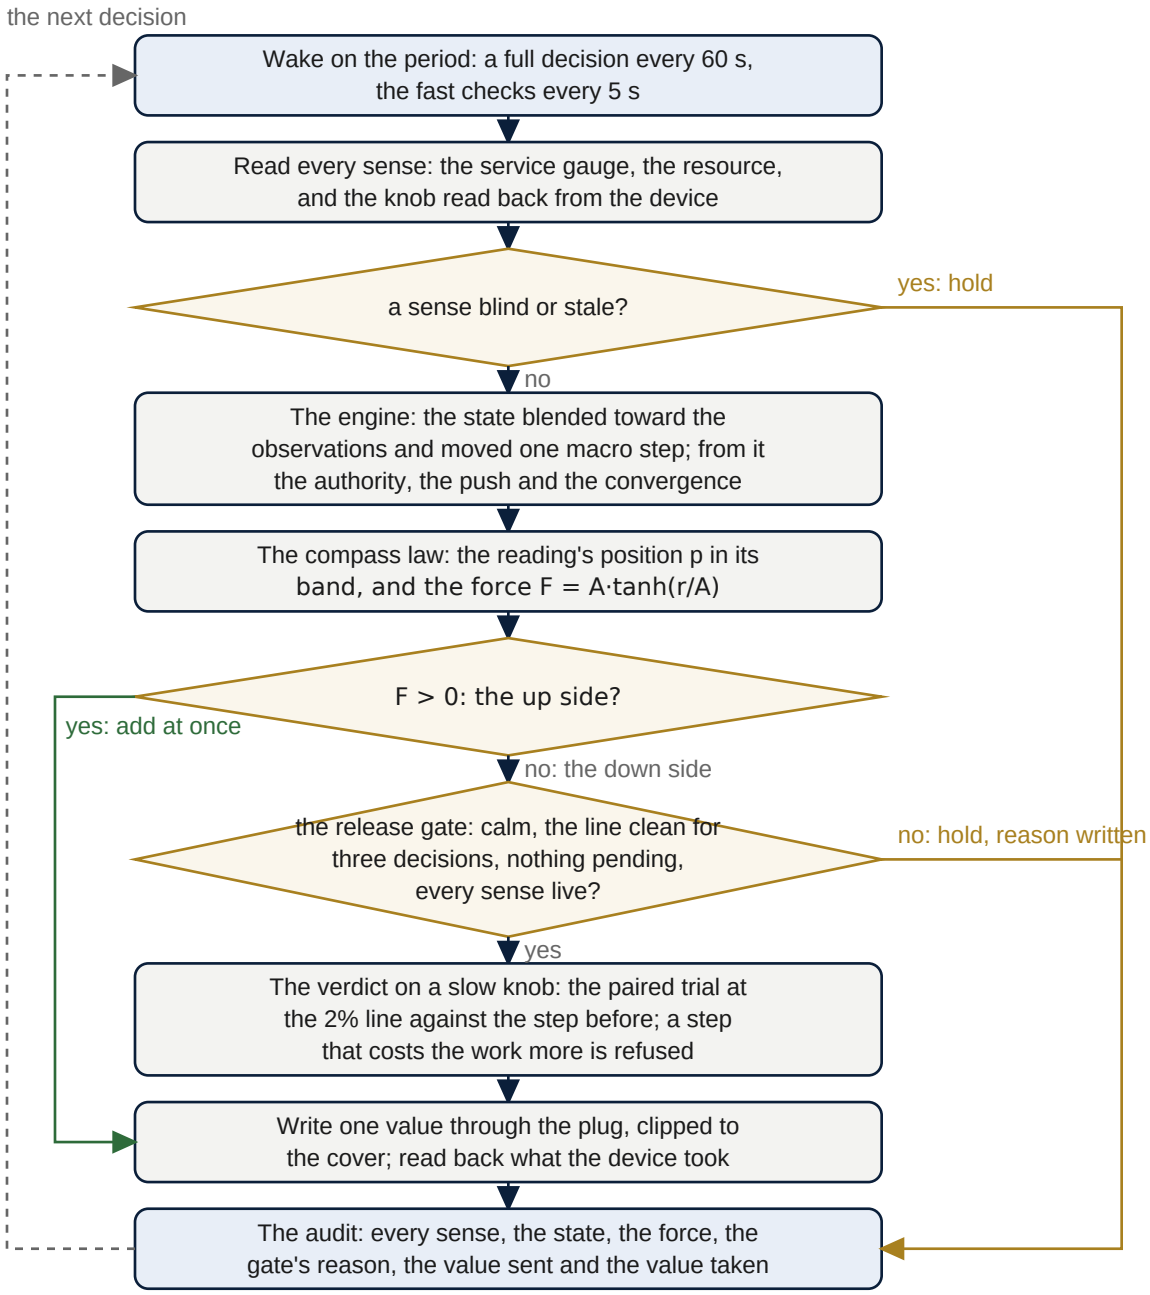


Figure 9. One decision of the governor. It wakes on its period, reads every sense, and holds if any sense is blind or stale: nothing is given back, and adding capacity is still allowed. The engine blends its state toward the observations and moves one macro step; the compass law turns the reading's position into a force. A positive force adds capacity at once, gated by nothing but the security hold.

A negative force must pass the release gate (calm, the line clean for three decisions, nothing pending, every sense live) and, on a slow knob, the verdict's paired trial at the 2% line. What survives is one write through the plug, read back, and one line in the audit that records every sense, the state, the force, the gate's reason and the value sent and taken, whether or not anything was written.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Name	`symmetric_verified` (`omnicompass/configurations.py`, `DEFAULT`)
Fingerprint	SHA-256 of `omnicompass/core.py`, recorded in `results/PREREGISTRATION.json` and `RELEASE_MANIFEST.json`; checked by `verify.py`
Evidence	every simulation, benchmark, live Kubernetes run and GPU harness in this repository

State: E (deviation), U (coherence), I[U] (unmet-need integral), S (structural stress), B and $\dot{B}$ (the bath).

```
v[eff]   = cos(ω[B] t / 2) · c · tanh(λ₀ + λ₁ (U − 0.5) + λ₂ S)
    ↪  (spinor closure, 720°)
dE/dt    = −α[E] E + β[int] + β[ext] + v[eff]
dU/dt    = μ U (1 − U²) − (dE/dt) / E[max] − λ[U] U + u
    ↪    (symmetric double well)
dI[U]/dt = (1 − U) − σ₁ E − δ S − λ[I] I[U]

dS/dt    = δ − αₛ S − (3/4) βₛ S²
    ↪    (gradient of Φ)
dB/dt    = Ḃ
dḂ/dt    = γ[c] δ S − (ω[B] / Q[B]) Ḃ − ω[B]² B
Φ(S)     = αₛ S² / 2 + βₛ S³ / 4 − δ S
```

u is the controller's command, `K[P] (target − U) − drift`, bounded by `U_AUTHORITY`; integration is RK4 with the macro and micro steps of `omnicompass/core.py`.

Mechanism identity

`results/MECHANISM_IDENTITY.json` (`tools/mechanism_identity.py`) fingerprints the mechanism M = (F, Theta, C, h, G, M[act], dt, A) component by component: state law, parameters, controller, observation map, authority law, actuator map, execution timing, shield. `verify.py` fails if any component changes without the record being rewritten. Every evidence claim names the mechanism id that produced it; "the eight-line engine" alone names none.

Configuration	Mechanism id	Role
`symmetric_verified`	`29d9808dfb8f626ad5de17a8a1efa37411dbab08a64af4b276143b466f7ce21c`	canonical
`printed_eight_line`	`cd333dc166fb7684ec0fca71f5f50488041e47825ee47d1ea667bec1f3d2259d`	named alternative embodiment

On the frozen 500-fixture population (`benchmarks/core_evidence.py`, seed 223387268), both are executable and neither is a stand-in for the other:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

	finite	CONVEY-5	CERT-10	mean final target error	mean integrated abs(u)	max abs(u)
`symmetric_verified`	500/500	500/500	500/500	7.48e-5	0.878	13.93
`printed_eight_line`	500/500	500/500	500/500	5.13e-6	11.79	18.87

The printed form reaches its target more tightly with about 13 times the control effort. The structure is Option A: one canonical configuration, one named alternative; no equivalence is claimed.

2. Variants

`printed_eight_line` *(the printed chart)*

Implemented in `omnicompass/configurations.py`, checked against the printed plate (`tests/test_engine_configurations.py`), **not benchmarked**: no result in this repository comes from it.

```
v[eff]   = c · tanh(λ₀ + λ₁ (U − Uₜ) + λ₂ S)
    ↪    (no spinor factor)
dE/dt    = −α E + β[int] + β[ext] + v[eff]
dU/dt    = α (1 − U) − (dE/dt) / E[max] − k U (1 − U) + u
    ↪    (logistic)
dI[U]/dt = (1 − U) − σ₁ E − δ S
    ↪    (no λ[I] term)
dS/dt, dB/dt, dḂ/dt as in section 1
```

Differences from the canonical engine: logistic U instead of the symmetric double well; no spinor factor; a general target U_t; no λ[I] damping; α in place of α[E]. α[U] and k enter the printed form; they do not enter the canonical engine.

3. What would change this declaration

Promoting a variant to canonical needs, in one commit: the variant run through every harness beside the canonical engine, its results reported next to the canonical results, this page and `RELEASE_MANIFEST.json` updated, and the preregistration amended on record (`results/LOCK_AMENDMENTS.json`). Until then the canonical engine is `symmetric_verified`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

4. Open mathematical items (from `docs/FORMAL_STATUS.md` and the handoff)

- A global stability proof of the forced six-state system is not closed. What is held on the U channel is proved in `docs/TRACKING_THEOREM.md`: unsaturated exponential tracking; the saturated case under a drift bound that holds over the declared box (F[bar] = 16.86 < 25); the sampled-data bound of the executed RK4 controller; admissibility.
- Candidate routes: the Unified Circle Principle on a region; Theorem 5.6 of the Closed Structure, if its core maps onto (E, U, I[U], S, B).

5. For filings

Which form a patent or copyright filing claims as the principal embodiment is a decision for The Omni-Compass LLC and its counsel. Whatever that decision, the software described by this repository runs the canonical engine of section 1, and a filing that claims the printed form should name `symmetric_verified` as the embodiment that has been implemented and tested, or the printed form should be benchmarked first (section 3).

CHAPTER 11

The Closed Circle: Why It Cannot Leave Its Compass

The governing principle is the Unified Circle Principle:

```
dX/dt = G(X),  X(0) in Omega
G(X) . n(X) <= 0 on the boundary of Omega        (the flow points inwa
    ↪ rd at the wall: nothing crosses)
grad L(X) . G(X) <= 0                            (the compass's energy
    ↪  L only falls)
=> lim X(t) in M*                                (every path settles i
    ↪ n the bottom of the compass)
```

In control engineering the second line is the Nagumo condition for an invariant set and the third is a Lyapunov function. Together they mean: anything that starts inside the container stays inside it, for every disturbance up to a known size, and comes to rest at the bottom. That is a certificate, not a test: it answers every case inside the walls at once.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

In plain words. Picture a round valley with a fence around its rim. The first line says the valley has a shape: given where the system is, the equations say which way it rolls. The second line says that at the fence the ground always slopes inward, so nothing that starts inside can ever roll out, however it is pushed within the strength the fence was built for. The third line says there is a height, *L*, that only ever decreases along any path, so the system cannot circle forever at one level; it must keep descending. The conclusion follows: every path ends at the bottom, the set M^*. The engineering value of such a certificate is that it is not a sample of behaviours; it is a statement about all of them at once, inside the fence.

What is certified, and what is not. The certificate is about the engine's own state: the six numbers of Chapter 9 stay inside their walls and settle. It is not a certificate about the plant the engine governs, whose physics the engine does not contain; that is why every plant is tested paired against native (Part VI), why the compass law clips every write to the knob's cover (Chapter 20), and why the shield between the engine and the levers is tested separately on two million adversarial cases with zero violations (`tests/test_shield_properties.py`) and the C++ engine soaked on one hundred million decisions with no failure (`results/SOAK.json`). The mathematics closes the brain; the harness, the cover, the verdict and the paired receipts close the hand.

The engine's states are each closed in this sense: the deviation tank drains faster than it can fill; the alignment's cubic walls push back from far out; the memory forgets; the bath's friction settles it. The rule behind all four is the compass's east-west line: what flows out (drain, damping) must always be able to match what flows in (drive). The formal status of each statement, what is proved, what is tested and what is conjecture, is written out in `docs/FORMAL_STATUS.md` and `docs/TRACKING_THEOREM.md`, and the theory chapters of this book (The Unified Circle Principle, Closing the Circle in the Engine) give the derivations.

What the certificate buys an operator, in practice. Three things. The engine cannot run away: there is no input, no sequence of readings and no fault in a sense that drives its internal state to infinity or into oscillation that grows, because the walls are part of the equations and not a check bolted on afterwards. The engine cannot hold a grudge: the memory state forgets at a fixed rate, so a bad hour does not bias the next day, and a governor restarted after a kill starts from the same rest state the certificate names. And the engine's behaviour under any disturbance smaller than the fence is the same kind of behaviour, a descent to the bottom, so a test on one plant's readings says something about the engine on another's; what it does not say, and what no mathematics of the engine alone could say, is how the plant answers, which is why the paired runs exist. An underwriter reading this section should take from it exactly this much: the part of the system that makes decisions is bounded by proof; the part of the system that carries them out is bounded by the cover, the gates and the hand-back, each tested; and the part that is the customer's own plant is measured, never assumed.

The compass. The Omni-Compass rose carries the whole Greek alphabet, Alpha to Omega: the complete set, in a ring whose end runs back into its beginning. Its north-south axis is polarity: Alpha and plus at the top, Omega and minus at the bottom, the two poles of the alignment's double well. Its east-west axis is flow: Beta and the push outward on one side, Gamma and the pull inward on the other, the drive and the damping. The spiral at the center is the attractor every path winds into. The ring closing on itself is the return: when Omni-Compass stops, every lever returns to where it began.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 12

Closing the Circle in the Engine

Each state of the engine was checked against the closed-circle conditions:

State	Closed?	Why
E, deviation	closed	it drains at rate α[E] while its inputs are bounded (the drive is capped by tanh)
U, alignment	closed	the cubic term μ U (1 − U²) pushes back hard from far out
I[U], memory	closed	it forgets at rate λ[I]
B, the bath	closed	the friction ω[B] / Q[B] settles it
S, the basin	closed on the positive side; open on the negative side below an unstable ridge	Φ(S) carries a cubic term, so the landscape falls away below the ridge (at S = −3.5 with the default parameters)

Three openings were found and each has its closure:

1. **The basin's negative side.** A quartic term in Φ(S) would give the compass a wall on both sides. This changes the frozen engine and is a new version with its own proof.
2. **The outer loop.** The frozen live governor computes the push and pull u and uses it as a convergence signal; it does not send u to a lever. The compass closes this loop: reading, force, plug, lever, read-back. On the modelled card this is the difference between +0.1% and several percent of work per energy (the one-wire governor against the corrected two-wire compass, `results/sim/gpu_two_wire/`).
3. **The corner.** clip() is a hard stop; tanh is its smooth form. The compass uses tanh.

What closing the loop has shown since. The compass law of the second opening is the law every result in the manual was made on: it was frozen as Omni v1 on 5 October 2026 with its proofs untouched, grown to the 945-muscle catalog as v2, and given one gate as v3, the slack gate on speed knobs, after the v2 realms read a service tradeoff on the Physics realm and the tower. That gate is the closed circle applied to a muscle's physics: an axis that is busy more than half the time at full speed has no slack to spend, and a law that spent it anyway would be spending energy for nothing; with the gate, every organism reads superior within its

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

guardrails and zero muscles read LOSS (`results/realms/REALMS.md`). On real software the same law, read through the plug and the read-back, is the law of the Kubernetes, database, broker and cache tables, with their gains and their losses. The first opening, the basin's negative side, remains open and documented: it would be a new version with its own proof, and no result depends on it.

CHAPTER 13

The Tracking Theorem

This page proves the internal tracking result of the canonical engine (`symmetric_verified`, mechanism id in `results/MECHANISM_IDENTITY.json`) in four steps, from the continuous law to the code as executed. Each statement carries one evidence class (see `docs/EVIDENCE_LEDGER.md`): **T** proved here, **V** checked by computation over a finite, frozen set (`tools/tracking_bounds.py` → `results/TRACKING_BOUNDS.json`).

What this page establishes is **internal**: inside the declared model, the controller conveys U to its target σ. It does not establish that σ is the right target for any outside plant, that the telemetry map is right, that any actuator mapping (HPA, GPU, CPU) is right, any energy saving, production performance, or stability of the whole forced six-state system. Target correctness and target conveyance are separate obligations; this page carries only the second.

Setting

U channel of equation (2): `dU/dt = f[U](x, t) + u`, with the uncontrolled drift

```
f[U](x, t) = μ U (1 − U²) − (dE/dt) / E[max] − λ[U] U
```

and the bounded cancellation-plus-proportional controller (`omnicompass/core.py`, `control_command`)

```
u = sat(−f[U](x, t) + K[P] (σ − U)),   sat(v) = max(−u[max], min(u[max
    ↪ ], v)),   K[P] = 12, u[max] = U_AUTHORITY = 25.
```

Tracking error `e = U − σ`, σ ∈ {−1, +1}.

Theorem 1 (T). Unsaturated tracking

On the unsaturated region `Ω[unsat] = { x : |−f[U](x, t) − K[P] e| ≤ u[max] }`, `de/dt = −K[P] e`. Along any interval spent in `Ω[unsat]`, `e(t) = e(t₀) exp(−K[P] (t − t₀))`, and `V = e²/2` satisfies `dV/dt = −K[P] e² < 0` for `e ≠ 0`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Proof. Inside `Ω[unsat]` the saturation is inactive, so `dU/dt = f[U] − f[U] + K[P] (σ − U) = −K[P] e`; since σ is constant, `de/dt = dU/dt`. The solution and `dV/dt = e de/dt = −K[P] e²` follow. ∎

This is a statement about intervals inside `Ω[unsat]` only; it is not global convergence.

Theorem 2 (T). The saturated case, under a declared drift bound

Assumption D. Along the trajectory, `|f[U](x(t), t)| ≤ F[D] < u[max]`.

Under D:

1. If saturation is active with `e < 0`, then `u = +u[max]` and `de/dt = f[U] + u[max] ≥ u[max] − F[D] > 0`; symmetrically for `e > 0`. So `dV/dt ≤ −(u[max] − F[D]) |e| < 0` wherever saturation is active.
2. With Theorem 1, `V` is strictly decreasing wherever `e ≠ 0`, saturated or not; `e` never changes sign (at `e = 0` the command is unsaturated because `F[D] < u[max]`, so `e = 0` is an equilibrium of the error dynamics).
3. Any saturated stretch ends within `(|e(t₀)| − e*) / (u[max] − F[D])` time units, `e* = (u[max] − F[D]) / K[P]`; the ball `|e| ≤ e*` lies inside `Ω[unsat]` and is forward invariant, and inside it the decay is exponential at rate K[P].

Proof of 1. Saturation with `u = +u[max]` means `−f[U] − K[P] e > u[max]`, so `−K[P] e > u[max] + f[U] ≥ u[max] − F[D] > 0`, so `e < 0`, and `de/dt = f[U] + u[max] ≥ u[max] − F[D]`. The other side is symmetric. 2 and 3 follow from 1 and Theorem 1, and `|−f[U] − K[P] e| ≤ F[D] + K[P] |e| ≤ u[max]` on the ball. ∎

Where D holds (T). On the declared box — parameters in `PARAMETER_RANGES`, `E₀` in [0, 1], `|U| ≤ 1.1` — equation (1) keeps E in `[(β − c)/α[E], (β + c)/α[E]]` widened to hold E_0 (the right side of (1) points inward at both ends, because `|v[eff]| ≤ c`), so `|E| ≤ 7/4.2`, `|dE/dt| ≤ 4.2·|E| + 2 + 5 ≤ 14`, and

```
F[D] = 6 · 2/(3√3) + 14 / 1 + 0.5 · 1.1 = 16.86 < 25 = u[max].
```

Because e keeps its sign and `|e|` does not grow (continuous time), U stays between U_0 and σ, so `|U| ≤ 1` and the box is self-consistent for the nearest-basin target. **Theorem 2 therefore holds globally over the declared box, in continuous time.** The actuator can still saturate: `|raw| ≤ F[D] + K[P] |e₀|` can exceed 25 when `|e₀|` is near 1.

Checked (V). Over the 500 frozen fixtures: observed `max |f[U]|` = 6.84 (nearest target), 7.01 (wrong target), each under that fixture's own bound (max 8.99) and under 16.86; saturated micro steps 0 of 100 000 (nearest target), 5 of 100 000 (wrong target).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Theorem 3 (T with a computed constant). The executed sampled-data controller

The code does not run the continuous law. Per micro step `h = MICRO_DT = 0.01`, it computes u_k from x_k, holds it through the four stages of one RK4 step (zero-order hold), and takes $x_{k+1} = F[h](x_k, u_k)$. There is no overwrite of U after the step, no projection onto a basin, no state replacement.

Integrating the U equation over one held interval,

$$e_{k+1} = e_k + h\,(f[U](x_k) + u_k) + \int_{[t_k,\,t_k+h]} (f[U](x(t)) - f[U](x_k))\,dt + \tau_k$$

with τ_k the RK4 truncation error. Unsaturated, $f[U](x_k) + u_k = -K[P]\,e_k$, so

$$e_{k+1} = \rho\, e_k + d_k, \quad \rho = 1 - h\,K[P] = 0.88, \quad |d_k| \le (h^2/2)\sup|df[U]/dt| + |\tau_k| =: \varepsilon[h].$$

Then by induction $|e_k| \le \rho^k\,|e_0| + (1-\rho^k)/(1-\rho)\cdot\varepsilon[h]$, and the error enters and stays in the neighbourhood $|e| \le \varepsilon[h] / (1-\rho)$.

The proof above is exact given ε[h]. **ε[h] itself is computed, not proved (V):** the largest $|d_k|$ over every micro step of the 500 frozen fixtures is 0.00378 (nearest target), giving the ultimate bound 0.0315, inside `BASIN_TOL` = 0.10 that CONVEY-5 and CERT-10 test. With the target aimed wrong, ε[h] = 0.0243 (dominated by the long transient, which includes the 5 saturated steps) and the bound 0.20 is wider than the basin — a conservative bound; the fixtures still certify 500 of 500.

What the discrete execution does **not** inherit: the continuous monotone decay. Within the band, $|e|$ grew on 27 061 of 100 000 micro steps and e changed sign 747 times — the sampled controller dithers inside $\varepsilon[h] / (1-\rho)$.

CONVEY and CERT. They are dwell checks against a declared neighbourhood ($|U - \sigma| \le 0.10$ for 5 and 10 consecutive macro steps). Theorem 3 says why they pass when the bound sits inside the neighbourhood. They are not an external certification.

Theorem 4 (T continuous; V discrete). Admissibility

Admissible set for a fixture with parameters p and initial state x0:

$$A = \{\, x : E \in [E[lo], E[hi]],\ |U - \sigma| \le |U_0 - \sigma|,\ S \text{ between } S_0 \text{ and } S_+(p) \,\}$$

`E_lo, E_hi` as in Theorem 2; S_+ the stable root of equation (6).

- **Continuous (T).** A is forward invariant: E by the inward-pointing field at both ends; U by Theorem 2; S because equation (6) is the one-dimensional gradient flow of Φ, monotone toward S_+ from any $S_0 > S_-$

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

(`s_admissibility` in `results/core_evidence.json`: 500 of 500 fixtures start above `S_minus`).

- **Discrete (V).** For the executed map `F[h](x, C(x))`, every micro step of every fixture: $x_k \in A$ implied $x_{k+1} \in A$ — 0 failures in 100 000 steps, target nearest or wrong. This is a finite verification on the frozen fixtures, not a proof over the box. An interval-arithmetic proof over the whole box is **open (O)**.

What remains open (O)

- Global stability of the forced six-state system (E, I[U], S, B are not all covered above).
- A proved (not computed) ε[h] over the declared box, and discrete invariance over the box.
- The inheritance / intertwining residual against an outside plant: instrumented (`tools/gpu_reps.py`, representation fidelity), not yet measured on a real card.
- The printed configuration (`printed_eight_line`) is not covered by this page: its U drift is logistic, not the double well, and needs its own bound (`docs/CANONICAL_ENGINE.md`).

CHAPTER 14

The Conveyance Law

1. What the manuscript says, read as mechanism

Source	Text	Mechanism
Ch. 29 §8	"E[system] = E + U + S + B … dE_system/dt = 0 (over full cycle). Energy redistributes. Energy reorganizes. Energy does not diverge."	The budget (site watts, cluster cores) is **conserved**: it is moved between organs, never created.
Ch. 31 §4	"Redistribution B acts as mediator between the baths. When E grows locally, B increases to distribute gradients."	Budget flows **down the gradient of need**: from organs holding surplus to organs in deficit.
Ch. 31 §5	"eigenvalues of the coupled system must remain bounded … $\mathrm{Re}(\lambda_i) \leq 0$"	The flow must have a proof of convergence, not a tuned damper.
Ch. 30 §5-7	"Redistribution surge … channels stored deviation into expansion … controlled release … No discontinuity."	A **reserve** is held and released **continuously** to organs at their limit. There is no on/off.
Ch. 29 §6	"Backpressure develops through S … Compression is … structured inward rotation."	When need falls, surplus is **pulled back** smoothly. Budget nobody needs is not spent.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Source	Text	Mechanism
App. J	"the engine can only act through what you expose"	Organs keep their own mechanisms. The law sets only each organ's share of the budget.

2. The law

Notation.

- Organs i = 1..n share a budget A.
- Organ i holds allocation a_i and has need d_i: the budget that serves its work at the engine's utilisation target ρ.
- Its deficit (local deviation) is

$e_i = d_i / (\rho\, a_i) - 1$ ($e_i > 0$: needs juice; $e_i < 0$: holds surplus)

The redistribution mediator:

$da_i/dt = \kappa\, a_i\, (e_i - \bar{e})$, $\bar{e} = \Sigma_j\, a_j\, e_j / A$

3. Properties and proofs

P1. Conservation.

- $\Sigma_i\, da_i/dt = \kappa\, (\Sigma_i\, a_i e_i - \bar{e}\, \Sigma_i\, a_i) = \kappa\, (A\, \bar{e} - \bar{e}\, A) = 0$.
- The budget is moved, never created, as in Ch. 29 §8.

P2. Gradient flow with a Lyapunov function.

- Substitute e_i: $a_i(e_i - \bar{e}) = d_i/\rho - a_i\, D/(\rho A)$, where $D = \Sigma\, d_i$.
- So $da_i/dt = (\kappa/\rho)(d_i - a_i\, D/A)$.
- This is the Shahshahani gradient on the simplex $\Sigma\, a_i = A$ of $F(a) = \Sigma_i\, (d_i/\rho)\, \ln a_i$. The Shahshahani metric weights by $1/a_i$, and $\partial F/\partial a_i = d_i/(\rho\, a_i)$, so $a_i(\partial F/\partial a_i - \text{mean})$ is exactly the flow above.
- Along the flow $dF/dt = \Sigma_i\, (1/a_i)(da_i/dt)^2 \cdot (\rho/\kappa) \geq 0$.
- F is strictly concave, so F is a Lyapunov function and the flow cannot cycle.

P3. Global exponential convergence.

- The ODE in P2 is linear: $a_i(t) = a_i^* + (a_i(0) - a_i^*)\, e^{(-\kappa D t/(\rho A))}$, with $a_i^* = A\, d_i/D$.
- The Jacobian is $-(\kappa D/(\rho A))\, I$ on the simplex, so every eigenvalue is $-\kappa D/(\rho A) < 0$. This meets $\mathrm{Re}(\lambda) \leq 0$ of Ch. 31 §5 strictly.
- At the equilibrium every organ has the same deficit $e^* = D/(\rho A) - 1$. None is starved while another idles.
- `replicator_step` integrates it exactly, in closed form, for any step size.

P4. Bounds (floors, ceilings, the budget).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- Allocations are projected onto $\{lo_i \le a_i \le hi_i, \Sigma\, a_i \le A\}$.
- The projection is water-filling: organs at a bound keep it, and the rest share the remainder in proportion.
- Budget an organ cannot use (it is at its need or its ceiling) is not spent.

P5. Reserve and surge.

- The dual-bath rate channel (the rate tracker) projects the rise in need over one actuation delay: $R = \Sigma_i \max(0, \dot{d}_i)$, capped at $A/2$. R is held back.
- After the flow, R is released continuously to organs whose deficit stays positive, in proportion to their shortfall and up to their ceilings.
- This is the controlled release of Ch. 30: continuous state, no switch.

4. Evidence

Mathematics in code. `tests/test_conveyance.py` (in `verify.py`) checks 20,000 random systems:

- P1 conservation to 1e-9;
- P2, F never decreases;
- P3, the trajectory equals the closed form;
- P4, bounds and budget.

It also runs 2,000 systems over 30 steps and checks the full law never exceeds the budget or breaks a floor. That test found and fixed one real bug: an organ whose need fell below its device floor was given a ceiling under that floor.

Simulation. `hardware/site_exchange.py`: four GPU groups of 16 H100-class GPUs share one site budget (MLPerf gamma). Held-out seed 929292, 48 scenarios per budget. Results: `results/hardware/SITE_EXCHANGE_HELDOUT_*.json`.

Site budget (share of TDP)	70%	60%	50%
Site-budget violation minutes, native / independent / **conveyance**	10.5 / 1.5 / **0**	45.6 / 10.5 / **0**	106.1 / 31.3 / **0**
Energy (kWh), native / static split / independent / **conveyance**	142.5 / 117.6 / 104.1 / **103.8**	139.1 / 107.9 / 103.5 / **102.0**	127.3 / 97.1 / 101.0 / **96.4**
Backlog minutes, static split (the arm that also keeps the budget) / **conveyance**	32.0 / **1.0**	89.7 / **8.9**	187.3 / **72.2**

Reading.

- **Keeping the budget.** Conveyance is the only dynamic arm that never exceeds the site budget.
- **Energy.** It uses the least energy at every budget.
- **Against the only other arm that keeps the budget (static split):** 31-115 fewer backlog minutes.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **At tight budgets, native and independent sizing show less backlog,** but only by drawing power over the site limit for 10-106 minutes, which in a facility trips breakers.
- **When the budget is below total need,** conveyance shares the shortage in proportion to need. That is the unique stable point of P3: fair, and not a choice of weights.

CPU and GPU on one budget. `hardware/node_exchange.py`: the same law with CPU organs beside the GPU organs. Four groups, each two 8-GPU servers (16 H100-class GPUs, 4 CPU sockets); each unit of GPU work needs 0.35 of the CPUs at full clock to feed it; demand 1.6x the plant traces (the GPUs are held back by the budget, not by work). Arms:

- **S** today's practice: every GPU at one fixed cap low enough that the site fits even with every CPU at maximum;
- **XM** conveyance among the GPUs, counting the CPUs' last measured draw;
- **XC** conveyance over CPU and GPU organs together: each CPU group is held to the clock its feeding work needs, and the watts it no longer holds flow to the GPU groups in deficit.

Seed 515151, 24 scenarios. Results: `results/hardware/NODE_EXCHANGE_*.json`. XC against S, paired:

Site budget (share of GPU TDP + CPU maximum)	60%	70%	80%
Work served	**+5.7%**	**+3.6%**	**+1.4%**
Backlog minutes	−15.8%	−27.5%	−17.8%
95th-percentile latency factor	−39.6%	−43.6%	−35.2%
Site-budget violation minutes, native / S / XM / **XC**	195.8 / 0 / 3.9 / **0**	140.9 / 0 / 6.2 / **0**	61.8 / 0 / 5.3 / **0**

Reading.

- **More work from the same building.** The tighter the budget, the more the CPUs' unused watts are worth to the GPUs.
- **Holding the CPUs is what makes the hand-over safe.** Counting the CPUs' measured draw (XM) serves about as much, but goes over the budget for 4-6 minutes in every setting: a CPU can rise between one reading and the next. XC holds each CPU to its allocation, so the watts it gives up are really free, and it never goes over.
- **Most of the gain is the CPUs' reserve, not their clock.** Against XM, XC gains ~1% work per kWh; against S, the watts a fixed plan must keep for CPUs that might peak are what the GPUs receive.
- The same holds for the least and most favourable MLPerf gamma fits, and for CPU shares 0.2 and 0.6 (+2.3% to +4.2% work at the 70% budget), `tests/test_node_exchange.py` checks N1-N4 in `verify.py`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

5. What is not claimed

- This is a simulation on declared device physics.
- The live levers that would carry it are GPU power limits (`nvidia-smi -pl`, DCGM), RAPL package limits, and pod CPU limits under a namespace budget. They exist in `omni_controller/muscles.py`, but the exchange between them has not run on hardware.

CHAPTER 15

Formal Status of the Mathematics

Not a global-stability proof of the forced six-state system. Proofs and their evidence classes: `docs/TRACKING_THEOREM.md`; every statement's class: `docs/EVIDENCE_LEDGER.md`.

Held:

- Isolated S-flow is the gradient of Phi (same formula in both cores).
- (T) Unsaturated: dU/dt = KP (sigma − U); V = e²/2 has dV/dt = −KP e² on that channel (Theorem 1).
- (T) Saturated, with the U drift bounded by F[bar] < U_AUTHORITY: V decreases wherever e ≠ 0; over the declared parameter box F[bar] = 16.86 < 25, so this holds over the box in continuous time (Theorem 2).
- (T, constant computed) Sampled-data RK4 controller: e_(k+1) = 0.88 e_k + d_k; with epsilon_h computed over the frozen fixtures (V), the ultimate bound 0.0315 lies inside the 0.10 basin (Theorem 3).
- (T continuous, V discrete) Admissible box forward invariant (Theorem 4).

Open:

- epsilon_h and discrete invariance proved over the whole box (interval arithmetic).
- Inheritance embedding / intertwining residual against a real plant (Closed Structure Def. 11.1): instrumented in the GPU bench (`tools/gpu_reps.py`, representation fidelity), not yet measured on a card.
- Mapping of monograph Theorem 5.6 onto (E,U,I[U],S,B).
- A tracking bound for printed_eight_line (logistic U drift).

Default core remains symmetric_verified (mechanism id in `results/MECHANISM_IDENTITY.json`).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 16

The Max, Formally: Definitions, Guarantees and Measures

This page states the engine's default brain, the max (`realms/compass_arm_v5.py`, `V5CFG`, engine omni-v5 by `tools/omni_version.py`), in definitions and properties. Each property carries its class: **V** a property of the code, proved by reading the code path named beside it and checked by the runs; **S** measured on our own models; **L** measured on real software; **P** measured by a physical meter. A V property is a statement about what the governor writes; it is not a statement that a measured outcome follows. Measured outcomes are stated with their numbers and their limits, and nothing on this page is claimed beyond them. The earlier formal results (`docs/TRACKING_THEOREM.md`, `docs/FORMAL_STATUS.md`) belong to the earlier core engine's channels and are not restated here.

1. Setting

A **body** is a set of plants p_1, ..., p_n run on one clock of decisions k = 0, 1, 2, ... (15 s each in the organisms). Each plant i has

- a template τ_i (compute_pool, thermal_zone, energy_storage, motion_axis, process_loop: `realms/plants.py`),
- one knob κ_i (capacity, setpoint, power or admission: the muscle's single wire),
- a **native controller** N_i, the plant's own law, unchanged by Omni-Compass: the pod autoscaler or the cluster autoscaler of a pool, the PI loop and staging of a cooled room, the dispatch of a battery site, the servo profile of an axis, the PI loop of a process,
- a state $x_{i,k}$ and an exogenous input $w_{i,k}$ (arrivals, heat from its own load, the site's own load, disturbance), drawn from the plant's seed, the same in every arm.

The plants are coupled through the body (`realms/harness.py`, `Body.couple`): with S_k the body's source power (every plant that is neither a room nor a battery site) and Z_k the rooms' power, room z receives heat $h[z] \cdot S_{k-1}$ and battery site s receives load $g_s \cdot (S_{k-1} + Z_{k-1} -$ its nominal), where h[z] and g_s are fixed by the body's calibration.

An **override** $o_{i,k}$ is a set of key-value pairs that bounds what N_i may do at decision k: a floor and a cap on the machines a pool's autoscaler may ask for, a setpoint for a room's loop, a reserve or a defended ceiling for a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

battery's dispatch, a speed scale for an axis. The plant then steps by its own law under that bound: $x_{i,k+1} = f_i(x_{i,k}, N_i(x_{i,k}; o_{i,k}), w_{i,k}, \text{coupling_k})$. The empty override leaves N_i exactly as shipped.

Definition 1 (the two arms). The native arm writes $o_{i,k} = \varnothing$ for every i and k. The Omni arm writes $o_k = G(y_0, ..., y_k)$ for $k < K$, where y_k is what the governor reads at decision k and K is the decision at which the governor goes silent (in every run, K = 0.8 × the run's decisions), and the lease's walk back after K (Property V5). Both arms run the same plants, the same seeds and the same inputs.

Definition 2 (a governor, and a collection of tools). A rule G is a **collection of separate tools** if there are maps $g_1, ..., g_n$ with $o_{i,k} = g_i(y_{i,0}, ..., y_{i,k})$ for every i and k: each muscle's bound depends on that muscle's readings alone. G is **one governor over the body** if for some plant i the bound $o_{i,k}$ depends on the readings of another plant $j \neq i$.

Definition 3 (a twin). The twin T_i of a plant i is the same plant model, built from the same row and seed, fed the same exogenous input, run under N_i alone with no override. The pools' twins run inside the governor (`Bone.__init__`, `Bone.advance_twin`); a twin is the governor's model of what native does with that plant.

Definition 4 (room on a line). The lines of a body are the battery sites' connections and the rooms' cooling. For a line ℓ with distance to its limit gap_ℓ (the connection's limit plus what its battery can still clip, less its import; or a room's cooling capacity less its command, and its degrees in hand), one-decision climb up_ℓ (the larger of line_z times its step-to-step spread, the largest climb it has shown, and a prior of 5% of the line) and load per W of the body's power a_ℓ, the room over r decisions is

$R(r) = \min \text{ over } \ell \text{ of } (\text{gap}_\ell - \sqrt{r} \cdot \text{up}_\ell) / \text{a}_\ell$ (`Bone.room`, `Bone.room_for`),

the power the body may still add, read r decisions ahead.

2. What the code guarantees (class V)

Proposition 1 (V). The max is one governor over the body. In `max_body_step`, the floor written on a pool is max(now + can, base), where can is the number of machines whose idle power fits in min(R(1), R(r) − used); R reads every battery site and every room of the body, and `used` is what was granted to the pools decided before it in the same decision. So the bound on one pool depends on the readings of the body's sites, rooms and other pools: by Definition 2, the max is one governor, not a collection of tools. No set of separate tools has this property, however many run at once. ∎

Property V1 (one wire). Every override the max writes uses only its muscle's own key: {floor, cap} on a pool wired by capacity or setpoint; {setpoint} on a room wired by its setpoint; {setpoint} or {capacity} on a battery site wired by that knob; {capacity} on an axis alone (inside a body an axis keeps its everyday speed); nothing on any other muscle. Proof: every branch of `max_apply`, `max_hold` and `max_body_step` writes only these keys. ∎

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Property V2 (never fewer machines than native asks for). For every pool i with a twin, at every decision k < K, the count its autoscaler is asked for is never below the twin's: a floor written is ≥ $m(T_{i,k})$, and a cap written is ≥ max($m(T_{i,k})$, n[min]), where m counts machines in service and starting. Proof: `max_ask` sets base = $m(T_{i,k})$ and want = max(forecast, base); `max_body_step` writes floor = max(now + can, base), and on a shortfall keep ≥ base. The pool's own law is a function of its own arrivals and settings only, so its twin runs exactly as the native arm's pool does: $m(T_{i,k})$ is the count native asks for at that decision. ∎

Property V3 (native at its limit is left alone). Under the max, the override of every muscle wired by power or admission, of every process loop, and of every axis whose machine has no speed above its everyday setting is empty at every decision: native already runs them at the top of their range. Proof: `max_ask` returns nothing for them and `max_body_step` writes ∅. ∎

Property V4 (grants come out of the room the lines have). At a decision with R(1) ≥ 0, the idle power of the machines the max adds, summed over the body, is at most R(1), and the machines of a pool that take r decisions to start are granted only out of R(r) less what was already granted. With R(1) < 0, what the max added goes back, the pools holding the most first, never below each pool's twin (V2), and no room is pulled below its operator's setpoint. Proof: `_units`, the running decrements of r[src], r[all] and used, and the shortfall branch of `max_body_step`. ∎ *Limit, stated with it:* R is a forecast. A line that climbs further within one decision than any climb it has shown, while power granted earlier is still in service (power is handed back one decision after a line shows the need), can still be carried over its limit. Section 4 gives how often that happened.

Property V5 (the lease: everything handed back). If the governor goes silent at decision K, every override moves 1/(K + W − k) of the way to its native value at each decision k ≥ K and is native from decision K + W − 1, W = 24 (`walk_back`; a floor that only held a pool at native's own count is let go at once). Every run checks every knob on every seed (`restore_ok`); a muscle or organism that fails is labelled INVALID. In the official table every muscle and every organism passed. ∎

Property V6 (the live ranges: from 1 up to one click under the system's own capacity; amendment 5). In the live Kubernetes controller, with n the machines in service, m the floor (two), T the machine lever's top and P the ready workers: T is the operator's `--max-nodes` where given; else P plus the room the cluster's own autoscaler publishes (the sum over node groups of maxSize less registered); else, where Omni-Compass resizes the pool with the operator's command, T = f − 1 for the smallest count f the pool's command has refused, and T = ∞ before any refusal; else T = P. Every machine count written lies in [m, T], moves at most the rate limit a decision (shield I5), and cruise writes min(T, n + step). The replica cap c of a sensed service never exceeds C = max(1, ⌊(A − Q)/r⌋ − 1), A the allocatable CPU of the ready workers and of the machines the system can still add (by T), or, where every node is a container on one machine (kind), that machine's CPU once; Q the requests of every other pod and r one pod's request: one pod under what the machines hold. At the max, every pod CPU limit written is ≥ the operator's own, and no frequency ceiling or GPU limit is written below its top; on the tune-down, a CPU limit is never written under the pod's request nor its use × (1 + headroom), and a GPU limit never under the card's own minimum. Proof: `Controller._machine_room`, `_max_nodes`, `_pool_command`, `_live_ceiling`,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`Muscles.push`, `_power_cap`, `_hardware` and `convey` (`omni_controller/`); `tests/test_compass_controller.py`, `tests/test_omni_controller.py`, `tests/test_muscles.py`. ∎ *Limit, stated with it:* T = ∞ refuses no count in advance: machines are still added only by the controller's own rules (the scheduling floor while pods wait for a place, one more past the compass's wall, the governor's law, cruise while a queue waits), within the rate limit; the first refusal by the pool, or by the cloud's quota behind it, sets the top from then on.

Definition 5 (the readings). For each seed s, the paired difference is d_s = Omni_s / native_s − 1 for work and energy, and Omni_s − native_s (percentage points) for the share of decisions over the line. Over n seeds, the 95% interval is mean ± t[0.975, n−1] · sd / √n. A gain or a loss is a row whose interval is clear of zero; otherwise the row reads no difference beyond the noise. Across runs A, B and C: the same sign in all three with every interval clear of zero reads "lower (or higher) in all three of our runs"; an interval across zero reads "no difference beyond the noise"; clear intervals of opposite signs read "the runs disagree" (`tools/readings.py`, `tools/confirm_abc.py`).

3. What the runs measure (classes S, L, P)

- **S, the muscles alone, 1,107 muscles, preregistered seeds 3000-3009, both loads** (`results/realms_v5/`, commit `eea291501848`, digest `5648f2902f1fae68`, every muscle its own card, section 5): 527 toward their aims, 421 at their limit on native (V3: the max writes nothing), 159 no difference beyond the noise, **0 LOSS or power given, 0 mixed**.
- **S, inside the organisms, the same seeds, three loads**: every organism with fewer misses as a whole under every load, and **0 plants with less work or more misses** in every organism under every load (0 of the 1,908 in the four stacked). Misses (the share of plant decisions over their line) fall 1.9% to 7.5% under each organism's own load, 1.4% to 7.2% under the climb (the load stepping 1 2 3 2 3 4 ... to twice its own) and 1.1% to 8.3% with work waiting in line, against 1.6% to 6.4%, 0.9% to 3.5% and 1.0% to 7.2% with one global setting for every muscle (digest `9be48445`, the same seeds), and the power given and the wear fall with them (Compute under its own load: power given +0.06% to +0.01%, wear +0.35% to +0.06%). Every row is reported in `results/realms_v5/REALMS_V5.md`.
- **L, real software**: `docs/THE_RECEIPTS.md`, receipt by receipt.
- **P, a physical meter on a real chip**: not yet produced on the current governor (`docs/THE_SEAT.md`, section 5).

4. The living body: why plants read LOSS, and the version that cures them (the engine since 12 October, night)

Found on development seeds only (7100-7299), never on the preregistered ones. Under the climb, rooms and UPS lines reach their limits in both arms; a plant read LOSS when the Omni arm reached a limit a moment sooner, or when a sense the brain read was wrong. Each cause, and the property of the code that removes it:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1. **A room snapped back.** A room cooled ahead of the heat, then returned at once to its operator's setpoint when the lines ran short: its own PI loop overshot warm of native, and once its cooling ran flat out the difference was frozen in. *V9 (the pedal lifted, never snapped):* a pull-down is handed back toward the operator's setpoint over the cooling's own reaction time. *V10 (no pull-down that cannot be held):* a new pull-down is granted only out of the room the lines have for that reaction time.
2. **A battery's charge counted as room after it ran out.** *V6:* a site whose battery covers its draw, but whose charge above its floor runs out within r + 1 + T decisions (T = 2: the heat of machines handed back reaches the rooms a decision later and their cooling answers over its own averaging, one more), has as room on its line only its limit less its whole draw, read at the draw's own climb.
3. **Machines handed back while a queue needed them.** *V7:* on a shortfall, a pool is never held below $\lceil (\lambda_{k-1} + Q_k / \Delta t) / \mu \rceil$.
4. **A room left warmer than native.** *V8:* every room has a twin: the same room under its operator's settings, warmed by native's heat (the body's source power with each pool's power replaced by its twin's). A room wired by its setpoint that reads warmer than its twin by $e > 0$ has its setpoint written at most $t[\text{set}] - e$, unless its cooling is already flat out.
5. **A room that cannot cure itself.** *V11 (the body cures what a muscle cannot):* a room wired by its cooling units, a power or an admission gate, or whose cooling is flat out, and that reads warmer than its twin by $e > 0$, puts a heat debt $e \cdot C / (\Delta t \cdot h)$ on the body (C its heat capacity, h its share of the body's source heat); the room the bone grants is bounded by minus that debt, so the machines the max added go back until no such room is warmer than native's.
6. **A battery that never timed its discharge.** *V12:* a battery wired by its power holds its charge while its line has room after the largest climb it has shown, line_z of its wobbles and a twentieth of its limit, and gives native's full power once the line could need it; it holds nothing until it has read its line for a window of decisions (20).
7. **A lock in the senses.** *V13 (a forecast starts at the first reading):* a plant shows its initial values before its first step; the jump from them to the first reading was taken as the line's largest climb ("never forgotten") and kept every battery's timed discharge shut for the whole run. Every forecast of a line now starts at the plant's first real reading, and the bone reads nothing before the body's first step.
8. **A twin that started wrong.** The body reads its sources at their nominal power before the first step; the room twins read zero, so for the first ten or so decisions they ran up to 0.3 °C apart from native's rooms and the body cured differences that did not exist. The twins now start from the body's own reading (V8, the definition above), and with the max writing nothing every room twin equals its room to the last digit, every decision (`tests/test_compass_arm_v5.py`).

The battery's admission gate stays native: deferring a site's flexible load to keep its line clear left part of that work not caught up by the end of a run (work first).

Measured on development seeds 7100-7199, the four realms under the climb, 400 organism runs each way:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

	Plants with less work or more misses	Misses (pp), the four realms	Work, the four realms
the engine before (omni-v5, 8d4f91f0)	19	−0.109, −0.125, −0.005, −0.144	+0.0013%, +0.0016%, +0.0000%, +0.0022%
V6-V10 only	7	−0.104, −0.110, −0.005, −0.137	kept
this version (V6-V13)	**0**	**−0.206, −0.187, −0.143, −0.212**	+0.0008%, +0.0010%, +0.0000%, +0.0016%

The misses fall about twice as far as before (in the Energy / Facility / Industrial body, from almost nothing to 0.14 points), and no plant in any of the 400 runs did behind native. The work gained is about two thirds of the version before: the heat debt hands back machines while a room that cannot cure itself is warmer than native's.

One lock is left, said plainly: a line that once jumped (a battery that stopped covering its site) is read as able to jump that far again for the rest of the run, which keeps the max from adding machines on that line. Removing it (every line's climb read on the site's whole draw) roughly triples the misses removed on the same seeds (−0.34 points), but in 36 of the 400 runs a machine pool whose queue sat at its limit then did more work and took one decision longer to clear it, which our decision count reads as LOSS. That is the next version's work, and it enters the engine only as a new version, every result run again on it, the founder told first.

5. Every muscle its own card (the engine since 13 October)

The founder's question of 12 October, night: does every muscle have its own tuning, maxed to its own benefit, instead of one global setting for a thousand muscles? It does, and the engine now carries it.

Definition 6 (a card). For muscle i, a card θ_i is the brain's settings for that muscle: for a machine pool, its edge utilisation u_i (how full it runs on its forecast before it calls for more) and its window w_i (decisions of history it reads); for a battery, its line margin z_i (wobbles kept under its line) and, wired by its power, its hold window and hold margin. The brain is one (the same law, the same bone, the same body); only these numbers differ by muscle. A muscle without a card runs the global setting θ_0 (u = 0.95, w = 20, z = 3.09, the hold window equal to w, a hold margin of a twentieth of the line). The tune-down never reads cards.

The search (development seeds only, `tools/tune_cards.py`). Every muscle whose settings can change what the max does (458 machine pools, 44 batteries, 48 axes) tries every candidate in a declared grid on seeds 7100-7109, alone, under its own load and with work waiting in line; θ_0 is always among the candidates. Pools: u ∈ {0.70, 0.75, ..., 0.95} × w ∈ {10, 20, 40, 60}; batteries wired by their power: z ∈ {0, 0.5, 1, 2, 3.09} × hold window ∈ {3, 5, 10, 20} × hold margin ∈ {0, 0.02, 0.05, 0.10}; other batteries: z ∈ {0, 0.25, ..., 4}; axes: heat head × strain. A candidate is kept if it beats θ_0 beyond the noise on those seeds (fewer misses, more work or faster: a 95% interval of the paired difference clear of zero), read LOSS than θ_0 nowhere, and is never behind native: on no seed and under no load over its line more often than native, doing less work or clearing its line later (the engine's own no-harm tests, seed by seed); among those, the fewest

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

misses, then the most work, the fastest, the least energy. It is then run again against θ_0 on seeds 7200-7209 and enters the engine only if it wins there too: a card must win twice. The preregistered seeds 3000-3009 are never read by the search.

V14 (the body has the last word on a line it shares). Inside a body, a battery wired by its power keeps the body's margins on its line: its z and its hold margin are never slimmer than θ_0's; its own window stays. A card is chosen for the muscle alone, and a battery's line inside a body carries the whole body's swing, which the battery alone never saw: the one plant behind native that the cards produced in development (a rack's power allocation, one extra decision over its line in the whole tower with work waiting, one seed of ten) was exactly that case, and V14 removes it.

What the search found: 409 of the 550 searched muscles beat θ_0 on the first seeds; 364 won again on the second (45 fell back to the global setting, none LOSS); the engine's cards are those 364 (`realms/muscle_cards_v5.csv`: 333 machine pools, 31 batteries). No axis setting beat the global one. A first set of cards was chosen by the mean over the seeds alone (371 cards); the engine's own no-harm test then caught one of them (an electrolyzer battery, one decision over its line on one seed), and the rule became the seed-by-seed one above. The cards are the ones it chose. A room alone and a process loop alone have nothing for a card to fix (native almost never misses there), and the 421 knobs native already runs at their limit have nothing above native to give: their help comes from the body. Every card is printed in plain words in the muscle catalog (`docs/MUSCLE_CATALOG.md`).

Inside the six organisms, on both development sets (360 organism runs, every plant against native): 0 plants with less work or more misses, and the misses removed against native 1.7 times the global setting's over the three loads (1.2 times under each organism's own load, about 1.9 under the climb, 1.7 to 1.8 with work waiting in line):

Seeds	Own load: global → cards	The climb: global → cards	Work in line: global → cards	Plants with less work or more misses
7100-7109 (the cards chosen here)	0.078 → 0.094 points	0.153 → 0.293 points	0.088 → 0.161 points	0
7200-7209 (the cards confirmed here)	0.074 → 0.087 points	0.145 → 0.282 points	0.086 → 0.149 points	0

Work is unchanged within a millionth, and the power given is lower than the global setting's in the organisms where it moves at all (Compute under its own load +0.058% → +0.011%). The preregistered result, on seeds the search never read, is section 3.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

6. Limits, stated plainly

- A card is chosen for its muscle alone. Inside a body the bone shares the lines and V14 keeps a battery wired by its power to the body's margins; the organisms were checked with every card on both development sets (0 plants with less work or more misses) and on the preregistered seeds (section 3), but a card is not tuned for the body it sits in.
- Many machine pools chose the most aggressive edge the search offered (256 of 333 cards at 0.70): their own limit may lie further out. Searching further is the next version's work, a new version with every result run again.
- V properties bound what the governor writes. They do not by themselves bound an outcome on a line the governor does not control (section 4).
- R is a forecast (V4). A climb no line has shown before can beat it within the one decision power takes to be handed back.
- S results are our models. They are never presented as proof of a physical saving; the physical receipt is a P run.
- The twin is exact for a pool (its law reads only its own inputs) and for a room (its heat is the body's own source reading with each pool's power replaced by its twin's, so with the max writing nothing it equals the room to the last digit); with the max writing, a room twin is native's room under native's heat as the brain reconstructs it, not a meter.

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results.

CHAPTER 17

The Mechanism of Action

Every statement here is tied to code in this repository, and the measured numbers are reproduced by `python tools/mechanism.py`, which writes `results/MECHANISM_OF_ACTION.json`. The engine files are frozen. Their SHA-256 hashes are checked by `verify.py`.

1. The state: six numbers that describe the whole system

Symbol	Name	What it stands for in a data centre
E	energy / excitation	how hard the system is being driven: queues, overload, power, heat
U	order parameter	how healthy and settled the system is: +1 healthy basin, -1 failed basin

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Symbol	Name	What it stands for in a data centre
I[U]	integrated need	unmet need accumulated over time: memory of pressure that has not been relieved
S	stress	slow structural stress from heat, power, network, security, staleness
B, Ḃ	bath and its rate	a damped oscillator driven by stress: the slow "tide" of physical load

2. The equations (omnicompass/core.py, lines 5-12)

```
(1) dE/dt     = −α[E] E + β[int] + β[ext] + v[eff]
(2) dU/dt     = μ U (1 − U²) − (dE/dt)/E[max] − λ[U] U + u,          |
    ↪ u| ≤ 25
(3) dI[U]/dt  = (1 − U) − σ₁ E − δ S − λ[I] I[U]
(4) v[eff]    = cos(ω[B] t / 2) · c · tanh(λ₀ + λ₁ (U − 0.5) + λ₂ S)
(5) Φ(S)      = αₛ S² / 2 + βₛ S³ / 4 − δ S

(6) dS/dt     = −dΦ/dS = δ − αₛ S − (3/4) βₛ S²
(7) dB/dt     = Ḃ ;   dḂ/dt = γ[c] δ S − (ω[B] / Q[B]) Ḃ − ω[B]² B
(8) R[B]      = finite-difference audit of (7) at every step, never fe
    ↪ d back
```

Each term does one job:

- **(1) Energy.** Energy decays at rate α[E] = 3.487. It is driven by two forcings: internal pressure `β[int]` (queue and overload) and external pressure `β[ext]` (power, heat, network, staleness, security). The drive term `v[eff]` (4) is bounded by `c` through the hyperbolic tangent, so no input can drive E without limit. This is the saturation (the tanh "speed limit"): however extreme the observation, the engine's response rate is capped at c = 1.
- **(2) Order.** `μ U (1 − U²)` is a double-well (bistable) drift with two stable basins, U = +1 (healthy) and U = -1 (failed), and an unstable ridge at U = 0. A rise in energy (`dE/dt`) pushes U out of the healthy basin. `u` is the bounded control input.
- **(3) Integrated need.** I[U] grows while U is below 1 (the system is not settled). It is reduced by energy and stress already being dealt with, and it leaks at λ[I] = 0.719. It is the engine's memory of unrelieved pressure.
- **(5)-(6) Stress.** A cubic potential (the "well in the basin"). S rolls downhill to its stable root. This is the slowest restoring force.
- **(7) Bath.** A damped harmonic oscillator (natural frequency ω[B] = 1, quality Q[B] = 2.5) driven by stress. It turns stress into a smooth, lagged "tide". It is the only second-order element.
- **(8) Audit.** The bath equation is re-checked numerically every step. The check is never fed back.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Integration: classical 4th-order Runge-Kutta, 10 micro-steps of 0.01 per macro step (`rk4_step`, `macro_step`). The C++ twin matches the Python to 3.6e-15 on 500 reference trajectories.

3. From telemetry to state (omnicompass/adapter.py, `observe_vector`, `assimilate`)

Each decision the telemetry is normalised to nine observations: q (queue), load, power, thermal, network, drift, stale, security, conflict. An observed state is computed from them:

```
E[obs]   = 0.25 q + 0.18 max(0, load − 0.85) + 0.16 power + 0.13 therm
    ↪ al + 0.10 network + 0.08 drift + 0.06 conflict + 0.04 stale
U[obs]   = 1 − (0.27 q + 0.18 power + 0.16 thermal + 0.12 network + 0.
    ↪ 12 drift + 0.10 conflict + 0.05 stale)
S[obs]   = 0.36 thermal + 0.28 power + 0.18 network + 0.10 security +
    ↪ 0.08 stale − 0.20 q

B[obs]   = 0.52 power + 0.26 thermal + 0.22 drift
I[obs]   = q + drift + conflict
β[int] = 0.58 q + 0.42 max(0, load − 0.75)        β[ext] = 0.33 power
    ↪ + 0.27 thermal + 0.20 network + 0.12 stale + 0.08 security
```

The state is blended toward the observed state with weight a = 0.339: `x ← (1 − a) x + a x[obs]`. It is then evolved by one macro step (0.1 engine time units) of equations (1)-(7).

4. From state to action (the allocation law, `Governor.step`)

```
push     = u(x) / 25,  u(x) = clip(−f[U](x) + 12 (1 − U), −25, 25)
    ↪     equation (2)'s controller, evaluated, not applied
ρ*     = clamp(ρ₀ − k[I] I[U] − k[E] E, ρ[min], ρ₀)
    ↪    target utilisation (the HPA target)
n[req]    = ceil(n load / ρ*) + ceil(k[q] q n)
    ↪        machines wanted

release  only while push ≤ push_release (the engine reports convergenc
    ↪ e), after band and dwell
cap      = clamp(cap_now load (1 + margin), cap_min, 1) when calm and
    ↪ U ≥ U[gate]; 1 under backlog;
           always ≤ 1 − cap_gain max(0, B − B[cap])
    ↪       the bath limits the power cap
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
change   permitted only while U ≥ U[gate] and no security block
rollback authorised if S ≥ S[rollback], U is falling, or a security bl
    ↪ ock is seen
```

5. Which equation drives which muscle

Muscle	Engine quantity used	Where
HPA target (pods)	rho* from I[U] and E, equations (1) and (3)	adapter `Governor.step`; live `omni_controller/controller.py`
Node pool (machines)	n[req] from load, queue and rho*; release gated by push from equation (2)	same
Power cap (pod CPU limits, CPU frequency, GPU limit)	cap from U gate and bath B, equation (7)	same; `omni_controller/muscles.py`
Rollout guard	change_permitted (U), rollback (S, dU)	`muscles.py`
Security hold	security observation raises S and blocks expansion	adapter, shield
Speed-first law	rho* for pods; push gates machine release	`omnicompass/speed.py`
Right-sizing	rho* sizes CPU; E widens the memory margin; push gates scale-in	`omnilab/rightsize.py`
Cold start	rho* sizes instances; I[U] sets how long to keep warm	`omnilab/coldstart.py`
GPU packing	I[U] pre-warms nodes; push gates power-off	`omnilab/gpupack.py`
Training power	E tightens the applied ramp limit under sustained grid stress	`omnilab/powersmooth.py`
GPU health	S and E shorten the checkpoint interval	`omnilab/health.py`
Cooling	E widens the inlet-temperature margin	`omnilab/cooling.py`
Inference	the full allocation law (node_delta) sizes replicas	`omnilab/inference.py`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Muscle	Engine quantity used	Where
Agent containment	I[U] throttles; the security observation contains	`omnilab/containment.py`
VM energy	I[U] and E raise the learning rate when attribution goes stale	`omnilab/vmenergy.py`

6. Measured: what the equations actually do inside the governor

Measured on a real observation stream (fleet plant, web services, fleet mode, 360 decisions):

Mode (eigenvalue of the Jacobian at the operating point)	Time constant	In decisions
-7.90	0.13	1.3
-3.10	0.32	3.2
-0.72	1.39	13.9
-0.20 +/- 0.98i (the bath)	5.0, period 6.4	50, rings every 64 decisions
-0.17	6.0	60

- **Every mode is stable** (all real parts negative). The operating point is a stable equilibrium inside the healthy basin: E = 0.095, U = 0.976, S = 0.315, B = 0.10. This is the basin keeping everything in, stated as mathematics.
- **Per decision, the equations and the observation move the state about equally.** Across all six variables the equations contribute 45-50% of each step's movement and the observation blend the rest.
- **Equation (2)'s control input u is not applied during governance.** The engine evolves open-loop (u = 0). The control law is evaluated only to produce `push`, which decides when capacity may be released.
- **Compute:** about 95 microseconds per decision in Python, and about 2.9 microseconds in the C++ twin.

7. What this explains, and what it points to

- **Why "engine off" scores close to "engine on" in the muscle benchmarks.** With the equations frozen, the observation blend still moves the state. Both versions are then low-pass filters of the same telemetry. The engine's fast modes (1-3 decisions) behave almost like the blend itself. Its distinct contribution is its slow memory: I[U] (14 decisions), S (60) and the bath (period 64 decisions). The muscle mappings mostly read E and rho*, which live on the fast modes.
- **The engine clock is not matched to the workload's rhythm.** One decision advances engine time by 0.1. At 60-second decisions the bath rings every 64 minutes, but web demand has a 24-hour rhythm and

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

training power a 2-second one. This is a wiring choice in the adapter (engine time per decision), not a property of the equations.

- **The controller in equation (2) is unused as an actuator.** Wiring its output u (or U's trajectory under u) directly to the actuators is the unexplored way to "let the math do the work".

Three wiring experiments follow directly. None changes a single equation:

1. **Clock matching.** Set engine time per decision so that the bath's natural period equals the workload's rhythm. The oscillator in (7) then carries the cycle and can anticipate it.
2. **Slow-mode actuation.** Drive machines from I[U], S and B (the memory modes) rather than E (a fast mode).
3. **Closed-loop actuation.** Apply equation (2)'s u and use its magnitude, not only its sign, as the actuator command.

Each is testable in the existing harness against every platform in the league (tuning/league.py), and will be tested there.

One pedal: push, lift off, idle, reset, and the kill switch

Omni-Compass drives a system the way a self-driving car drives itself: it feels, gauges and adjusts, with nobody in the seat. The words below are used the same way everywhere in this repository.

Two names only. native is the system as it runs on its own (Kubernetes and its autoscalers, the card's firmware, CityLearn's controller). **omni** is Omni-Compass on top of native: the same native system, with Omni-Compass governing it. Omni-Compass never runs instead of native, only on top of it, so every comparison is native against omni.

The modes. Off (manual): Omni-Compass not driving, native runs alone. Watching: Omni-Compass reads every gauge and logs what it would do, and writes nothing. Autopilot: the one pedal below. Cruise and idle at once: for work that comes as a pile.

Term	Meaning	In the code
Push	Traffic climbs and capacity is added at once, never held back; the whole cluster can take work the instant it is needed	(8.3); a lower HPA target is never limited
Lift off	Traffic falls and capacity is eased off a step at a time, handed back toward native, never below idle	(8.4)-(8.5); coasting, rule 6
Idle	The pedal lifted all the way: calm traffic, the engine running at its floor (two machines in service, ready)	`MIN_NODES`, the floor of the staging law (8.8)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Term	Meaning	In the code
Reset	Every setting the governor ever wrote is handed back to where native had it, read back, and the record removed; the next run starts fresh. Every benchmark arm ends with one and checks it	the reset file (`--kill-file`, a name kept for compatibility), `Controller.restore`
Cruise	A pile of work waiting for a place: machines in service up to the pool's own top, read live (a fixed pool's every machine at once, a growing pool a step a decision), held there without second-guessing, until the line has been empty for two decisions	rule 7, `--cruise-after`
Idle at once	The work is done and demand is at zero (the service at its least pods, wanting no more, at half its target or less): the pedal lifted all the way in one move, straight to idle (the floor), every safety check still holding	rule 8, `--idle-demand`, amendment 9
Kill switch	Security only: one switch in a human hand that turns Omni-Compass's governing off across the whole system at once, for anything rogue or anyone trying to drive a system through Omni-Compass's brain	`omnicompass/master.py`, `tools/omni_switch.py off`

The floor is a number the operator sets; lifting off never takes the system below it, however far the pedal is lifted. Earlier dated records, and the sealed original engine files, call the reset a "kill switch"; they are kept word for word.

8. The staging law: machines on and off in order, with demand that moves

Demand climbs, spikes, eases part way, climbs again and settles to idle. The staging law decides how many machines are in service at every decision, and which ones, so that capacity follows demand up at once and comes back down only as far as it safely can. It is the compass law (`omnicompass/compass_law.py`) applied to the machine pool (`omni_controller/controller.py`), the release gate (`omnicompass/nervous_system.py node_release_gate`), the verdict (`omnicompass/verdict.py`) and the actuator (`scripts/kind_nodepool.sh`). Every symbol below is a line of that code.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Position and force. The service reading r (the 95th-percentile response time, or the pressure that stands for it) is placed in its band [lo, hi], where hi is the response line:

```
p = (r - lo) / (hi - lo),      v = s v + (1 - s) (p - p_prev) / dt
    ↪                    (8.1)
F = A                                        if p >= 1 - c        (fail
    ↪  up, past the wall)
F = A tanh( (kp (p - p0) + kd v) / A )       otherwise; F = 0 if F < 0
    ↪ while v > 0 and p > p0   (8.2)
```

with the band's center p0 = 0.5, cushion c = 0.05, authority A = 1, kp = 1 and kd = max(0, 2 sqrt(kp tau / dt) - 1) dt (critical damping for a muscle that answers in tau seconds). F > 0 asks for capacity, F < 0 offers it back.

How many machines. With n machines in service now, n[nat] the count native ran, m the floor (two by default, `MIN_NODES`) and M the machines that exist (every machine usable; an operator may hold whole machines back with `NODE_CUSHION`, off by default), every count stays in m <= n' <= M. The protection is not a machine sitting out: it is the band inside every machine. Capacity is added at 95% of the response line, before the line is reached (8.2-8.3), and a machine goes back only if the ones left still run at or under the engine's utilisation target rho (8.5): a margin spread over all of them.

```
up      n' = min(M, max(m, n + 1))                                  if p >
    ↪ = 1 - c                     (8.3)
down    n' = max(m, n - 1)                                          if F <
    ↪  R and p < p0 and the verdict
                                                                    allows
    ↪  n_nat - (n - 1) and the gate G holds  (8.4)

hold    n' = n                                                      otherw
    ↪ ise
```

with the release threshold R = -0.2. Up is immediate and is never gated. Down is one machine per decision, never below the floor, and only when every term of the release gate holds:

```
G = [n > 1] and [nothing pending] and [pods not scaling up] and [no br
    ↪ each now] and
    [ used / ((n - 1) x per_node) <= rho ] and [contraction authority]
    ↪  and [every sense live] and
    [the last machine command landed]
    ↪                          (8.5)
```

rho is the engine's utilisation target: after a machine goes back, what remains runs at or under rho. The verdict (section 7 of the GPU preregistration, `omnicompass/verdict.py`) allows a machine count below native

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

only after a paired trial showed the service at that count at most a 2% LOSS than at the count before; that 2% is where the trigger sits, inside the engine.

This is hysteresis by construction. The up condition (p >= 0.95) and the down condition (p < 0.5 with F < -0.2) are far apart, so a demand that hovers never makes machines flap; a spike crosses the wall and adds a machine at once; a dip has to be deep, calm and sustained before one goes back, and then only one per decision. Between the two, the count holds.

Which machines. The actuator orders the pool:

```
idle   the open machine with the fewest serving pods, then the fewest
    ↪ pods, goes first;
       it is marked prefer-not (PreferNoSchedule) and its pods first t
    ↪ o go (pod-deletion-cost), so the
       autoscaler's own scale-down empties whole machines; no pod is m
    ↪ oved, evicted or restarted   (8.6)

wake   the idle machine still carrying the most work goes first (it is
    ↪  warm); the mark comes off and it is in
       service at once, with no boot
    ↪                          (8.7)
floor  two machines always in service (MIN_NODES, the operator may set
    ↪  more), ready for a spike  (8.8)

margin  every machine usable; the cushion is the band inside each one
    ↪ (the 5% before the line, and rho), not a
        whole machine held out
    ↪                           (8.9)
```

An idled machine stays powered and Ready at its floor (park_frac x idle power), never off: a pod that finds the open machines full lands on it at once, so no request ever waits on a machine Omni-Compass idled. Where a node autoscaler underneath really removes an empty machine (Azure's cluster autoscaler, Karpenter), that same order hands it the emptiest machine first, and the bill falls with the machine.

The same law on every discrete unit. Machines are one case. In the muscle models (`realms/compass_arm.py release_safe`), a cooling plant's chillers and a compute pool's machines follow the same law: one unit back only when the units left cover the recent peak with headroom (RELEASE_MARGIN 0.6 for machines, 0.8 of a unit's capacity for chillers), one at a time, and back at once when the wall is reached.

What is proved, measured and open. The order (8.6)-(8.8) is checked through the real actuator by `tests/test_staging_order.py` (the emptiest idles first, the warmest wakes first, two always in service, every machine usable, no pod moved). The gate (8.5) is checked by

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`tests/test_node_release_gate.py`. On real Kubernetes the law gave the same work 55-65% faster on 29-36% fewer machines (sets 22-27) and 48% more work on the same machines (the capacity test); its run under demand that wanders (up, spike, part way down, back up, idle) is in progress. Open: an order across different kinds of unit (a battery before a generator, a CPU before a GPU) is not wired; each pool is ordered within itself.

9. The state each muscle carries, and the modes as a state machine

9.1 The compass on a muscle is a dynamical system, so its state must persist. On muscle i the compass carries $z_i = (p_i, v_i, x_i)$: the position of the service in its band, its velocity, and the knob's continuous value. At each decision k, with reading r_k:

```
p_k = (r_k - lo) / (hi - lo),   v_k = s v_{k-1} + (1 - s)(p_k - p_{k-1}) / dt,
    ↪  F_k = F(p_k, v_k) by (8.2)    (9.1)
x_{k+1} = clamp( x_k + sigma g(F_k) F_k (x[hi] - x[lo]), x[lo], x[hi] ),   g
    ↪  = UP if F_k > 0 else DOWN          (9.2)
```

with x_0 the native value and sigma = +1 when a higher value is more capacity. Two properties depend on z persisting: (a) the knob integrates the force, $x_k - x_0$ = sum_j sigma g F_j span (until the cover binds), so a calm muscle eases step by step toward its cover; and (b) the damping term kd v_k needs p_{k-1}. If z were made fresh at every decision ($p_{k-1} = p_k$, v = 0, $x_k = x_0$), (9.2) would collapse to x_{k+1} = clamp(x_0 + sigma g F(p_k, 0) span): a memoryless map of the present reading, at most one step from native, with no damping. That is a different, weaker law. A renamed attribute did exactly that on 2026-10-05; `tests/test_compass_arm.py` now fails if the compass is ever made twice on one muscle.

9.2 The modes. The live controller is in exactly one mode at each decision. With q_k the pods waiting for a place, u_k the scaling-up flag, c the cruise count (`--cruise-after`, 2), M the machine ceiling and m the floor:

```
cruise on      q_j > 0 for the last c decisions
    ↪                              (9.3)
cruise off     q_j = 0 and not u_j for the last c decisions
    ↪                              (9.4)
in cruise      n' = min(M, n + s), M the pool's own top read live, s t
    ↪ he step; the service's autoscaler target held at the operator's
    ↪ own; the floor step
               makes no read and no write
    ↪                              (9.5)
idle at once   (not cruising) q = 0, no breach, not u, every sensed se
    ↪ rvice idle or at demand
               <= b, the gate G (8.5) holds, every sense live, the las
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ t command landed:
                n' = max(m, smallest n carrying the CPU in use at rho)
    ↪                                (9.6)
idle (a service at its floor)   I(h) := current = min = desired, and u
    ↪ _h <= target_h / 2            (9.7)
push / lift off / idle         (8.3) / (8.4)-(8.5) / (8.8)
```

9.3 Why cruise steps back (9.5). In cruise the machines climb to the pool's own top (a fixed pool's every machine at once, n = M; a growing pool a step a decision), so the floor step's only action (raise n to the floor the waiting pods need) adds nothing the climb does not already give: for a fixed pool floor <= M = n. Its reads (every pod, every node, node metrics, every HPA, each five seconds) carry no value of information, so removing them cannot change any action; they only cost CPU and API-server time on the machines the queue is using. The service's response time is also confounded in cruise: with a queue of other work holding the machines, a request waits on contended CPU, R = S / (1 - u[host]), not on the service's own pods. Reading that R as the service's own queue and adding pods would answer the wrong cause. So in cruise Omni holds the machines and leaves the service to its own autoscaler. `tests/test_compass_controller.py` checks that the floor step makes no API read during cruise; the controller before this rule made the full set of reads every five seconds.

9.4 Why idle is read from the autoscaler's floor (9.7). A served service never reads zero: a health probe or a client's keep-alive keeps one pod at a few percent of its request. In the batch test, one pod at about 10% of its request read as demand 0.10, above b = 0.05, and idle waited 15 minutes after the queue emptied. The autoscaler's own floor is the observable of "no demand beyond the minimum": the pods it keeps are its minimum, it wants no more, and they run under half the target. In the five frozen-engine web tests the service was never at its floor (0 of 5,102 readings), so (9.7) changes nothing there.

9.5 Reporting resolution. A paired change smaller than one part in a million of the value (|mean difference| <= 1e-6 |native|) is read "same", the number still shown. Below that, a difference is rounding in floating point and in the models' accumulators, not behaviour; a deterministic run gives a zero-width interval around it, which would otherwise read as proven.

9.6 A lever is moved only where moving it can pay. The compass decides how far and how fast. Whether a lever may move at all is a property of the muscle's physics. Four cases, each derived from the muscle's own model and each its own test:

- *Cooling power.* A zone's heat must leave it: over a run, the heat removed equals the heat made plus what the room's mass stores. A cap on cooling power q[max] cannot remove less heat. It only lets the temperature drift above setpoint while the PI command grows, and the staging rule, units = ceil(command / (0.8 q[unit])), turns that command into more units and more fan power, p = q[c] / COP + units x p[unit]. So a lower cap never saves energy, and the lever stays native. (The setpoint, which changes the COP, and the units, which change fan power at the same heat, remain levers.)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- *A battery's reserve.* Energy D drawn from the cells below the operator's reserve saves D sqrt(eta) of grid import, and the deficit is bought back at D / sqrt(eta). The net, D (1 - eta) / sqrt(eta) (10.5% of D at eta = 0.90), is always positive. Spending the reserve is never an energy saving; it is the price of keeping the draw under the connection's limit. So the reserve is spent only at the wall (p >= 0.95) and only when the battery can cover the excess (0 < imp - p[lim] <= p[batt]). Otherwise the operator's reserve holds, and no round trip is paid for nothing.
- *A backup reserve (a UPS).* It is held for an outage, which the model does not contain, so spending it for a peak trades away the reason it exists. Never a lever.
- *A compute pool's power cap.* With throughput mu(c) proportional to c^eps and the autoscaler holding utilisation near its target u*, the energy per unit of work is e(c) = (p[idle] / u* + p[dyn] c) / mu(c). At c = 1, de/dc > 0 (a lower cap saves) if and only if

```
eps < p_dyn / (p_idle / u* + p_dyn)
  ↪                                  (9.8)
```

At eps = 0.4 the cap saves on CPU hosts (threshold 0.62), GPUs (0.74), databases (0.51) and radio units (0.54). It costs energy where idle power dominates: a quantum computer's cryostat (0.19), a network switch (0.32), storage (0.26). There, running slower keeps the machines on longer: race to idle. In a deployment p[idle], p[dyn] and the speed curve come from the machine's own specification.

- *A motion axis's effort cap.* It lowers the copper loss of a full-acceleration move, (J a[max] / kt)^2 R, and stretches the move, which keeps paying the standing draw p[idle] + b v[max]^2. It moves only where the first exceeds the second: a reaction wheel (32 W against 5 W), not EV traction, a flight axis or a robot joint.
- *A machine released from a node pool.* A machine boots in minutes, and a burst that arrives in the meantime is served late. So a machine goes back only when the machines left cover the recent peak at 0.3 of the pool's own release level, the largest margin at which no pool is later than native (`results/realms/RELEASE_MARGIN_SWEEP.md`). This is the verdict of the live controller (section 8) in model form.

What a lever buys is labelled for what it is. Less work per energy, with no work lost and the time over the line proven lower, is SERVICE IMPROVEMENT WITH ENERGY TRADEOFF, the mirror of ENERGY IMPROVEMENT WITH SERVICE TRADEOFF. Without that proof it reads LESS WORK PER ENERGY.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 18

The Engine That Stands: Omni v7

Omni v7 is the engine that stands on main since 16 October (the founder's order: everything on the newest engine). Every benchmark runs again on it (`scripts/reruns.txt`; the grid conductor's reruns, grid and Azure queues restarted on it the same day), and every earlier table stands as its own engine's result until its three runs on v7 land; results from two versions are never pooled. v7 is v6 with five changes, each found from a v6 run's own files or from the governing rules themselves:

#	Change	Where	What it tightens
1	CPU conveyance obeys the namespace quota	`omni_controller/quota.py`, `muscles.py`	no write Kubernetes would refuse
2	On a shared host, no limit raised while the machine is at or over 75% busy or unread (the replica room's guard)	`omni_controller/muscles.py`	the host's top, nothing else
3	The verdict reads a trial in the reports' own words (GAIN, EVEN, LOSS)	`omnicompass/verdict.py`	the do-no-harm trigger
4	Every rule counts in seconds, not decisions	`omni_controller/controller.py`	the same behaviour at any decision period
5	The cloud's rule in one word, `--give-back-only`	`omni_controller/controller.py`, `deploy/install/omni-compass-cloud.yaml`, `scripts/kind_bench.sh`	the bill can only fall or stay

1. Quota-aware conveyance

The original capacity run 38722001872 tried to raise a pod CPU limit while its namespace CPU quota was already full. The candidate reads each namespace's ResourceQuota CPU-limit hard/used values, obeys the stricter pending spec/status ceiling, and reserves each accepted increase across all target deployments in one conveyance pass. It does not increase or delete an operator quota. PriorityClass scope selectors are matched from pod metadata, without deployment or quota names hardwired into the governor. Unknown quota state, read failures and unsupported scopes preserve native limits for expansion; reductions remain possible. Decreases do not create spendable headroom until observed by Kubernetes.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What the first live trial found, and the correction (16 October). The three trials of the candidate as first pushed (Goldilocks run 38825214203, the KEDA add-ons run 38825211370, the capacity test run 38825208939; one run of ten pairs each, so single runs, not three-run tables) read the candidate well short of omni-v6's three-run tables on the two add-on tests: Goldilocks response time at the 95th percentile -6% (EVEN) against v6's -58% GAIN in all three runs, HPA replicas +20% and pods started +200% (power given), the pod start wait +172% (LOSS); KEDA on the requests in flight p95 -2.7% (EVEN) against v6's -73%, replicas +17% (power given); KEDA on the CPU target and the requests p95 +3% (EVEN) against v6's -55%; the capacity test EVEN at every cap, as on v5. The governor wrote 5 commands a run against v6's 15 and the host was 4% busier against 40%: conveyance never raised a limit. The audit says why, 65 times in one repetition: `quota: CPU limit expansion blocked, reason: quota read unavailable: CalledProcessError`. The governor's role on every kind test (`deploy/kind/rbac-omni.yaml`, receipted in each run's `rbac_omni.txt`) cannot list ResourceQuotas, and the budget as first written read an unreadable quota as a zero allowance. The toy gate had not seen it because its model of the cluster answered the quota read with an empty list. The correction: a namespace whose quotas cannot be read is **no budget known**, not a zero budget; the raise proceeds as it did on omni-v6 and Kubernetes' own admission, which refuses any write over a quota the governor cannot see, stays the authority (the plug reads every write back and a refused one is audited and never advertised); the audit says so once a pass. Where the role can read the quota, the budget bounds every raise as before. The toy now runs the convey model a second time with the quota unreadable (section 6), the regression `test_an_unreadable_quota_holds_nothing` holds the v6 arithmetic under a forbidden read, and the three trials run again on the corrected candidate; the first trials stay in `results/live/raw/` on this branch as the record of the fault.

Kubernetes admission remains authoritative. A concurrent rejected write is audited and does not become an invented conveyance gain. The node's existing CPU cushion, operator CPU floor, security hold, workload schedule and benchmark validity checks remain intact. The separate runner shutdown in the historical run has no established cause and is not claimed fixed by this actuator change.

2. Conveyance on a shared host: one guard, two designs refused by the toy

The v6 three-run KEDA table (`results/live/V6_KEDA_REQUESTS.md`) read the pod start wait, mean, +12.5%, +12.0% and +22.7% (EVEN on the three-run rule, LOSS in two single runs) beside response time -59% and CPU used +55%. The run's own files (`results/live/raw/addons-run-38725705826`): 149 raises, each pod's limit set to 1,850m (two serving pods on its node) or 3,700m (one), the HPA at 8.8 replicas on average, the host 0.27 busy under native and 0.34 under Omni-Compass, past 75% busy for 0.3% of its samples. On kind every node is a container on one 4-core machine and reports all four cores as its own, so the limits sum to about three machines: a ceiling, not a use; the kernel's fair scheduler arbitrates when the pods ask for more than the machine, as it does for native's pods.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Two repairs were written first and both were refused by the toy gate (section 6) before any real run: **the host's CPU counted once** and shared by every serving pod (at the run's nine replicas 3,500m / 9 is under the operator's 500m, so nothing is ever conveyed: in the model the +64% work and -53% response time of conveyance are lost whole, requests served -16% against v6, LOSS); and **a hold while a pod starts on the host** (start wait 1.1% shorter for requests served -0.11% and response time +0.5%, both LOSS against v6 at the real regime). v7 keeps the one guard the model reads as no LOSS, the same as the replica room's (`omni_controller/capacity.py`): on a shared host no limit is raised while the machine's measured busy share is at or over 75% or cannot be read; limits already given stay; lowering is never held back; each hold is written to the audit (`"convey": "held"`). The slower pod start is the busier host serving more requests, the price of the work; it stays shown in every receipt and is judged as the table judges it.

3. The verdict in words

The verdict (`omnicompass/verdict.py`) is the engine's do-no-harm trigger: before a knob may move one step further from native, the step runs as a trial and its cost per piece of work is compared with the cost at the reference. Through v6 the comparison was the two medians alone: the step was allowed if m[trial] ≤ m[ref] · (1 + tolerance). On noisy work a median wanders, so a step that truly cost more than the allowance was often allowed by chance.

v7 (`judge="interval"`, the default) reads the trial exactly as a report reads a row (`tools/readings.py`). On the logarithm of each piece of work's cost, so that a heavy tail does not decide it, the change is

$d = \text{mean ln } c[\text{trial}] - \text{mean ln } c[\text{ref}]$, with the 95% interval $d \pm 1.96 \cdot \sqrt{s^2[\text{ref}] / n[\text{ref}] + s^2[\text{trial}] / n[\text{trial}]}$ (Welch's standard error),

and with $\tau = \ln(1 + \text{tolerance})$ the allowance in the same units:

- the interval wholly above zero is a **LOSS**: the step is refused and undone, whatever the allowance says;
- wholly below zero is a **GAIN**; across zero is **EVEN**;
- while the interval's half-width exceeds τ, the evidence is wider than the allowance, and the trial measures on, up to three times `min_samples`, before it decides;
- a GAIN or EVEN step is allowed only if both estimates are inside the allowance: the median (v6's guard, kept) and $d \le \tau$;
- a stepwise knob is read the same way against the costs first measured at native as well, so a run of small steps cannot add up past the allowance.

Every judgement writes its reading and its intervals to the audit (`"reading"`, `"interval_ln"`). `judge="median"` reproduces v6 exactly.

On noisy work (log-normal costs, σ = 0.25, a 2% allowance, 300 trials each, seeded):

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

True cost of the step	Allowed through v6 (medians)	Allowed in v7 (in words)
+0% (free)	63%	60%
+1%	56%	50%
+2% (at the allowance)	47%	39%
+3%	40%	28%
+5%	26%	14%

A step that costs more than the allowance is allowed about a third less often at +3% and about half as often at +5%; a free step is kept almost as often. A step whose cost is clearly higher reads LOSS and is refused. These are properties of the rule on modelled costs (class S), not benchmark results (`tests/test_verdict_interval.py`).

4. Every rule counts in seconds

Five of the governor's rules counted decisions: the clear time after a breach (3), the cruise wait (2), the strict window (5), the verdict's probe spacing (10), recheck (120) and trial length (20). At a decision every 60 seconds those are 3, 2, 5, 10, 120 and 20 minutes; at 15 seconds they would silently shrink fourfold, and a give-back trial's 20 decisions would last 5 minutes instead of 20. v7 states each rule in seconds (`--slo-clear-s 180`, `--cruise-after-s 120`, `--strict-window-s 300`, `--verdict-every-s 600`, `--verdict-recheck-s 7200`, `--verdict-trial-s 1200`) and converts it to decisions at the running period, n = max(1, round(seconds / period)). At 60 s every count is v6's; an explicit count (`--slo-clear`, `--cruise-after`, `--strict-window`, `--verdict-every`, `--verdict-recheck`) still wins.

Two moves are made rates in time as well: the compass moves the HPA target by the same amount a minute at any period (its step is scaled by period / 60, and coasting likewise), and a node pool gives back at most one machine a minute (`RELEASE_PERIOD_S = 60`), however often the governor decides.

5. The cloud's rule in one word

In a cloud Omni-Compass shows one thing: the same work as native for a smaller bill, never a bigger one. Through v6 that rule was assembled from several settings in the workflow (`OMNI_MACHINES_ONLY=1`, the dial at the tune-down, the sensed and capped deployments left empty). v7 makes it one flag, enforced in the governor itself: `--give-back-only` turns off every pod-, processor-, power-, clock-, cooling- and batch-actuator, sets the replica ceiling to 0 and the dial to the tune-down, and leaves the node pool as the only knob. Whatever else is passed, the governor can then only park a machine the cloud already made, after its own trial, and wake it on a breach: no more pods and no more machines than native. The Azure, Google and Amazon install file (`deploy/install/omni-compass-cloud.yaml`) and the machines-only branch of `scripts/kind_bench.sh` pass it.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

6. The toy gate: every change run in our own models first

The founder's order of 15 October, night: every fix, knob and rule is tried in a toy model before it is pushed, and goes to a real run only where it shows promise there. `tools/toy_gate.py` runs two checkouts, the engine that stands and the candidate, each in its own process, on the same seeds, and reads the candidate against the standing engine paired by seed (the mean change, its 95% interval over the seeds, the word by the gauge's aim). Three toys, all evidence class S, our own models, never a benchmark result:

- **cluster**: the shipped Kubernetes controller in the cloud setting (node-pool mode, the compass law, the tune-down, `--give-back-only`) on the toy cluster of `pilot/selfpilot.py` as the cloud meets it (the cloud's own autoscaler makes machines in both arms; the governor only parks one that exists, which the cloud deletes after ten minutes empty, and wakes it while it exists); a decision every 60 s and the fast check every 15 s; **cluster15** the same with a decision every 15 s.
- **convey**: one 4-core host carrying three kind nodes, php-apache under its HPA (200m request, 500m limit, 50%, 1 to 10), load generators stepping 1 2 3 1 2 1 as `deploy/kind/loadgen.yaml` runs them, set so the native arm sits where the v6 KEDA run's native arm did (host busy 0.28 and p95 0.40, response p95 229 ms, 8.3 pods against the run's 0.27, 0.42, 248 ms and 8.8); the candidate's own `Muscles.convey` called every 15 s. Since 16 October the model runs twice: once with the namespace's quota readable and empty (`convey`), once with the quota unreadable, as the governor's role finds it on every kind test (`convey_unreadable_quota`): the first trial's fault (section 1) is now the toy's to catch.
- **verdict**: the do-no-harm trigger alone on noisy work.

What it read on v7 against v6, 10 seeds (`results/toy_gate/`):

Toy	Reading
cluster, 60 s	v7 and v6 EVEN on every gauge; both against native: bill -1% (EVEN), energy per core-hour -2.4% GAIN, pods waiting for a place about three times native's (v6 LOSS, v7 EVEN). The cloud setting itself barely cuts the bill in this model and makes pods wait; checked against the Azure receipts' own pending-pod gauge before anything is concluded.
cluster, 15 s	v6: bill +43% (power given), pods waiting 10x (LOSS). v7: bill EVEN against native, pods waiting +111% LOSS, p95 +0.3% LOSS. Every rule now keeps its time, and faster is still not free: the default stays 60 s.
Toy	**Reading**
convey	v7 as first written (host once, start hold): requests served -16%, p95 +155% against v6, LOSS, nothing conveyed. The

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Toy	Reading
	busy guard alone: identical to v6 at the real regime and at double load (the hold never binds under 75%).
convey, quota unreadable (added 16 October)	the candidate as first pushed (digest 1a0d1d1b91bc49ad): requests served -39% and p95 +113% against v6, LOSS, the host and the limits given identical to native: nothing conveyed, as the live trials found. The corrected candidate (digest d6d467b824c585f1): identical to v6 on every gauge (+64% requests and -53% p95 against native), with the quota readable and empty and with it unreadable alike.
verdict	a step costing 3% more allowed 28% of the time instead of 40%; 5% more, 14% instead of 26%; a free step 60% instead of 63%.

The first three-run tables on v7 (16 October)

Twelve runs on real Kubernetes, ten pairs each, every one omni-v7 (`results/live/V7_*.md`), native against Omni-Compass on top. No row reads LOSS on the three-run rule.

Benchmark	What moved, GAIN in all three of our runs	EVEN	Power given
Goldilocks and the VPA's recommender	response time −45% to −47% mean, −60% to −62% p95, −67% to −69% p99; time over the line −100%	machines, failed requests, replicas, pods started, pod start wait, alert minutes	parked-worker energy +1.6% to +2.3%
KEDA's HTTP add-on	response time −57% to −58% mean, −71% to −75% p95; alert minutes −93% to −96%; replicas −15% to −19%; pods started −17% to −23%	machines, failed requests, pod start wait	parked-worker energy +2.2% to +2.3%
KEDA on CPU and requests	response time −36% to −38% mean, −52% to −54% p95, −57% to −59% p99; time over the line −98% to −100%	machines, failed requests, replicas, alert minutes	parked-worker energy +1.1% to +1.7%
CruiseKube applying its own recommendations	nothing: no setting written	every gauge	none

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Benchmark	What moved, GAIN in all three of our runs	EVEN	Power given
Fixed capacity, four CPU caps	nothing: the cap blocks the one lever	completed work and work inside the line at every cap	none

Single runs clear of the noise that the other two did not repeat, each EVEN on the rule: CruiseKube's 99th percentile +3.1% (run A) and node-hours +1.0% (run B); Goldilocks replicas +3.4% (run C); capacity's completed work +3.8% at 1 core (run A).

The room search (16 October): the muscles that read the same as native

The founder's standing question is whether every muscle runs at its own edge. On the realms table of the engine that stands (`results/realms_v5/MUSCLES_V5.csv`, the preregistered seeds 3000-3009), 159 of the 1,107 muscles read SAME AS NATIVE on every load. Measured muscle by muscle on development seeds (7100 and 7101) in our own models (class S, never a benchmark result):

Muscles	Plant and knob	What the max does	Native's own misses	Room under the max's gauges
111	a process loop's setpoint (the process, irrigation, turbine, batch-reactor, pipeline, mill, district-heat and inverter presets)	writes nothing: the loop's actuator is native's full range, and the loop's work is the disturbance it handles, fixed by the load	median 0.00% of decisions, at most 0.56%; 6 of the 111 miss at all	none on work or speed; on misses, the 0.56% of six loops, which a setpoint eased toward the band's middle could touch: a card candidate for a later version, worth under one part in a hundred
36	a cooled zone's setpoint (the data-hall, building and hospital presets)	cools ahead of the heat (28 of the 36 wrote), and under native the room never nears its line either	0.00% on all 36	none: nothing above native to give
Muscles	**Plant and knob**	**What the max does**	**Native's own misses**	**Room under the max's gauges**
12	a battery's power knob (the UPS, microgrid and facility presets)	holds the charge for the line and gives native's full power once the line could need it	2.1% to 24.3% of decisions	every miss falls while the charge sits at the operator's reserve (0.6 for a UPS, 0.2 for a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Muscles	Plant and knob	What the max does	Native's own misses	Room under the max's gauges
				microgrid), above the outage floor; the power knob may not spend the reserve, and the max keeps that boundary. The charge between the reserve and the floor belongs to the setpoint knob, where the engine's cards already read GAIN (8 of 8)

The reading: the max already takes every muscle to the edge its own knob has. Where a muscle reads the same as native, the measurement says there is nothing above native for that knob to give, and the max leaves it native by design (do no harm). The one measurable room, six process loops' 0.56% of decisions, is noted for a later version's card search; it is not an engine change, and no engine file moved for this measurement.

Validation

Six shared-host regressions pass (`tests/test_convey_shared_host.py`: each node keeps its own arithmetic under the top, a busy or unread host holds every raise, a busy host still lowers, a start holds nothing, separate machines are never held, an unreadable quota holds nothing). Nine quota regressions pass (`tests/test_quota_convey.py`, among them: an unreadable quota is no budget known); the original source fails both the full-quota regression and the admission-rejection regression. Existing conveyance integration checks pass unchanged. The verdict's rule tests (`tests/test_verdict_interval.py`, `tests/test_verdict.py`: v6's medians kept under `judge="median"`, a noiseless 1.5% rise refused against a 1% allowance under v7), the time-correct tests (`tests/test_time_correct.py`, `tests/test_cloud_cadence.py`) and the cloud tests (`tests/test_cloud_machines_only.py`) pass, as do every verdict user's tests (Redis, Kafka, pgbench, sysbench, YCSB, CPU power, GPU). Live GitHub trials on the v7 commit (KEDA's add-ons, Goldilocks, CruiseKube, capacity) repeats the original cap 1500m / repetition 4 / 1200-second-per-arm case at the original request rates. Its completion and measured result must be read from its artifact, with any LOSS retained. The trial cannot launch Azure, Google, Amazon or GPUs.

The organisms the candidate is run on are the seven of 16 October (the spine, the 267 muscles every stack runs on, the seventh; `docs/THE_SPINE.md`): they are groupings of catalog rows made in the runners, so the candidate's fingerprint did not move for them, and every organism table on this engine lists the spine first.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Reference: Kubernetes Resource Quotas and in-place container resource resizing. The CPU budget helper is included in both the engine and actuator fingerprints. README.md, LICENSE, NOTICE, DISCLOSURES.md, PATENTS.md and TRADEMARKS.md accompany the trial artifact.

© 2026 The Omni-Compass LLC. All rights reserved. **Evaluation and simulation use only.** Any commercial use, commercialization, monetization, production use, redistribution or hosted service of any part of Omni-Compass requires a signed, paid Omni-Compass Enterprise License from The Omni-Compass LLC. Every copy, export, report and printout carries this notice with `LICENSE`, `NOTICE` and `DISCLOSURES.md`. All patents, copyrights and trademarks filed in the USA. www.omni-compass.com

CHAPTER 19

The Engines and Their Audit

Which engine is which

There is **one** engine. Every other engine-looking file in this repository is either its required C++ twin or a frozen copy of where it came from. Nothing else runs.

File	Role	Runs?
`omnicompass/core.py`	**The engine** (`symmetric_verified`): six states, eight lines, RK4 with microsteps. Everything Omni does goes through it.	yes
`cpp/src/core.cpp`, `cpp/include/omnicompass/core.hpp`	The same engine in C++. Required: `verify.py` checks it against the Python on every fixture.	yes (twin)
`docs/handoff/mathematics/omni_compass_engine_source_c527df2d.py`	The original source as handed over (sha256 `c527df2d…`). Kept unchanged as proof of origin and as the parameter authority.	no (frozen)
`reference/omni_compass_reference_engine.py`	The same original with comments stripped (`tools/strip_reference.py`); same program fingerprint (`reference/PROVENANCE.json`).	no (frozen)

Fingerprints of the running engine, its parts and its twin: `results/MECHANISM_IDENTITY.json` and `RELEASE_MANIFEST.json`. `verify.py` fails if any of them changes without a new seal.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Engines from outside packages, not adopted

Copies of this repository passed around as zips (the XPASS packages) carry changes that are **not** in the engine here:

- `batch_claim1.py` (in those zips, not in this tree): a vectorised variant that applies u during the RK4 step (CLAIM1). No C++ twin; not verified against the 500 fixtures.
- an adapter that defaults to CLAIM1, takes the target sign from the starting state and adds a disruption budget. Its C++ governor was only partly ported, which is where the reported Python/C++ mismatches came from.

None of these enter before the GPU counted run run (the engine is frozen for it, `docs/GPU_PREREGISTRATION.md`). Any of them can be adopted afterwards only as a full change: Python and C++ together, the parity tests and `verify.py` green, and a new mechanism id.

The rule from here

One engine, one twin, two frozen originals. A new version **replaces** the old one in place, with a new seal; it is never added beside it. Older states are in git history and `docs/HISTORY.md`, not in extra files.

My engine, line by line: the source against what runs in your cluster

The source. `docs/handoff/mathematics/omni_compass_engine_source_c527df2d.py` (SHA-256 c527df2d…, 31,348 lines). Every mechanism below is named by its function there, followed by where it runs live and how it is checked on every `python verify.py`.

Mechanism	In the source	Where it runs	Checked by	Status
Six states E, U, I_U, S, B, Ḃ and equations (1)–(7)	`oc_derivatives`, `rk4_step`	`omnicompass/core.py`	`tests/test_core_parity.py`: 20,000 random states, max difference ≤ 1e-12	exact
Spinor closure, 720°: drive × cos(½ ω_B t)	`v_eff`, `spinor_closure_factor`	`core.v_eff`	same parity test	exact
Axle rest S* from equation (6)	`stable_S_equilibrium`	`omnicompass/storage.py`, `compass.axle`	parity; `tests/test_compass.py`	exact
Double well W(U), basins ±1	`W_potential`, `W_gradient_flow`	`core.derivatives`	parity	exact

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Mechanism	In the source	Where it runs	Checked by	Status
Regulation u = −f_U + K_P(σ − U), clipped at the authority	`hybrid_microstep_operator`	`core.control_command`; the governor's push	parity; 500 frozen trajectories (`fixtures/`), 0 mismatches	exact
Basin lock, conveyance, certification	`run_monte_carlo`, `macro_step`	`core.simulate`	500 frozen trajectories, 0 mismatches	exact
Composite storage V = V_U + V_W + V_E + V_S + V_I + V_B, the ledger that closes the circle	`composite_practical_lyapunov_value`, `bath_lyapunov_matrix`, weights	`omnicompass/storage.py`, read by the compass every decision	parity on 5,000 states (≤ 1e-13); descends 648 → 8 over 60 regulated steps with no rise	exact
Human switch: a file or a variable stops every command	`_oc_runtime_stop_requested`	`--kill-file`, restore of every lever	`tests/test_failsafe.py`, `tests/test_muscles.py`, every live run's switch drill	exact
Cap doctrine C1: only a ceiling *above* the reference is admissible; a lower one buys energy by slowing work	`_ci_omni_decision`, certificate C1–C4	`muscles.convey`: CPU limit never below the operator's, idle CPU conveyed to the work	`tests/test_convey.py`	exact
Sleep only in a certified empty interval	`_ci_omni_decision`, sleep channel	`scripts/kind_nodepool.sh`: a machine idles only once its work has left	`tests/test_active_nodes.py`, `tests/test_convey.py`	exact
Reference Kubernetes HPA rule	`oc_hpa_desired_replicas`	`cpp/` HPA, pod reflex	`tests/test_cpp_hpa_parity.py`	exact

Where my live wiring reads the engine differently from the source's own embodiment

Evolution between decisions. The source's compute embodiment advances the assimilated state *with* regulation locked on basin +1. My live governor advances it with u = 0 and reads the regulation command separately, as the push that gates every machine release.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- Both use the same equations.
- The difference is whether the regulation is applied to the state or only read from it.
- The pre-registered, frozen results were measured with u = 0. I keep that setting, and I report the difference here rather than change a frozen law mid-measurement.

PART THREE

The Physics: the Compass and the Nervous System

Push and pull, the band and its cushions, the physics of a processor, and the two-way wires that carry the force from the brain to every muscle and back.

CHAPTER 20

The Compass: Push, Pull and the Two Forces

The compass (`omnicompass/compass_law.py`) is the law that carries the engine's push and pull to every muscle.


Two bands.

- **The cover**, a knob's hard range (the device's or the operator's lowest and highest setting). Every write is clipped to it. Nothing Omni-Compass computes can set a knob outside it.
- **The compass**, the service reading as a position from 0 (calm) to 1 (the service line). Omni-Compass pulls that position to the bottom of the compass, the middle (0.5 by default; an operator may set it lower for extra margin). The walls run from 0.05 to 0.95; the last 5% on each side, 10% in all, is cushion.

The force. F = A tanh((K[P] (p - center) + K[D] v) / A), where p is the position, v its rate of change, A the authority.

- **Pull:** K[P] (p - center), gentle near the bottom, stronger up the walls.
- **Push:** K[D] v, the force that meets whatever is shoving the position, and the friction that stops it sloshing. With K[D] at or above critical damping the position glides to the middle and stops, with no overshoot and no ringing. Overshoot is wasted energy: force spent going the wrong way and spent again coming back.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

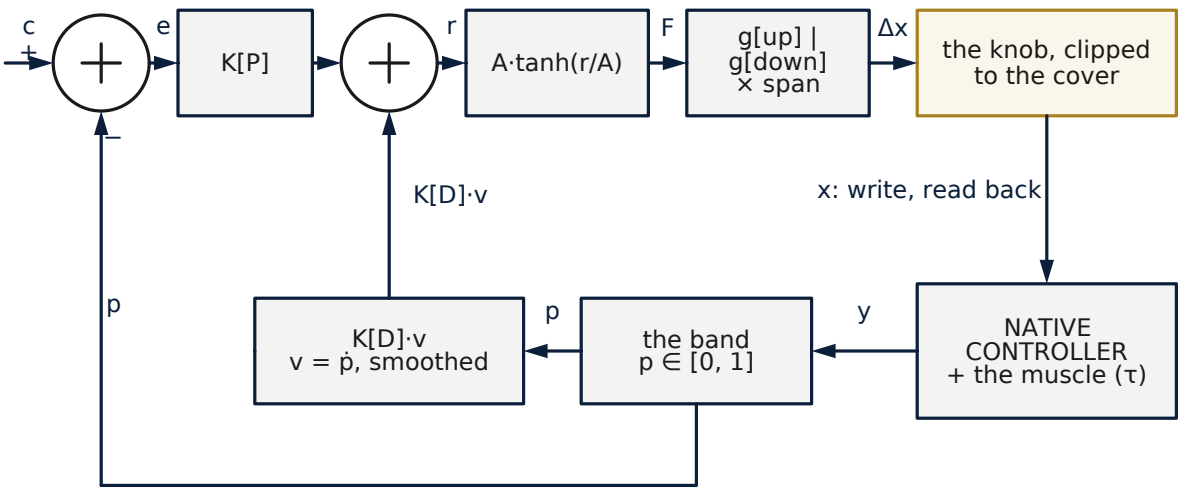

c the centre of the band; y the reading; p the reading's position in the band; e = p − c; v = ṗ smoothed; r the raw force; F the force after the saturation; Δx the step; x the knob. Fail up: p ≥ 0.95 → F = A at once; the down side held until p is back inside the band. No take-back while the reading climbs above the centre (F < 0 with v > 0 and p > c → F = 0). K[D] is set from the muscle's own response time τ (critical damping), never tuned by hand.

Figure 10. Block diagram: the compass law as a closed loop on one muscle. The reading y of the native controller and its muscle (response time τ) is placed in the band as the position p; the error e = p − c against the centre c, through K[P], is summed with the damping term K[D]·v (v the smoothed rate of change of p) into the raw force r, saturated to F = A·tanh(r/A), scaled by the gain of its direction (g[up] or g[down]) and the knob's span into the step Δx, and clipped to the cover before it is written and read back. The loop closes through the plant: one write a decision, one reading back.

- **Smooth, never a hammer:** tanh bends the force over into its maximum instead of slamming into a wall.
- **Fail up:** past the 0.95 wall the up side goes to its full force at once and the down side may not act until the position is back inside the compass.

Two forces: antagonist pairs. Like the muscles of an arm, every plug has an up side (adds capacity, power, cooling, speed) and a down side (takes it back), each with its own gain, because adding and taking back do not cost the same: a new machine takes minutes to boot; giving one back is instant. Where a machine has two wires, each side gets its own lever:

Muscle	Up force	Down force
GPU card	clock ceiling raised	power limit lowered (the lid)
Kubernetes	scale out	scale in
Cooling	chiller on, colder setpoint	warmer setpoint, unit released
Battery	discharge	charge, reserve held
Vehicle, joint	motor effort	braking, regeneration

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Why the GPU needs both wires. A card's firmware boosts its clock as high as it may while there is work, and its power limiter knocks the clock back each time the draw crosses the limit; on a busy card this happens many times a second, at the top of the clock range where each extra step of speed costs the most watts. With one wire (the power limit) a governor can only move the wall the boost pushes against. With two wires, the clock ceiling sets how high the boost may climb and the power limit becomes a lid that rarely needs to act: the card runs at the bottom of its compass instead of fighting itself at the top.

What the card taught us. Two rules make the difference between saving energy and spending the customer's time. First, *race while work waits*: when the card is saturated, both wires go to full at once, so a burst is always served at full speed; the compass paces only the slack between bursts. Second, *never slower than the card on its own*: the governor learns, from the card's own meter, the clock and the draw the card reaches by itself while busy, and never sets the clock ceiling or the lid under them. Without these rules the first real card saved 3.5% of its energy and made the slowest answers 58.5% slower; with them, the modelled card saves energy with the slowest answers at native speed or faster (Chapter 48, and `docs/GPU_PREREGISTRATION.md`, amendments 6 and 7).

The same law on every stack, and what differs

The law is written once (`CompassLaw`), and three declared numbers fit it to a muscle: the **decision period** *dt* (how often the governor decides), the muscle's **response time** tau (how long the service reading takes to follow the lever), and the **cover**. From tau and *dt* the law derives its own damping gain, K[D] = (2 sqrt(K[P] tau / dt) − 1) dt, which is critical damping for a first-order muscle under a proportional-derivative pull: the position glides to the center and stops. Nothing else is tuned per stack. The table below is the complete list of the compass's settings on every stack in this manual, so a referee can see that the "gains" differ only through the declared physics:

Stack	Reading (the wire in)	Line	Center	Decision period	Response time	Cover of the knob
Kubernetes, the HPA target	the mean response time of the latency window	the operator's SLO (500 ms)	0.4	60 s	the pods' start time	[0.6 × the operator's target, the operator's target]
Kubernetes, the machines	the same, through the release gate and the verdict	the same	0.4	60 s	a machine's wake	[the floor of 2, every machine]
PgBouncer, the pool size	time in the server plus time waiting for one, per transaction	50 ms	0.4	1 s	2 s	[2, PostgreSQL's limit minus 10]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Stack	Reading (the wire in)	Line	Center	Decision period	Response time	Cover of the knob
Kafka, the consumer count	the group's own end-to-end latency, mean of the last second	500 ms	0.4	1 s	3 s (a rebalance)	[1, the topic's partitions]
Redis, the memory ceiling	the application's request latency, mean of the last second	2 ms	0.4	1 s	2 s	[16 MB, 512 MB]
MongoDB, the storage-engine cache	the server's own mean read latency, last second	1 ms (set on the tuning workload's smoke run, from 2 ms)	0.4	1 s	2 s	[256 MB, 2,048 MB]
MySQL, the InnoDB buffer pool	the server's own mean statement latency, last second	0.6 ms a statement (set on the tuning workload's smoke runs, from 1 ms)	0.4	1 s	2 s	[128 MB, 2,048 MB], in 128 MB chunks
A drone's cruise override	the drone's tracking error	0.25 m, the declared safe error	0.5	one control tick (48 Hz)	1 s	[1.0, 2.0] × the planner's cruise
A substation's tap	the bus voltage in its band	the band's edge	0.5	one solve	a week of evidence before a step down	the tap's own range, one tap per move
A robot axis's speed	the axis's tracking error against its takt	the declared error	0.5	one control step	the axis's response	the axis's own limits
A GPU's clock ceiling and lid	the mean response time of the last 5 s	the SLO	0.4	2 s	the card's response	[the card's own busy clock, its top clock]; [the busy draw + 10%, the start limit]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

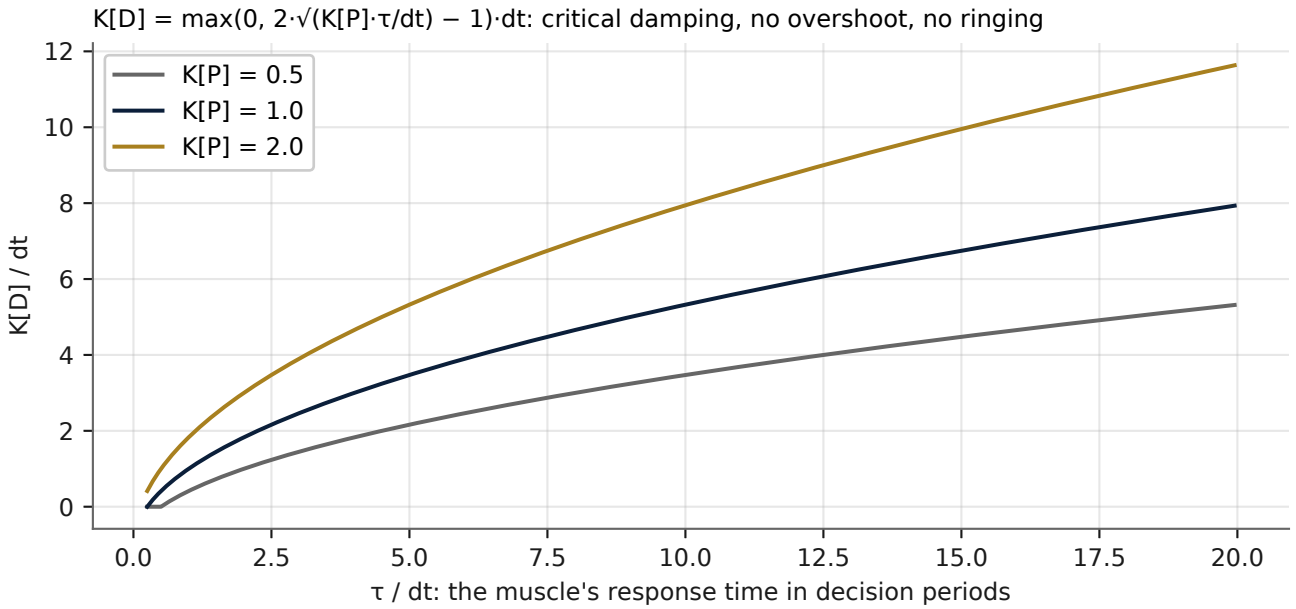


Figure 11. Curve: the damping gain the law sets from a muscle's response time, K[D] = max(0, 2·√(K[P]·τ/dt) − 1)·dt, for three values of K[P]. A slow muscle (large τ in decision periods) gets more damping, so the loop is critically damped: no overshoot and no ringing, whatever the stack.

The center is 0.4 wherever the reading is a service time (the "service profile" of the Kubernetes adapter, so that the service sits a little below the middle of its band with margin for a burst) and 0.5 where the reading is a physical error. A **cushion** of ±0.05 in force moves nothing, so a reading that sits at the center with the usual jitter does not make the knob chatter. These are the same numbers in every preregistration and every table; none was changed after a result was seen.

Direction rules: how a force becomes a move

The force is a number between −1 and +1. Each stack turns it into a move on its knob by a direction rule declared in its preregistration, always of the same shape: a positive force adds capacity in proportion to the force (ceil(force / 0.10) notches, so full force adds ten notches at once, capped by the cover), a negative force takes one notch back per decision, and only when the resource it would take is demonstrably idle (an idle consumer that read nothing in the last second, an idle server the pooler itself shows idle, a cache with nothing evicted in the last second) and only after a **dwell** of a few seconds since the last change, so a knob that was just moved is not moved back by its own transient. At 95% of the line the knob **fails up**: every consumer the topic can use, the pooler's own setting handed back, a quarter of the cache's cover added at once, the planner's own cruise, the card's own clocks. The up side is fast and the down side is slow and gated because adding and taking back do not cost the same, and because a gain bought by taking something back must be able to prove itself before it is kept.

Written out stack by stack, from the preregistrations, the rule reads as follows; the unit, the cover and the fail-up move are each the stack's own, and the shape is the same in every row.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

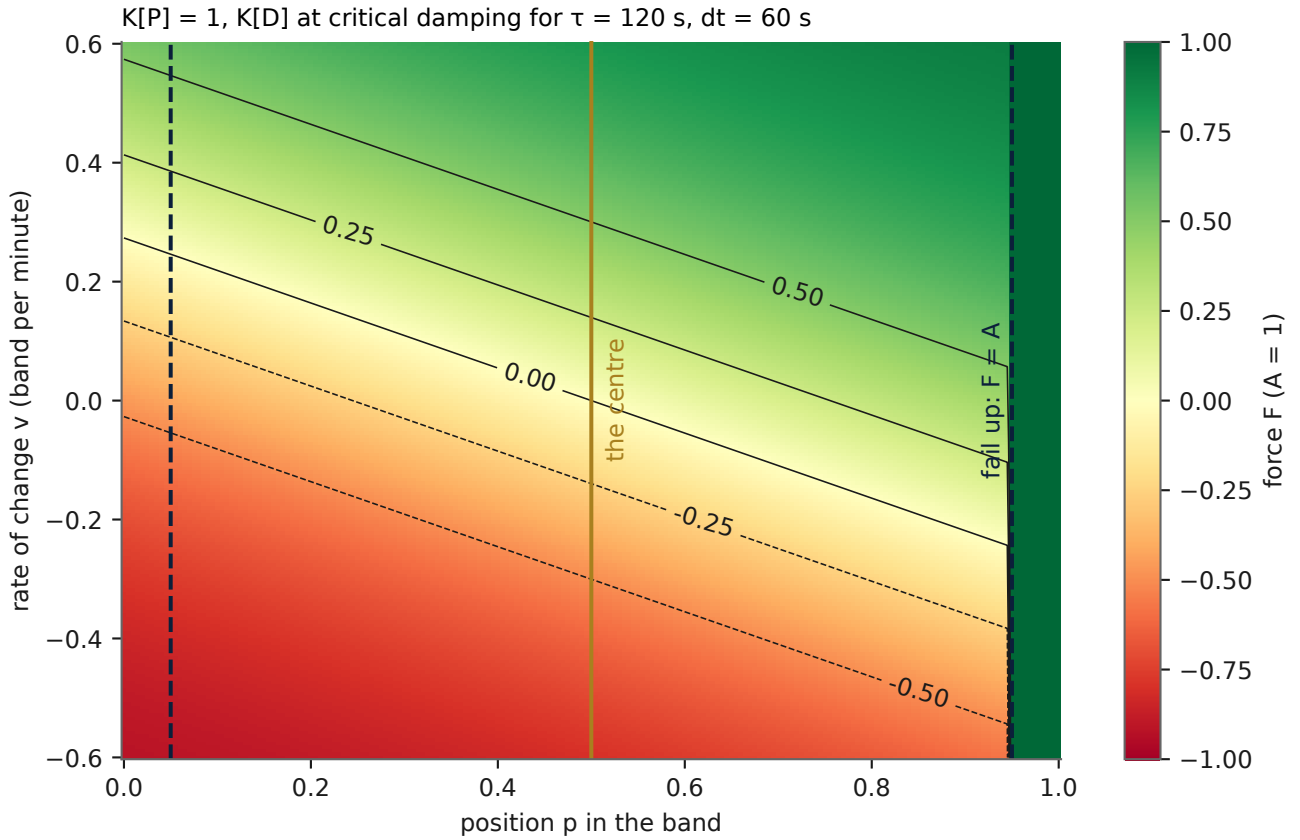


Figure 12. Grid: the force F over the band position p and its rate of change v, for K[P] = 1 and K[D] at critical damping with τ = 120 s and dt = 60 s. Green pushes capacity up, red gives it back; the no-take-back rule zeroes the force where the reading climbs above the centre, and past the upper wall (p ≥ 0.95) the force is the full authority A whatever v reads.

Stack	The knob and its unit	The cover	One notch back, when idle	Fail up at 95% of the line
Kubernetes (the cluster)	worker machines in service	the floor of two to every machine the operator has	one machine a decision, when the remaining machines would carry the load far under the wall	one machine up at once
PostgreSQL behind PgBouncer	the pooler's pool size, server connections	[2, 90]: the floor of two, never within ten of PostgreSQL's 100	one connection a decision, when the pooler itself shows a server idle	the pooler's own setting (20) handed back at once

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Stack	The knob and its unit	The cover	One notch back, when idle	Fail up at 95% of the line
Apache Kafka	consumers in the group	one to the topic's partitions (8)	one consumer a decision, when a consumer read nothing in the last second	every consumer the topic can use
Redis	the memory ceiling, MB	[16, 512] MB	one notch a decision, when calm and nothing was evicted in the last second	a quarter of the cover added at once
MongoDB (WiredTiger)	the cache size, 64 MB notches	[256, 2,048] MB	one notch a decision, when calm and nothing was evicted in the last second	a quarter of the cover (448 MB) added at once while full
MySQL (InnoDB)	the buffer pool, 128 MB chunks	[128, 2,048] MB	one chunk a decision, when the miss share is under 1%	four chunks at once while the pool is full

Two things in the table deserve a reader's attention. The "when idle" column is never a guess from the knob's own value: it is a reading from the stack's own counters (the pooler's idle servers, the consumer's last fetch, the cache's eviction count, the pool's disk reads against its requests), so the law gives back only what the stack itself reports it is not using. And the fail-up column is the stack's own fastest safe move, not a multiple of the notch; where the stack has a controller of its own (the pooler, the planner, the card's firmware), fail up means handing the knob back to it, which is the one move that can never be behind native by construction.

The do-no-harm gates inside the law

Three gates sit inside the law itself, each a consequence of a loss seen on a tuning case and each disclosed in the preregistration that carries it:

- **The verdict** (section 1.2): a slow knob moves only where a paired trial on the muscle shows no more than 2% cost.
- **The slack gate on speed knobs** (Omni v3): a motion axis that is busy more than half the time at full speed keeps its speed native, because spending its slack as speed when it has none would only cost energy. This gate is what turned the v2 "service tradeoff" on the Physics realm and the tower into "superior within guardrails" on v3, and it is the one rule that distinguishes v3 from v2.
- **The full-cache gate** (Redis): a miss in a cache with room to spare is a cold miss that no ceiling can mend, so the ceiling grows only while the cache is at 90% of it or more. On the tuning workload without that

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

gate the law raised the ceiling to 500 MB while 21 MB were in use; with it, the ceiling follows the working set.

The same gate recurs, in the form each store's own gauges allow, on every memory knob that followed, and each form was fixed on the tuning workload and disclosed before the counted runs:

- **MongoDB's storage-engine cache** grows by a notch only while the cache is full and the server's own read latency is above the centre of its band, and gives a notch back only while calm and nothing has been evicted in the last second (`docs/YCSB_PREREGISTRATION.md`). The smoke runs showed the line itself had to be set from the server's own readings (0.15 to 0.46 ms under a 2 ms line left the law nothing to do), and it was set to 1 ms before the counted runs.
- **MySQL's buffer pool** grows by a chunk only while the pool is at least 90% full of data pages and the server's own statement latency is above the centre, and gives a chunk back only while the **miss share**, pages read from disk as a share of the pool's requests in the last second, is under 1% (`docs/MYSQL_PREREGISTRATION.md`). The earlier rule, "no disk reads in the last second", was never satisfied on the tuning workload: InnoDB keeps stale pages resident, so a pool once filled reads full for ever, and a few new-page reads a second never stop even when the working set fits, so the pool the law had grown was never given back (877 MB held on average against native's 512 on that smoke run); the smoke record says so, and the miss-share rule replaced it before run A.

What the three forms share is the reason: a memory knob has no slack to spend unless the memory is both full and being missed, and memory given back while it is being missed is not a saving but a cost moved to the disk. The gate is written in each harness in the store's own units and checked by that harness's own tests against a fake server, so that a reader can see in the preregistration exactly which reading opens the gate and which closes it.

The profiles and the pedals

The compass has two **profiles**, service (the default) and batch, which differ only in what the pedals do with a pile of work: in the service profile the law paces the slack; in the batch profile cruise puts every machine in service while work waits for a place and idle takes them straight to the floor when the queue is done (section 1.3). Both are written out in the Kubernetes preregistration (`docs/K8S_COMPASS_PREREGISTRATION.md`, rules 7 and 8, amendment 9), both ran in the batch test, and the result (Chapter 48) is machines 19% to 23% fewer over the whole window and 29% to 35% fewer after the queue finished, with the queue itself finishing no later beyond the noise.

The reflex rule: one body, one brain

Everything in this chapter so far is the force: where a reading sits in its band, how hard the compass pushes, in which direction, and which gates stand in the way. This section is the rule that decides when the force may become a new setting. The founder's order of 10 October 2026 states it in one line: what the brain sends to a muscle has to coincide with what the muscle sends to itself and where it is at. Made into rules, it reads:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

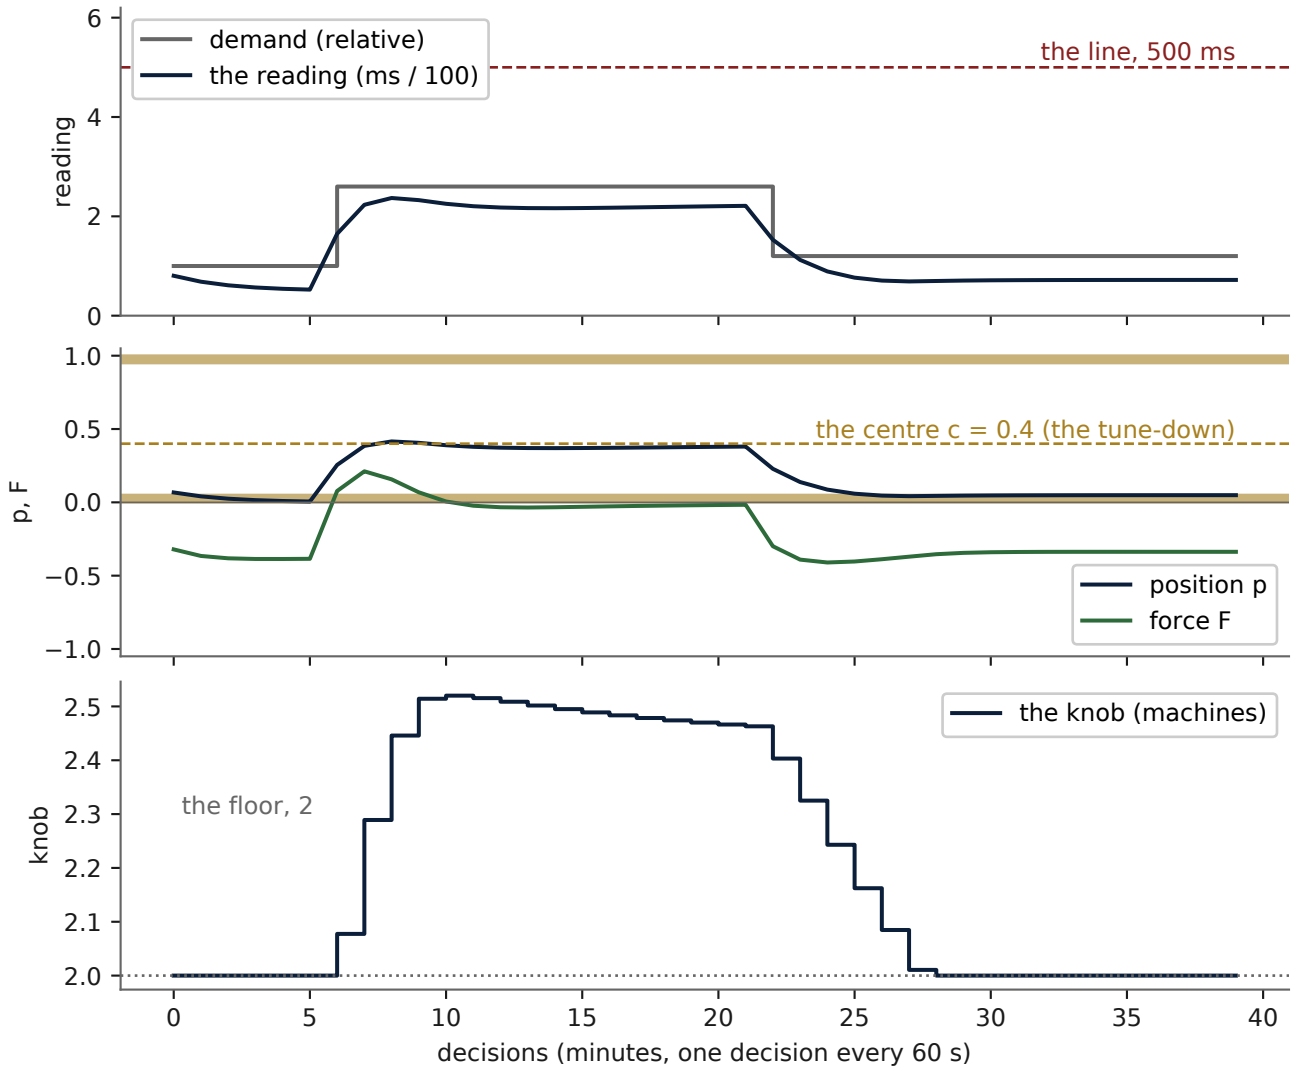


Figure 13. Modelled trace: the compass law answering a load step on one muscle (class S: the law's own code, omnicompass/compass_law.py, on a first-order muscle with τ = 120 s and a decision every 60 s). Demand rises 2.6-fold at minute 6 and falls at minute 22; the reading climbs toward the line, the position p leaves the centre c = 0.4 (the tune-down), the force F rises and the knob adds machines at once; as the reading settles the force crosses zero and the knob is given back one step at a time toward the floor of 2.

1. **Signal out, the muscle moves, the brain feels the full reaction, then it decides.** A trial runs to its full measurement and is never ended by the calm it causes. Only the wall (a fail-up) or the engine's own time limit ends a trial early.
2. **No forcing.** A spend is tried only when the muscle's own reading says there is something to buy (messages waiting, a cache missing, clients queued); a give-back only when the whole body is calm. The force is an urge, smooth, never a hammer.
3. **One body, one brain, one tick a second.** Everything is read first: every muscle's state, every service's speed and work, the host's processor, memory and energy where a meter exists. Then the brain decides.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The cost it judges is the body's cost, the Omni index's own arithmetic over all the work, all the speed, all the machines and all the resources, never one muscle's.

4. **Hurt nothing anywhere.** On top of the body's cost, a guard for every part: a step is refused if any one service read LOSS beyond its cushion, even when the body's total improved.
5. **One trial at a time inside a body.** Two muscles moved together cannot be told apart, so the body grants one new trial at a time, to the muscle asking loudest whose own condition holds. Every other muscle keeps acting inside what it has already proven.
6. **Nothing is permanent.** Every allowed step is tried again on the recheck and pulled back when it stops paying; a muscle at native is asked again whenever its signal returns. Native is where the brain stands when it has not yet been shown a reason, never a verdict.
7. **The wall belongs to the body.** If any service reaches its line, the trial stops, that step is undone, and every force in the body lifts off: the law's own lift, not a reset.

The trial itself keeps four rules, each learned from a measured run (`docs/OMNI_V4_PLAN.md`, Chapter 9): samples count only once the muscle reports itself settled; a spend on a queue or a cache is judged by the muscle's own reading, with the body's cost taken at the settled state; the reference and the trial are compared at the same load; and where single notches read flat, one scout step to the far side of the cover decides whether there is a hill to climb at all.

Which engine enforces what. In Omni v3, and in the v5 and v6 engines that carry its verdict, the verdict tries a slow knob on the muscle itself before it moves it (section 1.2), and the live harnesses carry the same verdict around every live knob (section 9.4). Omni v4 is the engine written to enforce all seven rules on every wire by construction: one body file that every muscle's wire passes through, the trial rules inside the verdict, and no wire that can write around them. It is designed (`docs/OMNI_V4_PLAN.md`) and not yet built; when it is, it carries its own fingerprint, the package version follows it, and every result in this book is run again on it. The theory of the rule is the chapter "The Reflex Rule" in Part One of the book.

CHAPTER 21

The Physics of a Processor

A GPU's firmware raises its clock one step at a time whenever there is work and room; each higher clock needs a higher voltage, and dynamic power rises with the clock times the square of the voltage, so the top of the clock range is where each extra step of speed costs the most watts. When the draw crosses the power limit, the firmware knocks the clock down several steps; with room again, it climbs again. On a busy card this repeats many times a second. The clock saws against the limit, the overshoots burn watts before the limiter catches them, and the card spends its time at the steepest part of its power curve. The power is the burner; the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

cooling removes the heat at its own pace; the limiter turns the burner down so the cooling can catch up, and the boost turns it back up.

The firmware does not aim at a balance point because it cannot see the job: it does not know whether the work is a response due in milliseconds or a batch due overnight, the right point moves with the workload, the room and the chip, and a limiter is simple to prove safe. The vendor default is set for maximum performance, and the electricity bill is the customer's.

Omni-Compass sits on the customer's side, where the job's service line is known. It holds two wires: the clock ceiling sets how high the boost may climb, and the power limit becomes a lid set just above what that ceiling draws. The boost stops at the bottom of the compass instead of slamming into the wall; the limiter rarely needs to act. Every watt kept off the chip is saved twice in a data center: once at the chip and again at the chillers that would have carried its heat.

CHAPTER 22

The Two-Way Nervous System

Every muscle is wired both ways: a sensory wire in (its meters) and a motor wire out (its knob), with the read-back closing the loop. Between them sits the nervous system (`omnicompass/nervous_system.py`), which decides how much authority each organ has at each moment:

- **Expand is always allowed** (except under a security hold): adding capacity, power, cooling or protection never waits.
- **Contract needs calm and a clean service record:** giving anything back is allowed only while the organ is calm enough and service has been inside its line for the last three decisions; continuous organs give back at most the calm share of their surplus per decision; discrete organs one unit at a time, through a release gate.
- **Fail up:** while service is breached, the knob returns to native at once.
- **Blind means hold:** if a sense goes stale or unreadable, nothing is given back until it returns.

One brain reads every organ at once. Because one law sets every knob, no two muscles fight: when the GPU's watts turn to heat, the cooling knob already knows it is coming; when pods scale up, the power envelope is ready.

"Two-way" is a statement about wiring, and it is checked, not assumed. Each muscle's plug (Chapter 32) carries exactly one sensory wire and one motor wire, and the wire check that must pass before any write (section 8.4) proves that the wires move: a value written through the motor wire is taken by the device and read back as the value sent, and the snapshot is restored and read back at the end. No governor writes a knob

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

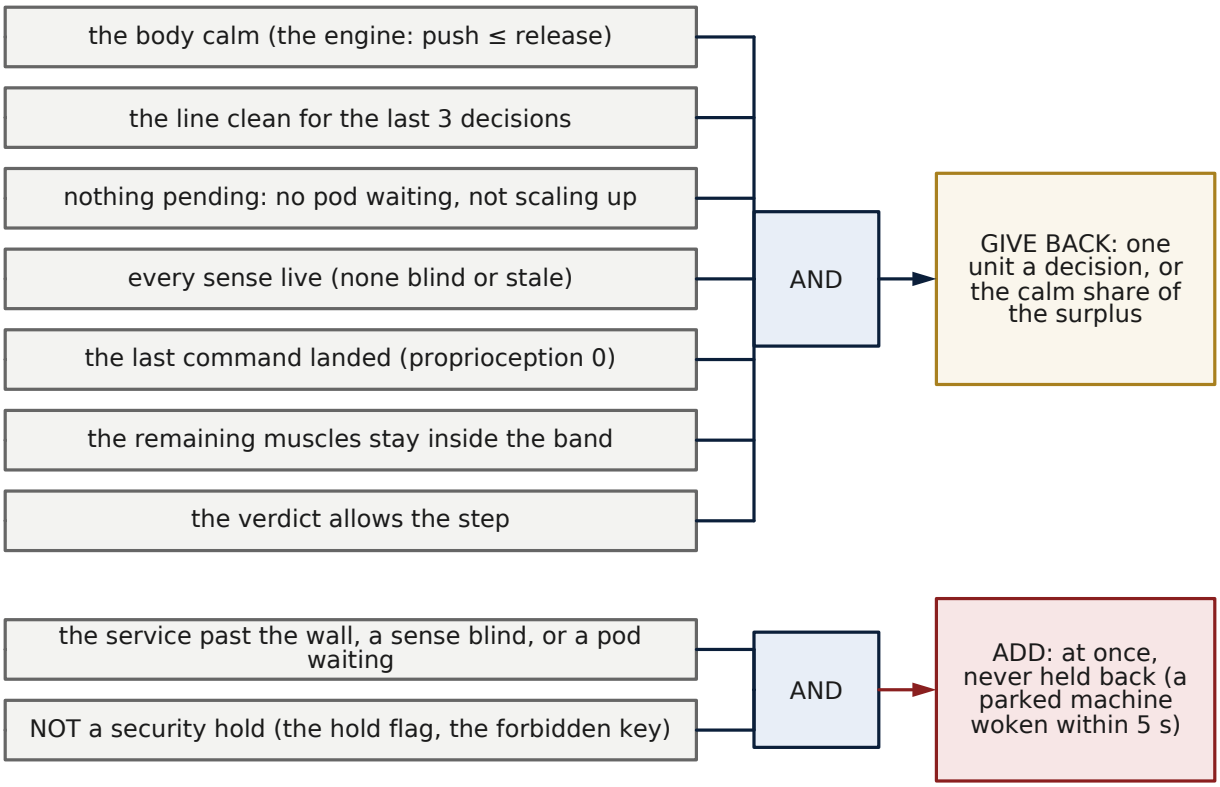


Figure 14. Logic diagram: the nervous system's authority to add and to give back. Giving back needs every condition at once: the body calm, the line clean for three decisions, nothing pending, every sense live, the last command landed, the remaining muscles inside their bands and the verdict's step allowed; adding needs only a reason (the service past the wall, a sense blind or a pod waiting) and the absence of a security hold. The asymmetry is deliberate: adding is cheap to undo and expensive to delay; taking back is cheap to delay and expensive to get wrong.

whose wire check has not passed, because a knob that can be written but not read back cannot be handed back with proof. What the wire check does not prove, section 8.5 says plainly: that the governor is reading the right gauge for the knob; that is what the watching arm is for. The receipts of every run therefore carry, for every write, the value sent and the value the device reported, side by side, and a reader who wants to know whether the governor's hand was really on the stack can check the two columns rather than take the summary's word.

The four rules above are the whole of the nervous system's authority model, and they are asymmetric on purpose. Adding is cheap to undo and expensive to delay, so it is never gated beyond the security hold. Taking back is cheap to delay and expensive to get wrong, so it is gated three ways: by calm (the engine's own state must report that the body is settling), by the service record (the gauge must have been inside its line for the last three decisions, not merely this one), and by the release gate's reasons, which are written into the audit every time the gate holds (section 7.1). Sections 7.2 to 7.4 take the three ideas that make this safe at scale, the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

governor's sense of its own hand, the rule that a missing reading is a hold and not a guess, and the case for one brain over many, and give the evidence for each from the live runs.

Authority, and the release gate

Authority is how far the nervous system lets an organ move in one decision. It is granted from the engine's state (section 4.3): an organ in a calm body with a clean service record may give back; an organ in a stressed body may only add. On Kubernetes the **release gate** (`omnicompass/nervous_system.py`, `node_release_gate`) lets one machine be given back only when every one of the following holds, and writes the first reason that fails into the audit so a reader can see why a machine was kept: the remaining machines would stay under 95% full; no pod is waiting for a place; the pods are not scaling up; the service is not breached; the organ's own pressure is under the release threshold; every sense is live; and the last command has landed (no new order goes on top of one the cluster has not yet carried out). One machine per decision is the rule in the slow, reversible direction; past the wall, one machine up at once.

What the gate writes, in a real run. The first repetition of the first kill-scenario run (`results/live/raw/run-37716845219/paired-1/`, the omni arm's `audit.jsonl`) holds 114 decisions and 42 writes. Its gate records read, in the governor's own words, "release permitted" eleven times, each with the utilisation the remaining machines would carry after the release (0.034 to 0.153, all far under the 95% wall); "node organ has no contraction authority" once, a calm cluster whose engine state had not yet earned the right to give back; and "latency breached now; node organ has no contraction authority; a sense is blind" once, three reasons at once in a decision whose latency sense read stale, every one of them a reason to hold. A reader can therefore see, decision by decision, not only what the governor did but why it declined to do the rest, and the first reason that failed is the one written, so that a machine kept in service always has a stated cause.

Proprioception and the one-writer rule

The nervous system knows where its own levers are. Every write is read back from the device (the plug contract, section 8), and the audit records both the value sent and the value the device took. If a lever is found at a value Omni-Compass did not write, someone else owns it: the governor stops writing that lever and leaves it alone, because restoring over it would fight the new owner. This is **proprioception**: the governor's sense of its own hand. It is the reason a wrong installation leaves a signature in the receipts (section 8.5) rather than a silent error, and it is what the wire check proves before anything runs.

The rule begins with the **snapshot**. The governor reads every knob it may move once, at the start, before its first decision, and that reading is the operator's setting for the whole run: every reset, every hand-back and every kill returns the knob to the snapshot, never to a value computed later, and the receipts record the snapshot beside the final read-back so that a reader can check the two are equal. The rule continues with the **read-back** after every write: the plug sends a value, waits for the device to take it, and reads the device's own report of what it holds. Where the device takes time to apply a setting, the plug knows that and does not

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

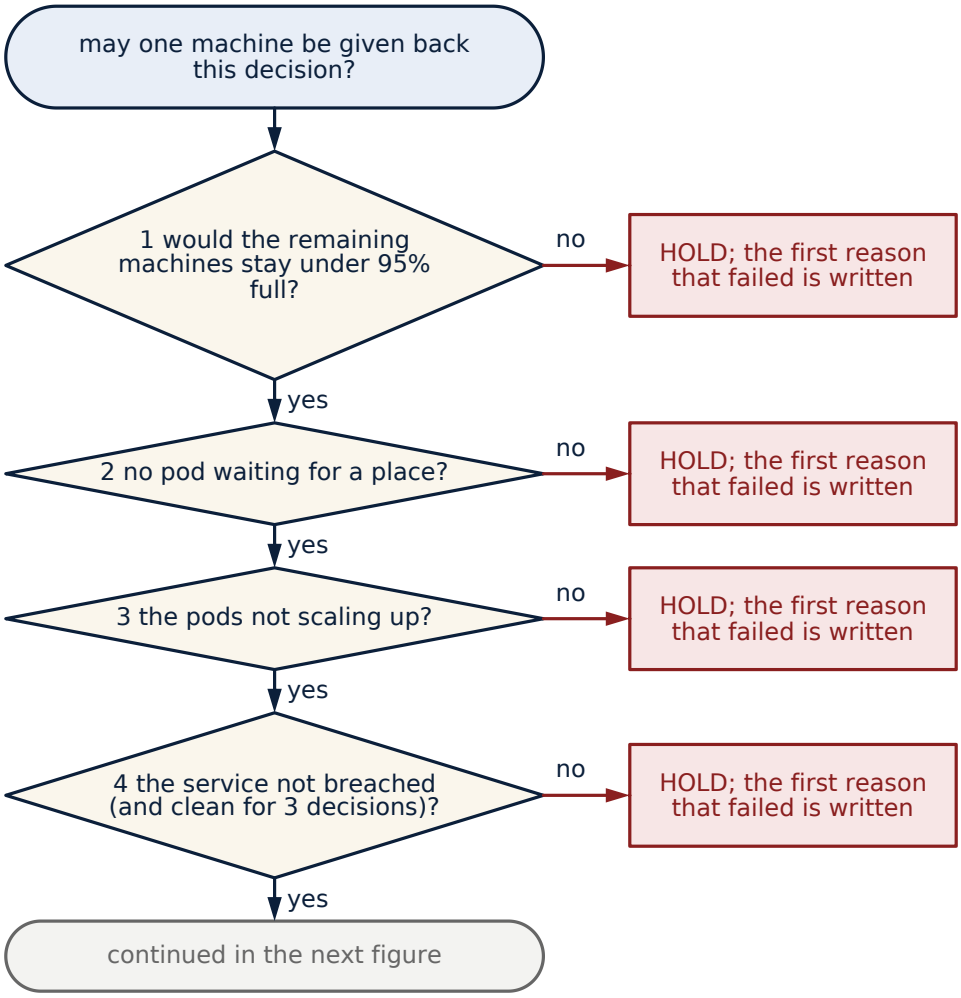


Figure 15. Flowchart: the release gate, reasons 1 to 4. May one machine be given back this decision? Only if the remaining machines would stay under 95% full, no pod is waiting for a place, the pods are not scaling up, and the service is not breached and has been clean for three decisions; the first reason that fails holds the machine and is written in the audit. Continued in the next figure.

mistake the transition for a foreign hand. The clearest case is MySQL's buffer pool, which the server resizes in chunks over several seconds and reports as it goes: the plug reads the server's own resize status and treats a pool caught mid-resize as its own write in progress, not as another owner's value, and waits for the server to report completion before it judges the write (`tools/run_sysbench.py`, `BufferPool`). The same shape holds on the Kubernetes autoscaler's bounds, Redis's memory ceiling and MongoDB's cache size: the value is read from the device's own console, and only a value that the governor neither wrote nor is waiting on is read as someone else's.

What follows from a foreign value is deliberately conservative. The governor does not restore over it, because an operator who changed a knob by hand meant to, and a second controller that changed it is a conflict to be reported, not won. The lever is left where it was found, the audit records the value and the time, and the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

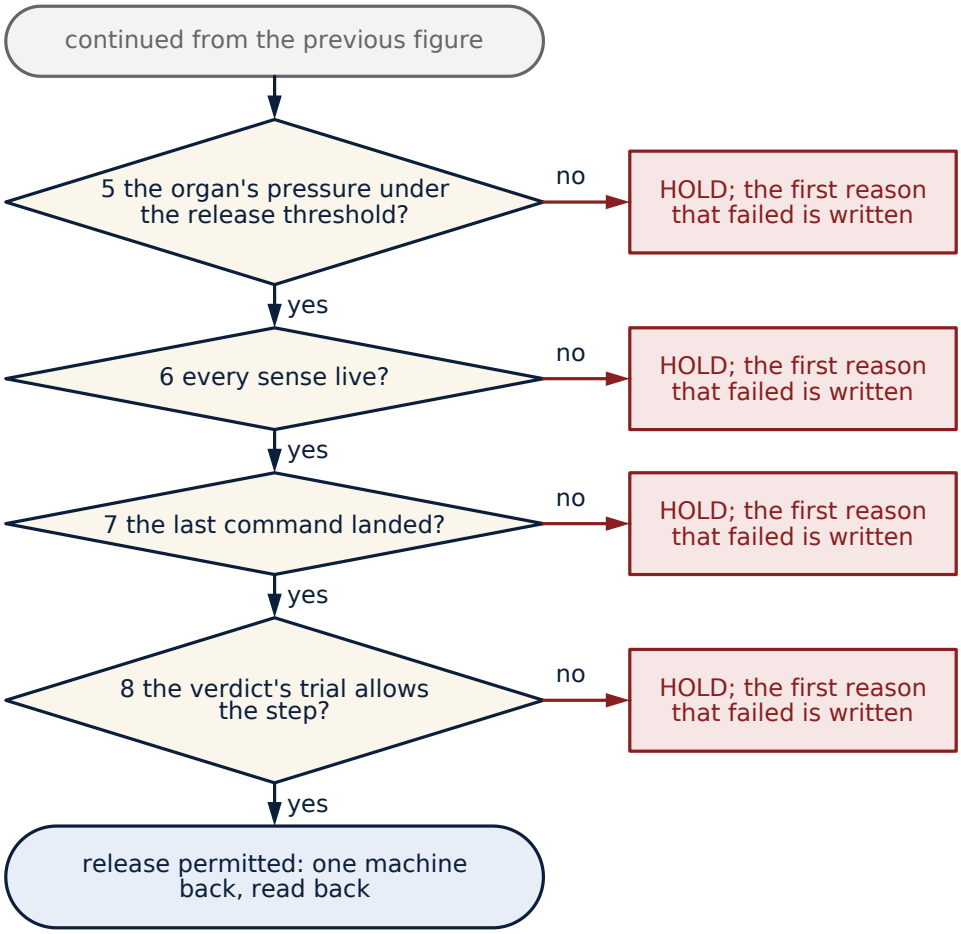


Figure 16. Flowchart: the release gate, reasons 5 to 8 and the release. The organ's pressure must be under the release threshold, every sense live, the last command landed, and the verdict's trial must allow the step; only then is one machine given back, and read back.

governor goes on governing the other levers. A reader of the receipts who finds such a record knows at once that two hands were on the stack, and the paired run that contains it is read with that in mind.

Blind means hold, and fail up

A sense that goes stale or unreadable is not read as calm. It is read as **blind**, and while any sense is blind nothing is given back; the knob holds, or, if the service was breached when the sense went blind, returns to native at once. In the fault test on real Kubernetes the response-time probe is deliberately paused for a minute in every arm; the audit shows the governor holding through the blind minute and resuming when the sense returns, and the table shows no row behind for it. The rule is simple to state and strict in effect: Omni-Compass never acts on a reading it does not have.

The rule was also tested without being arranged. In the two-hour robustness run on real Kubernetes (`results/live/V3_ROBUST_LONG.md`), the cluster's own API answered a handful of the governor's

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

reads of the autoscaler with a server error, two or three times a run out of the 120 decisions a two-hour window expects. Each of those decisions is in the controller's log with the reason the API gave, each was held (no write, no hand-back, no guess), and the governor took its next decision on schedule when the API answered again. The preregistration had said in advance that such decisions would be shown with their reason and not judged, and that is how they appear in the table: 97.5% of the expected decisions valid, the failed ones counted and named, the knob handed back at the end of every run. A referee who wants to see the rule in the same rule written by the gate itself can find it in the kill test's receipts (section 7.1), where a decision whose latency sense read stale is held with "a sense is blind" among its reasons, and in the fault test's blind-probe window, where it was arranged on purpose. The point in every case is the same: a stale or missing reading produces a hold, never a move, and the hold is in the record.

Why one brain

The alternative to one brain is a controller per layer, each tuned alone: an autoscaler that adds pods while a power cap is trying to hold the machines down, a cooling loop that chases heat the clock governor is about to remove. These controllers fight because none of them knows the others' intent. One law that sets every knob from one state cannot fight itself: the force on each lever is computed from the same reading of the same body at the same moment. This is also why the modelled organisms are run whole, at up to 1.7 million muscles on one clock (section 2.4): the question they answer is whether one brain stays coherent at that size, and the reading at every size is the same to the digit.

One brain also has to stay the same brain over time, and that is a measurable claim. The two-hour robustness run (section 16.8) measures the governor's own memory at the start and the end of each run and the time it takes to reach a decision in the last hour against the first. Over three runs the memory ratio was 1.05 to 1.07 and the decision-time ratio 1.07 to 1.20, both inside the limits set before the run (a leak would show as steady growth; a brain that slows as its records accumulate would show a ratio climbing toward the 1.5 limit), and the cluster's service under the governed arm was inside the noise of native in two of three runs. The 24-hour runs on three rented machines, started as this is written, ask the same two questions over twelve times the window. A single controller that keeps its memory and its speed over a day is the least a referee should ask of a brain that proposes to hold every knob at once; the figures are in the table, not asserted here.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 23

The Nervous System in Detail

The two-way nervous system (live controller)

Source. Manuscript Appendix J: "Nervous system. The signal layer: sensing interfaces, unit integrity, timing coherence, delay and dropout handling, and feedback interpretation. … The brain cannot compensate for corrupted signals." Section 5.3: the engine "projects forward state trajectories … and detects destabilization pressure before divergence."

The gap. Before this change, the live controller fed the engine's `stale` (signal dropout) and `drift_ratio` (actuation mismatch) channels with a constant 0. So the upward path could not report a blind sense, and the downward path never learned whether its orders landed.

Upward: afferent integrity (senses to engine)

Every declared sense reports whether it is live.

- **Latency.** Blind when its newest sample is older than two windows by the wall clock, or when the window holds no successful request.
  - A hung probe freezes its file; its last clean window must never be read as the present.
  - Failed requests inside a live window become latency pressure (the failed share), so a failure is never read as silence.
- **Power.** Blind when its command returns no number.

How blindness is used.

- The blind share enters the engine as `stale`. It raises E, lowers U and feeds the external bath (equations 1-3 via `assimilate`).
- The nervous system grants no contraction on a blind sense, to any organ, and admits no held batch work.
- Expansion and batch pause (the protective directions) stay allowed.

Downward and back: efferent feedback (proprioception)

Every command is recorded.

- The node count commanded.
- The HPA targets written.

At the next decision the observed state is read back. For each organ, `drift = |observed - commanded| / commanded`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- The largest drift enters the engine as `drift_ratio`. It raises E and I_U, lowers U and feeds B (equations 1-3).
- The node organ may not be given a new release while its last command did not land. For example, a drain refused by the PodDisruptionBudget leaves the node in service, and the next decision sees it.

Sideways: attribution (organ to organ)

The machine organ has its own engine view, fed with machine-attributable pressure only (pods waiting for a place).

It releases a machine only when all of these hold:

- pods are not scaling up and latency is not breached;
- nothing is pending;
- after the release the remaining machines stay at or below the engine's rho;
- its own calm, stress and security gates grant contraction;
- every sense is live;
- its last command landed.

Tests (all in `verify.py`)

Test	What it checks
`tests/test_two_way.py`	blind senses (about 75,000 random states), frozen-probe detection, failures read as pressure, release refused while blind or after an order that did not land
`tests/test_node_release_gate.py`	the release gate, over 200,000 states
`tests/test_nervous_system.py`	the original invariants N1-N6, over 300,000 states

Every live decision records the senses, their ages, the proprioceptive drift and the gate's reason in the audit, and the benchmark prints them in the job log.

Nervous system

Omni-Compass is one field. Muscles are nerves.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
telemetry  ->  afferent (per muscle)
           ->  one six-state engine
           ->  reflex (shield)
           ->  efferent (only WIRED + authority + not killed)
           ->  native controller on kill
```

`omnicompass/nervous.py` is the register. It does not invent GPU or chiller physics.

Status	Meaning
wired	this tree can sense and push
sensed	this tree can sense; it does not push
open	named, no plant, no push

Wired today: `nodes`, `hpa`, `power_cap`. Sensed: `heat`, `network`, `security`. Open: GPU, cooling, grid, queues, agents, … Never a muscle: value alignment.

```
python k8s_controlplane/test_nervous.py
```

PART FOUR

The Body: Muscles, Realms and Organisms

One thousand one hundred and seven muscles in four realms on one spine, built into seven organisms, and every gauge used to judge them.

CHAPTER 24

The Muscles, the Realms and the Seven Organisms

The catalog

The catalog of Omni v5 (`realms/catalog_v5.csv`) lists **1,107 distinct muscles in 70 families** (v2 and v3 listed 945 in 59, `realms/catalog.csv`, frozen for their results; v1 listed 656 in 46), each with its family, its plant model and its knob. A muscle is anything with a meter and a setting: a compute pool and its

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

machine count, a GPU and its clock ceiling, a chiller and its setpoint, a battery and its reserve, a feeder and its tap, a robot joint and its speed limit, a pump and its flow. Each muscle carries a declared plant model, the simplest physics that reproduces how its meter follows its knob, and a native controller of its own, which is what the muscle does when Omni-Compass is not there. The catalog was built in four waves (`docs/realm_study/`): the spine from primary specifications, each realm's extras from its own specifications, a cross-check against industry and open-source controllers, and a verification, de-duplication and mapping pass. The register (`docs/REGISTER.md`, Chapter 1) lists every family with its muscle count and the kinds of knob it carries, so a reader can see at a glance what the modelled realms contain and what they do not.

The seventy families, by realm, are these. **Compute, AI and cloud** (twenty-seven): AI inference serving, AI training, blockchain and ledger nodes, CI/CD and build farms, cloud virtual machines and capacity, container resources, cross-cluster and edge placement, DPU and programmable IO, distributed cluster managers, game servers and real-time interaction, GPU fabric and RDMA, GPU hardware, HPC and distributed compute, host CPU and memory, Kubernetes dynamic device allocation, Kubernetes placement and scheduling, Kubernetes workload scaling (the largest family, 32 muscles), Linux kernel and operating-system control, media streaming, node fleets and Karpenter-class control, OpenShift and the Machine API, quantum computing control (modelled), serverless functions, virtualization and hypervisors, work admission and demand shaping, and the body's gut (data-plane intake and waste) and skin (perimeter and admission). **Physics, robotics and autonomous** (eight): automotive EV and mobile powertrains, aviation and autonomous flight, elevators and vertical transport, marine propulsion and vessel automation, rail traction and train control, robotics fleets and warehouse automation, robotics motion control, and spacecraft and flight software. **Energy, facility and industrial** (seventeen): agriculture and irrigation, building and critical-environment HVAC, cooling and chillers, district heating and cooling, energy storage and microgrids, facility and grid optimisation, grid transmission and distribution, healthcare critical environments, industrial PLCs and process automation, mining and mineral processing, oil and gas pipelines, PDUs, UPS and electrical distribution, pharmaceutical and food manufacturing, power generation and turbine control, renewable generation and inverter control, semiconductor fabs and precision manufacturing, and water and wastewater pumping. **Distribution and specialized** (eighteen): cache and memory services, commerce and payments, content delivery and edge caches, data analytics and ETL, databases and transactions, financial markets and trading systems, medical imaging and clinical systems, messaging and streaming, network routing and switching, observability and telemetry, ports and maritime logistics, reliability, security and recovery, runtimes and applications, search, indexing and vector databases, service meshes and API reliability, block, file and object storage, telecom radio access and edge radio, and workflow, logistics and fulfilment. Thirteen of these, marked "v2" in the register (the elevators, marine, rail, agriculture, district heating, healthcare, mining, pipelines, pharmaceutical and food, power generation, renewable generation, medical imaging and ports families), came with the second engine version; they, with the muscles added to the families that already existed, are the difference between the 656 muscles in 46 families of v1 and the 945 in 59 of v2 and v3. Eleven more came with v5 (the Linux kernel, serverless, virtualization, content delivery, gut and skin families in a first wave; financial markets, media streaming, game servers, blockchain nodes and build farms in a second), with muscles added to families

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

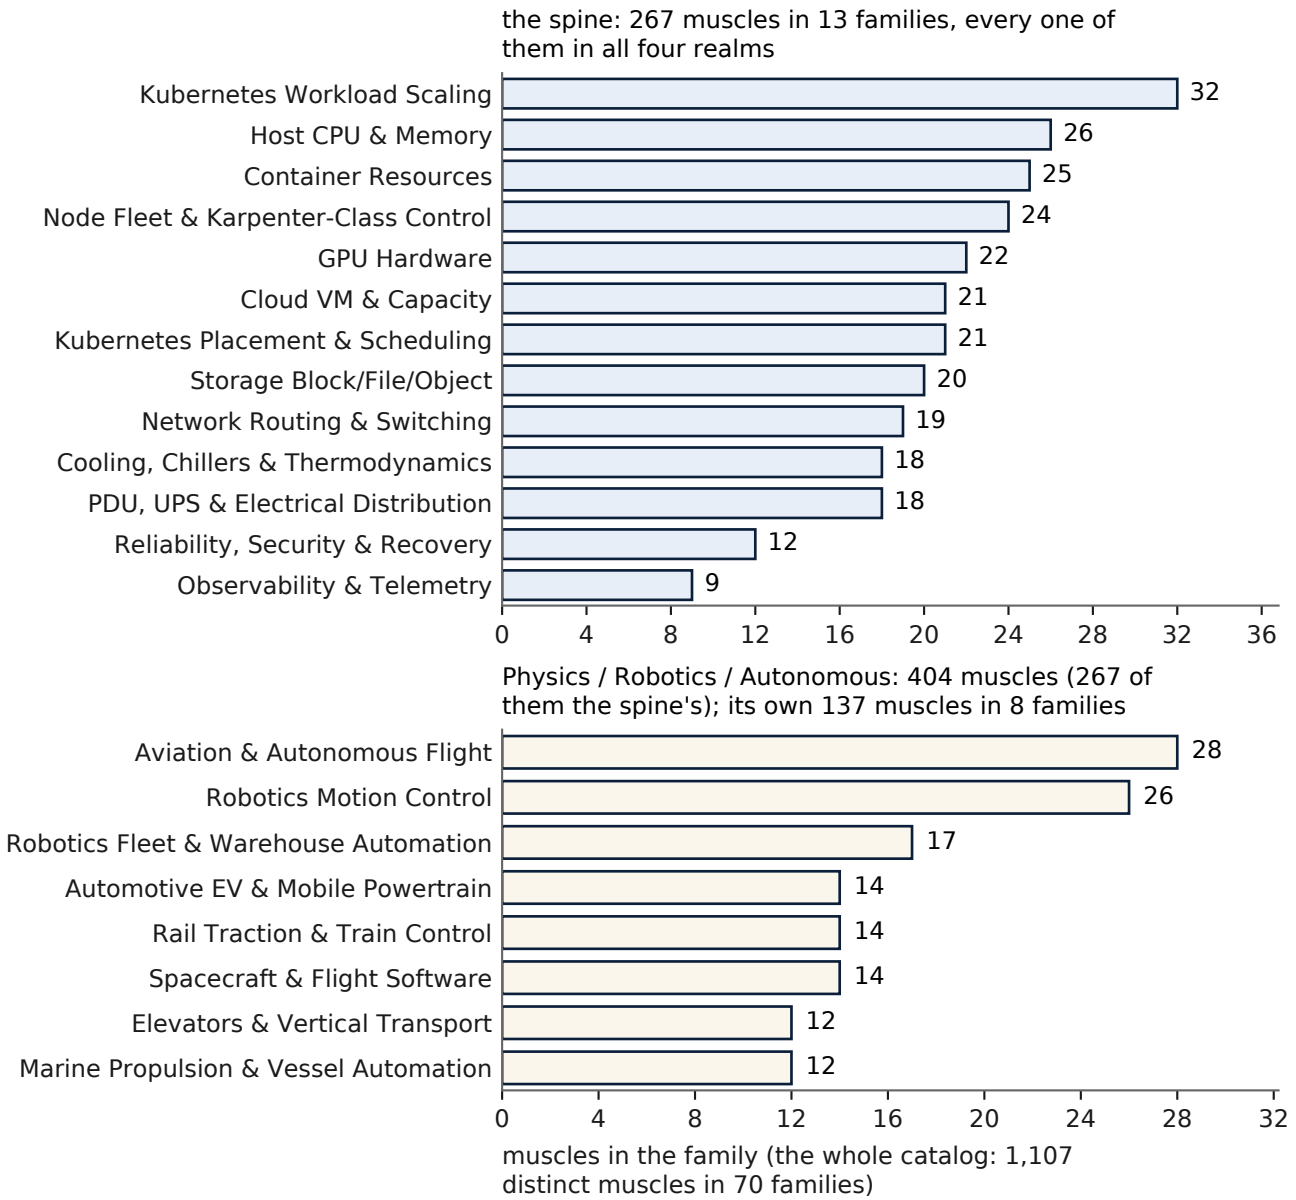


Figure 17. Grid: the families of the spine and of the Physics / Robotics / Autonomous realm, from realms/catalog_v5.csv. The spine's 267 muscles, every one of them in all four realms, in their 13 families; and the realm's own muscles, those it adds on the spine, in their families, by count.

already there; the founder's nine open-source pieces (Kepler, Climatik, EAR, CruiseKube, Goldilocks, the Kubernetes power manager, PEAKS, adaptive GPU power capping and NVIDIA's platform power budget) came on 12 October as ten muscles in the families their knobs belong to (`docs/OMNI_V5.md`, `docs/THE_SEAT.md`). The GPU family is named for the hardware, not one vendor.

Every muscle its own card. The brain is one, but since 13 October its settings are each muscle's own. A muscle's card holds the numbers the max uses for that muscle alone: how full a machine pool runs on its forecast before it calls for more and how many decisions of history it reads, how many wobbles of margin a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

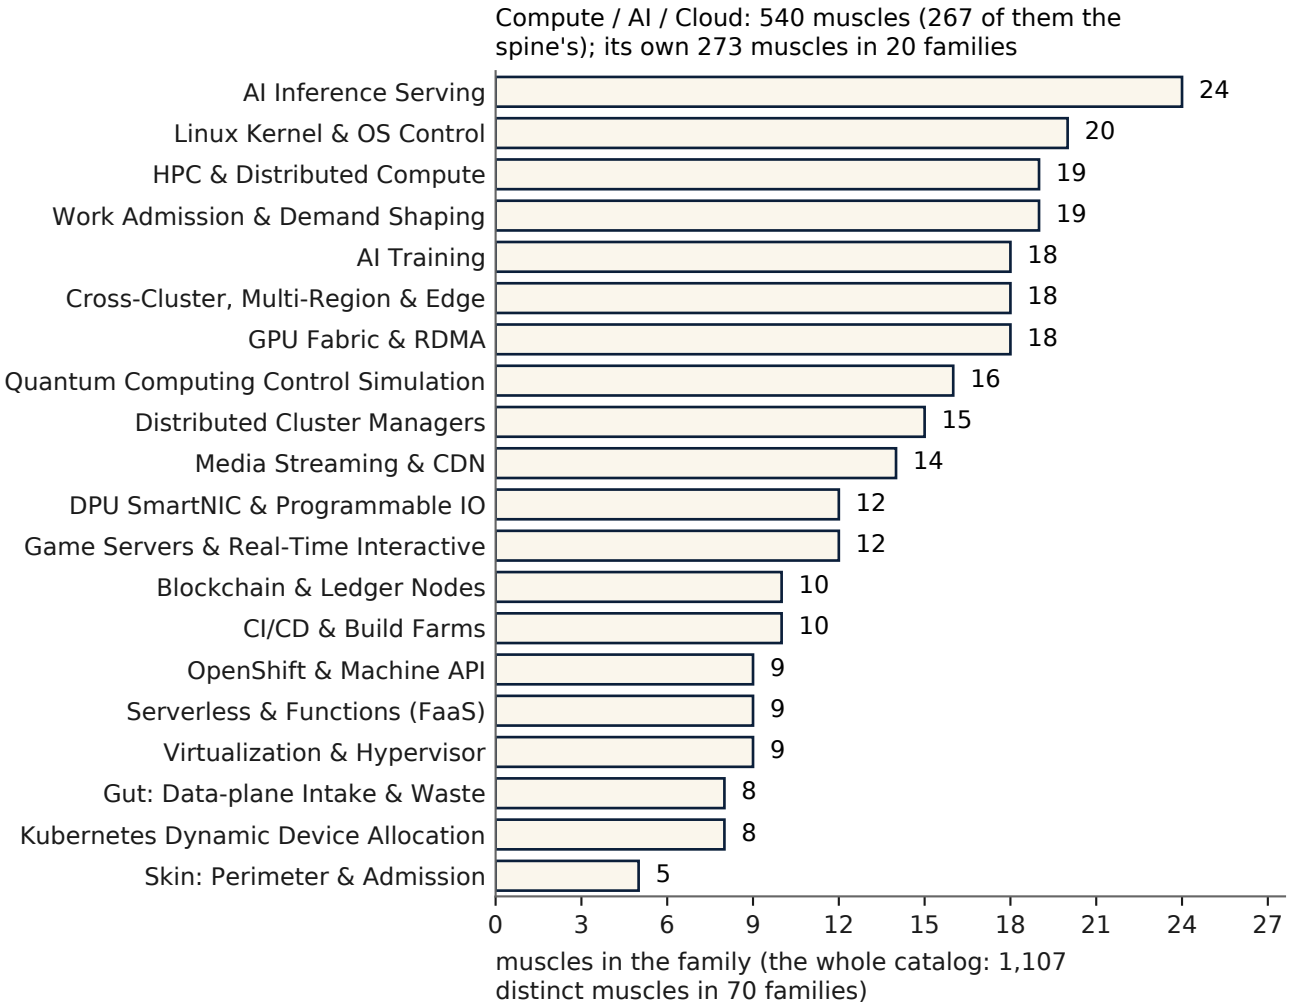


Figure 18. Grid: the families of the Compute / AI / Cloud realm, its own muscles on the spine, by count.

battery keeps under its line and, for a battery wired by its power, how long it reads its line before it holds and how much of it it keeps clear. The cards were found by an automatic search over every muscle (`tools/tune_cards.py`), on development seeds only, today's global setting always one of the choices, and a card was kept only where it beat the global setting beyond the noise on two separate sets of seeds and was never behind native on any seed under any load (never over its line more often, never less work, never its line cleared later): 364 muscles carry one (`realms/muscle_cards_v5.csv`, every card in plain words in the muscle catalog, the evidence in `results/cards_v5/CARDS.md`); the rest run the global setting. Inside a body, a battery wired by its power keeps the body's own margins on its line, because the line carries the whole body's swing, which the card chosen for the battery alone never saw. The formal statement is *The Max, Formally* (`docs/FORMAL_V5.md`, Chapter 11).

Every live benchmark in Part VI sits inside one of these families: the Kubernetes tests inside workload scaling and node fleets, PostgreSQL and MySQL inside databases and transactions, Redis and MongoDB's cache inside cache and memory services, Kafka inside messaging and streaming, the robot arms inside robotics

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

motion control, the drones inside aviation and autonomous flight, the power grids inside transmission and distribution, the buildings inside HVAC. A live result is therefore also a check on one family's model: where the real stack and the modelled muscle move the same way under the same law, the model has earned some trust; where they do not, the model is the thing to doubt, and the catalog's plant model for that family is the place to look.

The spine and the four realms

The muscles fall into four realms, and under every realm's own muscles stands the same **spine** of 267 muscles (Kubernetes workloads, containers, placement, node fleets, cloud capacity, hosts, GPUs, network, storage, observability, reliability and security, electrical distribution and cooling), because every realm's work runs on computers that must be scheduled, powered and cooled. Since 16 October the spine is an organism in its own right, the seventh, run native and with Omni-Compass on top like the other six: it is the base of every stack as an operating system is the base of every program, and a realm's reading beside the spine's shows what that realm's own trade adds to the base it stands on (the chapter *The Spine* follows this one). The catalog thus builds seven organisms, the spine first because the other six stand on it:

Organism	Muscles	What it is
The spine (`spine`)	267	the muscles every real stack runs on, every one in all four realms: clusters, containers, placement, node fleets, cloud capacity, hosts, GPUs, network, storage, observability, reliability and security, electrical distribution, cooling; an organism of its own, the base of the other six
1. Compute / AI / Cloud	540	clusters, GPUs, AI training and inference, cloud capacity, kernels, functions, media, games, ledgers, build farms
2. Physics / Robotics / Autonomous	404	joints, fleets, vehicles, flight and spacecraft axes
3. Energy / Facility / Industrial	480	data halls, buildings, batteries, UPS, process loops, feeders, hospitals, farms, pipelines, mines, district heat, power plants, renewables, pharmaceutical and food plants
4. Distribution / Specialized	484	networks, storage, databases, commerce, trading, content delivery, workflows, radio networks, clinical systems, ports
5. The four stacked, every duplicate kept	1,908	all four realms on one clock, the shared spine counted in each

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism	Muscles	What it is
6. The whole tower, every muscle once	1,107	every distinct muscle on one clock

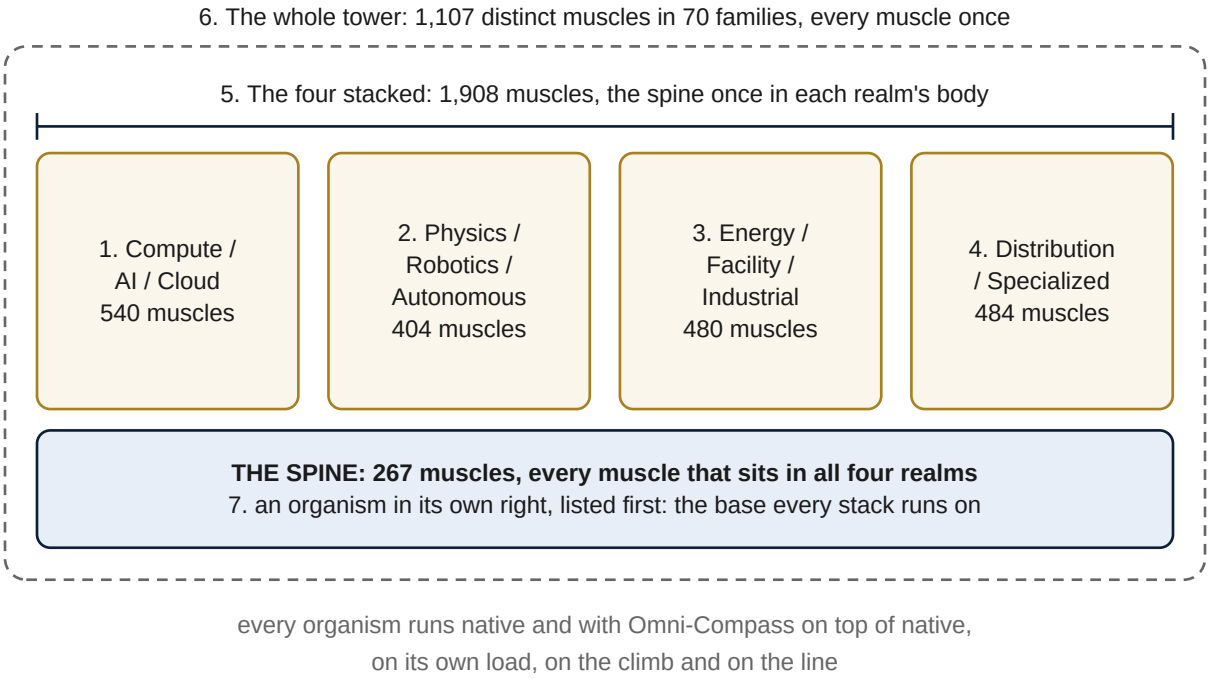


Figure 19. The seven organisms. The spine, the 267 muscles that sit in all four realms, is the base every stack runs on and an organism in its own right, listed first. The four realms stand on it; the four stacked count the spine once in each realm's body (1,908 muscles); the whole tower counts every distinct muscle once (1,107 in 70 families). Each organism runs native and with Omni-Compass on top of native.

These are the counts of the catalog that stands; earlier catalogs' counts stay with their own results in `docs/history/`.

The realms differ in what their domain muscles are and in how much slack their native controllers leave. Compute, AI and Cloud is clusters, cards, training and inference pools and cloud capacity, where the knobs are replica targets, machine counts, clock ceilings and power limits, and where native controllers are already good, so the modelled gains are small and the real gains come from the queue and the tail. Physics, Robotics and Autonomous is joints, fleets, vehicles, flight and spacecraft axes, where the knob is a speed or effort limit and the physics decides, axis by axis, whether spending slack as speed saves energy at all; this is the realm the v3 slack gate was written for. Energy, Facility and Industrial is data halls, buildings, batteries, UPS, process loops, feeders and plants, where the knobs are setpoints, units in service, reserves and taps, and where the muscles with the most room are also the ones whose reserves exist for a reason the model does not contain (a UPS held for an outage is never a lever). Distribution and Specialized is networks, storage, databases, commerce, workflows, radio networks, clinical systems and ports, where the knob is usually an admission, a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

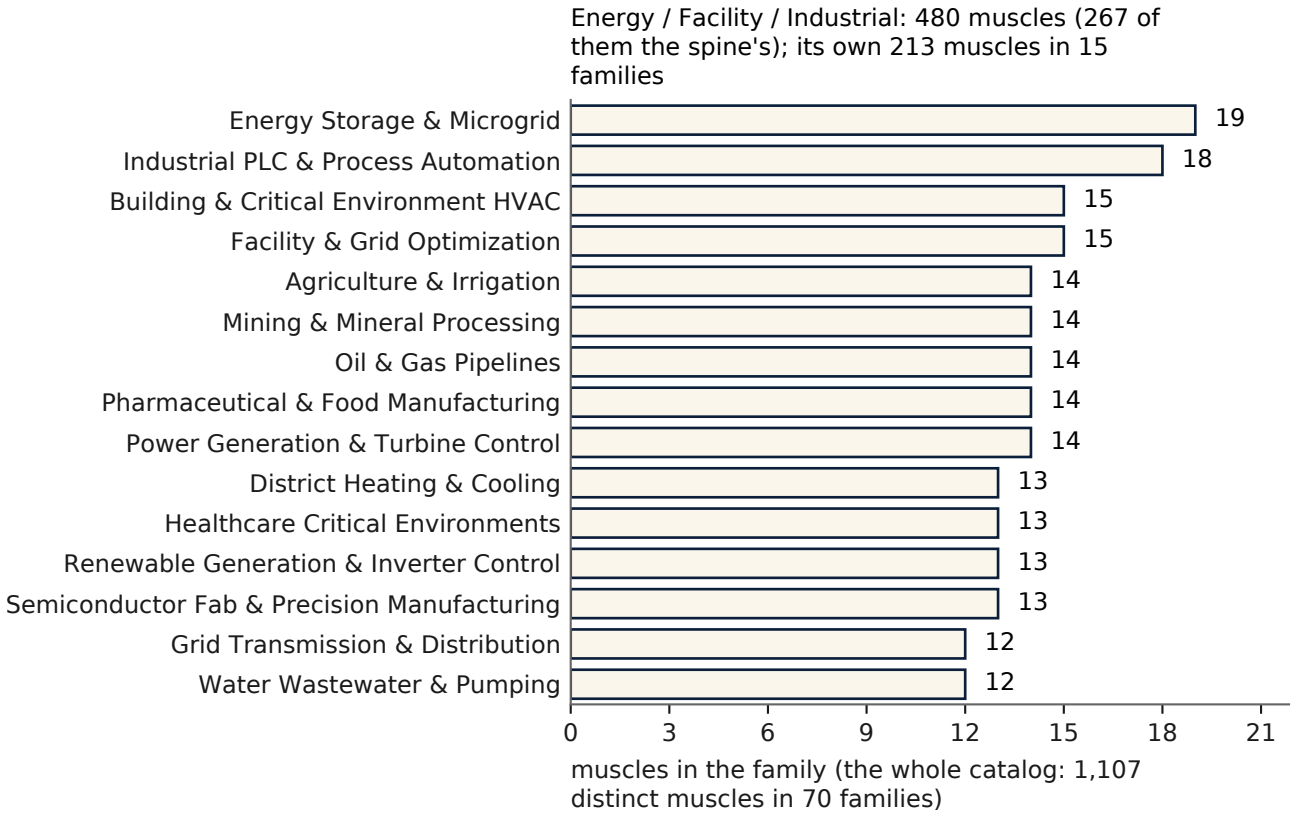


Figure 20. Grid: the families of the Energy / Facility / Industrial realm, its own muscles on the spine, by count.

pool or a replica count, and where the real stacks of this manual (the pooler, the broker, the cache) live. Every realm's list, by family and knob, is `docs/REALM_MUSCLES.md` and `docs/REGISTER.md` Chapter 1.

What an organism run is

These seven organisms are the benchmark set of the modelled realms. An organism is every one of its muscles stepped on one clock, each from its own plant model, each with its own native controller, and the whole fed one demand trace from one seed. Native runs the organism with every native controller alone. Omni runs the same organism, the same seed, the same demand and the same clock, with the compass law on every knob the verdict allows. Each run produces its own receipt: the organism's work, its energy, its time over its service line, and every knob's hand-back. In code and in the workflows the whole-catalog organisms and the spine are named `tower`, `stack` and `spine`, never by a count, because a count changes with the catalog and a name that carried one would read as a different organism; the old names are read as aliases.

The receipt is read in a fixed order. **Work** first: the organism's output over the window, which must not fall, and which reads LOSS by rule if it does, however little, as the four stacked at 1,000 copies showed on a difference of one part in a million (section 2.5). **Energy** second, and **work per energy** with it, which is the gain the modelled realms are built to show. **Time over the service line** third, the share of steps on which any

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

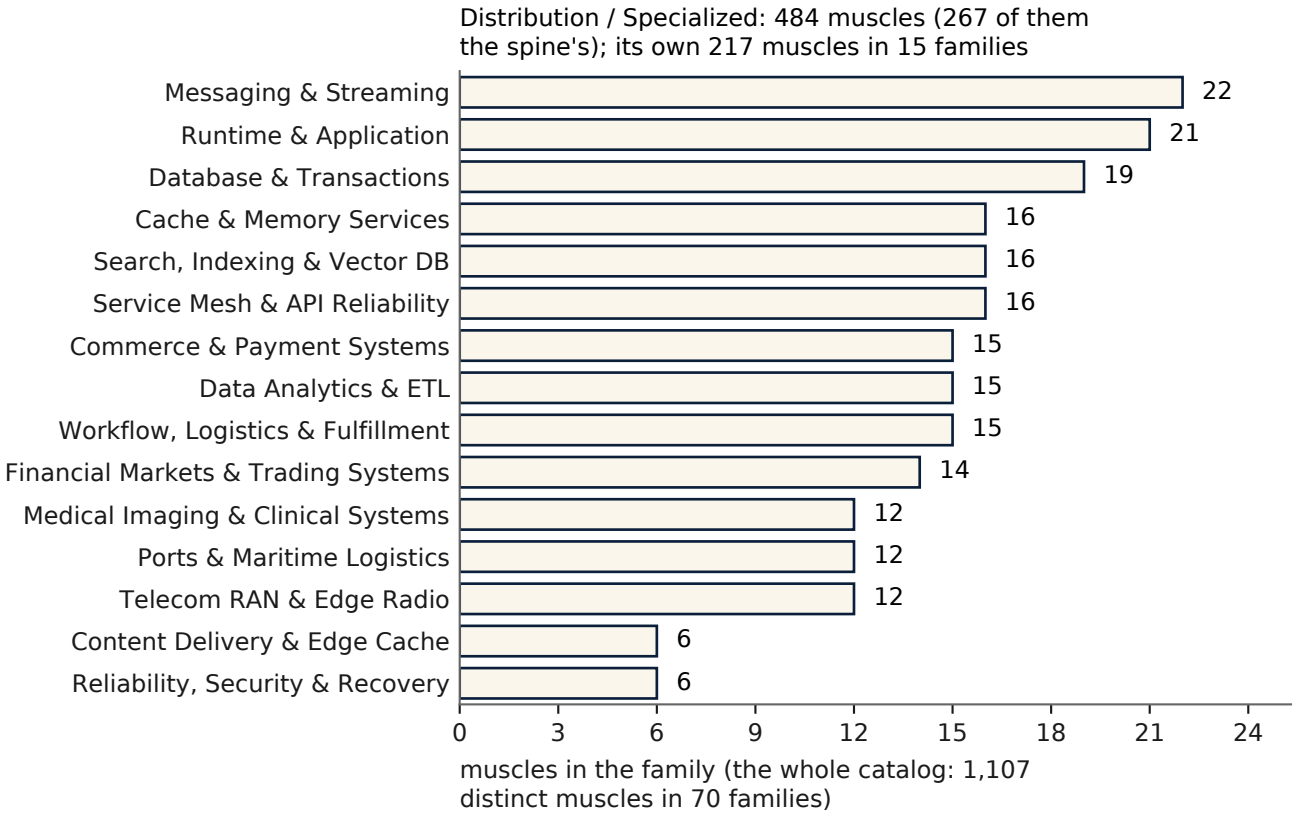


Figure 21. Grid: the families of the Distribution / Specialized realm, its own muscles on the spine, by count.

muscle's service reading was past its line, which is the do-no-harm gauge for the body as a whole. Then **every knob's hand-back**, which must be complete in every run or the run fails. The reading given to an organism (`results/realms_v5/REALMS_V5.md`, one table per engine) is GAIN, EVEN or LOSS by the key at the front of this manual: GAIN when its misses fell or its work rose beyond the noise and nothing moved the other way, EVEN inside the noise, LOSS named where it stands; the energy the max took is power given, shown beside the work. Earlier engines' readings, and the words they used, are history (`docs/history/`). What an organism run cannot show is also fixed: it is evidence class S, the plant models are our own, and nothing in it is presented as proof of a real stack. Its use is to show that one law holds across every realm at once, at a size no live benchmark can reach, and to find the rules that then have to earn their place on real software.

The grid of copies and runs

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

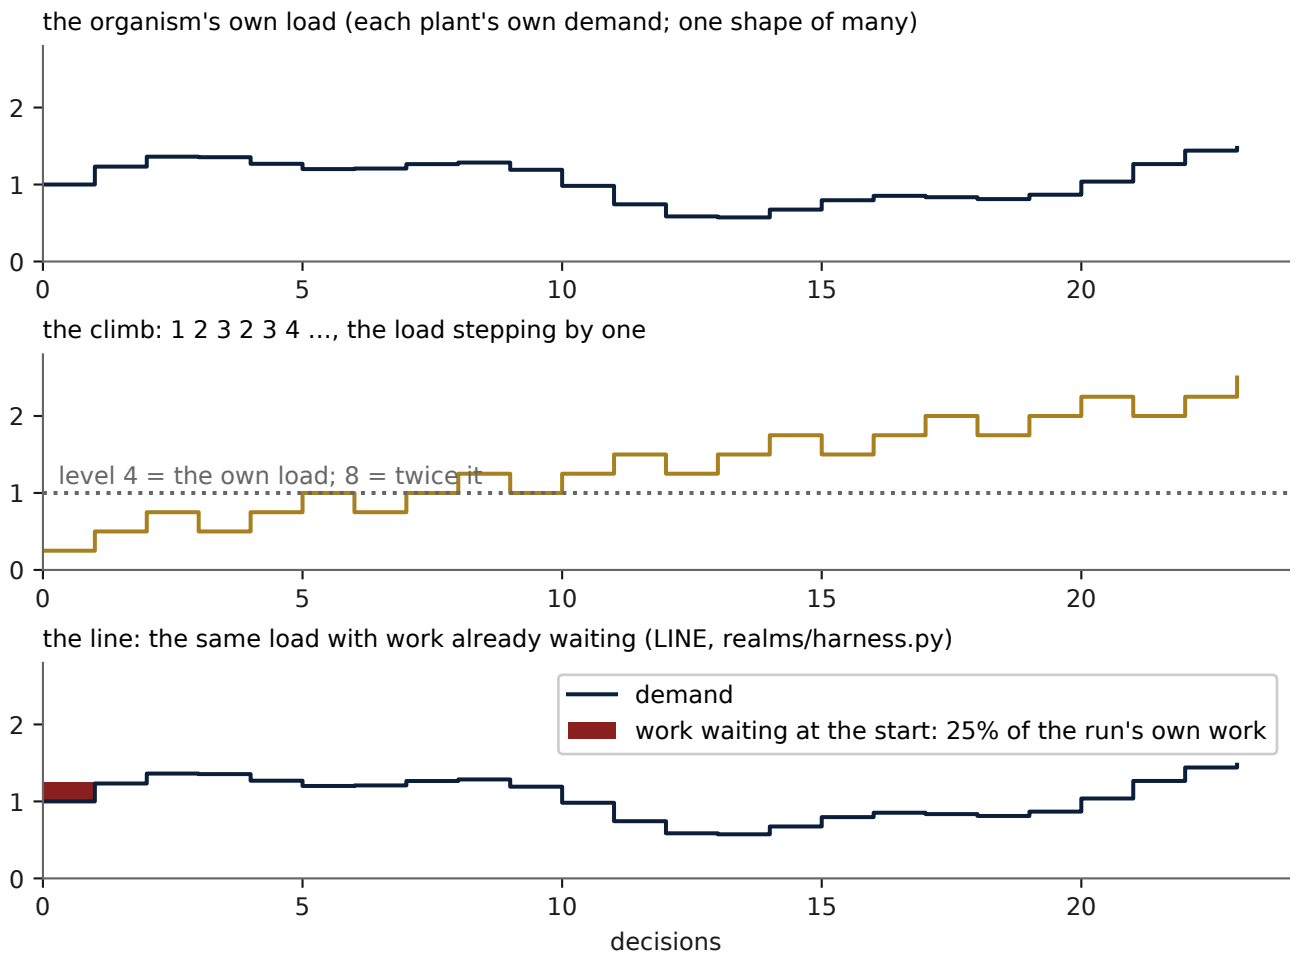


Figure 22. The three loads an organism runs under: its own load (each plant's own demand), the climb (the load stepping by one, 1 2 3 2 3 4 …, level 4 the own load and 8 twice it) and the line, the same load with a quarter of the run's own work already waiting when it starts.

Every organism runs at **1, 10 and 100 copies** (that many instances of the organism on one clock, so the four stacked at 100 copies is about 190,000 modelled muscles) and at **1, 10 and 100 paired runs** (that many native-and-omni pairs, each from its own seed): the seven organisms × three sizes × three run counts are 63 squares, run modelled and with the real cluster inside, both arms shown in every square. On GitHub's own machines the grid also runs the 1,000 tier, 1,000 copies and nested 1,000 runs (the founder's distinction of 15 October), a cell beyond a free runner's memory or time listed as pending runner capacity and never rented; paid cloud and GPU runs stay at 1, 10 and 100 copies with at most 100 repetitions (the founder's order of 12 October, kept for everything that costs money). Nothing is rented for the grid (`scripts/dispatch_grid.py`, `results/grid_v5/`). Earlier engines' grids, which went to 1,000 copies and 1,000 runs, stand as they were run in their own pages (`results/scale/`) and are never read across engines.

The two axes answer two different questions, and a reader should keep them apart. **Copies** is the size of the body the one brain governs: at 100 copies of the four stacked, the law computes a force for about 190,000

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Modelled (class S, our own models): the seven organisms at every size and run count, the change in misses against native. Green GAIN, grey EVEN, red LOSS, light grey one run (no label yet), white not in the receipt

	1 run	10 runs	100 runs
the spine, 1 copy	not in	not in	not in
the spine, 10 copies	not in	not in	not in
the spine, 100 copies	not in	not in	not in
Compute, 1 copy	1 run −0.181 pp	GAIN −0.191 pp	GAIN −0.204 pp
Compute, 10 copies	1 run −0.139 pp	GAIN −0.141 pp	GAIN −0.142 pp
Compute, 100 copies	1 run −0.135 pp	GAIN −0.135 pp	GAIN −0.135 pp
Physics, 1 copy	1 run −0.230 pp	GAIN −0.242 pp	GAIN −0.249 pp
Physics, 10 copies	1 run −0.113 pp	GAIN −0.114 pp	GAIN −0.116 pp
Physics, 100 copies	1 run −0.107 pp	GAIN −0.107 pp	GAIN −0.107 pp
Energy, 1 copy	1 run −0.078 pp	GAIN −0.096 pp	GAIN −0.108 pp
Energy, 10 copies	1 run −0.077 pp	GAIN −0.086 pp	GAIN −0.085 pp
Energy, 100 copies	1 run −0.087 pp	GAIN −0.086 pp	GAIN −0.085 pp
Distribution, 1 copy	1 run −0.106 pp	GAIN −0.135 pp	GAIN −0.152 pp
Distribution, 10 copies	1 run −0.064 pp	GAIN −0.068 pp	GAIN −0.069 pp
Distribution, 100 copies	1 run −0.058 pp	GAIN −0.059 pp	GAIN −0.059 pp
the four stacked, 1 copy	1 run −0.146 pp	GAIN −0.164 pp	GAIN −0.176 pp
the four stacked, 10 copies	1 run −0.099 pp	GAIN −0.103 pp	GAIN −0.104 pp
the four stacked, 100 copies	1 run −0.098 pp	GAIN −0.097 pp	GAIN −0.097 pp
the whole tower, 1 copy	1 run −0.034 pp	GAIN −0.042 pp	GAIN −0.047 pp
the whole tower, 10 copies	1 run −0.033 pp	GAIN −0.037 pp	GAIN −0.037 pp
the whole tower, 100 copies	1 run −0.038 pp	GAIN −0.037 pp	GAIN −0.037 pp

Figure 23. Grid chart: the seven organisms at every size and run count, modelled (class S), from results/grid_v5/GRID.md. Each cell is one square of the grid, copies × runs, with the change in misses against native and its reading: green GAIN, grey EVEN, red LOSS; a single run carries no label yet; the spine's squares are not yet in the receipt.

muscles from one reading of one clock, and the question is whether it stays coherent, whether the decision time stays inside the decision period, and whether the cluster inside it (section 2.5) is still served on time. **Runs** is the number of independent paired trials, each from its own seed, and the question is statistical: how wide the interval of the paired difference is and whether it moves as the trials multiply. A square at 1 copy and

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

100 runs tells a reader about the noise of the method; a square at 100 copies and 1 run tells a reader about the scale of the brain; the squares on the diagonal tell both at once. Every square shows the native value and the omni value side by side, never a change alone, because a change without its two ends cannot be checked against the organism's own records. The grid is rebuilt whole on every engine version, never patched square by square, so that no square carries a result from a different engine than its neighbours (Chapter 15).

The organisms with a real cluster inside

The modelled organisms are also run with a **real Kubernetes cluster inside** as one more muscle (`tools/run_kil.py`, workflows `six-kube`, `big-organism`, `big-organism-detached`): the organism's own compute demand drives a real load generator against a real service on a real cluster, and the cluster's watts come back into the organism as heat and load. At 1, 10 and 100 copies this runs on GitHub's machines under protocol 3 (the organism's model on the runner's last core, the kind nodes on the others, the same in both arms; the window set from the heavier arm's step, timed before either arm), and the whole tower and the four stacked at 100 copies also run on eight-core Azure machines, detached from the GitHub job that starts them. No 1,000-copy run is started from 12 October. These runs are evidence class L for the cluster and S for the organism around it, and are labelled "L + S".

Two rules keep these runs honest, and both are written in the preregistration before the run starts. The first is the **clock rule**. The organism must step on the measured window's clock: the row "organism behind its window" says how many seconds after the window its last step ended, and a repetition in which either arm ended more than 5% of the window late is marked **off the clock** in the organism's line, because its last steps saw a cluster whose load schedule had already ended. The row is shown and never judged; at 100 copies on the newest engine the tower's two arms ended 1.8 s and 2.4 s behind a 2,400 s window, a tenth of one percent, and no repetition was off the clock. The second is the **hand-back at 90%**. Omni-Compass releases the cluster's knob at nine tenths of the window and the last tenth is run by native alone in both arms, so that every repetition ends with the proof that the knob was given back and that native resumed where it would have been.

On the newest engine (omni-v5), the grid with the cluster inside (`results/grid_v5/GRID.md`, the card version, digest `5648f290`) reads the cluster's time over the response line and the organism's time over the line GAIN in every square of 10 and 100 repetitions; the organism's work per energy reads LOSS in 21 of those 36 squares (power given that bought fewer misses, not more work), and the cluster's 95th and 99th percentiles read LOSS in two squares at 100 copies. Protocol 3 at 100 copies (digest `6093b2b8`, ten paired repetitions each; runs 38464343379, 38462289297, 38462280620) found the cause of those two: the tower's 95th percentile +47.7% and the four stacked's +87.2% (99th: +32.1%), on a four-core machine already about 80% busy and failing about half its requests in both arms, where the max added 40% to 54% replicas that nodes unable to grow could not carry; the four realms read EVEN on every response time. The fix, the replica muscle's live headroom read from the machines under it, belongs to the next version (`docs/omni_v5/NEXT_VERSION_PLAN.md`, Chapter 59), and the eight-core Azure runs show how much of the LOSS the small machine carries. Earlier engines' runs at 1,000 copies on rented machines stand as

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

With the real Kubernetes cluster inside (the cluster class L, the organism class S): the seven organisms at every size and run count. Green: GAIN on n gauges, LOSS on none; red: a LOSS among them; light grey one repetition; white not in the report

	1 run	10 runs	100 runs
the spine, 1 copy	not in	not in	not in
the spine, 10 copies	not in	not in	not in
the spine, 100 copies	not in	not in	not in
Compute, 1 copy	1 run	GAIN 3, LOSS 1	GAIN 7, LOSS 1
Compute, 10 copies	1 run	GAIN 3, LOSS 1	GAIN 8, LOSS 1
Compute, 100 copies	1 run	GAIN 4, LOSS 1	GAIN 4, LOSS 1
Physics, 1 copy	1 run	GAIN 3, LOSS 1	GAIN 8, LOSS 1
Physics, 10 copies	1 run	GAIN 4, LOSS 1	GAIN 5, LOSS 1
Physics, 100 copies	1 run	GAIN 4, LOSS 1	GAIN 6, LOSS 1
Energy, 1 copy	1 run	GAIN on 4	GAIN on 7
Energy, 10 copies	1 run	GAIN on 4	GAIN on 8
Energy, 100 copies	1 run	GAIN on 4	GAIN on 6
Distribution, 1 copy	1 run	GAIN 5, LOSS 1	GAIN 7, LOSS 1
Distribution, 10 copies	1 run	GAIN 4, LOSS 1	GAIN 7, LOSS 1
Distribution, 100 copies	1 run	GAIN 5, LOSS 1	GAIN 5, LOSS 1
the four stacked, 1 copy	1 run	GAIN on 4	GAIN on 7
the four stacked, 10 copies	1 run	GAIN 5, LOSS 1	GAIN 7, LOSS 1
the four stacked, 100 copies	1 run	GAIN 5, LOSS 1	GAIN 5, LOSS 3
the whole tower, 1 copy	1 run	GAIN on 3	GAIN on 8
the whole tower, 10 copies	1 run	GAIN on 2	GAIN on 7
the whole tower, 100 copies	1 run	GAIN on 4	GAIN 5, LOSS 2

Figure 24. Grid chart: the seven organisms at every size and run count with the real Kubernetes cluster inside (the cluster class L, the organism class S), from results/grid_v5/GRID.md. Each cell counts the gauges that read GAIN and LOSS against native in that square; a square with a LOSS among its gauges is red, and it is looked into, never cut.

they were run, in their own tables (`results/live/V1_BIG_ORGANISM.md`, `results/live/V3_BIG_ORGANISM.md`), and are not read across engines.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The register

The register (`docs/REGISTER.md`) is the one list a referee can audit: every muscle by family (Chapter 1), every benchmark by platform with its native controller, Omni-Compass's knob, its gauges, its result and its file (Chapter 24), what is not measured yet, said plainly (Chapter 59), and every open benchmark still to run, in order, one or two at a time (Chapter 9). The program that takes each benchmark to its full size, with what each step costs, is `docs/PROOF_PROGRAM.md`. Every benchmark in this manual appears in the register under the same name.

A row in the register is read left to right as a sentence: the platform, the open benchmark used for it and who publishes that benchmark, the native controller Omni-Compass sits on top of, the knob it moves, the gauges it is judged on, and its state. The state is written in a small, repeated vocabulary so that a reader can scan the column: **queued** (in the audited queue, not yet preregistered), **preregistered and built** (the rules are frozen and the harness runs, no counted result yet), the smoke runs with what each one taught and what was changed before the counted runs, and **A, B, C done** with the three run numbers, the engine version and the readings, losses first where there are any. A row never loses its history: when a benchmark moves from smoke to counted, the smoke record stays in its preregistration, and when a result is superseded by a run on a later engine, the earlier table moves to `docs/history` with its engine named. The register is the only list that must be complete; the manual's Chapter 48 and the dossier (`docs/DOSSIER.md`) are readings of it, and anything in them that is not in the register is an error to be fixed in the register's favour.

The audited queue (Chapter 9 of the register) is the program's promise about what comes next, and it is deliberately short at the front: one or two benchmarks are run at a time, each preregistered, built, smoked and counted before the next is opened, so that no result is ever waiting on a harness that was half built when the runs began. The queue is ordered by what each benchmark adds to the index that the ones before it did not: a new resource traded (memory after machines, a buffer pool after a cache), a new native controller, a new class of evidence.

CHAPTER 25

The Spine: the Base Every Stack Runs On

The **spine** is the set of muscles every real stack runs on: the 267 muscles of the 1,107-muscle catalog (`realms/catalog_v5.csv`) whose realm list names all four realms. A robot fleet, a trading system, a hospital's critical environment and an AI training pool differ in every muscle of their own trade, and they are alike in this: their work runs on computers that are scheduled, placed, given processors and memory, connected, stored, watched, kept alive, powered and cooled. Those thirteen families are the spine. Since 16 October (the founder's order) the spine is an **organism in its own right**, the seventh, run native and with Omni-Compass on top of native exactly as the other six are, because the base of a stack deserves its own

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

reading before any trade is put on it. The relation is the one between an operating system and the programs that run on it: no program re-implements scheduling, memory or the disk, it stands on the system that does them; no realm's trade muscles re-implement the cluster, the fleet, the power or the cooling, they stand on the spine.

What the spine is made of

Family	Muscles	Plant model	Native controller class	The knob
Kubernetes Workload Scaling	32	compute pool (server)	the pod autoscaler, KEDA, the operator's rightsizers	replicas, targets
Container Resources	25	compute pool (server)	the vertical autoscaler, the scheduler's requests and limits	capacity, admission
Kubernetes Placement & Scheduling	21	compute pool (server)	the scheduler, descheduler, topology and affinity rules	admission, capacity
Node Fleet & Karpenter-Class Control	24	compute pool (node)	the cluster autoscaler, Karpenter-class provisioners	machines
Cloud VM & Capacity	21	compute pool (node)	the cloud's own scaling sets and capacity reservations	machines
Host CPU & Memory	26	compute pool (CPU host)	the kernel's frequency governor, memory and cgroup controls	capacity, power
GPU Hardware	22	compute pool (GPU)	the card's firmware: clocks, power limit, partitioning	clock ceiling, power cap
Network Routing & Switching	19	compute pool (network)	routing, queueing and buffer controls	capacity, admission
Storage Block/File/Object	20	compute pool (storage)	tiering, caching and throughput controls	capacity, admission
Observability & Telemetry	9	compute pool (server)	sampling, retention and scrape controls	admission
Reliability, Security & Recovery	12	compute pool (server)	disruption budgets, recovery and admission controls	admission
PDU, UPS & Electrical Distribution	18	energy storage (UPS)	the UPS and PDU controllers, their reserves and line limits	power, setpoint
Cooling, Chillers & Thermodynamics	18	thermal zone (data hall)	the chillers, air handlers and their setpoints	setpoint

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Two hundred and sixty-seven muscles in thirteen families: 156 capacity knobs, 48 admission knobs, 35 power knobs and 28 setpoints. Every one is listed, with its knob, in `docs/REALM_MUSCLES.md` (the spine first), and explained, wired and carded in `docs/MUSCLE_CATALOG.md` (the manuals' muscle appendix, with every family's wiring recipe from `docs/wiring_recipes.csv`: the native controller, the wire out, the wire in, the restore, and whether the wire has run live in this repository or only on a model). The muscles of the spine's Kubernetes families are the ones the live Kubernetes benchmarks run on real clusters (evidence class L); the spine as an organism is modelled (class S), and nothing in it is presented as proof of a real stack.

Why the spine is an organism

An **organism** is a set of muscles stepped on one clock, each from its own plant model with its own native controller, the whole fed one demand from one seed, so that the heat the machines make is load on the rooms, the power swing of the body is load on every site's line, and one brain judges every step against every other muscle's cushion. Run alone, the spine is a data center with nothing of any one trade in it: clusters, fleets, processors, cards, network, storage, power and cooling, and the governor on top of their native controllers. Three readings come from it that the realms alone cannot give:

1. **The base before the trade.** Whether Omni-Compass helps the machines every stack runs on, before any realm's own muscles are put on them. A buyer wiring only a cluster and its site wires the spine and nothing else.
2. **What a trade adds.** Each realm's organism is its own families on the spine. Read beside the spine's reading, a realm's reading shows what that realm's trade muscles add to, or take from, the base they stand on.
3. **The same base under four trades.** The four stacked carry the spine once in each realm's body, the tower carries it once in all. The spine run alone is the control for both: the same muscles, the same native controllers, no trade on top.

The spine is run under the same three loads as every organism (its own load; the climb, 1 2 3 2 3 4 …; work waiting in line), is judged by the same rule (work, speed and misses against native, the energy the max takes shown as power given), and has the same two arms and no other: **native**, every native controller alone, and **omni**, Omni-Compass on top of those same controllers, moving only the settings they expose, within their own ranges, and handing every setting back at the end.

How the spine is wired on a real stack

The spine is wired as any organism is: one governor per body, every shared resource a muscle or a gauge, a muscle with nothing to gain kept wired and watched (the Operator's Manual, chapter 2). The order is the order of the levels in the Operator's Manual, chapter 6, which is the order of the spine's own families: the cluster first (its workloads, then their resources and placement, then the machines under them), then the processors and the cards, then network and storage, then the site under all of them (electrical distribution and cooling), with observability and recovery wired from the first level, because the governor reads through them. Each family's

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

wire is one row of `docs/wiring_recipes.csv`: which native controller owns the setting, where the reading is tapped, where the setting is written, and how it is restored. A realm's own muscles are wired after the spine they stand on, never instead of it.

The spine in the runners and the pages

The organisms are groupings of catalog rows made in the runners; no engine file names them, so the spine entered the runners without changing the engine that stands (`python3 tools/omni_version.py` prints the same fingerprint before and after). In every runner the spine is `spine`; in `tools/run_scale.py` and the grid conductor (`scripts/dispatch_grid.py`) it is organism `7`, after the six that were numbered before it, so that every grid run already started reads back under its own number. Every table lists the spine first, because the other six stand on it.

Where	The spine
`tools/run_realms_v5.py`	every muscle alone, then the seven organisms under three loads; the spine's row first in every organisms table (`results/realms_v5/REALMS_V5.md`)
`tools/run_scale.py --organisms 7`, workflow `six`	the spine at 1, 10, 100 and, on GitHub's own machines, 1,000 copies, over 1 to 1,000 paired runs
`tools/run_kil.py --organism spine`, workflows `six-kube`, `aks-metered`, `gke-metered`, `eks-metered`, `cloud-organism`	the spine with the real Kubernetes cluster inside it as one more muscle
`tools/run_hil.py`	the spine with the real card inside it (the GPU Hardware family is a spine family)
`scripts/dispatch_grid.py`	the spine's squares started, read back and never started twice like every other organism's
`docs/REALM_MUSCLES.md`, `docs/MUSCLE_CATALOG.md`	the spine's 267 muscles listed first; each muscle's organisms column names the spine
`results/realms_v5/`, `results/grid_v5/`, `docs/STATE_OF_PLAY.md`	the spine's readings, native against Omni-Compass on top, each named for the engine it ran on

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 26

The Four Realms

The muscle tower on modelled plants: **1,107 distinct muscles in 70 families** (`realms/catalog_v5.csv`, the catalog the engine that stands carries), run as **seven organisms**, each native and with Omni-Compass on top of native: the **spine** (`spine`, the 267 muscles every real stack runs on, every one in all four realms; an organism of its own and the base of the other six, as an operating system is the base of every program: `docs/THE_SPINE.md`), each realm's organism (its own families on the spine: Compute / AI / Cloud 540, Physics / Robotics / Autonomous 404, Energy / Facility / Industrial 480, Distribution / Specialized 484), the four stacked on one clock with every duplicate of the spine kept (`stack`, 1,908) and the whole tower, every muscle once (`tower`, 1,107). Every muscle also runs alone on its own plant. Each is run natively (the plant's own controller alone) and with Omni-Compass on top, with meters and receipts, under three loads: the organism's own load, the climb (the load stepping by one, 1 2 3 2 3 4 …) and work waiting in line. Evidence class **S** (modelled: our own models of these machines, never counted in the headline and never presented as proof). The word "simulation" is not used for them; a live stack is class L, a meter class P.

Run it

```
pip install -r requirements.txt
python3 tools/run_realms_v5.py --out realms5-out     # the preregister
    ↪ ed run: every muscle alone and the seven organisms, seeds 3000-3
    ↪ 009
python3 tests/test_realms.py                         # the harness's o
    ↪ wn checks (also inside verify.py)

python3 tools/realm_muscles.py                       # docs/REALM_MUSC
    ↪ LES.md: every organism written out, muscle by muscle
python3 tools/muscle_catalog.py                      # docs/MUSCLE_CAT
    ↪ ALOG.md: every muscle explained, wired and carded
```

The run is deterministic: `realms-v5.yml` (GitHub) runs it again and fails if any label or number differs from the table committed in `results/realms_v5/`.

Results, each named for the engine it ran on: `results/realms_v5/REALMS_V5.md` (the tables: every muscle alone over its loads, and the seven organisms under the normal, climb and line loads),

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`MUSCLES_V5.csv` (one row per muscle and load), `REALMS_V5.json` (every per-seed contrast), `RUN.json` and `SHA256SUMS.txt` (commit and fingerprints). The grid of copies and runs (1, 10 and 100 copies × 1, 10 and 100 runs, modelled and with the real cluster inside) is `results/grid_v5/GRID.md`. The earlier catalogs' results stay as the road to 1.0: v3's in `results/realms/`, v2's in `results/realms/v2/`, v1's in `results/realms/v1/`; nothing is read across engines, and every result runs again on the engine that stands (`scripts/reruns.txt`).

What is where

File	What it is
`realms/catalog_v5.csv`	the 1,107 muscles: family, name, realm, plant, parameter set, knob (v1's 656: `realms/catalog_v1.csv`; v2/v3's 945: `realms/catalog.csv`)
`realms/muscle_cards_v5.csv`	every muscle's own card: the factory setting it runs on, found on development seeds and kept only when it wins twice and never falls behind native on any seed
`docs/wiring_recipes.csv`	every family's wiring on a real stack: the native controller, the wire out, the wire in, the restore, run live or modelled
`realms/plants.py`	the five plants and their native controllers; the four knobs; the capacity law for one plant
`realms/presets.py`	every parameter, one set per family class
`realms/compass_arm_v5.py`	the law on every muscle at its default, the max, and the dial's tune-down (`V5CFG`, `V5SAVE`)
`realms/harness.py`	the arms (native, omni), the organisms, the three loads, the outcome and the label rule
`docs/REALMS_PREREGISTRATION.md`	the question, the rules, the seeds and the development history, frozen before the run
`docs/THE_SPINE.md`	the spine, the seventh organism: what it is, why it is an organism, how it is wired, where it stands in the runners
`docs/REALM_MUSCLES.md`, `docs/MUSCLE_CATALOG.md`	every organism written out muscle by muscle, the spine first; every muscle explained, wired and carded (the manuals' appendix)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

How it relates to the rest

Layer	Realm harness	Elsewhere in this repository
Mathematics (T, V)	uses the engine and governor unchanged	`docs/TRACKING_THEOREM.md`, `verify.py`
Modelled (S)	**this**	the fleet and cluster models, the GPU model, the independent simulators (robot arms, grids, districts, swarms)
Real software (L)	not here	real Kubernetes and the live stacks (`results/live/`, newest engine first on the benefit sheet, `docs/BENEFIT_SHEET.md`)
Physical (P)	not here	the card: every earlier card result is obsolete and runs again on rented cards at one named commit (`docs/GPU_PREREGISTRATION.md`)

A realm result that reads GAIN is a reason to test that knob on a real machine, not a substitute for it. The realms whose knobs can be tested for real first are the compute realm's (Kubernetes on kind, the card), because the tools already exist.

CHAPTER 27

The Realm Muscles

Generated from `realms/catalog_v5.csv` (the catalog the engine that stands carries: 1,107 distinct muscles in 70 families) by `tools/realm_muscles.py`. A **muscle** is one setting on one machine that already has its own control; the one knob Omni-Compass may hold on it stands in brackets after its name. The catalog builds **seven organisms**, each run native and with Omni-Compass on top of native: the **spine**, the muscles every real stack runs on, an organism of its own and the base of the other six (as an operating system is the base of every program; `docs/THE_SPINE.md`); the four realms, each its own families with the spine under them, so the realm counts add to more than the tower; the four stacked; and the whole tower. What the engine does with each knob, which native controller owns it, where the reading is tapped and the setting written, how it is restored and its own card are written family by family in `docs/MUSCLE_CATALOG.md` (the manuals' muscle appendix); the organisms' results are in `results/realms_v5/REALMS_V5.md` and the grid in `results/grid_v5/GRID.md`, each named for the engine it ran on.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The seven organisms

In the runners the spine is `spine` (organism 7 in `tools/run_scale.py` and the grid conductor, after the six that were numbered before it); every table lists it first, because the other six stand on it.

Organism	Runner name	Muscles	What it is
The spine	`spine` (7)	267	the muscles every real stack runs on, every one in all four realms: the base of the other six
Compute / AI / Cloud	`compute_ai_cloud` (1)	540	its 273 own muscles on the spine of 267
Physics / Robotics / Autonomous	`physics_robotics_autonomous` (2)	404	its 137 own muscles on the spine of 267
Energy / Facility / Industrial	`energy_facility_industrial` (3)	480	its 213 own muscles on the spine of 267
Distribution / Specialized	`distribution_specialized` (4)	484	its 217 own muscles on the spine of 267
The four stacked	`stack` (5)	1,908	the four realms' organisms on one clock, every duplicate of the spine kept
The whole tower	`tower` (6)	1,107	every muscle of the catalog once

The spine: 267 muscles, in all four realms, an organism of its own

The thirteen families below are the computers every realm's work runs on and the power and cooling they need: Kubernetes workloads, containers, placement, node fleets, cloud capacity, hosts, GPUs, network, storage, observability, reliability and security, electrical distribution and cooling. Run alone, the spine is a data center with nothing of any one trade in it; under a realm, it is what that realm's own muscles stand on.

Kubernetes Workload Scaling (32; plant: compute_pool, server)

replicas [capacity], hpa_cpu_target [setpoint], hpa_memory_target [setpoint], hpa_custom_target [setpoint], vpa_apply [capacity], scale_to_zero [capacity], keda_threshold [admission], rollout_rate [capacity], max_surge [capacity], max_unavailable [capacity], deployment_pause_resume [admission], rollout_abort [admission], pod_eviction [admission], pdb_policy [capacity], scheduler_queue_priority [admission], api_priority_fairness [admission], hpa_min_replicas [capacity], hpa_max_replicas [capacity], hpa_scale_down_stabilisation_window [setpoint], hpa_scale_up_stabilisation_window [setpoint], hpa_scaling_rate_policies [capacity], hpa_policy_selection [capacity], hpa_tolerance [capacity], hpa_sync_period [capacity], vpa_minmax_allowed_resources [capacity], keda_polling_interval [setpoint],

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

rollout_progress_deadline [admission], rollout_readiness_delay [capacity], unhealthy_pod_eviction_policy [admission], graceful_termination [capacity], probes [capacity], kepler_energy_target_autoscaling [setpoint]

Container Resources (25; plant: compute_pool, server)

cpu_request [capacity], cpu_limit [capacity], memory_request [capacity], memory_limit [capacity], ephemeral_storage [capacity], hugepages [capacity], io_weight [setpoint], pids_limit [capacity], memory_high [capacity], memory_reclaim [capacity], swap_limit [capacity], cgroup_io_max [capacity], cpu_weight [setpoint], cpu_quota [admission], cpuset [capacity], runtime_class [capacity], in_place_resize [capacity], namespace_quota [admission], default_limits [capacity], memory_hard_limit [capacity], memory_protection [capacity], io_latency_target [setpoint], freeze [admission], cruisekube_request_rightsizing [capacity], goldilocks_vpa_request_recommendation [capacity]

Kubernetes Placement & Scheduling (21; plant: compute_pool, server)

node_selector [capacity], node_affinity [capacity], pod_anti_affinity [capacity], topology_spread [capacity], numa_placement [capacity], gpu_topology [capacity], storage_locality [capacity], network_locality [capacity], taint_toleration [setpoint], priority_class [admission], preemption_policy [admission], device_claim [capacity], failure_domain_spread [capacity], scheduler_backoff [admission], gang_admission [admission], deschedule [capacity], scheduler_scoring_strategy [capacity], scheduler_plugin_weights [setpoint], scheduling_gates [admission], cpu_manager [capacity], peaks_power_aware_placement [capacity]

Node Fleet & Karpenter-Class Control (24; plant: compute_pool, node)

node_desired [capacity], node_pool_min [capacity], node_pool_max [capacity], node_provision [capacity], node_cordon [admission], node_drain [admission], node_consolidate [capacity], node_replace [capacity], node_shutdown [capacity], node_power_on [capacity], nodepool_weight [setpoint], disruption_budget [admission], consolidation_policy [capacity], consolidate_after [capacity], expire_after [capacity], capacity_class [capacity], scale_down_utilisation_threshold [admission], scale_down_unneeded_time [capacity], scale_down_delay_after_add [capacity], expander [capacity], node_pool_limits [capacity], kubelet_eviction_thresholds [admission], kubelet_reserved_resources [capacity], max_pods_per_node [capacity]

Cloud VM & Capacity (21; plant: compute_pool, node)

vm_count [capacity], vm_size [capacity], vm_start_stop [capacity], vm_migrate [capacity], instance_family [capacity], asg_min [capacity], asg_max [capacity], spot_mix [capacity], reservation_mix [capacity], zone_selection [capacity], region_selection [capacity], architecture_selection [capacity], accelerator_selection [capacity], boot_disk_class [capacity], placement_group [capacity], interruption_response [capacity], target_tracking_policy [setpoint], scaling_cooldown_warmup [capacity], vm_cpu_cap_by_priority [admission], predictive_scaling [capacity], instance_refresh [capacity]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Host CPU & Memory (26; plant: compute_pool, cpu_host)

cpufreq_min [power], cpufreq_max [power], rapl_package_power [power], uncore_frequency [power], energy_perf_preference [power], cpu_idle_policy [power], memory_bandwidth [capacity], numa_balance [capacity], irq_affinity [capacity], llc_allocation [capacity], memory_pressure_gate [admission], page_reclaim_rate [capacity], transparent_hugepages [capacity], core_online_offline [capacity], thermal_throttle_policy [power], host_power_profile [power], frequency_governor [power], turbo_boost [capacity], dram_power_limit [power], swappiness_reclaim [capacity], core_packing [capacity], per_pod_cpu_frequency_range_and_c_state_access [power], uncore_frequency_per_node [power], ear_cpu_frequency_policy [power], ear_global_energy_budget [admission], k8s_power_manager_core_profile [power]

GPU Hardware (22; plant: compute_pool, gpu)

gpu_allocate [capacity], gpu_power_limit [power], gpu_sm_clock [power], gpu_memory_clock [power], gpu_persistence_mode [capacity], gpu_compute_mode [capacity], mig_mode [capacity], mig_geometry [capacity], gpu_timeslice [capacity], gpu_mps [capacity], gpu_quarantine [admission], gpu_reset [capacity], gpu_thermal_limit [power], gpu_ecc_response [capacity], gpu_job_power_budget [admission], application_clocks [power], gpu_temperature_target [setpoint], sync_boost [capacity], target_clocks [power], climatik_inference_power_cap [power], adaptive_gpu_power_cap [power], nvidia_platform_power_budget [power]

Network Routing & Switching (19; plant: compute_pool, network)

lb_weight [setpoint], route_weight [setpoint], rate_limit [admission], bandwidth_limit [capacity], qos_class [capacity], connection_limit [admission], failover_route [capacity], nic_rate_limit [admission], nic_queue_count [capacity], queue_discipline [capacity], congestion_control [capacity], egress_budget [admission], ingress_budget [admission], ecmp_weight [setpoint], path_selection [capacity], network_isolation [admission], nic_interrupt_coalescing [capacity], nic_ring_size [capacity], port_link_power [power]

Storage Block/File/Object (20; plant: compute_pool, storage)

volume_size [capacity], iops_limit [capacity], throughput_limit [capacity], replica_count [capacity], storage_tier [capacity], volume_placement [capacity], snapshot_trigger [capacity], rebalance [capacity], recovery_rate [capacity], backfill_rate [capacity], compaction_pressure [capacity], cache_allocation [capacity], object_replication [capacity], erasure_code_profile [capacity], storage_admission [admission], degraded_storage_gate [admission], scrub_schedule [capacity], io_scheduler [capacity], disk_power_spin_down [power], lifecycle_tiering [capacity]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Observability & Telemetry (9; plant: compute_pool, server)

collector_memory_limit [capacity], export_concurrency [admission], cardinality_budget [admission], retention_window [setpoint], remote_write_queue [capacity], telemetry_shed [admission], metric_scrape_interval [setpoint], batching [capacity], per_pod_energy_attribution [capacity]

Reliability, Security & Recovery (12; plant: compute_pool, server)

restart [capacity], rollback [capacity], traffic_divert_recovery [capacity], degraded_mode [capacity], actuator_freeze [admission], workload_isolate [admission], credential_rotation_gate [admission], policy_enforcement [capacity], rate_abuse_gate [admission], fault_domain_isolate [admission], backup_trigger [capacity], kill_switch [admission]

PDU, UPS & Electrical Distribution (18; plant: energy_storage, ups)

server_power_cap [power], rack_power_cap [power], pdu_branch_power_limit [power], pdu_outlet_control [capacity], ups_operating_mode [capacity], ups_charge_rate [power], ups_discharge_rate [power], phase_balance [capacity], load_transfer [admission], reactive_power_target [setpoint], voltage_target [setpoint], generator_dispatch [capacity], electrical_isolation [admission], breaker_trip_gate [admission], ups_shutdown_battery_test [capacity], hierarchical_power_budget_row_pdu_switchboard_controllers [power], priority_aware_capping_throttle_low_priority_first [power], power_oversubscription_with_prediction [power]

Cooling, Chillers & Thermodynamics (18; plant: thermal_zone, data_hall)

supply_air_temperature [setpoint], return_air_target [setpoint], coolant_supply_temperature [setpoint], coolant_flow [capacity], pump_speed [capacity], fan_speed [capacity], chiller_setpoint [setpoint], compressor_authority [power], cooling_tower_fan [capacity], cooling_capacity [capacity], rack_thermal_budget [power], gpu_thermal_envelope [setpoint], cpu_thermal_envelope [setpoint], thermal_workload_migrate [admission], thermal_load_shed [admission], server_fan_speed [capacity], economiser [capacity], chiller_plant_supervisory_control_rl_with_safety_layer [capacity]

Organism 1: Compute / AI / Cloud: 273 own muscles on the spine of 267 = 540 in its organism

The spine above, and these families of its own.

Work Admission & Demand Shaping (19; plant: compute_pool, server)

api_concurrency [admission], queue_concurrency [admission], queue_backpressure [admission], job_admission [admission], batch_admission [admission], inference_admission [admission], load_shed [admission], priority_gate [admission], tenant_admission [admission], burst_limit [admission], deadline_admission [admission], work_budget [admission], request_queue_limit [admission], retry_admission [admission], background_work_gate [admission], maintenance_work_gate [admission],

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

request_concurrency_limit [admission], adaptive_concurrency_limit [admission], priority_request_queue_under_limit [admission]

OpenShift & Machine API (9; plant: compute_pool, node)

machine_remediation [capacity], machine_health_gate [admission], mcp_pause [admission], mcp_max_unavailable [capacity], node_config_rollout [capacity], operator_reconcile_budget [admission], cluster_version_pacing [capacity], infra_machine_admission [admission], machine_failure_domain [capacity]

GPU Fabric & RDMA (18; plant: compute_pool, fabric)

nvlink_placement [capacity], nvswitch_route [capacity], gpu_fabric_quarantine [admission], rdma_bandwidth [capacity], rdma_route [capacity], nic_affinity [capacity], collective_concurrency [admission], collective_algorithm [capacity], collective_chunk_size [capacity], rank_placement [capacity], gpudirect_policy [capacity], congestion_response [capacity], rail_selection [capacity], fabric_failover [capacity], communication_priority [admission], fabric_isolation [admission], collective_protocol [capacity], nic_hca_selection [capacity]

AI Inference Serving (24; plant: compute_pool, gpu)

model_replicas [capacity], model_route_weight [setpoint], model_load [capacity], model_unload [capacity], model_instance_count [capacity], continuous_batching [capacity], max_batch_size [capacity], batch_queue_delay [capacity], inference_concurrency [admission], inference_max_tokens [capacity], kv_cache_budget [admission], prefix_cache_budget [admission], speculative_decode_budget [admission], model_precision [power], inference_priority [admission], inference_slo_gate [admission], autoscaling_target_concurrency_qps [admission], scale_to_zero_panic_window [setpoint], request_priority_levels [admission], kv_cache_swap_space [capacity], chunked_prefill [capacity], tensor_parallel_degree [capacity], disaggregated_prefill_decode [capacity], lora_adapter_load [capacity]

AI Training (18; plant: compute_pool, gpu_batch)

training_workers [capacity], global_batch_size [capacity], microbatch_size [capacity], gradient_accumulation [capacity], data_parallelism [capacity], tensor_parallelism [capacity], pipeline_parallelism [capacity], expert_parallelism [capacity], checkpoint_interval [setpoint], checkpoint_trigger [capacity], training_preempt [admission], training_gang_size [capacity], elastic_worker_count [capacity], straggler_mitigation [capacity], training_precision [power], compute_comm_overlap [capacity], activation_checkpointing [capacity], dataloader_workers [capacity]

HPC & Distributed Compute (19; plant: compute_pool, batch)

job_slots [capacity], mpi_ranks [capacity], rank_mapping [capacity], node_allocation [capacity], job_walltime [capacity], job_priority [admission], job_preemption [admission], checkpoint_restart [capacity], parallel_io_budget [admission], collective_budget [admission], accelerator_share [capacity], cpu_gpu_ratio [setpoint], memory_per_rank [capacity], scratch_budget [admission], scheduler_fair_share [admission],

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

backfill_policy [capacity], node_power_saving [power], cpu_frequency_per_job [power], partition_limits [capacity]

Distributed Cluster Managers (15; plant: compute_pool, batch)

task_admission [admission], task_priority [admission], resource_reservation [capacity], cluster_quota [admission], task_preemption [admission], binpack_pressure [capacity], spread_pressure [capacity], gang_schedule [capacity], worker_allocation [capacity], maintenance_evacuation [capacity], oversubscription [capacity], resource_reclaim [capacity], queue_fairness [admission], deadline_pressure [admission], scheduler_retry [admission]

Quantum Computing Control Simulation (16; plant: compute_pool, qpu)

qubit_mapping [capacity], circuit_admission [admission], shot_allocation [capacity], circuit_scheduling [admission], gate_scheduling [capacity], pulse_amplitude [capacity], pulse_duration [setpoint], pulse_phase [capacity], pulse_frequency [power], coupling_control [capacity], reset_scheduling [capacity], measurement_scheduling [capacity], dynamical_decoupling [capacity], noise_aware_routing [capacity], error_mitigation_budget [admission], quantum_queue_priority [admission]

Cross-Cluster, Multi-Region & Edge (18; plant: compute_pool, node)

multi_cluster_dispatch [capacity], region_dispatch [capacity], zone_dispatch [capacity], edge_dispatch [capacity], cloud_capacity_class [capacity], workload_migrate_region [capacity], data_residency_gate [admission], latency_region_gate [admission], cost_region_gate [admission], carbon_region_gate [admission], global_failover [capacity], federation_quota [admission], cross_cluster_replication [capacity], edge_offload [capacity], global_admission [admission], edge_site_node_pool [capacity], edge_inference_gpu_clocks [power], edge_sync_interval [setpoint]

Linux Kernel & OS Control (20; plant: compute_pool, cpu_host)

cgroup_cpu_weight [capacity], cgroup_cpu_quota [capacity], cgroup_memory_high [capacity], cfs_scheduler_latency [setpoint], cpufreq_dvfs_governor [power], transparent_hugepages [setpoint], io_scheduler_depth [capacity], numa_auto_balancing [setpoint], dirty_ratio_writeback [setpoint], vm_swappiness [setpoint], tcp_buffer_autotune [capacity], block_nr_requests [capacity], ksm_memory_dedup [capacity], net_rx_coalesce [capacity], cpu_cstate_governor [power], zswap_pool_fraction [setpoint], page_cache_reclaim [setpoint], irqbalance_affinity [capacity], net_qdisc_codel_target [setpoint], hugepage_pool_reserve [capacity]

Serverless & Functions (FaaS) (9; plant: compute_pool, server)

fn_concurrency_limit [capacity], fn_provisioned_concurrency [capacity], fn_scale_to_zero_idle [admission], fn_memory_size [capacity], fn_prewarm_pool [capacity], fn_reserved_concurrency [capacity], fn_burst_admission [admission], fn_snapstart_restore [capacity], fn_timeout_budget [setpoint]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Virtualization & Hypervisor (9; plant: compute_pool, cpu_host)

vcpu_allocation [capacity], memory_ballooning [capacity], vm_overcommit_density [capacity], live_migration_pacing [admission], numa_vcpu_pinning [setpoint], sriov_vf_allocation [capacity], vgpu_partition [capacity], vm_memory_dedup_ksm [capacity], hypervisor_cpu_pinning [capacity]

Gut: Data-plane Intake & Waste (8; plant: process_loop, process)

ingress_intake_pacing [capacity], dead_letter_retry_cap [setpoint], gc_compaction_pacing [capacity], ttl_eviction_waste [setpoint], backpressure_threshold [admission], queue_drain_rate [capacity], retry_budget_window [setpoint], compaction_debt_drain [capacity]

Skin: Perimeter & Admission (5; plant: compute_pool, server)

rate_limit_token_bucket [admission], connection_admission [admission], waf_inspection_sampling [capacity], tls_session_cache [capacity], ddos_shield_admission [admission]

Media Streaming & CDN (14; plant: process_loop, process)

abr_bitrate_ladder_cap [setpoint], player_buffer_target [setpoint], transcoder_worker_pool [capacity], live_transcode_gpu_clocks [power], vod_transcode_batch_power [power], packager_workers [capacity], origin_shield_cache_size [capacity], edge_cache_ttl [setpoint], segment_duration_target [setpoint], cdn_request_coalescing [admission], drm_license_server_pool [capacity], thumbnail_sprite_batch [capacity], media_ingest_admission [admission], encoder_lookahead_frames [setpoint]

Game Servers & Real-Time Interactive (12; plant: compute_pool, server)

agones_fleet_buffer_size [capacity], agones_fleet_min_replicas [capacity], agones_fleet_max_replicas [capacity], game_server_tick_rate [setpoint], players_per_server_cap [admission], matchmaking_admission_rate [admission], matchmaking_wait_window [setpoint], relay_server_pool [capacity], voice_chat_mixer_pool [capacity], game_node_pool_autoscaler [capacity], replay_render_batch [capacity], cloud_gaming_gpu_clocks [power]

Blockchain & Ledger Nodes (10; plant: compute_pool, storage)

node_db_cache_size [capacity], mempool_max_size [setpoint], max_peer_connections [capacity], script_validation_threads [capacity], block_relay_admission [admission], rpc_work_queue_depth [admission], utxo_cache_flush_interval [setpoint], indexer_batch_workers [capacity], archive_node_storage_tier [capacity], validator_host_power_profile [power]

CI/CD & Build Farms (10; plant: compute_pool, batch)

runner_scale_set_min_runners [capacity], runner_scale_set_max_runners [capacity], build_concurrency_limit [admission], build_cache_size [capacity], test_shard_parallelism [capacity], job_queue_admission [admission], artifact_retention_ttl [setpoint], build_node_cpu_frequency [power], remote_execution_workers [capacity], warm_runner_pool [capacity]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

DPU SmartNIC & Programmable IO (12; plant: compute_pool, fabric)

dpu_pf_tx_rate [capacity], dpu_vf_tx_rate [capacity], dpu_sf_tx_rate [capacity], dpu_bandwidth_share [capacity], dpu_qos_group [capacity], sriov_vf_count [capacity], smartnic_flow_steering [capacity], smartnic_offload_enable [capacity], dpu_cpu_budget [admission], dpu_memory_budget [admission], dpu_service_placement [capacity], dpu_failover [capacity]

Kubernetes Dynamic Device Allocation (8; plant: compute_pool, gpu)

dra_device_class_selection [capacity], dra_claim_capacity [capacity], dra_claim_sharing [capacity], dra_device_taint [capacity], dra_device_eviction [admission], dra_binding_readiness [capacity], dra_binding_failure_response [capacity], dra_device_configuration [setpoint]

Organism 2: Physics / Robotics / Autonomous: 137 own muscles on the spine of 267 = 404 in its organism

The spine above, and these families of its own.

Robotics Motion Control (26; plant: motion_axis, robot_joint)

joint_position [capacity], joint_velocity [capacity], joint_acceleration [capacity], joint_effort [power], cartesian_velocity [capacity], trajectory_speed [capacity], trajectory_acceleration [capacity], jerk_limit [capacity], collision_margin [capacity], force_limit [power], gripper_force [power], locomotion_speed [capacity], steering_angle [capacity], braking_force [power], balance_correction [capacity], trajectory_tolerances [capacity], velocity_acceleration_scaling [capacity], controller_update_rate [capacity], ros2_executor_threads [capacity], ros2_qos_history_depth [setpoint], ros2_control_loop_rate [setpoint], humanoid_balance_margin [capacity], humanoid_gait_speed [capacity], humanoid_joint_torque_limit [power], humanoid_step_height [capacity], manipulator_payload_speed_scaling [capacity]

Robotics Fleet & Warehouse Automation (17; plant: compute_pool, robot_fleet)

robot_dispatch [capacity], task_assignment [capacity], traffic_reservation [capacity], robot_route [capacity], charging_dispatch [capacity], battery_reserve [capacity], elevator_request [capacity], door_request [capacity], conveyor_speed [capacity], agv_speed [capacity], warehouse_zone_admission [admission], robot_quarantine [admission], fleet_failover [capacity], human_safe_stop [capacity], fleet_concurrency [admission], amr_fleet_charge_threshold [setpoint], amr_fleet_active_robots [capacity]

Aviation & Autonomous Flight (28; plant: motion_axis, flight_axis)

throttle_envelope [power], attitude_target [capacity], attitude_rate_target [capacity], velocity_target [capacity], altitude_target [capacity], waypoint_authority [capacity], flight_hold [admission], return_to_home [admission], land_action [admission], mission_admission [admission], geofence_response [admission], failsafe_selection [admission], battery_reserve_threshold [admission], actuator_saturation_envelope [capacity], flight_mode_transition [admission], flight_termination_safe_state [admission], attitude_rate_gains

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

[capacity], horizontal_speed_limit [power], vertical_speed_limits [power], acceleration_jerk_limits [power], px4_mpc_xy_vel_max [capacity], px4_mpc_z_vel_max_up [capacity], px4_mpc_acc_hor [capacity], px4_mc_rollrate_max [capacity], ardupilot_wpnav_speed [capacity], ardupilot_atc_accel_r_max [power], drone_battery_failsafe_reserve [setpoint], swarm_formation_spacing [capacity]

Spacecraft & Flight Software (14; plant: motion_axis, reaction_wheel)

space_command_admission [admission], flight_task_schedule [admission], space_mode_transition [admission], payload_duty_cycle [power], communication_allocation [capacity], space_power_budget [power], space_thermal_command [power], attitude_command_envelope [capacity], reaction_wheel_allocation [capacity], rcs_authority [power], safe_mode_transition [admission], watchdog_recovery [admission], instrument_activation [capacity], fault_isolation [admission]

Rail Traction & Train Control (14; plant: motion_axis, rail_traction)

traction_effort_limit [power], regenerative_braking_share [power], coasting_speed_target [capacity], dwell_time_schedule [admission], hvac_duty_cycle [power], train_auxiliary_power_budget [power], platform_approach_speed [capacity], acceleration_rate_setpoint [capacity], wheel_slip_protection_mode [admission], traction_motor_thermal_derate [power], catenary_voltage_limit [power], timetable_recovery_margin [admission], headway_target [capacity], door_release_hold [admission]

Marine Propulsion & Vessel Automation (12; plant: motion_axis, marine_propulsion)

shaft_speed_target [capacity], propeller_pitch_limit [power], shaft_power_limit [power], bow_thruster_duty [power], ballast_pump_mode [admission], engine_load_sharing_setpoint [capacity], slow_steaming_speed_target [capacity], auxiliary_engine_staging [capacity], shore_power_mode [admission], hotel_load_budget [power], trim_target [capacity], rudder_rate_limit [power]

Elevators & Vertical Transport (12; plant: motion_axis, elevator_hoist)

hoist_speed_target [capacity], acceleration_limit [capacity], regen_drive_mode [power], standby_power_mode [admission], destination_dispatch_schedule [admission], car_parking_mode [admission], door_dwell_hold [admission], escalator_speed_target [capacity], group_capacity_mode [admission], motor_thermal_derate [power], brake_test_schedule [admission], fire_recall_mode [admission]

Automotive EV & Mobile Powertrain (14; plant: motion_axis, ev_traction)

state_of_charge_limits [power], smart_charging_schedule [admission], traction_torque_limit [power], regen_braking_level [power], battery_charge_limit [power], battery_discharge_limit [power], battery_thermal_target [power], motor_thermal_limit [power], vehicle_speed_envelope [capacity], energy_recovery_target [power], auxiliary_power_budget [power], fast_charge_current [power], fast_charge_voltage [power], vehicle_safe_state [admission]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism 3: Energy / Facility / Industrial: 213 own muscles on the spine of 267 = 480 in its organism

The spine above, and these families of its own.

Industrial PLC & Process Automation (18; plant: process_loop, process)

plc_cycle_authority [admission], machine_cell_admission [admission], valve_position [setpoint], pump_flow [capacity], compressor_speed [capacity], heater_power [power], furnace_setpoint [setpoint], pressure_setpoint [setpoint], temperature_setpoint [setpoint], mass_flow_setpoint [setpoint], tank_level_target [setpoint], conveyor_rate [capacity], feed_rate [capacity], purge_vent_action [admission], controller_mode [capacity], alarm_limits [capacity], safety_interlock_trip [capacity], opc_ua_writes [capacity]

Energy Storage & Microgrid (19; plant: energy_storage, microgrid)

battery_charge_power [power], battery_discharge_power [power], battery_soc_reserve [setpoint], grid_import_limit [power], grid_export_limit [power], pv_curtailment [power], ev_charge_power [power], heat_pump_power [power], electrolyzer_power [power], microgrid_demand_limit [power], peak_shaving [capacity], time_of_use_schedule [setpoint], energy_load_shed [admission], flex_load_admission [admission], storage_dispatch [capacity], microgrid_emergency_reserve [setpoint], volt_var [capacity], volt_watt [capacity], constant_power_factor_reactive_power [power]

Facility & Grid Optimization (15; plant: energy_storage, facility)

facility_power_budget [power], utility_demand_limit [power], demand_response [admission], electricity_price_gate [admission], carbon_intensity_gate [admission], renewable_dispatch [capacity], generator_start_stop [capacity], site_battery_dispatch [capacity], pue_target [setpoint], cooling_power_budget [power], it_power_budget [power], rack_power_allocation [power], facility_peak_guard [capacity], grid_frequency_response [admission], facility_islanding [admission]

Healthcare Critical Environments (13; plant: thermal_zone, hospital)

operating_room_air_change_setpoint [setpoint], isolation_room_pressure_target [setpoint], patient_room_temperature_setpoint [setpoint], surgical_suite_humidity_target [setpoint], ahu_supply_air_temperature [setpoint], pharmacy_cold_room_setpoint [setpoint], sterile_storage_humidity_setpoint [setpoint], imaging_suite_cooling_capacity [capacity], chiller_plant_staging [capacity], exhaust_fan_capacity [capacity], ward_night_setback_mode [admission], medical_gas_plant_demand_limit [power], emergency_power_load_shed [admission]

Agriculture & Irrigation (14; plant: process_loop, irrigation)

irrigation_pump_speed [capacity], mainline_pressure_setpoint [setpoint], soil_moisture_target [setpoint], pivot_speed_setpoint [setpoint], fertigation_dose [power], greenhouse_temperature_setpoint [setpoint], greenhouse_co2_target [setpoint], vent_position_setpoint [setpoint], grain_dryer_temperature_setpoint

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

[setpoint], cold_storage_temperature_setpoint [setpoint], barn_ventilation_rate [capacity], milking_vacuum_level_setpoint [setpoint], well_drawdown_level_target [setpoint], drip_zone_dispatch [admission]

Oil & Gas Pipelines (14; plant: process_loop, pipeline)

compressor_discharge_pressure_setpoint [setpoint], pump_station_suction_pressure_target [setpoint], line_pack_target [setpoint], pipeline_flow_setpoint [setpoint], compressor_unit_staging [capacity], vfd_pump_speed [capacity], terminal_tank_level_target [setpoint], leak_detection_shutdown [admission], batch_interface_dispatch [admission], heater_outlet_temperature_setpoint [setpoint], drag_reducing_agent_dose [power], valve_position_target [setpoint], cathodic_protection_voltage [setpoint], pressure_protection_priority [admission]

Mining & Mineral Processing (14; plant: process_loop, mill)

sag_mill_load_setpoint [setpoint], mill_speed_target [setpoint], crusher_gap_setpoint [setpoint], flotation_aeration_rate [power], cyclone_feed_pressure_target [setpoint], thickener_underflow_density_target [setpoint], reagent_dose [power], conveyor_speed_setpoint [setpoint], dewatering_pump_level_target [setpoint], ventilation_on_demand_airflow [capacity], stockpile_level_target [setpoint], slurry_pump_speed [capacity], tailings_discharge_shutdown [admission], ore_blend_dispatch [admission]

District Heating & Cooling (13; plant: process_loop, district_heat)

supply_temperature_setpoint [setpoint], return_temperature_target [setpoint], differential_pressure_setpoint [setpoint], network_pump_speed [capacity], heat_pump_staging [capacity], chp_dispatch [admission], thermal_storage_level_target [setpoint], peak_boiler_heater_output [power], substation_flow_limit [capacity], peak_demand_shed [admission], outdoor_reset_setpoint [setpoint], cooling_network_supply_temperature [setpoint], cooling_storage_level_target [setpoint]

Power Generation & Turbine Control (14; plant: process_loop, turbine)

turbine_speed_droop_setpoint [setpoint], unit_load_setpoint [setpoint], boiler_steam_pressure_setpoint [setpoint], feedwater_level_target [setpoint], agc_participation_limit [capacity], excitation_voltage_setpoint [setpoint], hydro_gate_position_target [setpoint], combustion_air_ratio_setpoint [setpoint], cooling_water_flow_setpoint [setpoint], inlet_guide_vane_position [setpoint], reserve_dispatch_priority [admission], turbine_ramp_rate_limit [capacity], emissions_shutdown [admission], nuclear_rod_position_target [setpoint]

Renewable Generation & Inverter Control (13; plant: process_loop, inverter)

inverter_volt_var_setpoint [setpoint], inverter_volt_watt_setpoint [setpoint], active_power_curtailment [power], plant_reactive_power_target [setpoint], wind_turbine_yaw_offset [capacity], pitch_angle_limit [capacity], rotor_speed_setpoint [setpoint], inverter_frequency_droop_setpoint [setpoint], ramp_rate_limit

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

[capacity], tracker_stow_mode [admission], string_mppt_voltage_setpoint [setpoint], noise_mode_schedule [admission], ice_detection_shutdown [admission]

Pharmaceutical & Food Manufacturing (14; plant: process_loop, batch_reactor)

reactor_temperature_setpoint [setpoint], agitator_speed_setpoint [setpoint], fermenter_dissolved_oxygen_target [setpoint], ph_setpoint [setpoint], pasteurizer_holding_temperature_setpoint [setpoint], freezer_tunnel_temperature_setpoint [setpoint], cip_cycle_dispatch [admission], cleanroom_pressure_cascade_setpoint [setpoint], lyophilizer_shelf_temperature_setpoint [setpoint], chromatography_flow_setpoint [setpoint], steam_sterilizer_cycle_priority [admission], oven_zone_temperature_setpoint [setpoint], refrigerant_compressor_authority [admission], batch_hold_quarantine [admission]

Building & Critical Environment HVAC (15; plant: thermal_zone, building)

setpoint_reset_trim_and_respond [setpoint], duct_static_pressure_setpoint [setpoint], optimal_start_stop [capacity], zone_temperature_target [setpoint], zone_airflow [capacity], ahu_fan_speed [capacity], damper_position [capacity], economizer_position [capacity], boiler_setpoint [setpoint], heat_pump_mode [admission], humidity_target [setpoint], occupancy_ventilation [admission], building_demand_limit [power], thermal_storage_dispatch [capacity], hvac_emergency_mode [admission]

Grid Transmission & Distribution (12; plant: process_loop, feeder_voltage)

capacitor_bank_switch [capacity], voltage_regulator_tap [setpoint], transformer_tap [setpoint], inverter_real_power [power], inverter_reactive_power [power], feeder_voltage_target [setpoint], feeder_load_transfer [capacity], distribution_storage_dispatch [admission], demand_response_dispatch [admission], frequency_droop_setpoint [setpoint], grid_protection_mode [admission], grid_restoration_sequence [admission]

Semiconductor Fab & Precision Manufacturing (13; plant: process_loop, chamber)

run_to_run_control [capacity], idle_sleep_mode [capacity], tool_job_dispatch [admission], wafer_route [capacity], chamber_recipe_selection [admission], chamber_temperature [setpoint], chamber_pressure [setpoint], gas_flow [capacity], rf_power [power], vacuum_pump_speed [capacity], robot_transfer_rate [capacity], lot_priority [admission], tool_quarantine [admission]

Water Wastewater & Pumping (12; plant: process_loop, water)

pump_speed_water [capacity], valve_position_water [setpoint], reservoir_level_target [setpoint], line_pressure_target [setpoint], flow_target_water [setpoint], aeration_rate [power], chemical_dose_rate [power], filtration_backwash [admission], lift_station_dispatch [admission], leak_isolation [admission], water_demand_shed [admission], water_emergency_shutdown [admission]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism 4: Distribution / Specialized: 217 own muscles on the spine of 267 = 484 in its organism

The spine above, and these families of its own.

Service Mesh & API Reliability (16; plant: compute_pool, server)

circuit_breaker [admission], retry_budget [admission], service_timeout [admission], service_concurrency [admission], connection_pool [capacity], traffic_divert [capacity], traffic_mirror [capacity], canary_weight [setpoint], outlier_ejection [admission], health_threshold [admission], dns_traffic_weight [setpoint], session_affinity [capacity], request_hedging [capacity], fault_injection_gate [admission], service_failover [capacity], load_balancing_policy [capacity]

Database & Transactions (19; plant: compute_pool, database)

db_replicas [capacity], db_memory [capacity], db_cache [capacity], query_concurrency [admission], read_route [capacity], shard_placement [capacity], db_failover [capacity], replication_lag_gate [admission], db_write_throttle [admission], db_pool_resize [capacity], transaction_concurrency [admission], lock_timeout [admission], checkpoint_rate [capacity], vacuum_compaction_rate [capacity], parallel_workers [capacity], background_writer [capacity], synchronous_replication [capacity], buffer_pool [capacity], io_capacity [capacity]

Messaging & Streaming (22; plant: compute_pool, server)

partition_count [capacity], partition_placement [capacity], producer_quota [admission], consumer_quota [admission], broker_io_quota [admission], message_retention [capacity], queue_depth_limit [admission], consumer_concurrency [admission], producer_batch_size [capacity], fetch_batch_size [capacity], rebalance_rate [capacity], replication_factor [capacity], retry_backoff [admission], dead_letter_divert [capacity], stream_priority [admission], broker_failover [capacity], prefetch [capacity], memory_disk_alarm [capacity], mqtt_broker_max_connections [capacity], mqtt_max_inflight_messages [setpoint], mqtt_session_expiry [setpoint], broker_cluster_nodes [capacity]

Cache & Memory Services (16; plant: compute_pool, server)

cache_size [capacity], cache_ttl [setpoint], cache_eviction_policy [admission], cache_replicas [capacity], cache_sharding [capacity], cache_prefetch [capacity], cache_writeback_rate [capacity], cache_admission [admission], hot_key_isolation [admission], cache_connection_limit [admission], cache_memory_limit [capacity], cache_compression [capacity], cache_warmup [capacity], cache_failover [capacity], cache_flush_rate [capacity], memory_size_threads [capacity]

Search, Indexing & Vector DB (16; plant: compute_pool, server)

index_workers [capacity], index_refresh_rate [capacity], segment_merge_rate [capacity], search_concurrency [admission], search_timeout [admission], shard_count [capacity], shard_replication [capacity],

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

shard_rebalance [capacity], vector_search_k [capacity], vector_batch_size [capacity], embedding_workers [capacity], index_memory_budget [admission], query_route [capacity], hot_shard_isolation [admission], search_admission [admission], circuit_breakers [admission]

Data Analytics & ETL (15; plant: compute_pool, batch)

executor_size [capacity], dynamic_allocation_min [capacity], dynamic_allocation_max [capacity], shuffle_partitions [capacity], shuffle_bandwidth [capacity], etl_concurrency [admission], stage_parallelism [capacity], query_slots [capacity], spill_threshold [admission], cache_fraction [setpoint], batch_interval [setpoint], stream_backpressure [admission], data_locality_wait [capacity], speculation_policy [capacity], analytics_admission [admission]

Runtime & Application (21; plant: compute_pool, server)

worker_count [capacity], thread_pool [capacity], jvm_heap [capacity], gc_budget [admission], connection_pool_runtime [capacity], application_cache_size [capacity], runtime_memory [capacity], async_concurrency [admission], event_loop_workers [capacity], process_count [capacity], request_timeout [admission], background_workers [capacity], runtime_cpu_budget [admission], runtime_io_budget [admission], runtime_restart [capacity], go_runtime [capacity], keepalive_connection_reuse [capacity], dns_resolver_cache_size [capacity], dns_negative_cache_ttl [setpoint], mail_queue_concurrency [capacity], mail_retry_interval [setpoint]

Reliability, Security & Recovery (6; plant: compute_pool, network)

ids_capture_threads [capacity], ids_ring_buffer_size [setpoint], ids_rule_group_admission [admission], waf_inspection_workers [capacity], siem_ingest_pipeline_workers [capacity], endpoint_scan_scheduling [admission]

Commerce & Payment Systems (15; plant: compute_pool, commerce)

payment_admission [admission], payment_concurrency [admission], payment_retry [admission], payment_timeout [admission], fraud_review_gate [admission], authorization_route [capacity], processor_route_weight [setpoint], transaction_queue_limit [admission], idempotency_window [setpoint], order_reservation [capacity], inventory_hold [admission], checkout_load_shed [admission], refund_queue_rate [capacity], settlement_batch [capacity], payment_failover [capacity]

Workflow, Logistics & Fulfillment (15; plant: compute_pool, workflow)

workflow_admission [admission], workflow_worker_rate [capacity], task_queue_rate [capacity], workflow_retry [admission], workflow_backoff [admission], workflow_timeout [admission], inventory_allocation [capacity], fulfillment_route [capacity], warehouse_queue [capacity], carrier_selection [capacity], dispatch_priority [admission], shipment_batch [capacity], route_replan [capacity], sla_escalation [capacity], compensation_action [capacity]

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Medical Imaging & Clinical Systems (12; plant: compute_pool, clinical)

pacs_archive_tier_target [setpoint], dicom_router_concurrency [admission], ehr_application_replicas [capacity], hl7_interface_queue_limit [admission], fhir_api_rate_limit [admission], reconstruction_gpu_workers [capacity], modality_worklist_timeout [admission], patient_monitoring_gateway_capacity [admission], lab_analyzer_batch_window [admission], telehealth_session_admission [admission], clinical_backup_window [admission], imaging_prefetch_priority [admission]

Ports & Maritime Logistics (12; plant: compute_pool, port)

quay_crane_allocation [capacity], yard_crane_fleet_size [capacity], berth_window_admission [admission], truck_gate_rate_limit [admission], horizontal_transport_fleet_size [capacity], reefer_plug_power_budget [power], shore_power_connection_capacity [capacity], rail_mounted_gantry_dispatch [capacity], container_dwell_priority [admission], vessel_arrival_pacing [admission], stacking_height_target [setpoint], equipment_charging_window [admission]

Content Delivery & Edge Cache (6; plant: process_loop, process)

cdn_cache_ttl [setpoint], edge_cache_size [capacity], origin_shield_concurrency [capacity], prefetch_aggressiveness [setpoint], tiered_cache_promotion [capacity], edge_pop_admission [admission]

Financial Markets & Trading Systems (14; plant: compute_pool, server)

matching_engine_threads [capacity], order_gateway_sessions [capacity], order_admission_rate_limit [admission], pre_trade_risk_check_workers [capacity], market_data_fanout_threads [capacity], market_data_conflation_interval [setpoint], fix_session_heartbeat_interval [setpoint], kernel_bypass_poll_cores [power], tick_store_write_batch [setpoint], post_trade_settlement_workers [capacity], end_of_day_risk_batch_power [power], colocation_rack_cooling_setpoint [setpoint], backtest_grid_nodes [capacity], surveillance_alert_queue_workers [capacity]

Telecom RAN & Edge Radio (12; plant: compute_pool, ran)

ran_connection_admission [admission], ran_ue_handover [capacity], ran_cell_traffic_steering [capacity], ran_slice_resource_budget [admission], ran_prb_allocation [capacity], ran_scheduler_weight [setpoint], ran_tx_power [power], ran_antenna_tilt [capacity], ran_carrier_enable [capacity], ran_cell_sleep [capacity], ran_du_cu_placement [capacity], ran_fronthaul_budget [admission]

Organism 5: the four stacked, every duplicate kept, 1,908 muscles

The four realms' organisms above, run on one clock as one body (`stack`; the older name `stack_1226` is read as an alias): every muscle listed under organisms 1 to 4, the spine counted once in each, 1,908 in all.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism 6: the whole tower, all 1,107 muscles once

Every muscle of the catalog once (`tower`; the older name `organism_656` is read as an alias): the spine and every realm's own families, 1,107 in all.

Organism 7: the spine, 267 muscles

The spine listed first above, run on its own (`spine`): the same muscles, the same native controllers, nothing of any one realm on top of them.

CHAPTER 28

The Domain Map

Every system Omni-Compass can sit on, what it reads, what it pushes, the reflexes that bound it, and where it stands.

1. The connector pattern

Omni-Compass is the same engine on every muscle. Each muscle gets one connector with five parts:

Part	Role	Example (compute)
Afferent (sense)	What the muscle reports	load, pending work, power, heat
Engine	Equations (1)-(7) turn readings into state: error E, coherence U, pressure I[U], stress S, bath B	same six-state engine everywhere
Efferent (push)	The equation (2) law and allocation law drive the muscle toward convergence	node count, HPA target, power cap
Reflex (shield)	Hard limits checked before any push	never below pod requests, step limits, power limit
Kill	Control returns to the muscle's own controllers	restore HPA targets, observe only

Fit tiers used below:

- **Direct**: Omni can govern the muscle as a supervisory controller.
- **Supervisory**: Omni governs budgets, schedules and envelopes; the muscle's own real-time controller stays in charge of fast inner loops.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Advisory**: regulated or safety-critical; Omni recommends until certified (IEC 61508, DO-178C, ISO 26262, medical and financial regulation).
- **Not Omni's problem**: a different kind of problem; stated so no one claims otherwise.

Status: **Wired** (in code, verified), **Partial**, **Open** (connector not yet built).

2. Digital infrastructure

Muscle	Reads	Pushes	Reflexes	Fit	Status
Compute nodes and node pools	load, pending pods, requests	node count, park or power off	request floor, step limit	Direct	**Wired**
Pods via HPA	utilisation, replicas	HPA target	bounds 50-95%	Direct	**Wired**
Power caps	watts, site limit	per-node caps	site power limit (I4)	Direct	**Wired** (harness)
Heat	temperatures	feeds decisions	thermal limit	Direct	**Sensed**
GPUs / accelerators	utilisation, power, temperature, memory	power caps, clocks, partitioning (MIG), packing	temperature, job safety	Direct	Open
CPU power states	per-socket power (RAPL)	frequency scaling, sleep states	latency floor	Direct	Open
Memory	used vs requested	request right-sizing	OOM margin	Direct	Open
Storage	I/O load, latency, capacity	tiering, placement, volume scaling	durability, replica counts	Super visory	Open
Network, load balancers	traffic, congestion, latency	routing weights, traffic shift	capacity per link	Direct	Partial
CDN / edge	cache hit, origin load	cache and origin routing	freshness	Direct	Open
Batch and HPC job queues	queue depth, deadlines	admission, priority, time shifting	deadline guarantees	Direct	Open
Multi-cluster / multi-region	load, cost, carbon per region	placement	data residency	Direct	Open
Deployments	release health	pause, roll back	never skip required checks	Direct	Partial (stack harness)
Databases, stateful services	load, replication lag	read replicas, pools	consistency limits	Super visory	Open

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Muscle	Reads	Pushes	Reflexes	Fit	Status
Control plane health	API latency, etcd load	rate of Omni's own actions	never overload the API	Direct	Open
Tenant quotas	usage per tenant	who may grow	fairness bounds	Direct	Open
Hardware health	disk and memory errors	early drain of failing machines	availability floor	Direct	Open
Observability pipelines	data volume, cost	sampling, retention	required audit data	Direct	Open
Security posture	policy blocks	block expansion during holds	I1	Direct	Partial (sensed)

3. AI

Muscle	Reads	Pushes	Reflexes	Fit	Status
Training clusters	GPU power, progress, network	power caps, packing, checkpoint timing	never kill a run mid-step	Direct	Open (gpu vessels in harness)
Training power smoothing	synchronised power swings	ramp limits, staggering	grid ramp limits	Direct	Open
Inference serving	request rate, latency, queue, GPU memory	replicas, batch size, GPU sharing	latency SLO	Direct	Open
Model routing and cost	cost per request, quality signals	route to smaller or larger models, token budgets	quality floor	Direct	Open
Model releases	evaluation results, drift, errors	gate, pause, roll back a model	release gates	Direct	Open
Data pipelines, vector databases	backlog, freshness	scaling, scheduling	freshness bounds	Direct	Open
AI agents: containment	actions, spend, resources, network use	CPU, memory, network and spend caps, tool permissions	hard caps, instant kill	Direct	Open
Carbon-aware AI	grid price and carbon intensity	when and where training runs	deadlines	Direct	Open

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

AI alignment: what Omni can and cannot do

Alignment has two parts, and only one is Omni's.

Part	What it means	Omni's role
Value alignment	The model itself wants and does what people intend: honest, safe, helpful behaviour learned in training	**Not Omni's problem.** A governor outside the model cannot make the model's goals or judgement correct.
Control and containment	Whatever the model wants, it can only act within bounds: resources, permissions, spend, network reach, a kill that works	**Direct.** This is a governance problem: sense what the agent is doing, bound what it may spend and touch, revoke instantly, keep an audit trail.

Omni-Compass can be the boundary layer AI runs inside. It cannot be the thing that makes AI trustworthy. Claims must keep that line.

4. Facilities and energy

Muscle	Reads	Pushes	Reflexes	Fit	Status
Cooling plant	inlet temperatures, chiller load	setpoints, fan curves, chiller staging	inlet temperature limits	Direct	Open
Building HVAC	zone temperatures, occupancy	setpoints, schedules	comfort bounds	Direct	Open
Facility power distribution	PDU and UPS load	limits for the shield	breaker limits	Supervisory	Open
On-site batteries and generators	state of charge, grid state	charge and discharge	reserve floor	Supervisory	Open
Power grids: demand response	grid signals, prices	shift or shed flexible load	contractual limits	Direct	Open
Microgrids, renewable smoothing	generation, storage, load	dispatch	frequency and voltage limits	Advisory to supervisory	Open
EV charging fleets	vehicle needs, grid capacity	charge schedules	departure deadlines	Direct	Open

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Muscle	Reads	Pushes	Reflexes	Fit	Status
Water and pumping	demand, pressure, energy price	pump schedules	pressure limits	Supervisory	Open
Grid frequency and protection	frequency, faults	none	certified protection systems	Advisory	Out of scope for control

5. Physical operations

Muscle	Pushes	Fit
Manufacturing lines	scheduling, energy, throughput balance	Supervisory
Warehouses and logistics	task allocation, fleet charging	Direct
Robot fleets	task assignment, charging, traffic, safety envelopes	Supervisory (never joint-level control)
Traffic signals, transit, rail scheduling	timing and schedules	Advisory (safety-certified)
Ports, shipping	berth and crane scheduling, energy	Supervisory
Agriculture, greenhouses, irrigation	water and climate setpoints	Direct
Mining, oil and gas	energy and scheduling only	Advisory (process safety)
Semiconductor fabs	tool scheduling, energy	Supervisory

6. Science, space, biology, finance, health

Domain	What Omni could govern	What it must not touch	Fit
HPC / supercomputers	job queues, power, cooling	none beyond the facility	Direct
Quantum-computer facilities	cryogenics energy, calibration scheduling	qubit control	Supervisory
Satellites and constellations	power, thermal, data budgets, scheduling	attitude and orbit control (flight software)	Supervisory
Spacecraft / astrodynamics	mission resource budgets	guidance and navigation	Advisory

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Domain	What Omni could govern	What it must not touch	Fit
Biology: lab automation, bioreactors	setpoints, schedules, cold chain	living-system interventions without validated models	Supervisory
Financial markets	risk limits, exposure caps, trading infrastructure	making trades, market control	Advisory (regulated)
Hospitals	bed, staffing and energy operations	medical devices, treatment	Advisory
Aviation, automotive, nuclear	monitoring	any direct control	Advisory (certification required)

7. The problems everyone in computing has, and Omni's fit

Problem	What Omni can do	Fit
Data-centre energy growth	right-size, park, cap, shift work in time and place	Direct
Cloud cost overruns and idle capacity	consolidate, right-size, remove padding	Direct
GPU scarcity and low GPU utilisation	pack jobs, share GPUs, schedule by priority	Direct
Heat and cooling limits	govern IT load and cooling plant together	Direct
Grid connection limits for new data centres	power smoothing, demand response, stay under contracted power	Direct
Carbon reporting and reduction	carbon-aware placement and timing, measured energy	Direct
On-call burnout and alert fatigue	hold the levers people turn at night; fewer alerts, each one meaning something	Direct
Autoscalers fighting each other	single authority	Direct (proven in simulation)
Latency and SLO breaches under load	headroom governance, fast scheduling floor	Direct
Noisy neighbours, unfair tenants	quotas and growth permissions	Direct
Hardware failures	early drain on failure signs	Direct

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Problem	What Omni can do	Fit
Observability cost and data explosion	sampling and retention governance	Direct
Configuration drift	detect and gate, not rewrite configurations	Supervisory
Cold starts	pre-warming policy	Direct
Data egress costs	placement near data	Supervisory
Runaway AI agents and spend	caps, permissions, kill, audit	Direct
Security misconfiguration, supply-chain attacks	block risky expansion during holds	Partial (not a security scanner)
Model hallucination and bias	none	Not Omni's problem
AI value alignment	none	Not Omni's problem
Software bugs, technical debt, legacy migration	none	Not Omni's problem
Vendor lock-in	a single governor over mixed clouds	Supervisory

8. Order of wiring

1. Digital infrastructure: GPUs, CPU power states, memory, storage, network, job queues, multi-region.
2. Facilities and energy: cooling plant, power distribution, batteries, demand response.
3. AI: training power smoothing, inference serving, model routing, agent containment.
4. Physical operations, then science and space as supervisors.
5. Regulated domains as advisors, until certified.

Each connector follows the same path as compute: wired, benchmarked against today's controls, verified, pre-registered, tested on held-out scenarios, then released.

CHAPTER 29

The Problem Map

Method: the issue trackers of the projects that run the world's clusters (Kubernetes autoscaler, Karpenter, Kepler, Kueue, Volcano, Knative, KEDA, kubernetes/kubernetes), the public industry reports (Cast AI, Datadog, Uptime Institute, IEA) and recent papers (Meta Llama 3, AI-datacenter power stabilisation). Not all

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

of GitHub: a targeted scan of where the money and the failures are. Status: **have** = in this repository and tested; **partial** = built but not proven live; **missing** = not built.

#	Problem (evidence)	Size	Best tool today and its gap	Omni-Compass fit	Status
1	**Idle capacity.** Average Kubernetes CPU utilisation 8%, memory 20%, falling; CPU over-provisioning 69%, memory 79% (Cast AI 2026). 83% of container cost goes to idle resources (Datadog)	largest money leak in cloud	Karpenter, Cluster Autoscaler, CAST AI: each fixes nodes only	one authority over replicas, requests, nodes and power	**built** (omnilab/rightsize.py, held-out)
2	**HPA and VPA cannot be used together on CPU/memory**, "not compatible by design" (kubernetes/autoscaler #1726, #2939, #6060, #6247; coordination asked again in #8493, 2025)	blocks right-sizing for most teams	none; official advice is "don't"	exactly what a single authority solves: one engine owns both numerator and denominator	**built** (omnilab/rightsize.py: HPA+VPA vs one authority, held-out)
#	Problem (evidence)	Size	Best tool today and its gap	Omni-Compass fit	Status
3	**Karpenter consolidation churn**: nodes replaced every 5-10 minutes for 2-3 generations, busy nodes removed instead of empty ones, one shared	outages, wasted boots	Karpenter's own timers and budgets	engine-gated release (equation 2) plus dwell; C-throughput cut node churn 50% in simulation	built in simulation (AKS NAP = Karpenter arm, tuning/vendor_compare.py); live Karpenter opponent next

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Problem (evidence)	Size	Best tool today and its gap	Omni-Compass fit	Status
	timer (karpenter #1851, #1019, #2705, #3046; provider-aws #7146, #8868, #7356, #8536)				
4	**CPU limits throttle apps** (CFS quota), causing latency and even OOMs (kubernetes/kubernetes #67577, #97445)	latency tails	manual tuning, "remove limits" advice	power-cap muscle must watch latency; our first live run hit this exact problem	have; live runs 3-5 found and fixed the resize permission
5	**Cold starts / scale-from-zero latency** (knative/serving #4902, #14202, #9104; kedacore/http-add-on #219)	seconds of latency per edge	Knative activator, KEDA	pre-warming decided by the engine from its state (anticipation)	**built** (omnilab/cold start.py, held-out)
6	**GPU utilisation ~5%** (Cast AI 2026); idle GPUs scattered across nodes (volcano #3948, kueue #5243)	the most expensive silicon idle	KAI Scheduler, HAMi, nvshare, Volcano binpack	GPU power-limit muscle (have, calibrated), packing and sharing (missing)	**built** (omnilab/gpu pack.py, held-out) + power limit
#	Problem (evidence)	Size	Best tool today and its gap	Omni-Compass fit	Status
7	**AI training power swings**: 50-75% of TDP in milliseconds per GPU, ramps over 1000 MW/s at	grid-connection risk, equipment damage	batteries, fast PSUs, manual GPU power caps	"training power smoothing" muscle: ramp-rate limit through GPU power caps, the engine's bath state B is	**built** (omnilab/powersmooth.py, held-out; basin-only arm recorded)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Problem (evidence)	Size	Best tool today and its gap	Omni-Compass fit	Status
	gigawatt scale; operators impose power and ramp-rate limits (SemiAnalysis; Uptime; arXiv 2508.14318, 2606.04869)			literally a damped oscillator	
8	**GPU failures and stragglers**: Llama 3, 419 interruptions in 54 days on 16K H100s, one every ~3 hours; 58.7% GPU-related; slow stragglers undetected (Meta; Lablup 2605.09370)	lost training time	Meta's internal tools, checkpointing	hardware-health muscle: sense straggling, drain early	**built** (omnilab/health.py, held-out)
9	**Outages**: 54% cost more than $100,000, 1 in 5 more than $1M; power causes 45% of incidents (Uptime 2025)	direct money	SRE runbooks, AIOps	recovery and physical-SLA results in simulation: recovery 58 to 17 min	have (sim)
10	**Cooling**: industry PUE stuck at ~1.54 for six years (Uptime 2025)	~35% overhead on every watt	DCIM, DeepMind cooling AI	heat afferent have; cooling-plant muscle	**built** (omnilab/cooling.py, held-out)
#	**Problem (evidence)**	**Size**	**Best tool today and its gap**	**Omni-Compass fit**	**Status**
11	**Energy measurement in VMs is impossible**:	nobody can prove savings in	Kepler estimators	same gap we hit	**built** (omnilab/vmenergy.py: meter-calibrated

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Problem (evidence)	Size	Best tool today and its gap	Omni-Compass fit	Status
	no RAPL/IPMI in VMs, Kepler building a model server (kepler #2487, 2026)	cloud VMs			attribution, held-out)
12	**LLM inference autoscaling**: KV cache fills memory before compute; prefill vs decode need separate scaling (vLLM, llm-d)	latency and GPU cost	llm-d, KServe, custom	inference muscle: scale on KV-cache use and queue, not CPU	**built** (omnilab/inference.py, held-out)
13	**Runaway AI agents**: loops and recursive calls, ~$10,000 overnight examples (Dark Reading; sandbox guides)	cost and safety	per-tool caps, early kill-switch projects	agent-containment muscle: caps, kill, audit	**built** (omnilab/containment.py, held-out); live version next
14	**Human error**: failures to follow procedures rose 10 points (Uptime 2025)	outages	runbooks	fewer manual actions: pages and human interventions to zero in simulation	have (sim)

Results of the build pass (held-out seeds 90001-90030, 30 per muscle, code frozen by SHA first)

Omni-Compass against the strongest native tool in each muscle; + toward its aim, - away from its aim, = tie / not significant.

#	Muscle	Opponent (best native)	Toward its aim	Away from its aim	Tie / n.s.
1-2	right-sizing	VPA in-place + HPA	CPU -3%, memory -11%, p99 -99%, reversals -84%,	p95 +15%, OOM kills (few)	work done

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle	Opponent (best native)	Toward its aim	Away from its aim	Tie / n.s.
			SLO minutes -57%		
5	cold start	KEDA HTTP	p95 -75%, p99 -58%, delayed >1 s -71%, instance-hours -8%	cold-start count (x8)	
6	GPU packing	Volcano binpack	idle powered GPU-hours -20%, energy -2%	mean wait +16% (seconds)	p95 wait, jobs, fragmentation
7	training power	vendor floor, worst-day setting	burn -9%, throughput loss -44%, 1-s swing -6%	max ramp (inside the grid's limit)	0 grid violations both
8	GPU health	threshold detection	goodput +10%, lost GPU-h -20%, restarts -29%, straggler hours -99%		checkpoint overhead
10	cooling	outdoor-air reset	PUE -2%, cooling -13%, inlet violations -73%		max inlet
11	VM energy	host meter split by CPU	per-VM error -37%, worst VM -34%		total
12	LLM inference	KEDA on queue	TTFT p95 -18%, SLO breaches -58%, GPU-hours -19%, preemptions -56%		TPOT, TTFT p50
13	agent containment	static caps	rogue spend -96%, time to contain -99%, peak sub-agents -59%	false stops (0.6 -> ~2.7/day), honest work -7%	forbidden actions (0 both: RBAC)

Engine vs no-engine: in every muscle the omni_no_engine arm scores close to omni. The mapping from engine state to action carries most of the effect; the evolved dynamics add smoothing. The basin-only arm (power smoothing, the bath equation alone setting the draw) cut ramps 63% but did not hold the grid limit: the human-set limit is required.

What this says

- The problems with the most money behind them are **idle capacity (1)**, **HPA/VPA coordination (2)** and **GPU idleness (6)**. Problem 2 is the cleanest proof of Omni-Compass's thesis: the Kubernetes project itself says its two autoscalers cannot share a metric, because they fight. A single engine owning both is the answer the issue tracker keeps asking for.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- The problem with the most strategic weight is **AI training power swings (7)**: it is new, it threatens grid connections, and Omni-Compass's own equation (7) is a damped second-order bath, the natural controller for ramp limits.
- The problems we already hit ourselves (4, 11) are the same ones the industry has: good evidence the benchmark is real.

Build order proposed

1. Request right-sizing muscle (VPA role) under the same engine, benchmarked against HPA + VPA "in conflict".
2. Training power-smoothing muscle (GPU power-cap ramp limits) with a synthetic synchronized-training power trace.
3. GPU packing / fragmentation muscle (with fake-gpu-operator or KWOK on the live cluster).
4. Live Karpenter opponent (kwok provider) to test problem 3 head to head.
5. Inference muscle (KV-cache and queue driven), then hardware-health (straggler drain), then agent containment.

Sources

- kubernetes/autoscaler issues #1726, #2939, #6060, #6247, #8493
- Karpenter #1851, #1019, #2705, #3046; aws/karpenter-provider-aws #7146, #8868, #7356, #8536
- kubernetes/kubernetes #67577, #97445
- Knative #4902, #14202, #9104; KEDA http-add-on #219
- Volcano #3948; Kueue #5243; KAI Scheduler; HAMi
- Kepler #2487
- Cast AI 2026 State of Kubernetes Resource Optimization; Cloud Native Now on the report
- Uptime Institute annual outage analysis 2025; Uptime global survey 2025
- SemiAnalysis: AI training load fluctuations; Uptime: AI power fluctuations; Power Stabilization for AI Training Datacenters; Source-side mitigation
- The Llama 3 Herd of Models; Tom's Hardware on Llama 3 failures; Lablup 504-GPU report
- vLLM anatomy; llm-d 0.5
- Dark Reading: AI agents and runaway costs

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 30

The Seven Organisms and the Benchmark Grid

Omni-Compass is benchmarked on seven organisms, each run native and with Omni-Compass on top of native on the same seed, the same load and the same clock. An organism is a set of muscles stepped together on one clock, each muscle from its own plant model with its own native controller, the whole fed one demand from one seed, so that the heat the machines make is load on the rooms, the body's power swing is load on every site's line, and one brain judges every step against every other muscle's cushion. On the 1,107-muscle catalog the engine that stands carries (`realms/catalog_v5.csv`) the seven are: the **spine**, the 267 muscles every real stack runs on, every one in all four realms, an organism in its own right since 16 October and the base of the other six, as an operating system is the base of every program (`docs/THE_SPINE.md`); the four realms, each its own trade's families on the spine, Compute / AI / Cloud (540 muscles), Physics / Robotics / Autonomous (404), Energy / Facility / Industrial (480) and Distribution / Specialized (484); the four stacked with every duplicate of the spine kept (1,908); and the whole tower with every muscle once (1,107). Earlier catalogs' organisms and counts stay with their own results in `docs/history/`.

Every organism runs under three loads: its own load; the climb, the demand stepping by one, up and down (1 2 3 2 3 4 …), past what native can carry, so that the most each arm can do shows; and work waiting in line when the run starts. Every receipt shows work, the time over the service line (misses), the energy the max took as power given beside the work it bought, wear, and whether every knob was handed back; the reading is GAIN, EVEN or LOSS by the key at the front of this manual, judged by what each gauge is for and never by the sign of its number. The spine read beside a realm shows what that realm's trade adds to the base it stands on; the spine read alone shows whether the governor helps the machines every stack runs on before any trade is put on them.

The grid. Each organism runs at 1, 10 and 100 copies of itself on one clock and at 1, 10 and 100 paired runs, modelled and with the real cluster inside, both arms shown in every square; on GitHub's own machines the 1,000 tier runs too (the founder's distinction of 15 October), a cell beyond a free runner's memory or time listed as pending runner capacity and never rented, while paid cloud and GPU runs stay at 1, 10 and 100 copies with at most 100 repetitions. The two axes answer two questions. Copies is the size of the body one brain governs: at 100 copies of the four stacked the law computes a force for about 190,000 muscles from one reading of one clock, and the question is whether it stays coherent, whether the decision is made inside the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

decision period, and whether the cluster inside it is still served on time. Runs is the number of independent paired trials, each from its own seed, and the question is statistical: how wide the interval of the paired difference is and whether it moves as the trials multiply. The grid's readings on the engine that stands are `results/grid_v5/GRID.md` and the standing block of `docs/STATE_OF_PLAY.md`, every square shown, the spine's squares filled by the conductor as they land; the number is small because the native controllers in the models are well tuned and leave little room, it is real within the model, and it is never counted in the Omni index, which is made of real stacks only.

On a GPU machine the real card is wired into each organism as one more muscle of its GPU Hardware family, a spine family, so the card is in the spine and in every organism built on it; its own power meter and its requests are counted in the organism's receipt, kept apart from the modelled plants and also added to them. Real Kubernetes is benchmarked separately on real clusters, and it is also wired into the organisms as one more muscle (`tools/run_kil.py`): at 1, 10, 100 and, on GitHub's own machines, 1,000 copies, the organism's own compute demand drives a real load generator against a real service on a real cluster, and the cluster's watts come back into the organism as heat and load. Those runs are labelled "L + S": the cluster is live software, the organism around it a model.

The seven organisms are models (evidence class S). They show how the law behaves across hundreds of kinds of machine at once and whether its effect is stable as the count and the size grow. Real Kubernetes, the real database, the real broker, the real cache and the real card are the anchors measured on real software and, for the card, a real meter; their results and their losses are in the manual's section 16.

CHAPTER 31

The Metrics Catalog

Every gauge Omni-Compass produces, where it comes from, and what kind of number it is. Three kinds:

- **Measured**: read from a real system (a real Kubernetes cluster, a real GPU's own meter, a real wall plug).
- **Modelled**: computed by a simulation from declared physics or recorded traces. It shows the mechanism, not a measurement.
- **Internal**: Omni-Compass's own state and decisions, recorded in its audit log on every decision, live or simulated.

Every report says which kind each number is. A modelled number is never presented as a measured one.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1. Service: what the customer feels

Gauge	Unit	Where	Kind
Response time, mean / 95th / 99th percentile	ms	live Kubernetes (`tools/live_reps.py`), GPU bench (`tools/gpu_reps.py`), GPU sims	measured live; modelled in sims
Failed requests	%	live Kubernetes	measured
Alert minutes: whole minutes whose 95th percentile, failed requests counted over, was over the line (the babysitting tax)	min	live Kubernetes and the cloud (`tools/live_reps.py`)	measured
Requests served / not served	count	GPU bench, GPU sims	measured / modelled
Pod start wait, total and mean	s	live Kubernetes (API server creation-to-Ready)	measured
Pending pods	pod-minutes	live Kubernetes	measured
Backlog (SLO breach) minutes	min	site and node exchange sims, stack benchmark	modelled
95th-percentile latency factor	×	site and node exchange sims	modelled
Availability, time healthy, recovery minutes, recovered	share, min	stack benchmark (`benchmarks/stack_benchmark.py`)	modelled
SLA violations (physical, total, backlog, power, heat)	share of time	stack benchmark	modelled

2. Work and capacity: what the operator gets for the money

Gauge	Unit	Where	Kind
Work per energy (served requests per kJ)	req/kJ	GPU bench (the preregistered primary outcome), GPU sims	measured / modelled
Work per wall energy (whole machine)	req/kJ	GPU bench with a smart plug (`tools/wall_meter.py`)	measured
Work served	work units	site and node exchange sims	modelled

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Gauge	Unit	Where	Kind
Work per kWh	units/kWh	node exchange sim	modelled
Energy per served request	J	GPU bench	measured
Energy per core-hour	Wh	live Kubernetes	declared model
CPU used by the app	cores	live Kubernetes (`kubectl top`)	measured
Utilisation (used / allocatable)	share	live Kubernetes	measured
Replicas (HPA), mean	count	live Kubernetes	measured
Pods started	count	live Kubernetes	measured
Worker nodes in service, node-hours, idle node-hours	count, h	live Kubernetes, stack benchmark	measured / modelled

3. Energy and power: the bill and the building

Gauge	Unit	Where	Kind
GPU energy (the device's own `power.draw`, integrated)	J	GPU bench	measured
GPU mean power	W	GPU bench, GPU sims	measured / modelled
CPU package energy (RAPL)	J	GPU bench, where the machine exposes RAPL	measured
Whole-machine energy at the wall	J	GPU bench with a smart plug	measured
Energy on kind	Wh	live Kubernetes	**declared model** (kind has no meter)
Energy	kWh	site, node exchange and stack sims	modelled
Peak power	kW	site and node exchange sims, stack benchmark	modelled
Site-budget violation minutes (time over the building's limit)	min	site and node exchange sims	modelled
GPU power limit, mean; power-limit writes	W, count	GPU bench, GPU sims	measured / modelled
Power-cap travel	share	stack benchmark	modelled

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

4. Hardware: heat and wear

Gauge	Unit	Where	Kind
GPU temperature, peak and mean	°C	GPU bench, GPU sims	measured / modelled
Heat-over minutes	min	hardware plant sim (`hardware/plant.py`)	modelled
Thermal travel	share	stack benchmark	modelled
Machine round trips, node starts and stops, scale reversals	count	stack benchmark	modelled

Lower power and fewer temperature swings are the conditions for longer hardware life. **No hardware life extension is claimed** until real temperature, duty-cycle and wear records exist.

5. Battery equivalent (derived)

A battery holds a fixed amount of energy, so battery life follows directly from work per energy:

- runtime on the same charge, for the same work: × (native energy ÷ Omni-Compass energy)
- work on the same charge: × (Omni-Compass work per energy ÷ native work per energy)

Example: the modelled GPU card at +5.1% work per kJ (`results/gpu/sim/after`) does 5.1% more work on one charge. The same rule turns any measured work-per-energy result into a battery figure. On-site battery banks as an organ of the power budget are designed (`docs/DOMAIN_MAP.md`, "on-site batteries") and not yet built.

6. Safety and control: proof it behaved

Gauge	Where	Kind
Writes executed per arm (native 0, watch 0, Omni-Compass n)	GPU bench, live Kubernetes	measured
Settings commands the governor wrote on its own, and the share of its additions decided while the service was still inside its line (the babysitting tax; no person touches either arm)	live Kubernetes and the cloud (`tools/live_reps.py`)	measured
Every arm ended at its start setting (the reset restored it)	GPU bench, live Kubernetes switch drill	measured
Invariant violations (all, and excluding power)	stack benchmark	modelled

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Gauge	Where	Kind
Security violations, contradictions, pages	stack benchmark	modelled
Freeze check: code hashes at start and end (counted runs)	GPU bench (`FREEZE.json`, `FREEZE_END.json`)	measured
SHA-256 of every raw file	every live run	measured
The seal: every Python/C++ twin unchanged since proven equal	`results/SEAL.json`, `verify.py`	checked on every build

7. Internal: Omni-Compass's own state, on every decision (audit log)

Field	Meaning
`E, U, I_U, S, B, B_dot`	the six-state engine: energy, coherence (health), unmet-need integral, stress, redistribution, its rate
`state_observed`, `state_projected_next`, `prediction_error`	what the device said, what the engine projected, and how far off the last projection was
`requested_cap`, `granted_cap`, `shield_bound`, `want_w`	what the engine asked for, what the shield allowed, which bound decided it, the limit written
`admissible`	whether the engine was permitted to change anything this decision
`speed_lock` (`ratios`, `line`, `aim`, `rate`)	the speed lock's reading against the run without Omni-Compass
`convey` engaged / released	when idle CPU is conveyed to serving pods, and when it is given back
`authority`: `calm` and its scalars (`kappa, h, sigma, nu`), `execute`, `contract` per organ, and the machine organ's own view	how settled the engine is, whether it may act at all, and which organs may give capacity back this decision (Kubernetes controller; `omnicompass/nervous_system.py`)
compass readings	the direction the engine reads the whole system to be moving (`omnicompass/compass.py`)
`write`, `would_write`, `why`	every command sent (or, in watch mode, withheld) and its reason
`snapshot`, `restored`	every setting read at start, and its read-back after the reset

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

8. Where each report lives

Report	Command	Output
Live Kubernetes, paired	`benchmark-reps.yml` (commit with `[reps]`)	`LIVE_REPS.md`, `results/live/`
GPU bench on a real card	`sudo bash scripts/gpu_paired.sh`	`results/gpu/run-*/GPU_REPS.md`
GPU physics sim	`python3 tools/gpu_physics_sim.py`	`results/gpu/sim/`
CPU-then-GPU speed lock sim	`python3 tools/gpu_pipeline_sim.py`	`results/gpu/sim/pipeline/`
Site power exchange (GPU groups)	`python3 hardware/site_exchange.py`	`results/hardware/SITE_EXCHANGE_*.json`
CPU + GPU on one budget	`python3 hardware/node_exchange.py`	`results/hardware/NODE_EXCHANGE_*.json`
Full stack benchmark and every check	`python3 verify.py`	`results/`, `VERIFICATION: PASS`

PART FIVE

The Harness and the Wiring

The universal plug, the adapters, the wire check, and the step-by-step work of wiring Omni-Compass onto a running stack.

CHAPTER 32

The Plug, the Adapters and the Wire Check

Think of a high-end car stereo: one head unit, one standard plug on its back, and an adapter harness for each make of car that matches the car's factory plug. You never cut a factory wire, and when you pull the stereo, the car works as it did. Omni-Compass is wired the same way.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

8.1 The plug (one design for every muscle). Each plug has as many channels as its muscle has knobs. Every channel declares its cover (range), its direction (which way is "more"), its units and how fast it may move. Every plug keeps the same contract (`omnicompass/compass_law.py`, `Plug`):

1. **attach** - read the knob once, before any write: the snapshot. It never moves afterwards.
2. **read** - the service reading, into the compass.
3. **write** - one value, clipped to the cover, then read back from the device.
4. **one writer** - if the knob is found at a value Omni-Compass did not write, someone else owns it: Omni-Compass stops writing and leaves that value alone.
5. **restore** - on stop, the knob returns to the snapshot (where Omni-Compass found it, not the last value it wrote). For muscles whose native controller moves the knob itself, restore hands control back.

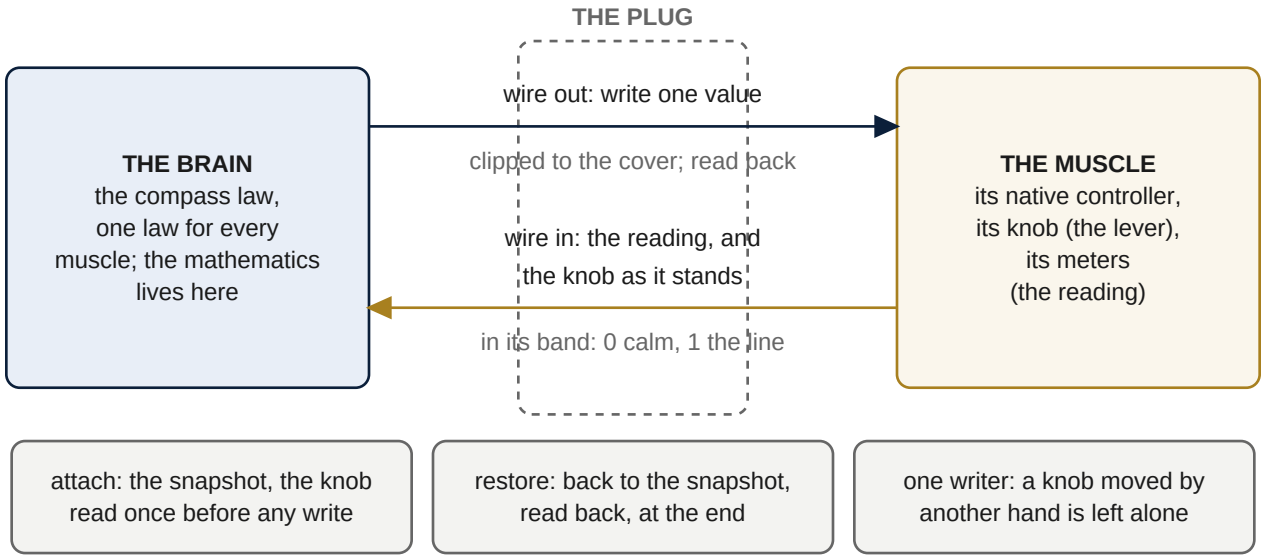


Figure 25. The two-way plug. One wire out carries the governor's write, one value per decision, clipped to the knob's cover and read back from the device; one wire in carries the muscle's reading, placed in its band, and the knob as it stands. The snapshot taken at attach, before any write, is the restore point, and a knob found where the governor did not put it belongs to another writer and is left alone. The brain holds the mathematics; the plug holds nothing but the contract.

8.2 Adapters (one per standard plug). Omni-Compass speaks each industry's standard control interface through an adapter. Status is stated plainly:

Standard	Muscles	Adapter status
Kubernetes API	HPAs, deployments, pods, nodes	**built** (`omni_controller/controller.py`, `muscles.py`)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Standard	Muscles	Adapter status
NVIDIA NVML / `nvidia-smi`	GPU clock ceiling, power limit	**built** (`omni_controller/gpu_compass.py`, two wires; `gpu_governor.py`, one wire)
Linux cpufreq, RAPL	CPU frequency ceiling, package watts	**built** (`--cpufreq-policy-root`, `--rapl-cmd`)
Site meter, building controller by command	site watts, supply-air setpoint	**built** (`--power-cmd`, `--cooling-cmd` command templates)
Cloud node groups (Karpenter, Cluster Autoscaler, MachineSet)	machines	**built** through `--node-scale-cmd` templates
BACnet, Modbus, SNMP	chillers, air handlers, PDUs, UPS	designed; today reached through the command templates above
OPC UA, EtherNet/IP, PROFINET, EtherCAT, ROS 2, CAN	PLCs, drives, robots, vehicles	designed; modelled in the realm harness
IEC 61850, DNP3, OpenADR, IEEE 2030.5, SunSpec, OCPP	substations, batteries, inverters, chargers	designed; modelled in the realm harness

The engineer's job for one muscle is three things: which adapter, the address of the knob, and its safe range.

The plug contract, line by line, and why each line is there. *Attach* reads the knob once before any write and keeps that value as the snapshot. It is read once and never again, because a snapshot that moved with the knob would restore to wherever the governor last left it, and the whole point of the restore is to return to where the operator had it. *Read* takes the service reading (a response time, a temperature, a queue, an error) into the compass as a position in its band; the plug declares the band, the law does not guess it. *Write* takes one value, clips it to the cover before it leaves the plug, sends it through the muscle's own interface, and then reads the lever back from the device and records both the sent and the taken value; a device that took something other than what was sent (a clock that rounds to 15 MHz steps, a pool size the pooler capped) is recorded as it is, not as it was asked. *One writer* compares the lever as found at every read with the value last written; a lever found elsewhere has another owner, and the plug raises `ForeignWriter`, after which the governor leaves that lever alone for the rest of the run and says so in its audit and its exit code. *Restore* writes the snapshot back on stop and reads it back; a restore that does not read back is an error (exit 3), never a silent success. The same five lines are implemented for Kubernetes objects (annotations hold the snapshot on the object itself, so a watchdog can restore from the object without the governor's memory), for `nvidia-smi`, for PgBouncer's console, for Redis's `CONFIG SET`, for the consumer group and for the simulators' knobs, and `tests/test_*` prove each against a fake device.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

8.3 Power-up order. Read-only first; then take the knobs, the least consequential first; on stop, hand them back in reverse order. In the Kubernetes controller the order is: the latency feed and the cluster's own metrics (read); the HPA target (a setting the HPA accepts and corrects within a minute); the pods' CPU limits (conveyance, in place); the machines (the slowest and most consequential, through the release gate and the verdict). On stop the machines are woken first, then the limits, then the target, so the cluster is never left with fewer machines than its pods need while a setting above them is still being handed back.

8.4 The wire check (mandatory before any write). For the GPU it is one command, `sudo python3 tools/gpu_wire_check.py --gpu 0`, and `scripts/gpu_rented_run.sh` runs it first and stops if it fails:

Step	It proves
1 read	every meter answers: watts, temperature, utilization, limit, clock, top clock
2 snapshot	the start limit is recorded once
3 up wire	with the card busy, a ceiling below its own busy clock pulls the clock down under it; reset, the clock comes back above it
4 down wire	a lower power limit is reported back exactly; the start limit is reported back exactly
5 restore	clocks reset and the start limit read back
6 stop	the governor, stopped by its signal, hands both wires back
7 other writer	a limit set by someone else while the governor runs is left alone, and the governor exits 5

Any failure prints the wire, the step and what the device said, and nothing else runs. That turns a wiring fault from guesswork into one named line to fix.

8.5 Wired right or wired wrong. The wire check proves the wires move. It does not prove the governor reads the right thing. A correct installation leaves signatures in its own receipts; a wrong one leaves others. Check them on your first paired runs, before you believe any number, good or bad.

Check	Wired right	Wired wrong, and what to look at
Watch arm against native	equal on every gauge (watch writes nothing)	different: the probe, the load or the machine differs between arms, not Omni
Requests served, failed requests	equal to native	fewer served or more failed: a lever is cutting capacity; check its cover and its sign
p95 and p99 response time	at native or faster	slower: the reading or the floors are wrong (rows below)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

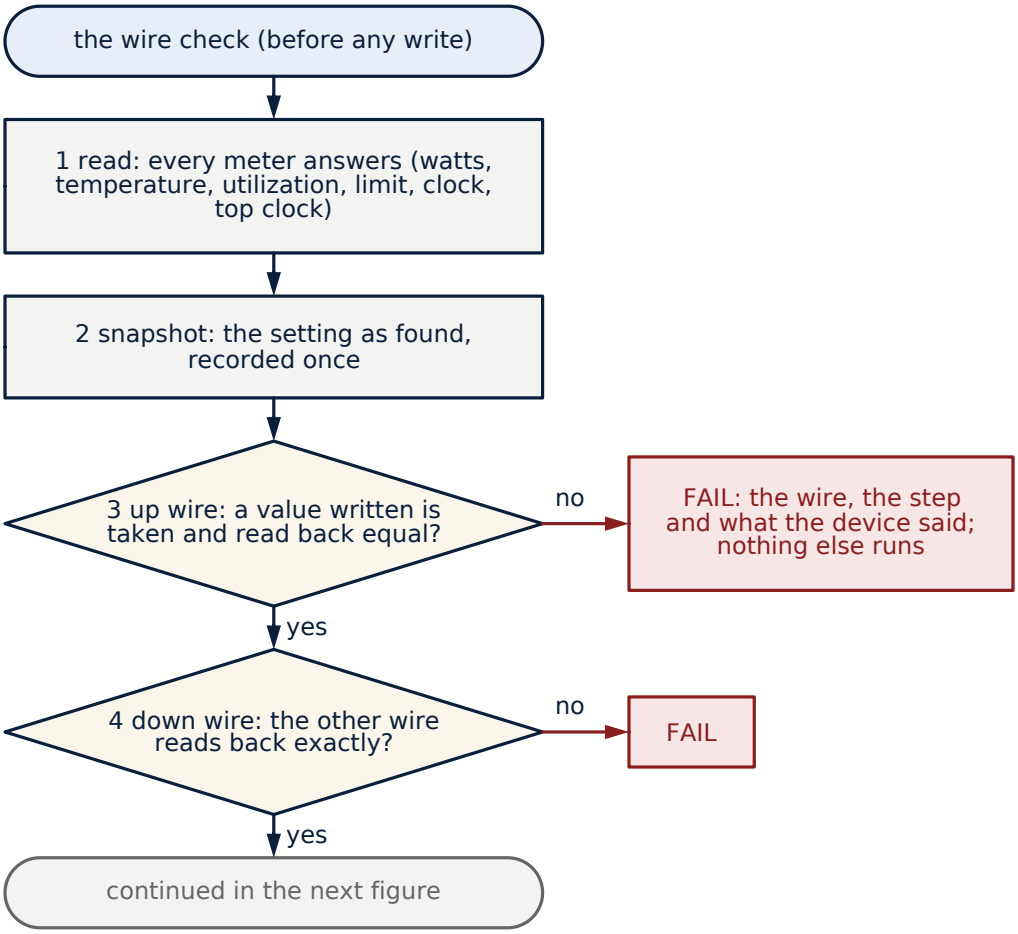


Figure 26. Flowchart: the wire check, steps 1 to 4. Before any write: every meter answers; the setting as found is recorded once as the snapshot; a value written on the up wire is taken and read back equal; the down wire reads back exactly. A step that fails stops everything with the wire, the step and what the device said; the chart continues in the next figure.

Check	Wired right	Wired wrong, and what to look at
GPU: the card's clock while busy	at or above the clock the card reaches on its own	below it: the speed floor is missing or the lid is under the card's own draw
GPU: the lid while busy	at or above the card's own busy draw	at the envelope floor while busy: the lid is sized from a curve, not from the card's own meter
GPU: credit per write (`GPU_REPS.md`)	compass decisions pace the slack, race decisions cover the bursts; fail-up is rare	fail-up in most decisions: being busy is being read as a breach, or the service line is set too low

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.


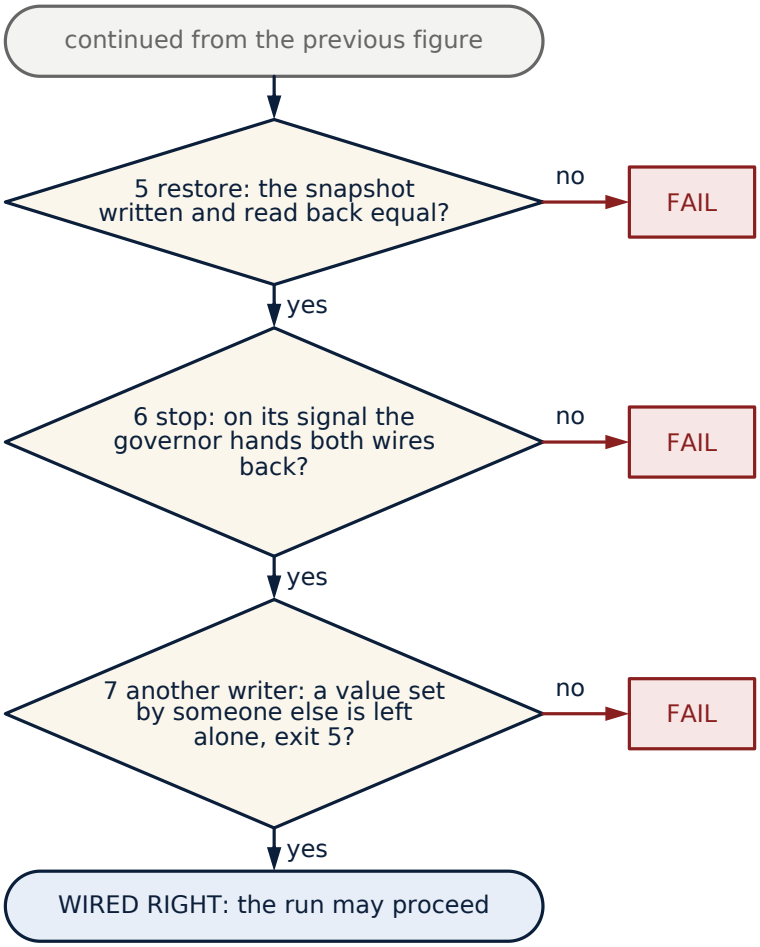


Figure 27. Flowchart: the wire check, steps 5 to 7 and the verdict. The snapshot written back reads back equal; on its stop signal the governor hands both wires back; a value set by someone else is left alone (exit 5). Only then is the muscle wired right and the run may proceed.

Check	Wired right	Wired wrong, and what to look at
Kubernetes: machines given back	through the release gate, one per decision, with no pod waiting	machines given back while pods wait, or none at all while the service is far inside its band: check the latency feed, `--slo-ms` and the release gate's reasons in the audit
Kubernetes: the reset	every HPA target, replica range, CPU limit and worker back to native, no record left	anything left: an earlier run or another controller wrote the same objects
Every lever after the run	at its snapshot	not at its snapshot: another writer, or a restore that failed (exit 3): restore by hand and investigate

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Check	Wired right	Wired wrong, and what to look at
The feed itself	fresh samples every few seconds	stale or empty: Omni reads it as blind and fails up; fix the feed, not the governor

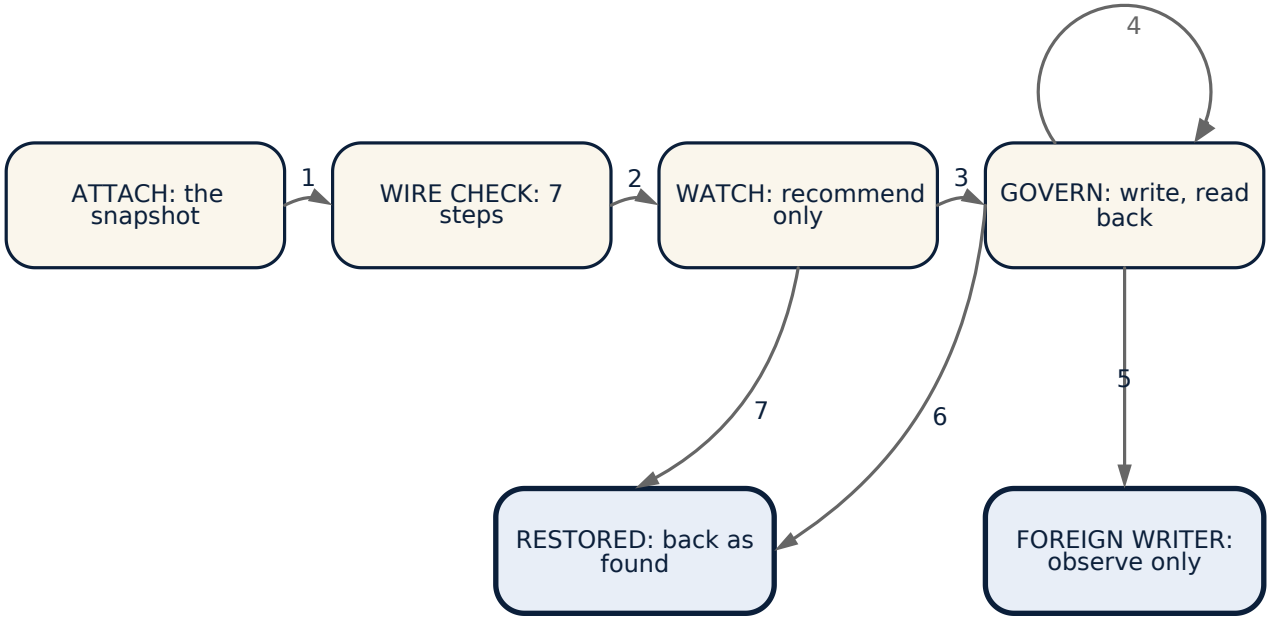

1 (no condition) · 2 WIRED RIGHT · 3 the paired trial passed · 4 every decision: clamp, gate, write, read back, receipt · 5 the knob found where the governor did not put it · 6 stop: reset, OFF, the lease · 7 stop before the trial passed

Figure 28. State machine: the life of one muscle under the plug. Attached with its snapshot, checked by the seven-step wire check, watched in recommend-only mode until the paired trial passes, then governed, one clamp, gate, write, read-back and receipt a decision; a knob found where the governor did not put it moves the muscle to observe only, and every stop restores it to the setting as found.

The rule. If any row reads "wired wrong", the result of that run says nothing about Omni-Compass: fix the wiring, run the wire check and the watch arm again, and only then compare. The first real card run is the worked example: its receipts showed the card's busy clock under its own (736-768 MHz against 861-889), the lid at the 105 W floor under its own 135 W draw, and fail-up in 46% of decisions. Each of those is a row in this table.

8.6 The wire check on the other stacks. The GPU has a one-command wire check because its wires are the hardest to get right. The other stacks carry the same proof in a different place: every Kubernetes arm records `kubectl auth can-i` receipts for what the governor's identity can and cannot do (and fails if it can do anything it must not), checks that the cluster holds nothing but the harness, and ends with the reset check that every HPA target, replica range, CPU limit and worker is back at native with no record left; every database, broker and cache arm reads the knob back after every write and hands it back at the end, and the report says

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

"handed back: yes" or the run is invalid; every simulator arm checks that every override was handed back. The watching arm, where it is run, is the wire check of the reading: a watching governor that disagrees with native on any gauge has found a difference in the probe, the load or the machine, not in Omni-Compass.

8.7 Coding a new muscle: the muscle SDK. A muscle not in the catalog (Appendix G), or one whose native controller speaks an API no adapter covers, is coded on the muscle SDK (`omnicompass/muscle_sdk.py`, printed in full in the Source appendix), the contract every adapter obeys: **observe, bound, request, execute, read back, receipt, restore**. The SDK adds a muscle and never a brain: the chain is plant telemetry → observation adapter → the same engine state → bounded authority → shield → actuator → read-back → plant, and the governing state (E, U, I[U], S, B, Ḃ) is untouched by any muscle added (Chapter 9). The governor proposes a setting; the SDK's runtime earns the authority to write it, verifies the write and writes the receipt. An engineer codes five functions and declares three contracts; everything else (the clamp, the gate, the snapshot, the restore, the receipt) is the runtime's.


The five functions (the `MuscleAdapter` protocol, or `FunctionalMuscle` for a small connector): `observe()` returns the reading with its timestamp and quality (the wire out); `snapshot_native()` records the setting as found, once, before the first write; `execute(value)` writes one setting through the system's own command or API (the wire in; **WRITES**); `readback()` reads the setting back from the system, never from memory; `restore_native(snapshot)` puts the setting back as found. The adapter owns the vendor's API; the brain never sees it.

The three contracts (`MuscleSpec`): the **capability** (`CapabilityContract`: the cover's `minimum` and `maximum`, the `resolution`, the most one write may move (`max_step`) or the most a second may move (`max_rate_per_s`), the `units`, whether the knob is `reversible` and whether it reads back); the **timing** (`TimingContract`: the observation and decision periods, the actuation delay, the minimum hold and the cooldown between writes, the timeout, and `stale_after_s`, past which a reading is blind); the **safety** (`SafetyContract`: the `hard_min` and `hard_max` nothing may cross, `fail_closed`, a `safe_default`, and the `forbidden` context keys, such as a security hold, under which no write is permitted). The spec also names the muscle (`muscle_id`, `plant_id`), its class (`resource_type`, one of the standard classes below), its `automation` mode and its evidence class (`Evidence`: D design, S our own models, L live software, P physical meter, C commercial).

The automation modes, from least to most authority: `disabled`; `recommend` (every command computed and receipted, nothing written: the watch level of Chapter 35); `manual`; `external_approval` (a write only with `approved=True` from your change process); `automatic`. A muscle starts at `recommend` and is promoted exactly as Chapter 35's levels promote a stack.

What the runtime does with each command (`MuscleRuntime.command`), in order: a stale or invalid observation blocks the write and marks the muscle blind (section 7.3); the mode is checked; the request is clamped to the capability (cover, step, rate, resolution); the safety contract is asked (`outside_hard_bounds`, `forbidden:<key>`); the hold and the cooldown are checked (`hold_or_cooldown`); only then is the native snapshot taken, once, and the write made, and where the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

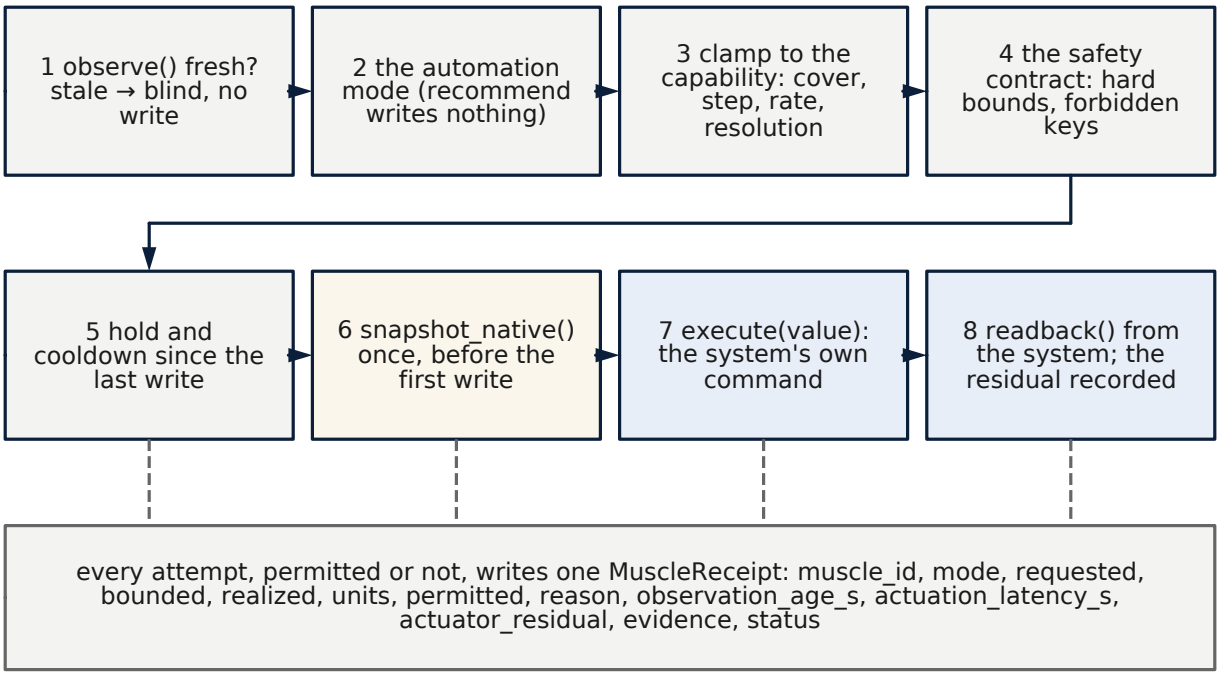

The five functions an engineer codes: observe, snapshot_native, execute, readback, restore_native. The three contracts declared: capability, timing, safety. The runtime does the rest, in this order, for every command.

Figure 29. The muscle SDK's runtime: what happens to one command. The eight steps the runtime takes, in order, for every value the governor proposes: the observation's freshness (stale means blind, no write), the automation mode (recommend writes nothing), the clamp to the capability contract, the safety contract, the hold and the cooldown since the last write, the snapshot taken once before the first write, the execute through the system's own command, and the read-back with its residual. Every attempt, permitted or not, writes one MuscleReceipt with the fields shown.

capability says the knob reads back, the setting is read back and the residual (realized minus bounded) recorded. Every attempt, permitted or not, writes one receipt (`MuscleReceipt`): `muscle_id`, `mode`, `requested`, `bounded`, `realized`, `units`, `permitted`, `reason`, `observation_age_s`, `actuation_latency_s`, `actuator_residual`, `evidence`, `status`. `MuscleRegistry` holds every muscle of a body, refuses a duplicate name, answers `catalog()` (every muscle with its cover, mode, evidence and status) and `restore_all()`, which hands every muscle back in the reverse of the order they were registered.

A worked example. The power limit of one graphics card, through the card's own command, first in `recommend`:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
import json, subprocess
from omnicompass.muscle_sdk import (
    AutomationMode, CapabilityContract, Evidence, FunctionalMuscle,
    MuscleRegistry, MuscleRuntime, MuscleSpec, Observation,
    SafetyContract, TimingContract)

def read_limit():
    # the wire out: the setting as the card reports it now
    out = subprocess.run(
        ["nvidia-smi", "-i", "0", "--query-gpu=power.limit",
         "--format=csv,noheader,nounits"],
        capture_output=True, text=True, check=True).stdout
    return float(out.strip())

def write_limit(w):
    # the wire in: one setting, the card's own command (WRITES)
    subprocess.run(["nvidia-smi", "-i", "0", "-pl", str(int(w))],
                   check=True)

spec = MuscleSpec(
    muscle_id="gpu0.power_limit", plant_id="card-0",
    resource_type="gpu.power_limit", adapter_version="1.0",
    capability=CapabilityContract(minimum=100.0, maximum=300.0,
                                  resolution=1.0, max_step=25.0,
                                  units="W"),
    timing=TimingContract(observation_period_s=2.0,
                          decision_period_s=2.0, minimum_hold_s=10.0,
                          stale_after_s=6.0),
    safety=SafetyContract(hard_min=100.0, hard_max=300.0,
                          forbidden=("security_block",)),
    automation=AutomationMode.RECOMMEND,
    evidence=Evidence.LIVE_SOFTWARE,
    native_owner="the card's firmware")
muscle = FunctionalMuscle(
    spec, observe=lambda: Observation(read_limit()),
    execute=write_limit, readback=read_limit,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    snapshot=read_limit, restore=write_limit)
audit = open("/var/log/omni/muscles.jsonl", "a")
registry = MuscleRegistry()
registry.register(MuscleRuntime(
    muscle, audit=lambda rec: audit.write(json.dumps(rec) + "\n")))

receipt = registry.command("gpu0.power_limit", 250.0,
                           context={"security_block": False})
# recommend: permitted False, reason "recommend", nothing written;
# the receipt is in the audit
registry.restore_all()
# every muscle back as found, in reverse order; each one receipted
```

Promoted to `AutomationMode.AUTOMATIC`, the same code writes: a request of 250 W from the 300 W found is bounded to 250 and read back (residual 0); a request of 200 W ten seconds later is bounded to 225 by `max_step`; a request inside the 10-second hold is refused (`hold_or_cooldown`); a request made while `security_block` is true is refused (`forbidden:security_block`) and nothing moves; `restore_all()` returns the card to the 300 W found at the start and its receipt says `restored`. These outcomes are the SDK's own tests (`tests/test_muscle_sdk.py`).

The standard classes (`STANDARD_MUSCLE_CLASSES`) name the knob a new adapter governs, so that the catalog and the receipts read the same across a company's stacks: `kubernetes.replicas`, `.cpu_request`, `.cpu_limit`, `.memory_request`, `.memory_limit`, `.hpa_target`, `.pod_placement`, `.node_pool`; `host.cpufreq`, `.cpu_quota`, `.cpuset`, `.memory`, `.io`; `gpu.power_limit`, `.clock_envelope`, `.mig`, `.admission`; `cloud.instance_count`, `.instance_size`, `.placement`, `.start_stop`, `.capacity_policy`; `storage.volume_size`, `.tier`, `.iops`, `.throughput`, `.placement`; `network.traffic_weight`, `.rate_limit`, `.bandwidth`, `.routing`; `application.concurrency`, `.worker_count`, `.queue_admission`, `.jvm_heap`, `.thread_pool`, `.batch`; `facility.cooling_setpoint`, `.rack_power`, `.site_power`. A class is a contract, not a claim that a connector for it has run live: each adapter earns its own evidence class, and Appendix G's wiring recipes say which have (`docs/wiring_recipes.csv`).

A muscle coded on the SDK is wired into a body as any other (Chapter 24): one governor per body, the muscle's reading a gauge of that body, its receipts in the body's audit; the wire check of section 8.4 applies to it unchanged (snapshot, write, read-back, restore, nothing left behind), and it enters service through the levels of Chapter 35, watched first.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 33

The Harness

> **Before you wire anything:** read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

This tree is the GitHub-ready kit: frozen engine + C++ twin + two plants + live stub.

What to run

```
pip install -r requirements.txt
python verify.py --quick          # engine, C++, soak, parity
python k8s_controlplane/test_controlplane.py
python -m k8s_controlplane.suite  # elastic / always_on / idle_power
python tests/test_hpa_three_way.py
python tests/test_omni_controller.py
```

The machine's own power (the Linux frequency governor as native, Omni on the frequency ceiling, energy from the processor's meter; root on a machine on the metal, not a virtual one; `docs/CPU_POWER_PREREGISTRATION.md`):

```
sudo python3 tools/run_cpu_power.py --probe           # can this mach
    ↪ ine run it?
sudo bash scripts/cpu_power_run.sh                    # the three wor
    ↪ kloads, native and omni, three repetitions; one folder
python3 tools/cpu_power_abc.py A B C --out V3_CPU_POWER.md   # three r
    ↪ uns into the table
```

Fleet plant (Omni as node authority vs HPA+CA / Karpenter-lite):

```
python -m fleet.planetlab --dir fleet/traces/planetlab --scenarios 8 -
    ↪ -out /tmp/pl
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

C++:

```
cmake -S cpp -B cpp/build -DCMAKE_BUILD_TYPE=Release && cmake --build
    ↪ cpp/build -j2
./cpp/build/oc_smoke
```

Two plants (do not mix the tables)

Tree	What Omni is	What the energy number means
`k8s_controlplane/`	On top of HPA+CA (target / gate / park)	Pack and optional CA gate on a 20-node replica
`fleet/`	Node-pool authority; CA off	Consolidation vs CA and Karpenter-lite

Observe must match the native arm on that plant. If it does not, the run is invalid.

Engine species

Shipped `omnicompass/core.py` is the patent principal form: cubic \(U(1-U^2)\), FIG. 4 command, RK4 with held \(u\). `omnicompass/pools.py` is actuation only (off / hold / park). It does not change the field.

Not in this harness

Live kube-controller-manager, kind CI, GPU MIG scheduler, facility cooling plant. `omni_controller/` is observe-first against kubectl; tests use `tests/fake_cluster/kubectl`.

See `LIMITS.md`.

CHAPTER 34

The Wiring Guide

Before you wire anything: read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

The current manual is `docs/INTEGRATION_MANUAL.md` (every stack, every level, every switch). This page is kept for reference; where the two differ, the integration manual is current.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Which knobs to wire in at all: `docs/WIRING_VERDICTS.md` gives every knob in every published result one of three words from the tables themselves: **write** (wire both ways), **watch** (wire out only: Omni reads, the native controller lives by itself) or **operator's choice** (a trade). A knob that showed nothing, or lost, stays native. **How to wire for superiority:** every knob starts in watch (wire out only); an observation run shows what native does alone; then the brain's own verdict decides on the knob, in real time, whether a notch pays before it is written (`tools/knob_verdict.py` around the engine's verdict; the manual, section 6.4); a knob that cannot prove it pays stays native, and the operator's setting is always free. Where that verdict stands today, knob by knob, is the last table of `docs/WIRING_VERDICTS.md`.

The full step-by-step manual, with the switch, the living band, parking and the pod reflex, is `docs/OPERATOR_MANUAL.md`. This page is the short version.

Three stages. Each stage adds only the permissions it needs. A stage is promoted only after its evidence is in, and the reset works at every stage:

```
kubectl -n omni-compass exec deploy/omni-compass -- touch /tmp/omni.ki
    ↪ ll
```

The switch is one human-operated switch for the whole harness (OFF restores every HPA target, replica range, CPU limit and cordon Omni-Compass changed, and records it; removing the file turns Omni-Compass back ON). It never fires by itself and never switches off one module: a failed decision is skipped, boundaries are held by the living band.

0. Build the image

```
docker build -f deploy/Dockerfile -t <registry>/omni-compass:<tag> .
docker push <registry>/omni-compass:<tag>
```

What the image contains.

- The engine.
- The nervous system.
- The live controller and its levers.
- The frozen closure-law setting (`/app/law/closure.json`).

How it runs. As a non-root user, with a read-only root filesystem and no Linux capabilities.

1. Shadow: read-only, decides and logs, never writes

```
kubectl apply -f deploy/install/omni-compass.yaml      # set the image
    ↪  line first
kubectl -n omni-compass logs deploy/omni-compass -f
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Proof of read-only. `scripts/pilot_shadow.sh` runs the same stage from a workstation with `kubectl auth can-i` receipts that the identity cannot write, and writes `SHADOW_REPORT.md`.

Run length. One to two weeks.

Pass condition. Zero writes, and recommendations you agree with.

2. Target: Omni-Compass sets each HPA's CPU target

```
kubectl apply -f deploy/rbac-target.yaml              # adds: patch h
    ↪ orizontalpodautoscalers
kubectl -n omni-compass patch deploy omni-compass --type=json -p \
  '[{"op":"replace","path":"/spec/template/spec/containers/0/args/1","
    ↪ value":"target"}]'
```

What happens. The HPAs keep scaling pods. Omni-Compass only moves their target within bounds.

The SLO reflex. Add `--latency-file` and `--slo-ms`, and the target is never tighter than native while the SLO is breached.

Pass condition. Latency never behind native, and fewer pod-hours.

3. Node pool: Omni-Compass sizes the node pool

Add permissions. `patch nodes`, `create pods/eviction` (`deploy/kind/rbac-omni.yaml` is the tested example).

Set the mode. `--mode nodepool --node-scale-cmd "<your pool resize command with {n}>"`. Examples of the resize command:

- a Karpenter NodePool limit;
- a cloud node-group size;
- `scripts/kind_nodepool.sh` on kind.

What guards a release. The machine organ gives a node back only when all of these hold:

- every sense is live;
- its last order landed;
- pods are not scaling up;
- nothing is pending;
- the remaining nodes stay at or below the engine's target utilisation.

A PodDisruptionBudget on each service is required, because drains go through the eviction API.

Optional levers. Each has its own flag and permissions, and all are listed in `omni_controller/muscles.py`:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- right-sizing;
- cold start;
- batch pacing;
- agent containment;
- cooling;
- CPU frequency.

Evidence, and where it is

Evidence	File
The controller, every lever and the Unified Control Switch on real Kubernetes (kind)	`results/live/LIVE_LEVERS_2_NERVOUS.txt`
Read-only shadow on real Kubernetes: every decision logged, 0 writes	`results/live/LIVE_SHADOW_1.txt`
Least-privilege identity receipts	`rbac_omni.txt` in every live run
Native vs Omni on top vs Omni alone, paired on one machine, real Kubernetes	`results/live/LIVE_PAIRED.md`
The full wiring manual	`docs/OPERATOR_MANUAL.md`
The frozen engine's results, three runs each, read by rule	`results/live/V1_*.md`, `results/live/V3_*.md`; `docs/OMNI_V1.md`, `docs/OMNI_V3.md`
The same wiring on Azure's managed Kubernetes (the bill), a database pooler, a rented machine, the simulators, a message broker's consumer group, a cache's memory ceiling, a drone swarm's autopilot	the manual, chapter 7 (`docs/OMNI_COMPASS_MANUAL.md`)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 35

Before You Start, and the Eight Levels

What your system needs

You run	You need
Kubernetes (vanilla, EKS, GKE, AKS, OpenShift/OKD, Rancher, kind)	Kubernetes 1.34 or newer (in-place pod resize); metrics-server (`kubectl top nodes` works); an HPA with a CPU target on each governed service; a readiness probe and a short preStop pause on each service
A response-time feed (strongly recommended at every level)	a CSV per service, `elapsed_seconds,latency_ms,ok`, written continuously; `scripts/latency_probe.py` writes one against any HTTP endpoint
NVIDIA GPUs	a driver with `nvidia-smi`; root (or the capability to run `nvidia-smi -pl` and `-lgc`); on a VM, full GPU passthrough
CPU power control	Linux cpufreq with the schedutil governor; RAPL for package watts; usually bare metal
Site power and cooling	a command that prints site watts, and a command that sets the supply-air setpoint through your building management system

Why each requirement is there. Kubernetes 1.34 or newer is required because the conveyance muscle resizes a pod's CPU limit in place, which older versions do only by restarting the pod, and a restart is a disruption Omni-Compass never causes. metrics-server is the HPA's own eyes and the governor's: without it neither knows what the pods use. An HPA with a CPU target on each governed service is the native controller Omni-Compass sits on; a service without one has nothing for level 2 to move. A readiness probe and a short preStop pause are what make a drain invisible to clients: the Service stops sending requests to a pod before it stops, and kube-proxy sends them to another ready endpoint. The response-time feed is the one wire a cluster does not already have: Kubernetes knows what its pods use, not what its users wait; the compass needs the second, and `scripts/latency_probe.py` writes it against any HTTP endpoint every five seconds. On the GPU, root is needed only for the two `nvidia-smi` writes, and a VM must pass the whole card through or the driver refuses to lock clocks (the wire check's step 3 is where that shows).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

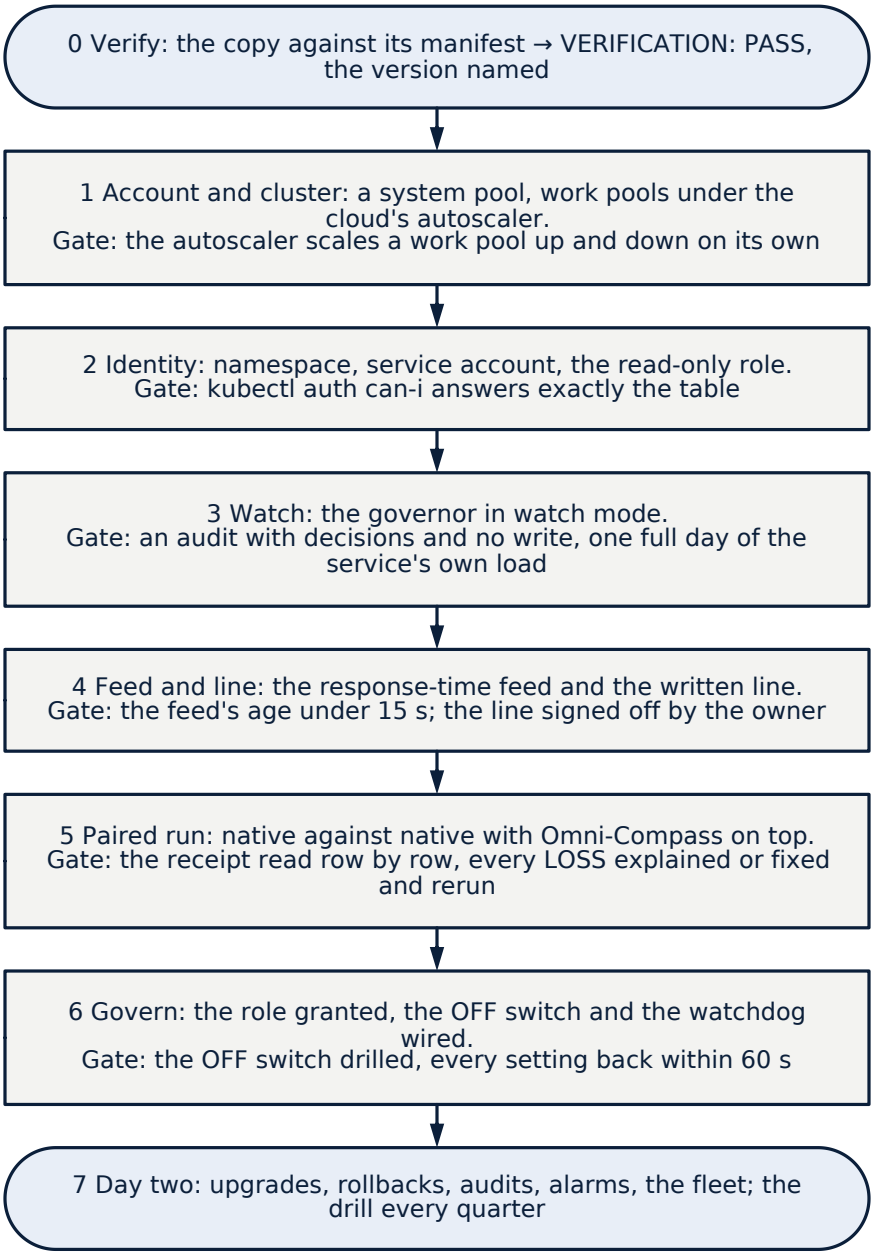


Figure 30. Flowchart: the implementer's eight phases and their gates. From the verified copy through the account and the cluster, identity, the watch, the feed and the line, the paired run and the governing grant to day two; each phase has a gate that must pass before the next begins, and the OFF switch is drilled before the governor writes.

Get the software and check it

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
git clone https://github.com/The-Omni-Compass-LLC/The-Omni-Compass.git
cd The-Omni-Compass
pip install -r requirements.txt
python3 verify.py                        # every check; ends with VERIF
    ↪ ICATION: PASS
```

Build the container image once:

```
docker build -f deploy/Dockerfile -t <your-registry>/omni-compass:<tag
    ↪ > .
docker push <your-registry>/omni-compass:<tag>
```

It runs as non-root, with a read-only root filesystem and no Linux capabilities.

What `verify.py` checks is worth knowing before it is run, because its last line, `VERIFICATION: PASS` or `FAIL`, is the only thing a reader has to read. It runs every test in `tests/` (the law, the plugs, the readings rule, every benchmark's own harness against a fake server), checks the engine's fingerprints against the preregistered registry so that a changed engine file fails before anything is measured, compares the release's files with its manifest (`tools/release_manifest.py --check`: the engine, the C++ twins, the live evidence's digests, one object that names the commit it was written at) and runs the layout check (`tools/layout_check.py`: the declared root, every link and every named path present). It takes a few minutes on a laptop and needs no network beyond the clone. GitHub runs the same script on every push under Python 3.12, and each run is listed under the repository's Actions tab with the commit it checked; a result in this manual is only ever cited from a commit whose run passed.

To know which engine a checkout carries, ask it:

```
python3 tools/omni_version.py                 # omni-v7, omni-v6, omn
    ↪ i-v5, omni-v3, omni-v2, omni-v1, or what differs
python3 tools/omni_version.py --commit <sha>   # the same question of
    ↪ any pushed commit
```

Every result table in `results/live/` cites the commit it ran on, and the three-run tools refuse to combine runs from different engines (Chapter 15). The founder's standing order is that no result is ever read across engines, and the command above is how a reader checks that for themselves.

The levels

Take them in order. Each has a pass condition; go to the next level only when it holds. The OFF switch works at every level.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

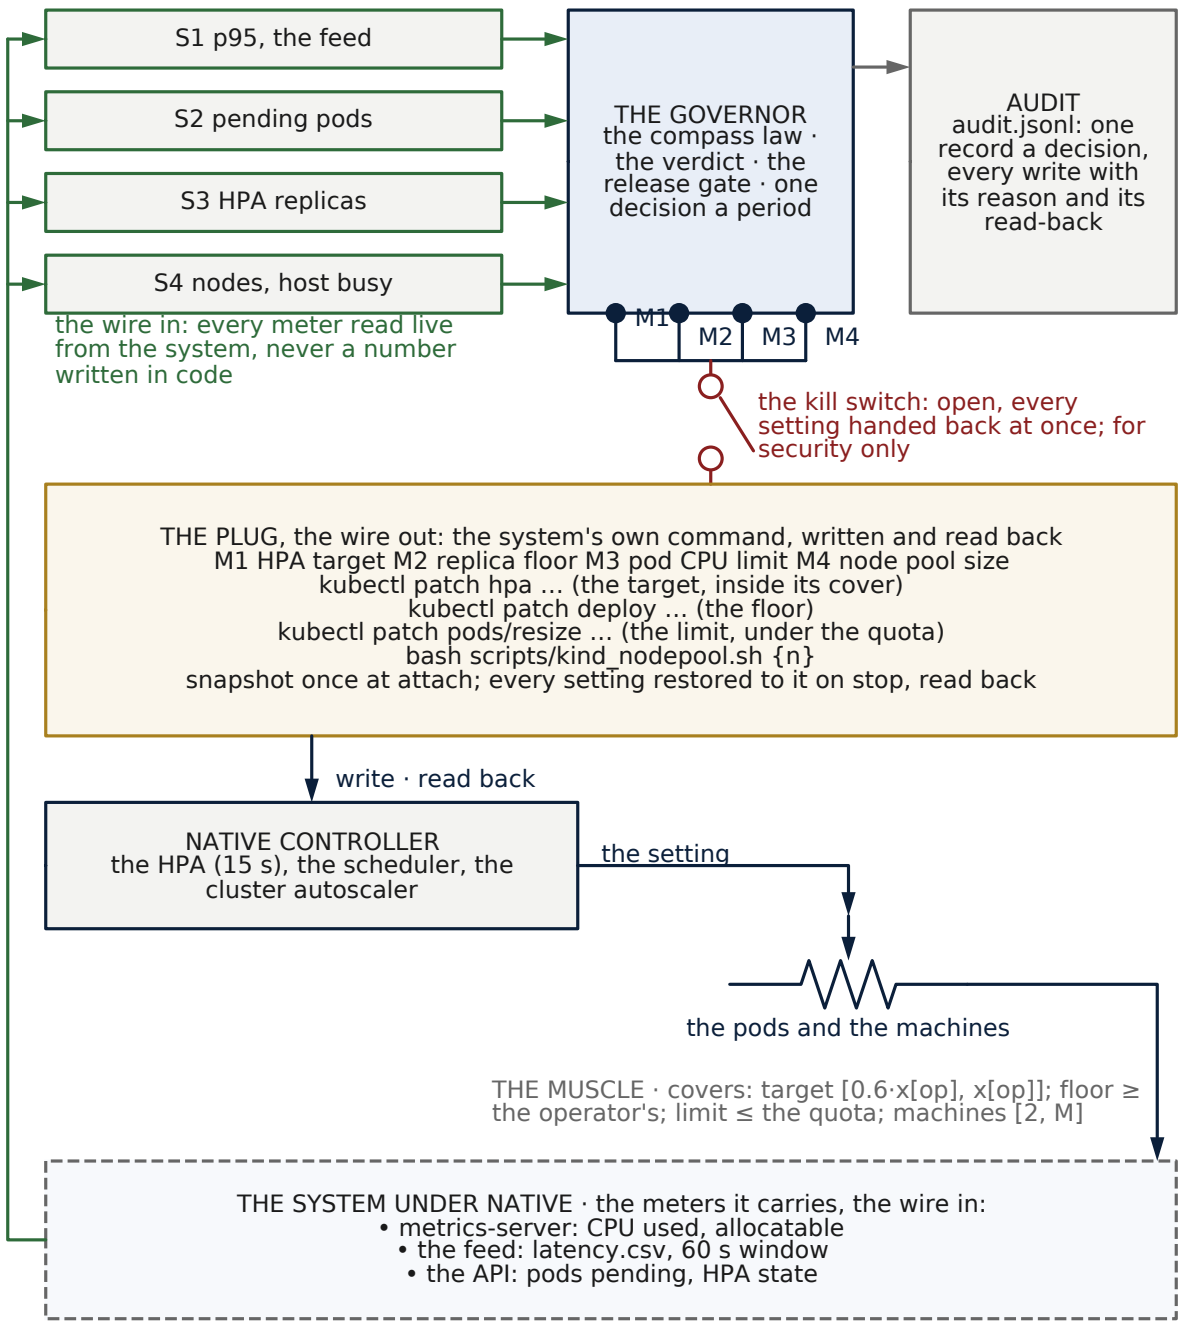


Figure 31. Wiring schematic: Kubernetes in the cluster, levels 2 to 4. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. Here the senses are the response-time feed, the pods waiting for a place, each autoscaler's replicas, and the machines with the host's busy share; the motors are the autoscaler's target,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

the replica floor, the pod CPU limit and the node pool size, each through kubectl's own patch and resize commands. Level 2: the target and the floor; level 3: the machines through the release gate and the verdict; level 4 (--strict-replicas): the replica decision itself. The HPA keeps its own 15-second check underneath. Nothing is ever deleted or evicted; a parked machine is emptied by the autoscaler's own scale-down.

The levels exist because a governor earns authority the way a new operator does: by watching first, then by touching the setting that is cheapest to undo, then the next. Level 0 touches nothing and proves the software is the software (`verify.py` checks every sealed file's fingerprint and runs every test). Level 1 watches a live cluster for as long as the operator likes and logs every decision it would have taken, so the operators can read those decisions against what they would have done; nothing passes level 1 until they agree with its readings. Level 2 moves the HPA target, which the HPA itself corrects within a minute if the governor is wrong, and raises replica floors ahead of bursts; it is the first level that can show a gain and the first that can show a loss, and the paired receipts of Chapter 46 are its pass condition. Level 3 moves machines, the slowest lever, through the release gate and the verdict; it is where the bill moves and where the most care is spent. Level 4 hands Omni-Compass the replica decision itself, with the HPA kept as the fast reflex upward; it is an option, not a step on the way, and the benchmarks in this manual do not use it. Levels 5 to 7 are the GPU, the CPU and the site, each with its own wire check and its own pass. An installation may stop at any level and run there indefinitely; most will stop at level 3.

Level 0 - Evaluate without touching anything.

```
python3 verify.py
python3 tools/run_scale.py --runs 10 --scale 1 --out results/scale/eva
    ↪ l     # the seven organisms, modelled
python3 tools/run_gpu_card.py results/sim/gpu_two_wire/eval
    ↪        # the two-wire card, modelled
```

Pass: `VERIFICATION: PASS`. Nothing in your systems is touched.

Level 1 - Watch (read-only).

```
kubectl apply -f deploy/install/omni-compass.yaml     # set the image
    ↪ line; it runs --mode observe
kubectl -n omni-compass logs deploy/omni-compass -f
```

The install file grants a read-only identity; `scripts/pilot_shadow.sh` records `kubectl auth can-i` receipts that show it cannot write. Every decision it would take is logged with its reason. Pass: zero writes, and readings your operators agree with.

Level 2 - The pods, on top of your autoscalers. WRITES.

1. Grant `patch horizontalpodautoscalers` and `patch pods/resize` (`deploy/rbac-target.yaml`).
2. Run with `--mode target --latency-file <feed> --slo-ms <your p95 target>`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

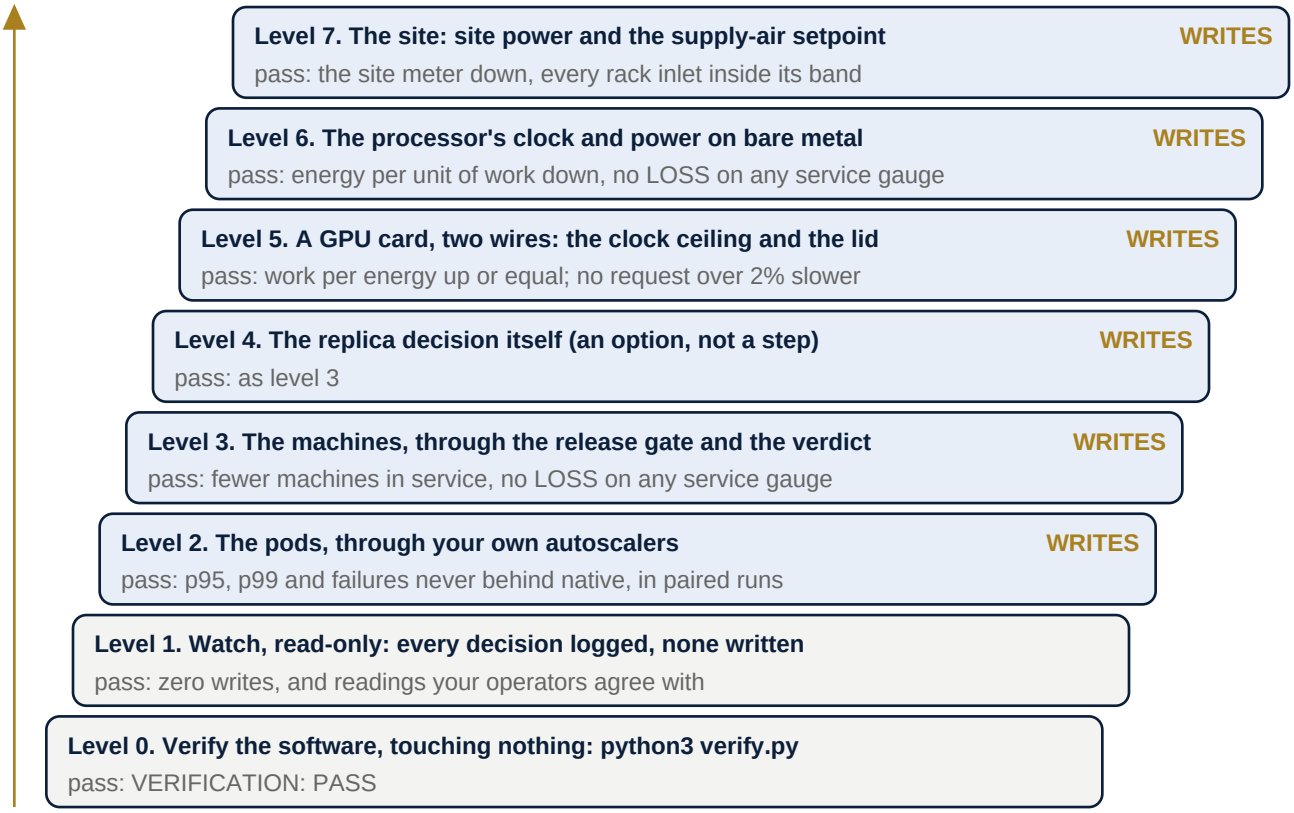


Figure 32. The eight levels of an installation, taken in order, each with its pass condition. Levels 0 and 1 write nothing; from level 2 the governor writes, and the wire check must pass before any level that writes. An installation may stop at any level and run there indefinitely.

3. Optional pod muscles, one at a time:

Muscle	Switch	What it does
convey	`--latency-file` and `--cap-deployments ns/name`	gives each machine's idle CPU to the serving pods on it
rightsize	`--rightsize-deployments ns/name`	each pod's CPU request follows its measured use times (1 + headroom), in place
coldstart	`--coldstart-deployments ns/name` `--coldstart-signal ns/configmap`	scales a service to zero while no work waits, wakes it when work arrives
batch	`--batch`	admits held Jobs labelled `omnicompass.io/batch=true` when there is load and power headroom

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Muscle	Switch	What it does
batch pace	`--batch-pace`	pauses Jobs labelled `omnicompass.io/pausable=true` under power or heat stress, resumes them after
rollout guard	`--rollout-guard ns/name`	pauses a rollout while change is not permitted
contain	`--contain-namespaces ns --contain-cpu-m <m>`	holds an agent namespace to a CPU budget
security hold	`--security-configmap ns/name`	key `hold: "true"` blocks every expansion

Your HPAs keep scaling as before; Omni-Compass sets their targets and raises floors ahead of bursts. Pass: p95, p99 and failed requests never behind native, over paired runs (Chapter 46).

Level 3 - The machines. WRITES.

1. Grant `patch nodes` and `patch pods` (`deploy/kind/rbac-omni.yaml`).
2. Run with `--mode nodepool --active-nodes-only --closure /app/law/closure.json --node-scale-cmd "<command with {n}>"` and `--node-restore-cmd "<command>"` for the OFF switch. For the compass law on the same levers, use `--law compass` (reads the mean response time of the latency window between a tenth of `--slo-ms` and `--slo-ms`, held at `--compass-center 0.4`; p95 at the SLO, a blind feed or a waiting pod adds capacity at once; the HPA target never goes above the operator's; machines go back one at a time through the release gate).

Your platform	The park/wake command
any cluster, bare metal, kind	`bash scripts/kind_nodepool.sh {n}`
Karpenter / EKS Auto Mode	the NodePool CPU limit at `{n}` times node CPU, parked nodes kept
Cluster Autoscaler node group	the group's desired size, scale-down through parking
OpenShift / OKD	the worker MachineSet replicas, parked

A machine is given back only when every sense is live, the last order landed, pods are not scaling up, nothing waits for a place, and the remaining machines stay inside the band. Pass: fewer machines in service, with no LOSS on any service gauge.

Level 4 - Omni-Compass decides; Kubernetes is the muscle. WRITES. Add `--strict-replicas`: Omni-Compass decides each service's replica floor and when to shrink; the HPA stays as the fast reflex upward. Pass: as level 3.

Level 5 - A GPU box, two wires. WRITES.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
sudo python3 tools/gpu_wire_check.py --gpu 0                    # must
    ↪  end: WIRED RIGHT
# watch: computes both wires and writes neither
sudo python3 -m omni_controller.gpu_compass --mode watch --gpus 0 --au
    ↪ dit /var/log/omni/gpu.jsonl \
     --latency-file <feed> --slo-ms <p95 target> --floor-w <your lowes
    ↪ t watts>
# govern: writes the clock ceiling and the power limit
sudo python3 -m omni_controller.gpu_compass --mode cap --gpus 0 --audi
    ↪ t /var/log/omni/gpu.jsonl \
     --latency-file <feed> --slo-ms <p95 target> --floor-w <your lowes
    ↪ t watts>
# OFF: clocks reset, power limit back to the start, read back
sudo touch /tmp/omni-gpu-kill
```

Every `--interval` seconds (default 2) it reads the card's own meters and the response times, and:

- **learns the card on its own** first: while the ceiling is at the top and the card is busy, its busy clock and busy draw; until 15 such readings are in, neither wire moves;
- **races while work waits**: at 95% utilization or more, the ceiling to the top and the lid to the start limit;
- **paces the slack**: the mean response time of the last 5 s, between a tenth of `--slo-ms` and `--slo-ms`, held at the compass's center (0.4); the ceiling moves in whole 15 MHz steps, never under the card's own busy clock, and the lid never under the card's own busy draw plus 10%, never over the start limit;
- **asks the card first (the verdict)**: before the ceiling may go one step lower, a paired trial measures the card's own time on each request (the workload's `service_ms`) at the top and at that step; the step is allowed only if it adds at most `--allow` (2%). Where no step passes, the ceiling stays at the top: the card runs as it does alone, and the audit says so (`verdict_state: left native`);
- **fails up** when p95 reaches `--slo-ms`, a request fails, the feed goes blind or the card reports a heat slowdown.

One law, no profiles: down gain 0.0125, center 0.4, floor at the card's own busy clock, allowance 2% (GPU preregistration, amendment 8). The workload must write `service_ms` (the card's own time per request) in its latency file, as `tools/gpu_workload.py` does; without it no step is ever allowed and the card stays native. Pass: work per energy up or equal; requests served equal; no request more than 2% slower at the median, p95 and p99 at native or within 2%; every row of section 8.5 reads "wired right".

Level 6 - CPU clock and power. WRITES. On bare metal, add to the controller: `--cpufreq-policy-root /sys/devices/system/cpu/cpufreq --cpufreq-require-schedutil --rapl-cmd "<prints CPU package watts>"`. The

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

OFF switch writes every policy's recorded maximum back exactly. Pass: energy per unit of work down, no LOSS on any service gauge.

Level 7 - Site power and cooling. WRITES. `--power-cmd "<prints site watts>" --site-limit-w <limit>` brings site power stress into the engine; `--cooling-cmd "<sets {c}>" --cooling-min-c 18 --cooling-max-c 27 --cooling-restore-c 22` lets it hold the supply-air setpoint in its band. CPU and GPU sharing one power budget (`hardware/node_exchange.py`) and GPU groups sharing a site budget (`hardware/site_exchange.py`) run as models today. Batteries are designed as an organ, not yet wired.

Wiring for superiority: watch first, then the brain's own verdict on every knob

The founder's order of 9 October 2026 fixes the order of wiring. Every knob is wired out first and in last, and the wire in is connected only by a measurement the brain makes on the knob itself. The steps, for any stack:

1. **Wire out, everything.** Every muscle's readings reach the brain, one wire out per muscle. Nothing is written. This is watch mode (section 1.3): where every installation starts, and where any knob returns the moment it stops paying.
2. **Run the observation.** With the stack together and under its real or replayed demand, let the brain watch for at least one full cycle of that demand. In watch mode the brain learns the band of every reading, where the native controllers hold them, and which readings leave calm and when. Nothing is decided yet; the audit says what the brain saw.
3. **Let the verdict decide each knob, one trial at a time.** Switch the knobs the operator is willing to have moved into verdict mode. A knob still writes nothing until the brain has run a paired trial on it (section 1.2; `omnicompass/verdict.py`; on the live stacks `tools/knob_verdict.py` around it): the knob is held at the operator's setting for a reference, then one notch away, under the same traffic, and the step is allowed only if the muscle's own cost did not rise under the declared objective. The objective is the operator's one declaration per knob: the resource reading (the service, the resource and the CPU weighed together, the default and the index's own reading) or the service reading (work and speed alone). A refused step is not retried for a set time; an allowed step widens the allowance by one notch, and the next trial probes the next. The compass then moves the knob by its law inside the allowance, never outside.
4. **Keep checking.** The trials recur. A knob whose last step stops paying when the demand changes is refused on its recheck and the allowance narrows back; a knob that never passes a trial stays native for good, which is the right answer for that knob and costs nothing. New noise in the system is answered the same way: the compass reacts inside the allowance within its time constant, and the allowance itself is re-earned by measurement.
5. **Read the verdicts, muscle by muscle.** The audit carries the state of every knob every second (`verdict_phase`, `verdict_direction`, `allowed_low`, `allowed_high`, the cost sample) and the arm's record sums it; the wiring page (`docs/WIRING_VERDICTS.md`, section 16.6b) is the same

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

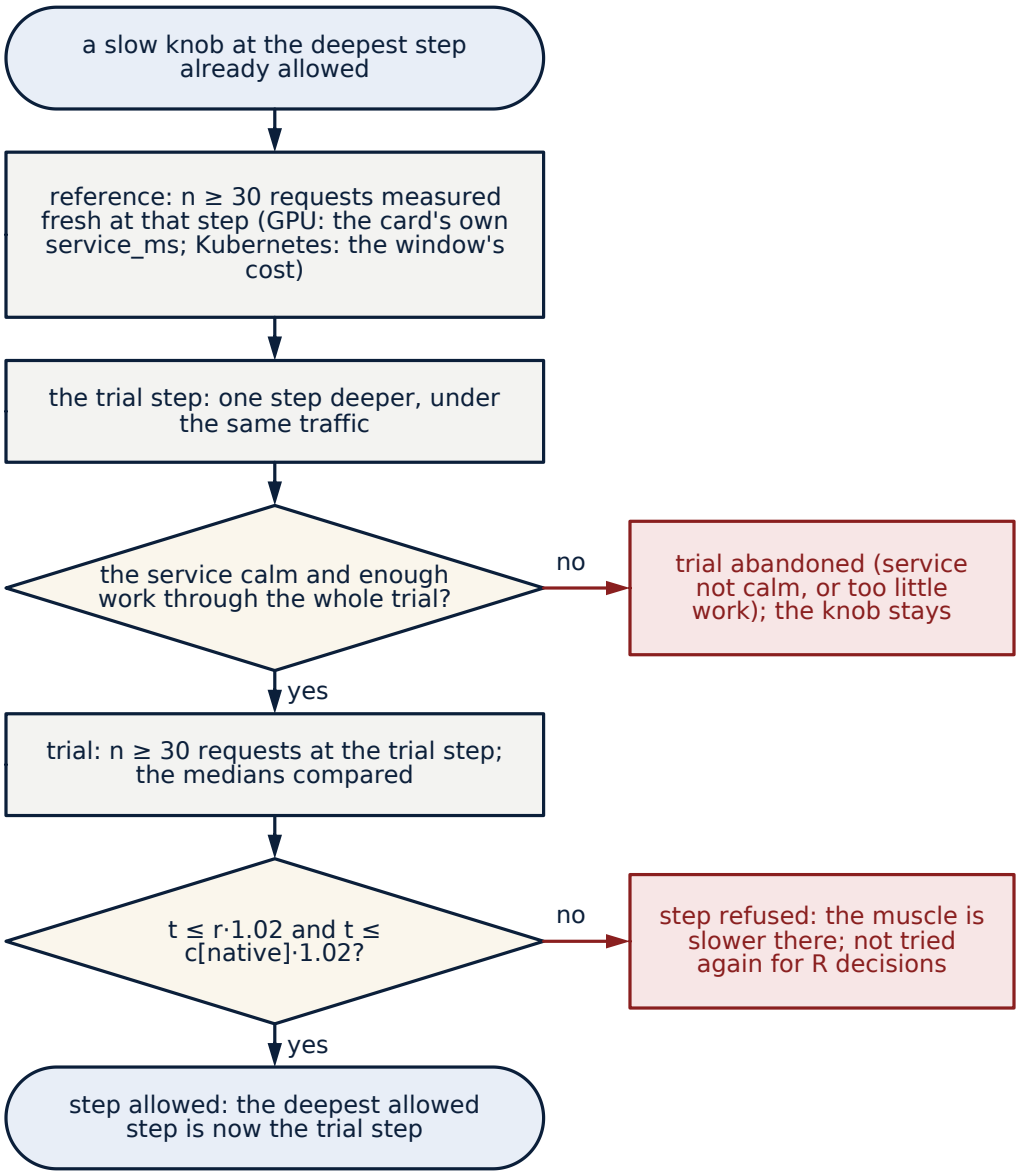


Figure 33. Flowchart: the verdict's trial on one step. At the deepest step already allowed, n ≥ 30 requests are measured fresh as the reference; one step deeper, under the same traffic, n ≥ 30 more are the trial; the trial is abandoned if the service was not calm or too little work came through, refused if the trial's median cost exceeds the reference's or native's by more than 2%, and otherwise the deepest allowed step moves one deeper.

judgement made from the published tables after the fact. An operator who wants one knob wired both ways and another watched only sets the objective on the first and leaves the second in watch.

What this gives: no knob is ever written on faith. Where Omni-Compass can beat the native controller on the muscle's own gauges, it will have proved it on that muscle before it moved it; where it cannot, the muscle lives by itself and Omni reads it. The organism's superiority is then the sum of the knobs that earned it, not one turn of a single dial for the whole system. On the five live stacks of Chapter 36 this is built and declared (the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

amendments of 9 October in the Redis, Kafka, PostgreSQL, MySQL and YCSB preregistrations); the counted runs on it were dispatched on 10 October, three runs a stack and objective, the expectation written before them (`docs/RERUN_2026-10-10.md`). On the Kubernetes controller the verdict already guards the machines (section 1.2). Inside the modelled realms the organism still takes one directive for every muscle; making the verdict per muscle there is the next engine, Omni v4 (`docs/OMNI_V4_PLAN.md`), designed and not built, because every result must be run again on a new engine.

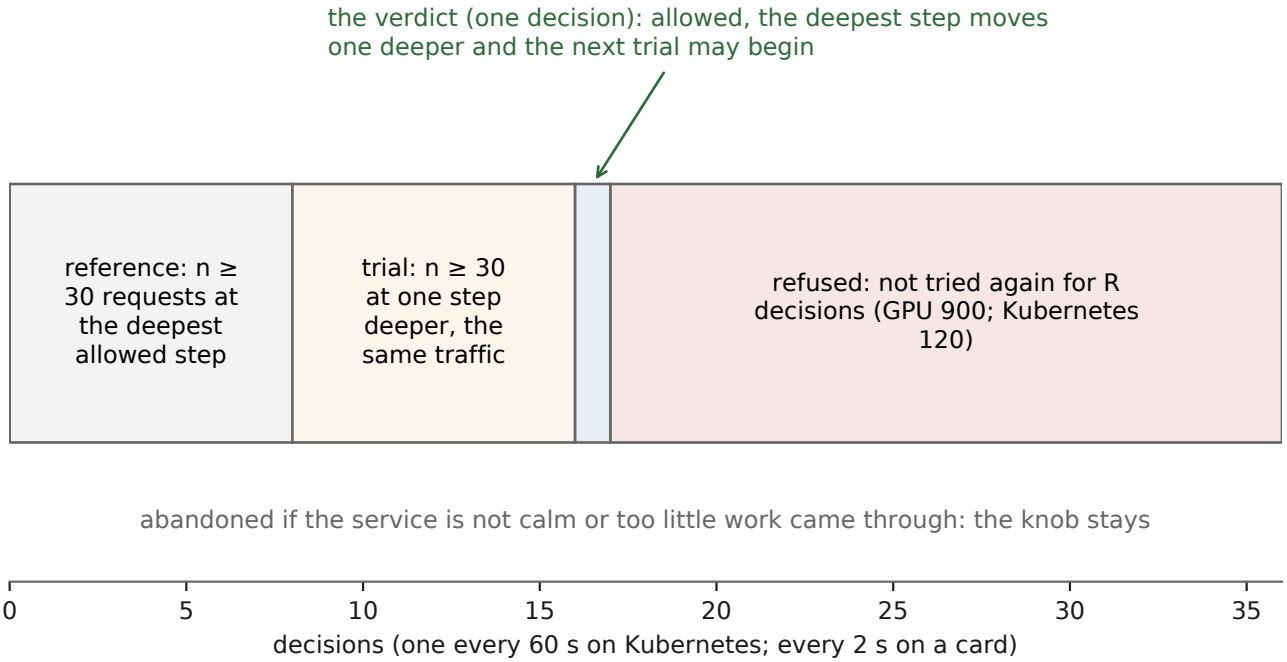


Figure 34. Timing diagram: a give-back trial from reference to verdict, in decisions. The reference (n ≥ 30 requests at the deepest allowed step), the trial (n ≥ 30 at one step deeper under the same traffic), the verdict in one decision, and, on a refusal, the quiet period in which the step is not tried again (900 decisions on a card, 120 on Kubernetes). A trial is abandoned, and the knob stays, if the service is not calm or too little work came through.

CHAPTER 36

Stack by Stack

Every wiring below is the same plug (Chapter 32): one wire in (the stack's own meter), one wire out (one setting the stack already accepts), a snapshot taken once before the first write, every write read back,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

everything restored on OFF. Native is always the stack's own controller left as shipped; omni is that controller with Omni-Compass on top.

Stack	Levels	Notes
Vanilla Kubernetes, kind, Rancher	1-7	as written
Amazon EKS	1-5	machines via Cluster Autoscaler node group or Karpenter; CPU power control is not exposed on EC2 VMs; GPUs on bare-metal or full-GPU instances
Google GKE, Azure AKS	1-5	the provider's node-pool size as the park/wake command; on AKS the managed cluster autoscaler stays native and deletes the machines Omni-Compass idles (10.1)
Red Hat OpenShift / OKD	1-5	the same permissions through a Role; machines via the worker MachineSet
NVIDIA GPU servers without Kubernetes	5	the two-wire GPU governor alone
Bare-metal CPU servers	6	cpufreq and RAPL through sysfs
Slurm / HPC	5 on the GPU nodes	a job-level Slurm connector is not built
Building management	7	through your BMS's command line or API, in the command templates
PostgreSQL behind PgBouncer (any database behind a pooler with a console)	one knob	the pool size through the pooler's own admin console (10.2)
A power grid's substation tap changer (pandapower, SimBench)	one knob	the tap position, one whole tap per move (10.3)
Buildings with batteries (CityLearn)	one knob a building	the battery's charge and discharge inside the simulator's own limits (10.3)
Robot arms (MuJoCo Menagerie)	one knob an axis	the joint speed where the axis has slack; never on an axis at its takt (10.3)
A rented cloud machine running the big organisms	the whole harness	the detached run: rent, run, collect, delete (10.4)
A message broker's consumer group (Apache Kafka)	one knob	the consumer count inside [1, partitions], read from the consumers' own records; the rebalance paid on every move (10.5)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Stack	Levels	Notes
A cache's memory ceiling (Redis)	one knob	`maxmemory` through the cache's own console, grown only while the cache is full (10.6)
Drone swarms (gym-pybullet-drones; PX4 and ArduPilot next)	one knob a drone	the cruise override inside the autopilot's limits; a separation wall; collisions void the cell (10.7)
A database's storage-engine cache (MongoDB under YCSB)	one knob	the WiredTiger cache size through the server's own console, grown only while the cache is full (10.8)

Managed Kubernetes on Azure: the bill as the gauge

On Azure Kubernetes Service the muscle is the same as on kind (Chapter 35, levels 1 to 3) and one thing is new: the bill is real. The workflow `aks-metered` builds a fresh cluster for every arm the same way: a system pool of one machine, tainted so no workload lands on it (Azure's add-ons and the load generator live there; it is never measured and never governed), and one or several **work pools** under Azure's own cluster autoscaler, every pool labelled `omni-role=work`, every pool starting full. Native is that autoscaler alone. Omni on top is the same autoscaler with Omni-Compass idling the machines it gives back, which the autoscaler then deletes on its own schedule. The bill counts every work machine that exists, every 15 seconds, priced at Azure's list price for its family (`tools/live_reps.py`, `POOL_PRICES`); each cluster is deleted when its arm ends, so nothing keeps billing.

Sizing the fleet to the lever. The smallest saving a fleet can show is one machine. On 4 workers one machine is 25% of the fleet, so only a saving of about 30% or more can clear the noise; on 15 workers about 10%; on 96 about 3%. The expected machine saving under Omni-Compass is a few percent, so the 4-worker runs (`results/live/V1_AKS_STEADY.md`, `V1_AKS_BURST.md`) read no difference beyond the noise on every gauge, which is the honest reading of a fleet too small for the lever, not a result against it. A new subscription allows 200 vCPUs in a region but 10 per machine family, so one family gives five 2-vCPU workers; the way past it is **several families at once**: eight pools of four to five workers each make a fleet of 39 (`worker_pools` input, `size:max,size:max,...`; `pool_prices` names each family's price). The app's replica ceiling is raised with the fleet (`hpa_max`: nine 200-millicore pods fit one 2-vCPU worker, so 9 × workers lets the fleet fill), the same in both arms. The preregistered design is in `docs/K8S_COMPASS_PREREGISTRATION.md`, "The fleet that can show one machine"; the account setup, click by click, in `docs/AZURE_SETUP.md`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

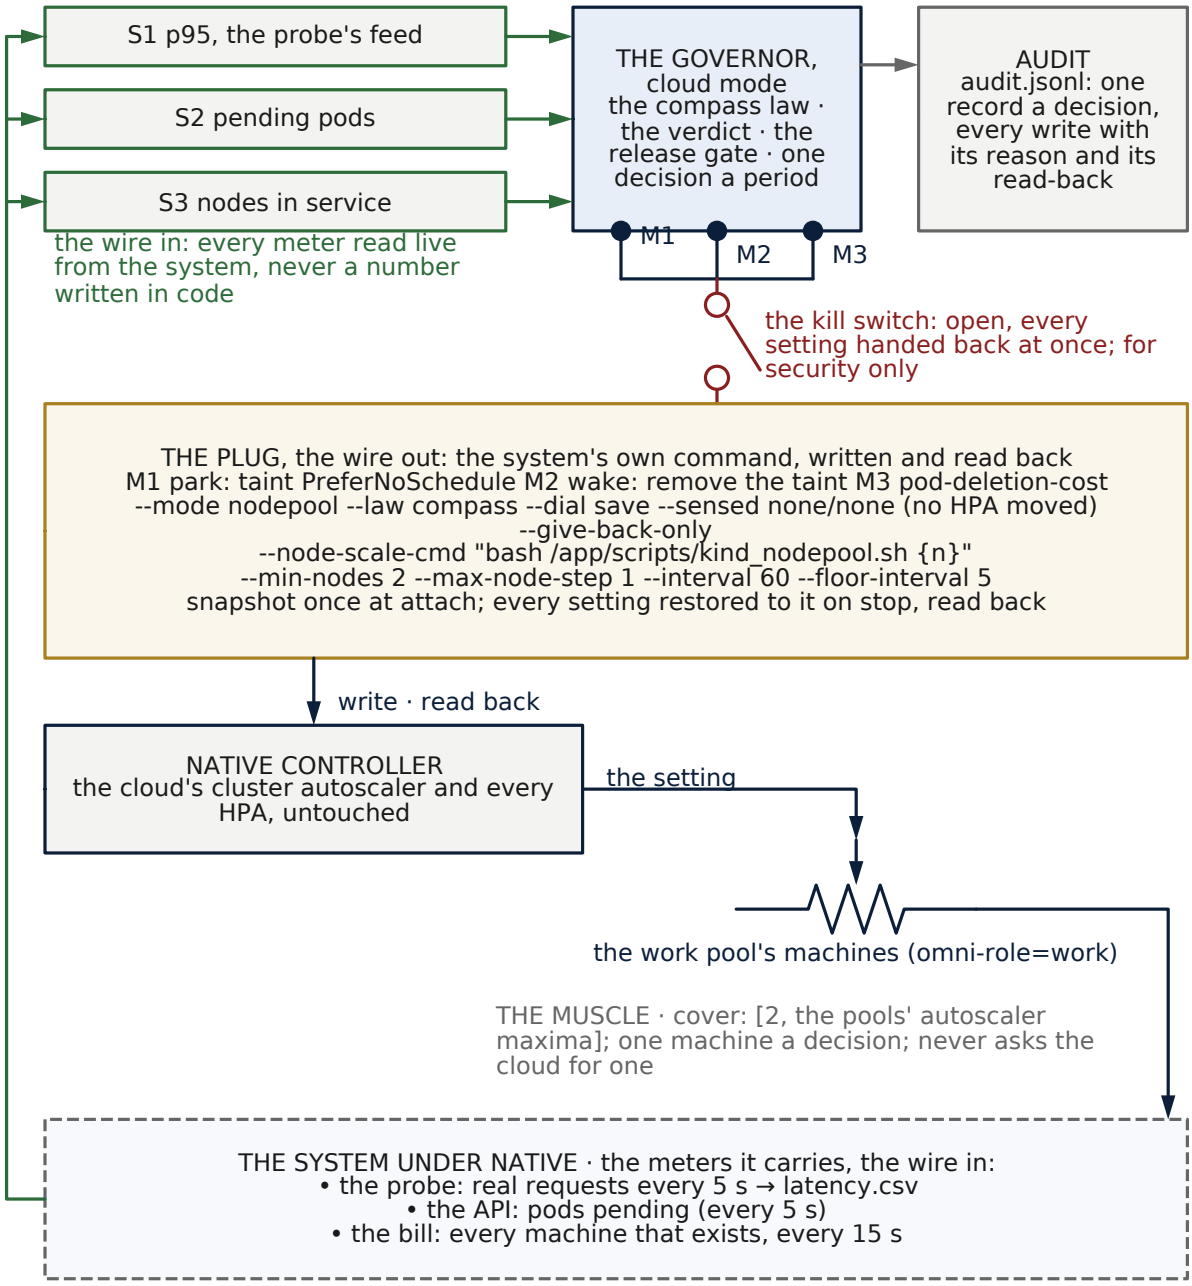


Figure 35. Wiring schematic: a managed cloud cluster, the machines alone (the cloud mode). The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the probe's feed, the pods waiting and the machines in service; the only motors park a machine (a PreferNoSchedule taint), wake it (the taint removed) and mark its

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

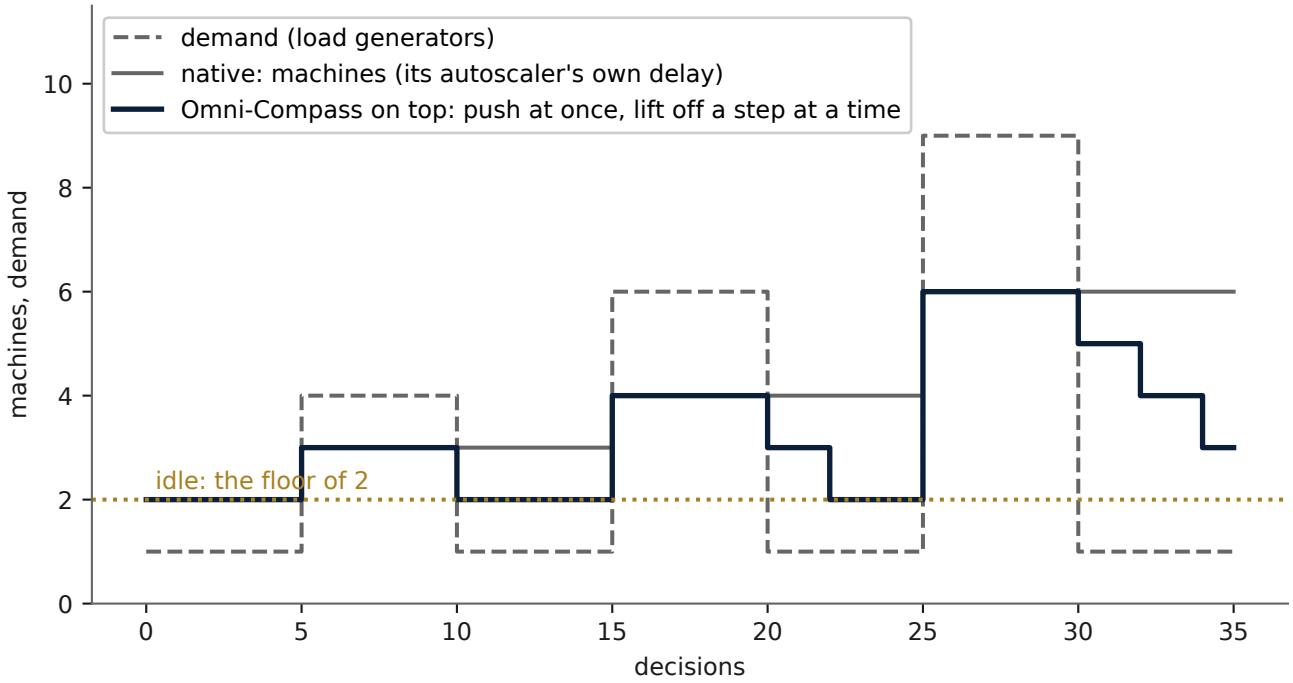


Figure 36. Modelled trace: one pedal over a burst, machines against demand (class S: the rules of the pedal drawn over the burst 1 4 1 6 1 9, five decisions a step). Native's autoscaler adds a machine when pods cannot be placed and removes one after its own delay; with Omni-Compass on top the push adds capacity at once at the wall and the lift off gives it back one machine at a time through the gate and the trial, never below the floor of 2.

pods first to go; no autoscaler is moved, no processor conveyed, no power capped. A machine is parked only after its own trial (the response time holds within 2%) and woken on a breach: at the next decision (60 s) for a response time over the line, at the next fast check (5 s) for a waiting pod. No cloud credential: the governor holds a Kubernetes service account that can read, taint and annotate, nothing more.

In the cloud, the bill is the gauge, and it is never raised. In a public cloud every machine that exists is billed, whether it carries work or not, so the aim on a managed cluster is native's work for a smaller bill, never a bigger one. The cloud therefore runs at the tune-down (`dial save`, the `dial` input of `aks-metered` and its default) with the governor on the machines alone (`OMNI_MACHINES_ONLY=1`): it moves no pod autoscaler, conveys no processor and caps no power, so the pods are exactly native's and the cloud's own autoscaler alone makes machines; the governor parks a machine the cloud already made only after its own trial shows the response time holds, and wakes it on a breach. It can hold no more pods and no more machines than native: the bill can only fall or stay, and it falls in the quiet stretches between bursts and in a day's trough. The max (`dial max`) belongs where the machines are already paid for (your own racks, a chip whose heat line is its limit), where more work from the same machines is the gain; in a cloud it buys speed with machines, and every machine it adds is on the bill. The benefit of the max is taken before the cloud, in the service's own engine, or after it, in the chip. In the cloud, as everywhere, the governor's fast checks (the scheduling floor, the pod reflex, conveyance on every third) run every 5 seconds, three times as fast as the HPA's own 15-second

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

check, and its full decision every 60 seconds. Through v6 a shorter decision period was not a free setting: the give-back trial's phase (`max_trial`, 20 decisions), the breach cool-down (`--slo-clear`), cruise (`--cruise-after`) and the trial spacing counted in decisions, so at 5 seconds a trial would have lasted 100 seconds, too short for the 200 response times it measures, and no machine would ever have been given back (`docs/K8S_COMPASS_PREREGISTRATION.md`, "The decision period in the cloud"). v7 states every one of them in seconds (`--slo-clear-s 180`, `--cruise-after-s 120`, `--strict-window-s 300`, `--verdict-every-s 600`, `--verdict-recheck-s 7200`, `--verdict-trial-s 1200`) and converts each to decisions at the running period, n = max(1, round(seconds / period)), so at 60 seconds every count is v6's; the compass's step on the HPA target and its coasting are scaled by period / 60, so the target moves the same amount a minute, and a pool gives back at most one machine a minute at any period (`docs/OMNI_V7.md`, Chapter 9). The default period stays 60 seconds, because the governor core still advances its own state one fixed step per decision; a shorter default waits for that clock in seconds and a test that shows no LOSS. In the cloud v7 also makes the whole rule one flag, `--give-back-only`, enforced in the governor itself: every actuator but the node pool off, the replica ceiling 0, the dial at the tune-down (`docs/OMNI_V7.md`, Chapter 11).

What the Azure runs taught us. Three lessons, each recorded as an amendment to the preregistration before the fleet was dispatched again. First, a fleet is sized by the lever, not by the budget: a 4-worker fleet cannot show the few-percent machine saving the law makes, so its honest reading is "inside the noise", and running it again would not change that. Second, a new subscription's allowance is per machine family, so the fleet that can show one machine is built from nine families at once, each pool at its own list price, and the bill prices each pool separately. Third, a cloud region can refuse a new cluster for hours at a time (Azure's capacity for new control planes in its region, on both control-plane tiers); the harness therefore checks the subscription's allowances before it builds anything, so a refusal costs cents and not a cluster, and every refusal is recorded with its time.

A database behind its connection pooler

PostgreSQL is wired through PgBouncer, the pooler most of its deployments already run (`docs/POSTGRES_PREREGISTRATION.md`, `tools/run_pgbench.py`). Nothing models the database. The wire in is the pooler's own report (`SHOW STATS`, `SHOW POOLS`): once a second, the time a transaction spent in the server plus the time clients waited for one, over the transactions completed. The wire out is one setting through the pooler's own admin console, `SET default_pool_size`, inside the cover [2, 90]: never under two server connections, never within ten of PostgreSQL's connection limit. The compass holds that reading at 40% of a 50 ms line. Where the time was spent decides the direction: waiting for a server grows the pool; time inside the server shrinks it by one, so fewer backends fight for the same cores; calm gives back one idle server a second, and only one the pooler itself shows idle. At 95% of the line the knob is handed back to the pooler's own setting at once. If the knob is found at a value Omni-Compass did not write, it stops writing (one writer). At the end of every omni arm the pool size is restored to the snapshot and read back. The

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

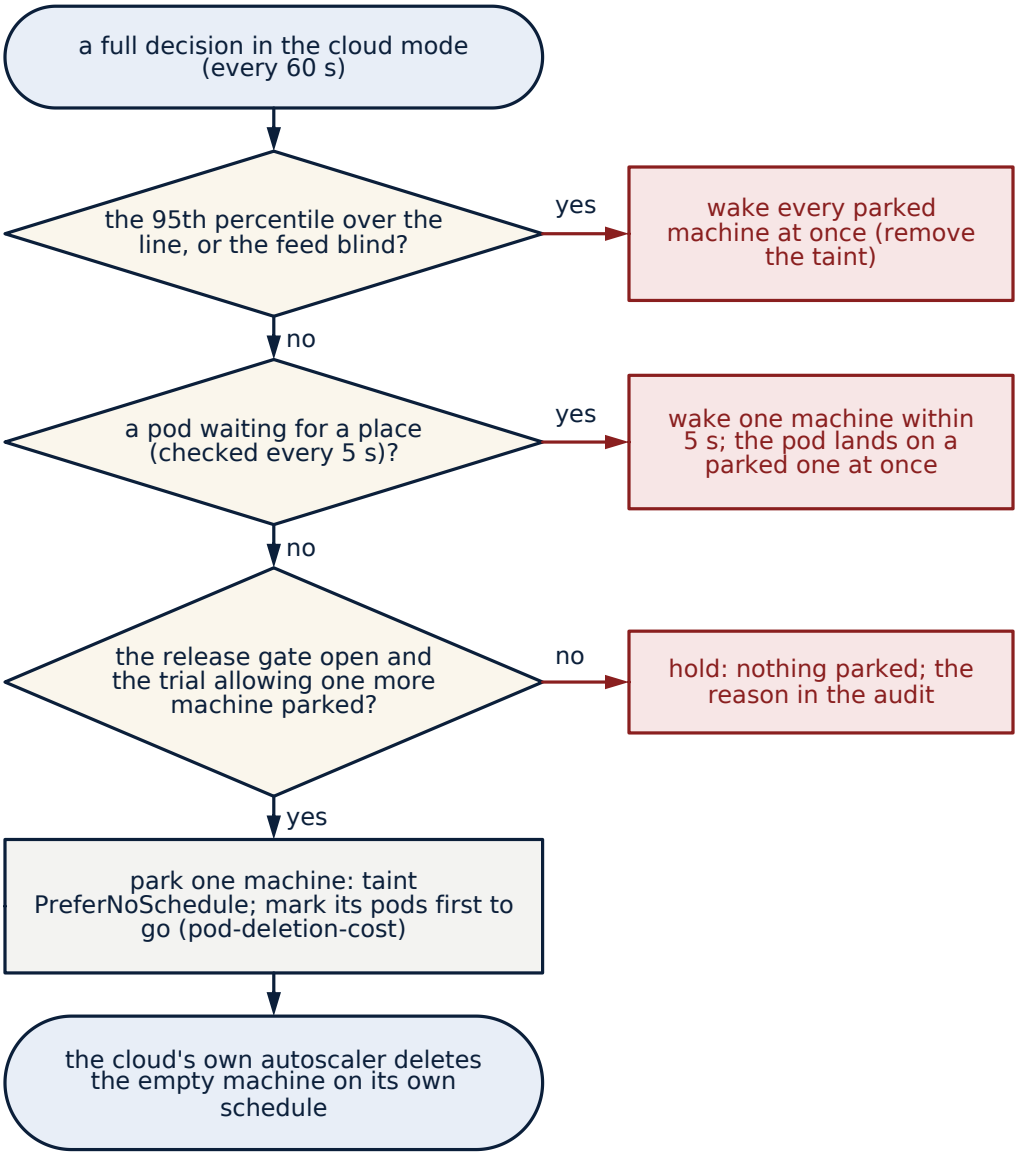


Figure 37. Flowchart: parking and waking a machine in the cloud. At every full decision: a 95th percentile over the line, or a blind feed, wakes every parked machine at once; a pod waiting for a place, checked every 5 s, wakes one machine within 5 s while the pod lands on a parked one at once; otherwise, only with the release gate open and the trial allowing it, one machine is parked (a PreferNoSchedule taint, its pods marked first to go), and the cloud's own autoscaler deletes it once empty, on its own schedule.

same plug fits any pooler or proxy with a console and a pool-size setting (PgBouncer, Pgpool-II, ProxySQL, the application's own pool).

What the database taught us. The first untouched run on this stack was a loss, and it stays in the preregistration as it came (`docs/POSTGRES_PREREGISTRATION.md`, "The first untouched run, and amendment 1"): on the read-only workload the pooler's own clock read 0.11 ms a transaction against a 50 ms line, so the law gave back one idle connection a second until the pool stood at its floor of two, while the users'

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

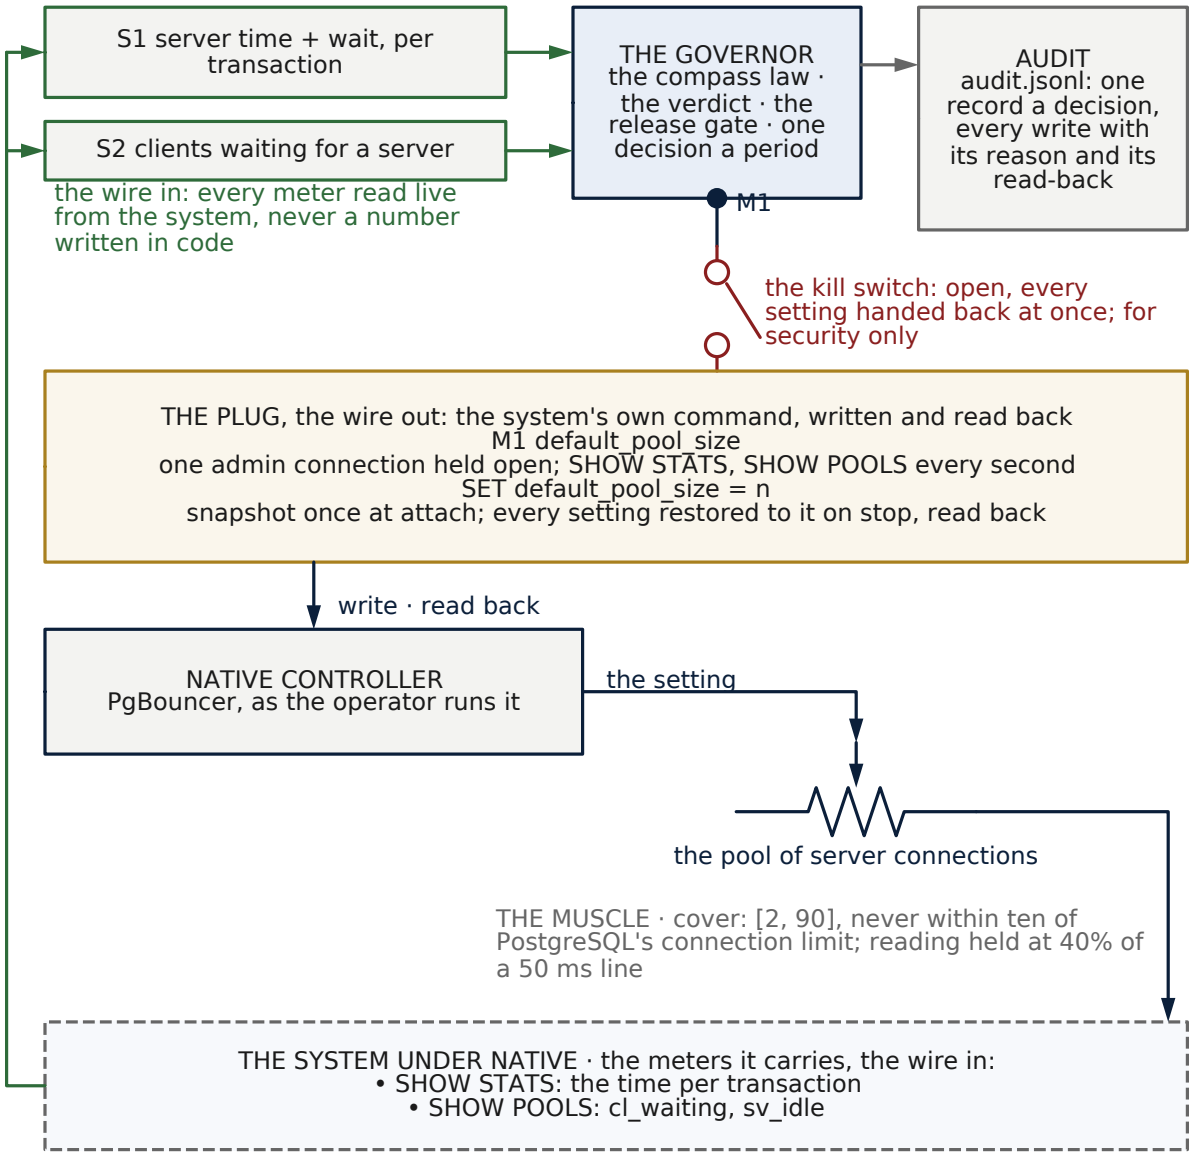


Figure 38. Wiring schematic: a database behind its connection pooler. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the server time plus the wait per transaction and the clients waiting for a server; the one motor is default_pool_size, written over one admin connection held open. Up: a server for every percent of clients waiting; down: one idle server, only while clients waited under 1%; at 95% of the line the pool goes back to the pooler's own setting at once. One writer; the restore read back at the end.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

95th percentile went from 4 ms to 3.9 s. The pooler could not see the time a client spent behind its own schedule waiting to send, so its clock said calm while the users waited; the preregistration had said so in one line without drawing the consequence. Amendment 1, declared before any counted run, made the reading the larger of two: the pooler's service time, or the share of its clients queued for a server, so a pool too small for the offered rate shows at the pooler as clients waiting and the knob fails up to the operator's setting at once; and it held the dwell when lifting off only, never when pushing. The counted runs are three new untouched runs on the amended rule; the first run is not counted and is not hidden. The result the same in all three of our runs is a resource held, not speed, and its cost the same in all three of our runs is the host's CPU: the compass's own reads of the pooler's console every second are CPU the native pooler never spends, and they are counted against it.


What the cost turned out to be (amendment 2, 8 October). The record had explained the +14% to +28% of host CPU as "PgBouncer queuing clients behind a smaller pool", without a measurement. Measured, it was ours. The pooler's own log of one counted workload holds 7,956 logins to its admin console, one for every `psql` process the harness launched to take a reading (about two a second in both arms for the sampler, four more a second plus three per write in the omni arm for the brain); one launch costs about 52 ms of CPU on a machine of the runner's class, because psql loads libpq, OpenSSL, GSSAPI and LDAP and connects before it runs one command; and a paired repetition of `select` with a per-process meter put +55.9 CPU-seconds on those launches against a +52.8 s difference in the host total, with PgBouncer at +1.2 s and PostgreSQL at −4.7 s. The second cost in the table, the median latency +15% to +17%, was the take-back rule giving back one idle server a second whenever the pooler's service time read calm, which against a 50 ms line it always did, so the pool was shrunk into a queue the pooler itself was reporting. Amendment 2, declared before the second counted set (`docs/POSTGRES_PREREGISTRATION.md`): the harness speaks the pooler's wire protocol over one connection held for the whole arm, in both arms, so no process is launched for a reading; the queue line: a server is taken back only while the pooler's clients waited for one under one percent of its time in the last second and a transaction was served, and while they waited one percent or more servers are added back, one for every percent of waiting, up to the pooler's own setting (the one-percent line the two other database tests already use), so the pool probes down to the smallest size that serves without waiting and gets its servers back the moment anyone waits; and the harness records its own CPU beside the host's. The engine's 40 files are untouched (`tools/omni_version.py` prints omni-v3). The second set's table replaces the first when it lands, and the first moves whole to `docs/history`.

Independent simulators, each with its own native controller

Three published simulators are wired the same way, and the simulator's own controller is always native:

- **CityLearn** (`tools/run_citylearn.py`): every district the simulator ships; the knob is each building's battery charge and discharge inside the simulator's own limits; the native arm is the simulator's own rule-based control.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

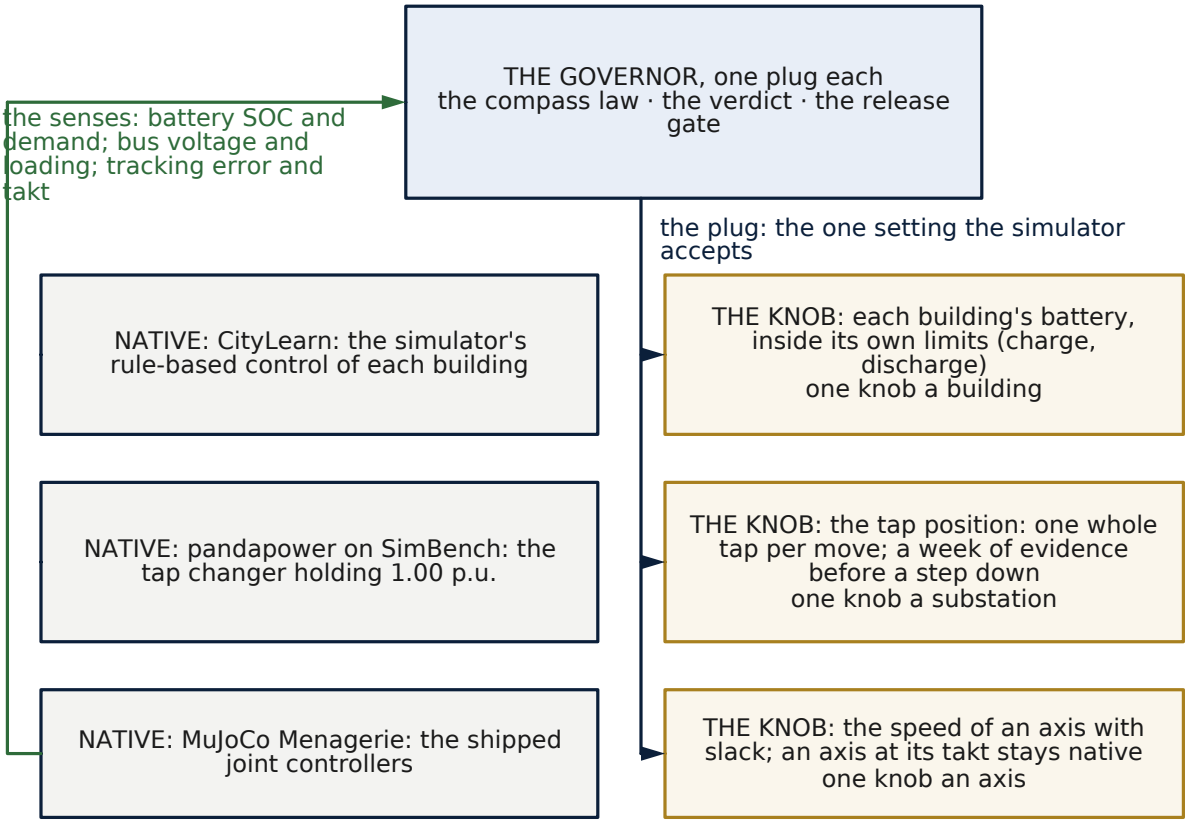

The simulator's own controller is native in every cell; the plug writes the one setting it accepts, reads it back and restores it at the end. Receipts are class S: statements about the simulator's model, never about hardware.

Figure 39. Wiring schematic: three independent simulators, each on its own native controller. One plug for each: CityLearn's rule-based control of each building, pandapower's tap changer on SimBench, and the shipped joint controllers of the MuJoCo Menagerie. The governor writes the one setting each simulator accepts, reads it back and restores it at the end; the senses come back along one bus. Receipts here are class S: statements about the simulator's model, never about hardware.

- **pandapower on SimBench grids** (`tools/run_pandapower.py`): the knob is the substation tap changer, one whole tap per move and a week of evidence before stepping down; the native arm holds the tap at 1.00 per unit as the grid ships.
- **MuJoCo Menagerie robot arms** (`tools/run_mujoco.py`): the knob is the joint speed of an axis that has slack; the paired physics trial written before the run leaves an axis at its takt native, so UR5e and iiwa 14 have nothing for Omni-Compass to move and the Gen3 and Panda do.

Each is preregistered (`docs/CITYLEARN_PREREGISTRATION.md`, `docs/PANDAPOWER_PREREGISTRATION.md`, `docs/ROBOTICS_PREREGISTRATION.md`), each runs A, B and C as separate GitHub runs, and each table is made by rule (`tools/citylearn_abc.py`, `tools/pandapower_abc.py`, `tools/mujoco_abc.py`). These are evidence class S: statements about the simulator's model, never about hardware.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What the simulators taught us. Three things a referee should weigh. First, a deterministic simulator makes the three-run rule stricter, not looser: MuJoCo and pandapower reproduce to the digit on any machine, so their A, B and C must agree to the digit and any difference is a finding about the harness, while PyBullet reproduces only to a part in a thousand across machines, which the swarm table discloses as an amendment and tolerates by that much and no more. Second, a knob that cannot pay is left alone by the physics, not by a rule of thumb: the robot arms' paired trial showed that two of four arms gain nothing from a speed override and left them native, the cooling model showed that a cap on cooling power can never remove less heat and so is never a lever, and a battery's reserve is spent only at the wall because every round trip through the cells costs the efficiency loss (`docs/MECHANISM_OF_ACTION.md`, 9.6). Third, a gain in one gauge is often a loss in another, and the simulators show both: the grid's losses rise in the four grids with their own generation while the energy drawn falls everywhere; the buildings' bills rise in the 2023 districts while their peaks fall; the Panda's copper loss rises while its torque falls. The tables carry every one of those rows, and the index carries none of them, because they are models.

The big organisms on a rented machine

The whole tower and the four stacked at 100 copies (about 110,700 and 190,800 modelled muscles) with a real cluster inside are also run on rented eight-core machines, **detached** (`.github/workflows/big-organism-detached.yml`), so that the cluster has more cores under it than GitHub's four-core runner gives: `start` rents one Azure machine, installs the tools, starts every repetition of every organism under `nohup` and leaves the machine running on its own; `collect` (every two hours on the clock, or by hand) copies the files back when every repetition has finished, publishes one artifact per cell and deletes the machine; `survey` lists which machine sizes and quotas a subscription may rent, region by region, and rents nothing. A machine older than `max_hours` is collected as it is and deleted, so nothing runs forever on the bill. The commit to run is an input, so a run is always tied to one engine. **The clock rule** (Chapter 46) and protocol 3 decide the window for each size on each machine: the window is set from the heavier arm's step, timed on the machine before either arm, so the organism keeps its clock (the tower at 100 copies on 14 October: 2,880 s windows on three machines, ten repetitions in all; the stack follows on the same three machines). No 1,000-copy run is started from 12 October; earlier engines' 1,000-copy runs on this workflow stand as they were run, in their own tables.

The same workflow carries a second test. With the input `test=robust` the machine runs the robustness harness's long scenario instead of an organism (`scripts/kind_paired.sh` with `ROBUST=long`, exactly as the GitHub job runs it), with the window stretched to whatever `duration_s` asks and the wandering load schedule repeated to fill it; the 24-hour run of section 16.8 uses it, one paired repetition on each of three rented eight-core machines of three families (the start job tries the size it is given and falls back through the eight-core sizes the subscription may rent when the allowance refuses it; the four-core size asked for was refused because the tower's machine held its family's allowance, and the preregistration records what was rented), collected and deleted at 60 hours at the latest. The cells it writes are named `robust-long-x<window>-<repetition>` beside the organisms'

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`six-<organism>-x<copies>- <repetition>`, and the collect job gathers both. The `max_hours` input is the machine's own limit, written into the machine at start, so a collect that finds a machine past its limit takes what is there and deletes it, whichever job started it.

Three things a reader should know about any detached result. The machine is one Azure virtual machine rented for this run alone, not a GitHub runner shared with a queue of other jobs, so its size is known (the table names it) and it is not cut off at six hours; that, and not only the job limit, is why the big organisms are run there. The files come back exactly as the machine wrote them, copied cell by cell with the machine's own log beside them, and the archive bot stores them under the collect run's number with a SHA-256 list of every file, so the start run and the collect run are both cited in the table. And the machine is deleted after the collect, so a result cannot be re-read from the machine, only from the archived files; the preregistration says this before the first start.

A message broker's consumer group

Apache Kafka is wired as an operator runs it (`docs/KAFKA_PREREGISTRATION.md`, `tools/run_kafka.py`): one broker as shipped, a topic of eight partitions, a consumer group at the operator's count of two. Nothing models the broker. The wire in is the group's own end-to-end latency: each message carries its production time, each consumer records when its handling ended, and the reading is the mean over the messages consumed in the last second; a second with nothing consumed while messages wait reads as the line (someone is waiting and no one is taking), and nothing consumed with nothing waiting reads as calm. The wire out is the count of consumers in the group, which is what an operator changes, inside the cover [1, 8]: never fewer than one, never more than the topic has partitions. The compass holds the reading at 40% of a 500 ms line with a response time of 3 s, because a consumer added or removed shows only after the group rebalances. Slow service with messages waiting adds consumers in proportion to the force; calm with nothing waiting gives back one idle consumer a second after a five-second dwell; at 95% of the line every consumer the topic can use starts at once. The rebalance that every move costs is paid by Omni-Compass and counted in the gauges. At the end of every omni arm the count is handed back to the operator's and read back. The result (Chapter 48) is the shape this wiring predicts: the queue kept short, no message lost, at the cost of consumers running, which reads power given by rule and stands beside the gain.

A cache's memory ceiling

Redis is wired as Ubuntu ships it, with the two settings an operator sets for a cache, a memory ceiling of 64 MB and the allkeys-lru eviction rule (`docs/REDIS_PREREGISTRATION.md`, `tools/run_redis.py`). The application in front of it is ours and declared: 1,500 requests a second from 32 threads on a Zipf working set that widens and narrows one notch at a time; a miss costs a declared 5 ms trip to the store behind the cache and a write-back. The wire in is the application's own request latency, the mean over the last second (a hit about 0.3 ms, a miss about 5.5 ms). The wire out is one setting through Redis's own console, `CONFIG SET maxmemory`, inside the cover [16, 512] MB. The compass holds the reading at 40% of a 2 ms line. Its direction rule carries the do-no-harm gate in the form this stack needs: misses grow the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

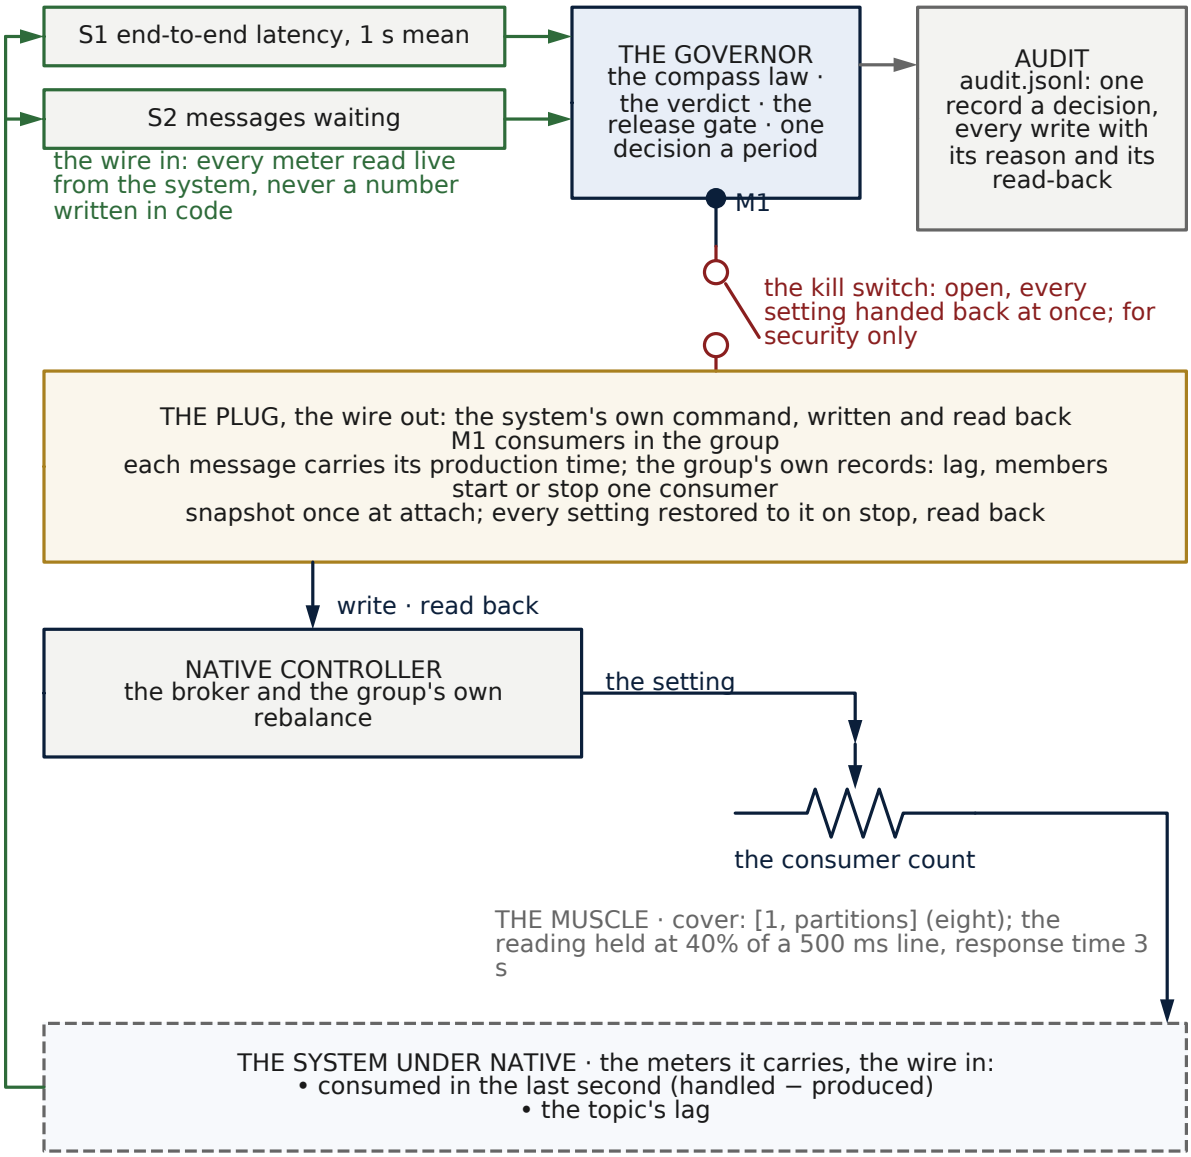


Figure 40. Wiring schematic: a message broker's consumer group. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the end-to-end latency and the messages waiting; the one motor starts or stops one consumer. Slow with messages waiting: consumers added in proportion to the force; calm with nothing waiting: one idle consumer given back a second after a five-second dwell; at 95% of the line every consumer the topic can use. The rebalance every move costs is paid by Omni-Compass and counted in the gauges.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ceiling by notches of 8 MB **only while the cache is full** (memory used at 90% of the ceiling or more), because a miss in a cache with room to spare is a cold miss that no ceiling can mend; calm with nothing evicted in the last second gives back one notch a second, after a five-second dwell since the last growth; at 95% of the line with the cache full a quarter of the cover is added at once. One writer: a ceiling found at a value Omni-Compass did not write stops it. At the end of every omni arm the ceiling is handed back to the operator's 64 MB and read back. The memory the compass holds for a wide working set is the resource this benchmark trades and reads power given by rule; the gain is the hit rate and the work inside the line. The result (section 16.4) is exactly that shape: on all three untouched workloads the work inside the line and the hit rate rose 14% to 27% and the ceiling held rose from 64 MB to 200 to 270 MB, with the host's CPU inside the noise and every ceiling handed back.

Drone swarms: the autopilot's cruise

In gym-pybullet-drones (University of Toronto, MIT License; `docs/SWARM_PREREGISTRATION.md`, `tools/run_swarm.py`) every Crazyflie 2.x flies its shipped position controller along the planner's path at the planner's cruise: that is native. The wire in is each drone's tracking error, the distance between the drone and the point its autopilot was told to be at, on a band from 0 to a declared safe error of 0.25 m. The wire out is one knob a drone, the cruise override: the fraction of the planner's cruise the carrot moves at, never under 1.0 (the planner's own) and never over 2.0 (a quarter of the autopilot's own speed limit), moving by at most 0.01 a control tick. With slack the compass spends it as speed; as the error grows it eases; at 95% of the safe error the cruise is the planner's at once. Two guards belong to this stack: a **separation wall** (a drone with another within 0.5 m flies the planner's cruise, whatever the error reads) and the **paired physics trial** before the counted missions, which asks the simulator's own figures whether a faster mission costs less energy at all and keeps the error under the safe error; where it does not, the override is left native for that cell and the cell reads "nothing for Omni to move". Energy is a declared model from the simulator's own motor constants, said to be a model wherever it is printed; a collision voids the cell. At every landing and at the end of the run the override is handed back and read back.

A database's storage-engine cache

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

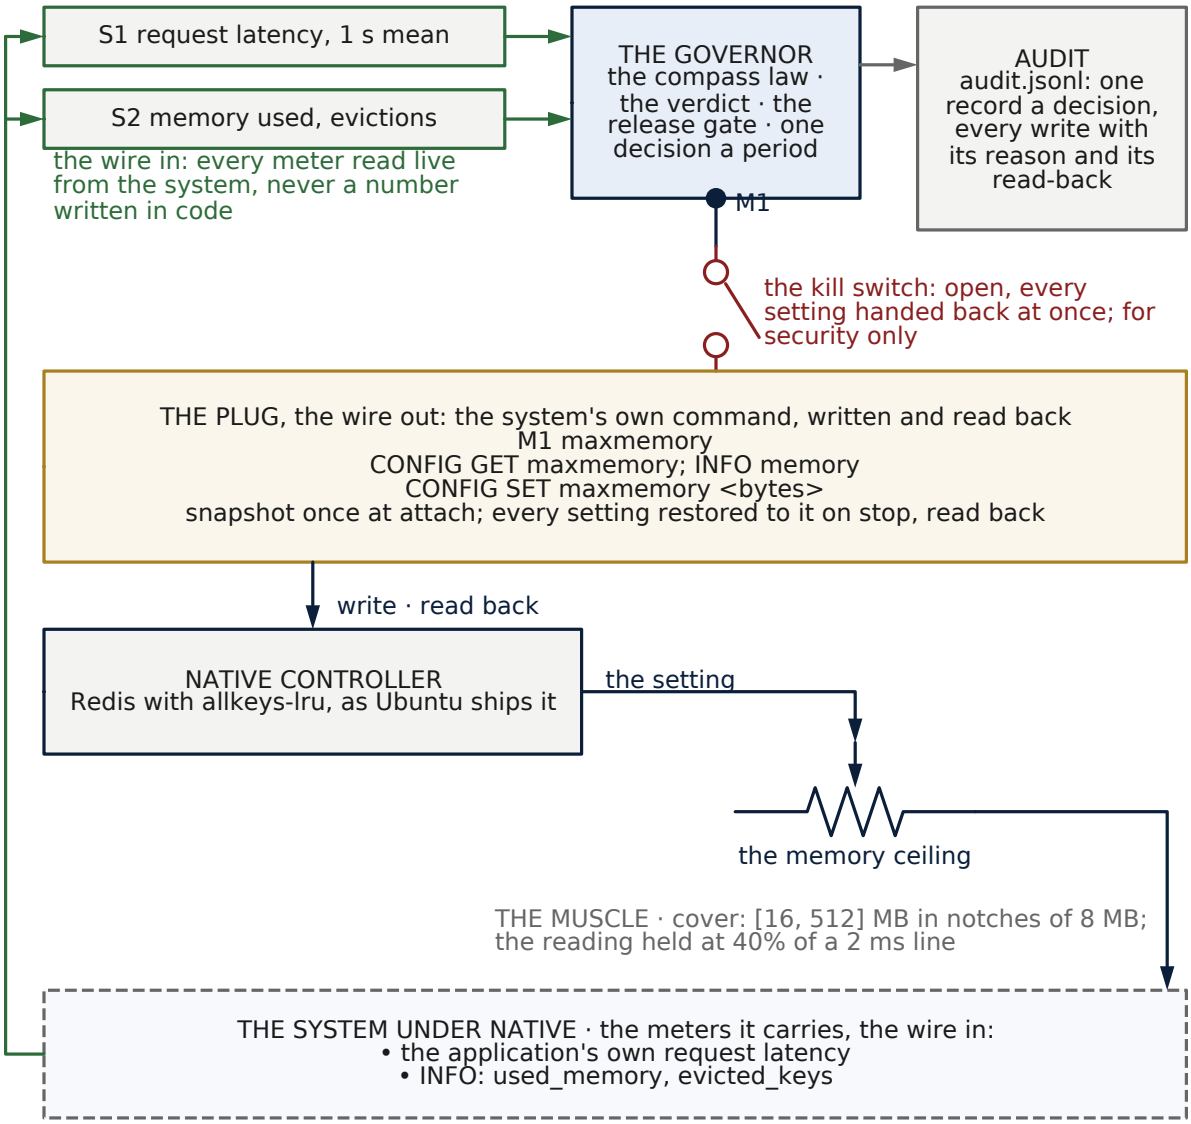


Figure 41. Wiring schematic: a cache's memory ceiling. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the request latency and the memory used with the evictions; the one motor is maxmemory, written with CONFIG SET. Misses grow the ceiling only while the cache is full (used ≥ 90% of the ceiling); calm with nothing evicted gives one notch back a second after a five-second dwell; at 95% of the line with the cache full, a quarter of the cover.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

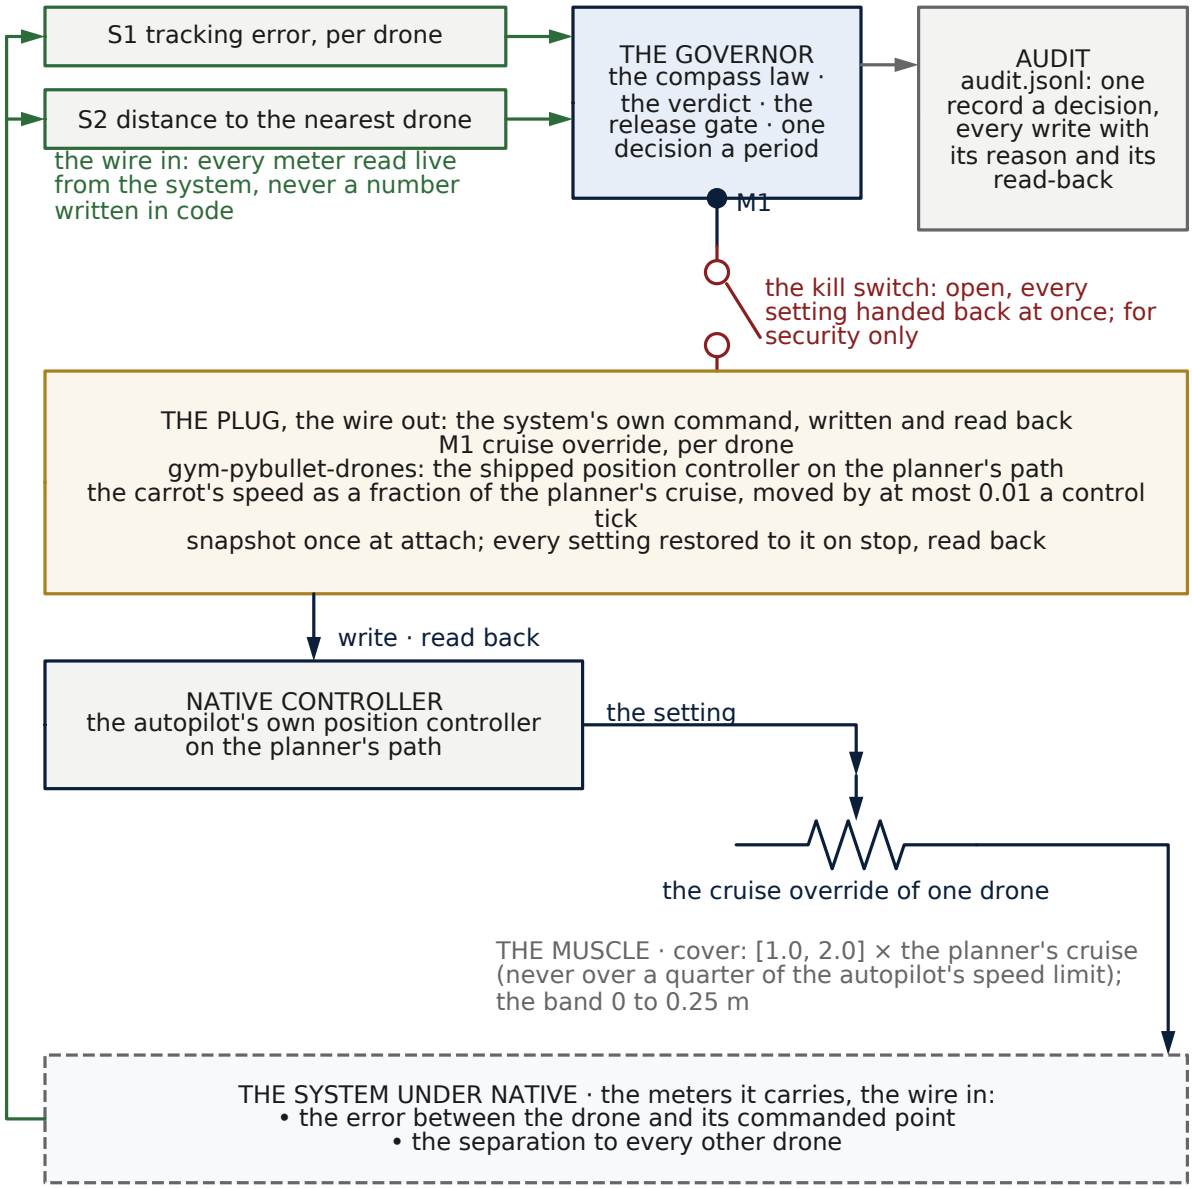


Figure 42. Wiring schematic: a drone swarm's cruise override. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are each drone's tracking error and its distance to the nearest drone; the one motor is the cruise override of one drone, a fraction of the planner's cruise moved by at most 0.01 a control tick. With slack the compass spends it as speed; as the error grows it eases; at 95% of the safe error the planner's cruise at once. The separation wall: a drone within 0.5 m of another flies the planner's cruise whatever the error reads. A collision voids the cell.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

MongoDB is wired as an operator runs it (`docs/YCSB_PREREGISTRATION.md`, `tools/run_ycsb.py`): the 8.0 series from its publisher's own signed repository, its configuration as shipped but for the one setting an operator sets for the storage engine, the WiredTiger cache, at 512 MB. The questions are asked by YCSB, the published cloud-serving benchmark, running its own core workloads as the project ships them, with the key space stepping one notch at a time through the cache and past it, so the working set fits the operator's cache at the low notches and outgrows it at the high ones. The wire in is the server's own mean read latency over the last second, from its `serverStatus` operation latencies, differenced. The wire out is one setting through the server's own console, `setParameter wiredTigerEngineRuntimeConfig cache_size`, inside the cover [256 MB, 2,048 MB]: the server's own floor at one end, a quarter of the machine at the other. The compass holds the reading at 40% of a 1 ms line (written as 2 ms before the first smoke run and set at 1 ms on the tuning workload's figures, as the preregistration reserved; see below). The direction rule is the cache's: slow reads grow the cache by notches of 64 MB only while the cache is full (bytes in it at 90% of its size or more), because slow reads in a cache with room to spare are not the cache's to mend; calm with no page evicted in the last second gives back one notch a second after a five-second dwell; at 95% of the line with the cache full a quarter of the cover is added at once. One writer, read-back and the hand-back at the end are the plug's, as everywhere. *Amendment 1 (8 October, declared before the second counted set): the give-back gate is now the cache's miss share, pages read into it under one percent of the pages requested from it in the last second, the MySQL test's gate, and growth is gated on missing the same way; the first set's audits showed that "no page evicted" is satisfied by every cold cache while it fills, so every burst and c arm gave four notches back in its first five seconds, before its first eviction, and then sat at the floor of the cover evicting for the rest of the arm. The memory the first set credited was that artefact, and the second set is expected to credit less, perhaps nothing beyond the noise.* Disclosed before the run: on a machine where the data files fit in the operating system's own page cache, a storage-engine cache miss is a read from memory and a decompression, not a disk read, so the gain available to this knob is smaller than it would be on a machine whose data does not fit in memory; the result will say what it is. The same plug fits any store whose engine exposes a cache size at run time (InnoDB's buffer pool, RocksDB's block cache) and any store that does not can only be sized at restart, which is not a knob Omni-Compass moves.

What the smoke runs taught, and why they are in the record. A benchmark of a cache is only a benchmark if the working set reaches the cache. Three smoke runs of the tuning workload, one repetition each and none counted, were needed before the harness asked the question it was built to ask, and each is written in the preregistration with its run number and its figures. The first failed before an arm ran, on two harness faults (a relative file path handed to a program that runs from its own directory; a server log copied as a file the upload step could not read). The second ran end to end and showed the design did not touch the cache at all: YCSB's shipped request distribution is zipfian, which concentrates almost every request on a few thousand hot records whatever the key space, so at the top notch of 1.5 million records the cache held 36 MB of its 512 MB, both arms answered inside the line with a p95 of 0.20 ms, and omni, seeing calm and nothing evicted, gave memory back to the floor of the cover. That would have read as a free memory saving for Omni-Compass, and it would have been worthless: a knob with nothing to do had moved to its floor. The requests were changed to a uniform draw over the notch's key space so the working set is the key space, the one departure from YCSB as

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

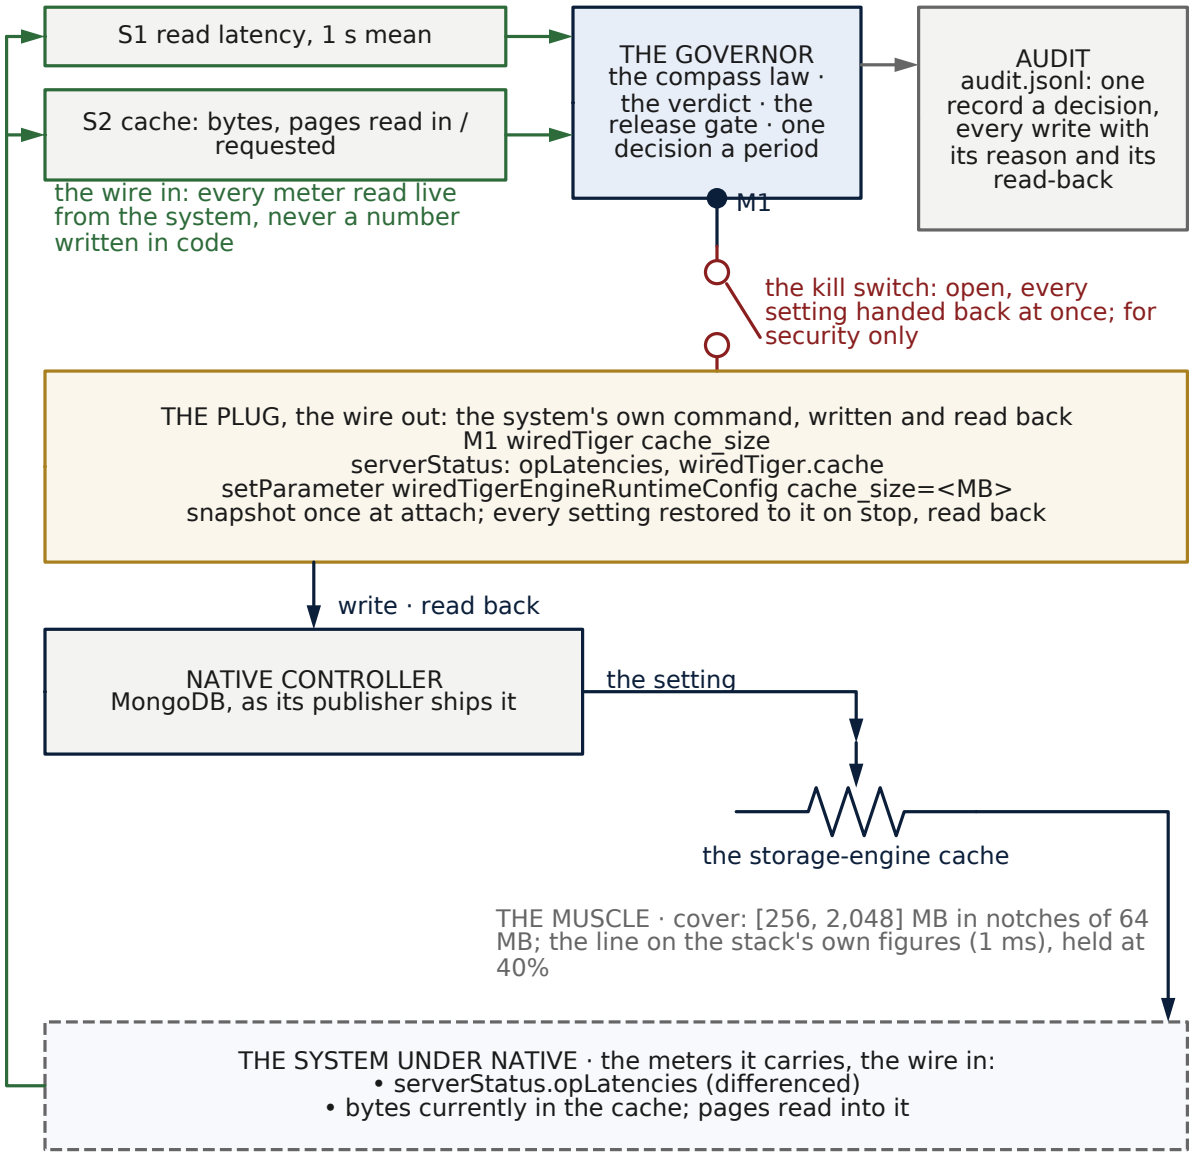


Figure 43. Wiring schematic: a database's storage-engine cache. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the read latency and the cache's bytes with its pages read in against pages requested; the one motor is the WiredTiger cache size, written through setParameter. Grow only while the cache is full (≥ 90%) and missing (pages read in ≥ 1% of pages requested); give one notch back after a five-second dwell only while the miss share is under 1%; at 95% of the line with the cache full, a quarter of the cover.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

shipped, and said so. The third smoke still held 38 MB, and the per-notch figures the runner now prints showed why: the dataset was loaded with ordered keys but the run phase used YCSB's default hashed keys, so every read asked for a record that did not exist and was answered from the index alone, which fits in a few megabytes. The run phase now names ordered keys too. Nothing in the rules, the gauges or the workloads changed across the three. The fourth smoke reached the cache: native held 336 to 481 MB of its 512 MB across the notches and read 453,000 pages into it, and its per-notch figures set the line. The server's mean read latency ran 0.15 to 0.24 ms while the cache held the working set and 0.23 to 0.33 ms while it did not, with a p95 never above 0.42 ms; against a 2 ms line every one of those readings sat in the bottom quarter of the band, under the 0.4 center, so the compass could only ever read calm, the same fault as a Kubernetes line set at ten times the service's normal response. The line was set at 1 ms, the one change the preregistration had reserved for the tuning workload, with the center unchanged, so that a hit is calm and a full cache reading past 0.4 ms is slow; the one repetition's whole-arm figures (work inside the line −1.9%, cache held −31%, pages read +32%, host CPU +8%, p95 equal) are recorded and not counted. The point for a referee is the method: a result that flatters the governor is the first thing to suspect, the suspicion is pursued to a harness cause, the cause is written down with the run that showed it, a band is set on the tuning case's own figures and never on an untouched one, and the counted runs begin only when the harness provably asks the question.

A database's buffer pool, resized online in the server's own chunks

MySQL is wired as an operator runs it (`docs/MYSQL_PREREGISTRATION.md`, `tools/run_sysbench.py`): the 8.0 series from Ubuntu's own package, its configuration as shipped but for the settings an operator sets for InnoDB, the buffer pool at 512 MB (MySQL's own default is 128 MB, and the preregistration says why 512 MB is the operator's setting here), the chunk the server resizes in at its shipped 128 MB, one pool instance, and the performance schema on. The questions are asked by sysbench, the standard OLTP benchmark Ubuntu ships as its own package, running its published scripts as shipped at a fixed offered rate, with the number of tables in use stepping one notch at a time through the pool and past it. The wire in is the server's own mean statement latency over the last second, from the performance schema's statement summary, differenced. The wire out is one statement through the server's own console, `SET GLOBAL innodb_buffer_pool_size`, inside the cover [128 MB, 2,048 MB] and always in whole chunks, because that is how the server itself moves the pool. Two things about this knob differ from the MongoDB cache and the plug carries both. The server resizes asynchronously and reports its progress in its own status variable, so the plug waits for the resize to complete before reading back, and a pool found mid-resize is the server still carrying out Omni-Compass's own write, not a foreign hand. And a shrink evicts pages while the resize runs, so the dwell after any move is ten seconds rather than five. The compass holds the reading at 40% of a 0.6 ms statement line (written as 1 ms, set on the tuning workload's smoke runs, as the MongoDB line was: a hit reads 0.14 to 0.22 ms across GitHub's runners and a full pool missing a third of its reads 0.05 to 0.06 ms more, so the center sits at 0.24 ms, above the hits and under the misses); the direction rule is the cache's with one difference the smoke runs forced: slow statements grow the pool by chunks only while the pool is full, at 95% of the line with the pool full four chunks are added at once, and calm gives one chunk back after the dwell only while the pool's misses are under one percent of its read requests, because

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

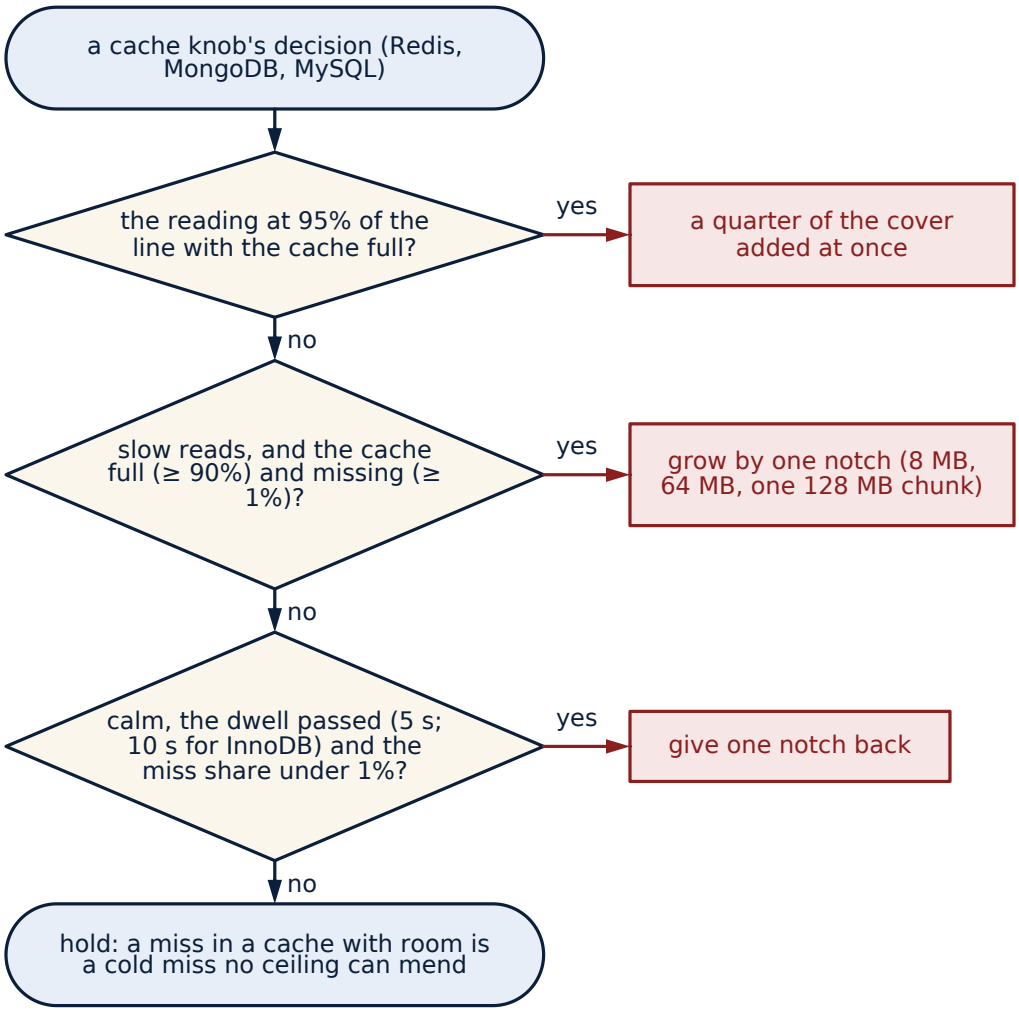


Figure 44. Flowchart: the direction rule of a cache knob (Redis, MongoDB, MySQL). At 95% of the line with the cache full, a quarter of the cover is added at once; slow reads with the cache full (≥ 90%) and missing (≥ 1%) grow it by one notch; calm, after the dwell (5 s; 10 s for InnoDB) and with the miss share under 1%, gives one notch back; otherwise the knob holds, because a miss in a cache with room is a cold miss no ceiling can mend.

InnoDB keeps stale pages resident, so neither "pages free" nor "no page read from disk" ever says that a pool holds its working set, and the miss share does (amendment 2 of 8 October, declared before the third counted set: the pool also grows only while it is missing, one percent or more, the same line the other way, because the second set's audits showed 36 of read_write's 82 grows bought chunks while the pool missed under one percent of its reads, for slow writes the pool cannot mend; and no chunk is given back in a second with no read request). The work-inside-the-line gauge uses a transaction line, the statement line times the statements a transaction as sysbench's script ships it (one for a point select, fourteen for the read-only mix), and says so. One writer, read-back and the hand-back at the end are the plug's, as everywhere. The same disclosure as MongoDB's holds and is made before the run: on a 16 GB machine with a 1.4 GB dataset a pool miss is a read from the operating system's page cache, not from disk.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

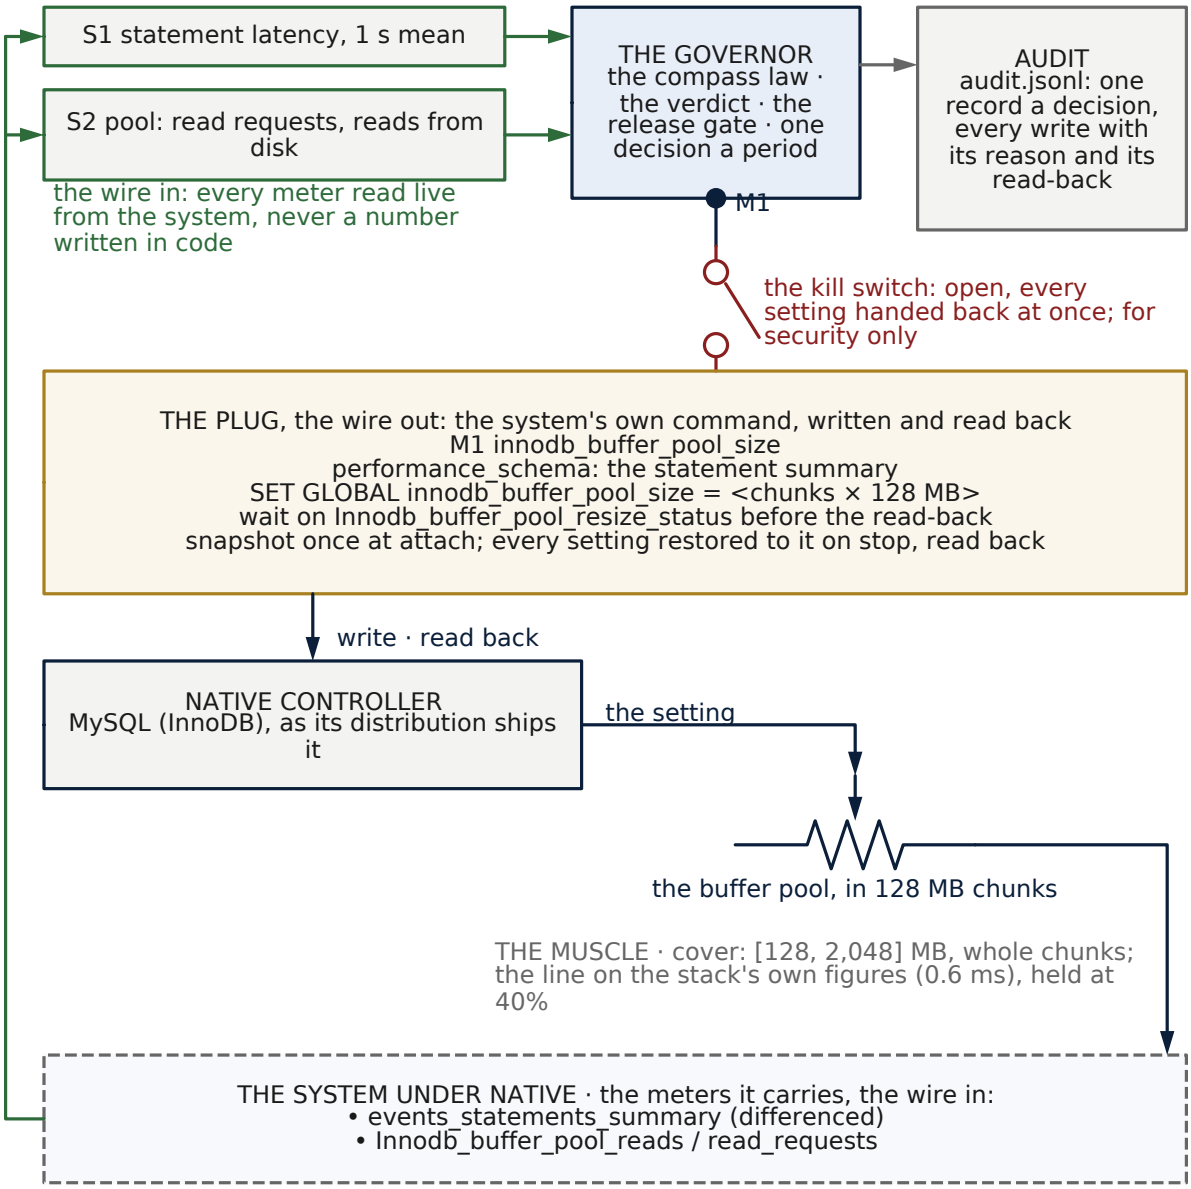


Figure 45. Wiring schematic: a buffer pool resized online in the server's own chunks. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the statement latency and the pool's read requests against reads from disk; the one motor is innodb_buffer_pool_size, in whole 128 MB chunks. The server resizes on its own time: the plug waits for the resize before reading back, and the dwell after a move is ten seconds; the hand-back waits for the server too, writes again if ignored, and records what it waited for.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What the first counted set taught about this knob. Three runs of five workloads (`results/live/V3_SYSBENCH.md`, 8 October) read every gauge inside the noise, and 15 of the 45 omni arms did not read the operator's pool back at the end. The audits show the server still "withdrawing blocks" of a shrink the law had asked for when the arm ended: InnoDB withdraws the last blocks of a shrink only when the pages the load has pinned are released, so under load the withdrawal does not finish, and the server ignores a new `innodb_buffer_pool_size` while a resize is in progress, so the restore the plug issued at that moment was dropped. Every following arm began from a fresh server at the operator's setting, so no other arm was affected, and the decision loop never wrote during a resize (its writes are gated on the status); only the restore was. The plug now waits for the resize the server is carrying out (the load has stopped by then, so a stalled withdrawal finishes), writes the snapshot, and writes once more if the server ignored the first write; the receipt of that restore (what was in flight, the seconds waited, the writes, the final read-back) is in every omni arm's record and the table counts the arms. The rows of the first set stand as they are, hand-back NO included, in `docs/history/V3_SYSBENCH_set1.md`; the preregistration carries the finding and the amendment; and the second counted set, run on the amended plug the same afternoon with nothing else changed, handed the pool back on all 45 omni arms and is the result in section 16.4. The lesson is general and is the reason section 7.2 exists: a knob the device applies on its own time has to be handed back on the device's time, and the proof of the hand-back is the read-back, not the write.

The machine itself: the kernel's frequency governor under the processor's meter

The lowest level a governor can sit on is the machine it runs on. Linux already has a controller for the processor's clock, the frequency governor (`schedutil`, or the processor driver's own), choosing the clock every few milliseconds under a ceiling the operator sets once; and the processor has its own energy meter (RAPL) ticking in microjoules. Omni-Compass sits on top of the governor exactly as it sits on the HPA: the governor keeps running, and Omni moves one knob, the frequency ceiling of every CPU, through the kernel's own files (`tools/run_cpu_power.py`, `docs/CPU_POWER_PREREGISTRATION.md`).

The reading is the service's own mean latency, held at 40% of a 20 ms line by the compass law; calm gives one notch of the ceiling back (5% of the top clock), a slow service raises it by notches, the wall puts the top on at once. Every notch down is tried on the machine itself first (section 9.4): the brain's verdict around the engine's own, eight cost samples at the deepest notch already allowed and eight one notch further, allowed only if the cost does not rise within 2%. The cost is the index's own reading for one machine (package power × latency / work inside the line), so a notch that saves less energy than it costs in speed is refused and the ceiling stays where the operator left it; a second declared objective, energy per request inside the line with the line as the guardrail, is run beside it. The snapshot of every CPU's governor and ceiling is taken once; the ceiling is handed back and read back at the end; a ceiling found at a value Omni did not write stops it; the master switch and the lease hand back if Omni dies.

The meter is the processor's own counter, class P with the caveat that it is the processor's calibrated counter and not an external meter; a smart plug on the wall socket (`WALL_METER`) adds the whole machine, read by

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

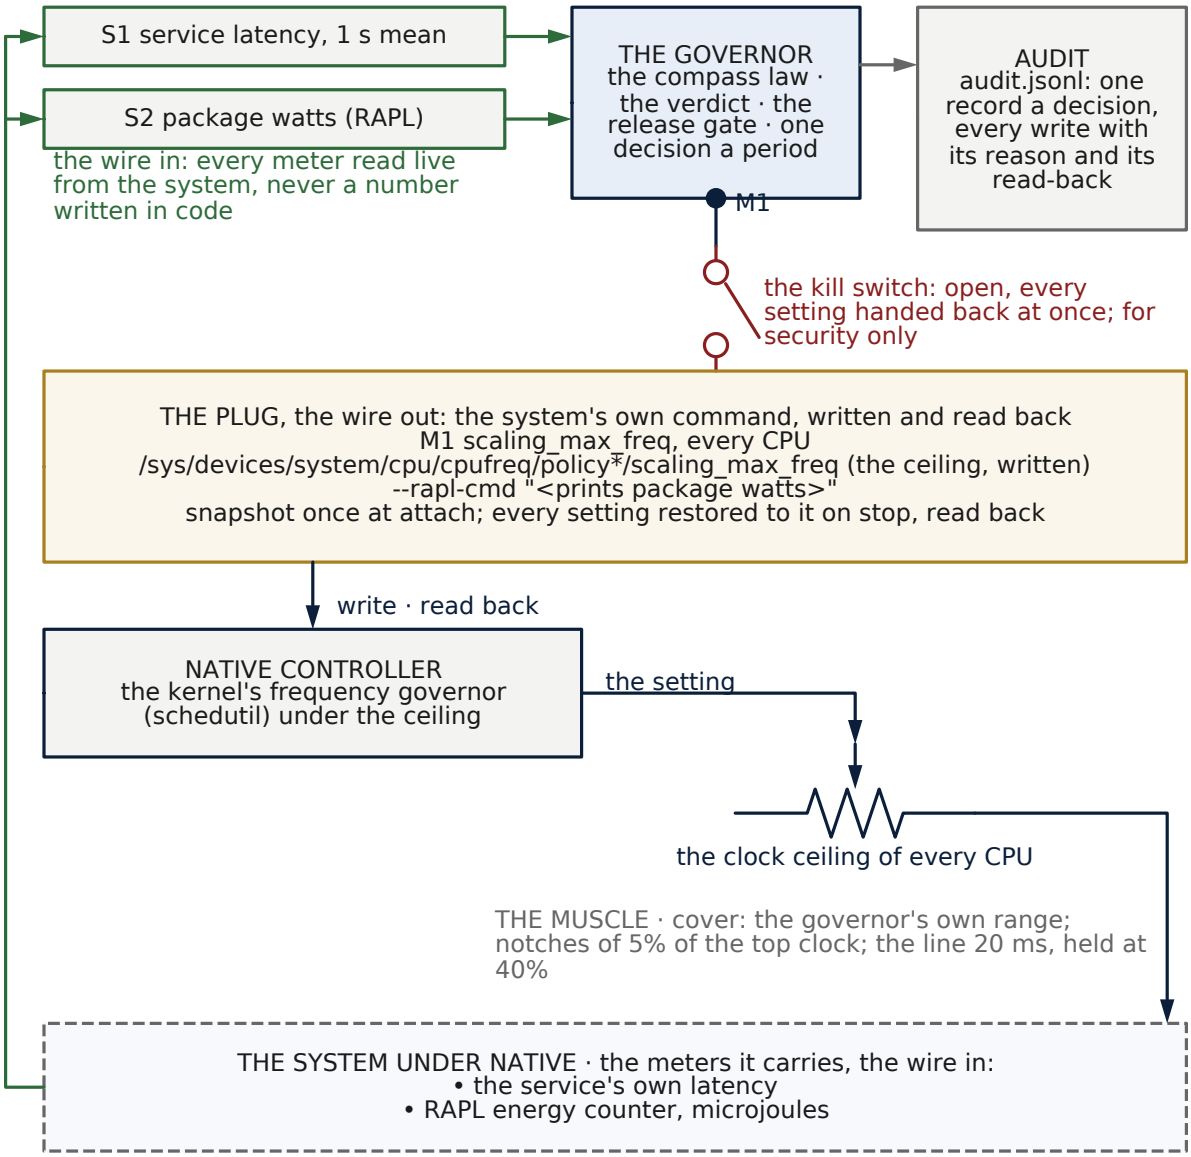


Figure 46. Wiring schematic: the machine's frequency governor under the processor's meter. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the service's latency and the package watts from RAPL; the one motor is scaling_max_freq, the ceiling of every CPU's frequency policy. Every notch down is tried on the machine first: eight cost samples at the deepest notch allowed and eight one further, allowed only if package power × latency / work inside the line does not rise within 2%. A snapshot of every policy, restored exactly.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

the harness only. GitHub's own machines are virtual and expose neither the governor nor the meter: the workflow proves it with the probe on every dispatch. The benchmark runs on a machine on the metal as root, in one command (`sudo bash scripts/cpu_power_run.sh`): the founder's own tower or laptop on Linux, a rented bare-metal server, or a self-hosted runner on either. Three runs make the table (`tools/cpu_power_abc.py`). Nothing in the engine changes.

The data center under the servers: cooling, power and batteries

Under every cluster in this book stands a building. Its native controllers are older and more conservative than any autoscaler: the building management system holds the supply-air temperature through the cooling units' own loops, the chilled-water plant runs its own sequence, the uninterruptible power supply holds its reserve, the power distribution units meter every rack, and every server's management controller and every card's firmware enforce their own power limits. Omni-Compass sits on top of them exactly as it sits on the HPA. They keep running; it moves only the settings they already accept, and only inside the band the operator writes down.

What it may set, and what it never sets.

Muscle	Native controller	The knob Omni-Compass may hold	Switch	Status
Cooling	the building management system and the cooling units' own loops	the supply-air setpoint, inside the operator's band	`--cooling-cmd "<sets {c}>" --cooling-min-c --cooling-max-c --cooling-restore-c`	built (level 7)
Site power	the site's own limit and its breakers	none: site watts are read, and the site limit enters the engine as a stress	`--power-cmd "<prints site watts>" --site-limit-w <limit>`	built (level 7)
Servers' processors	the kernel's frequency governor and the processor's own limits	the clock ceiling and the power limit	section 10.10	built (level 6)
Cards	the card's firmware	the clock ceiling and the power limit	level 5	built

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

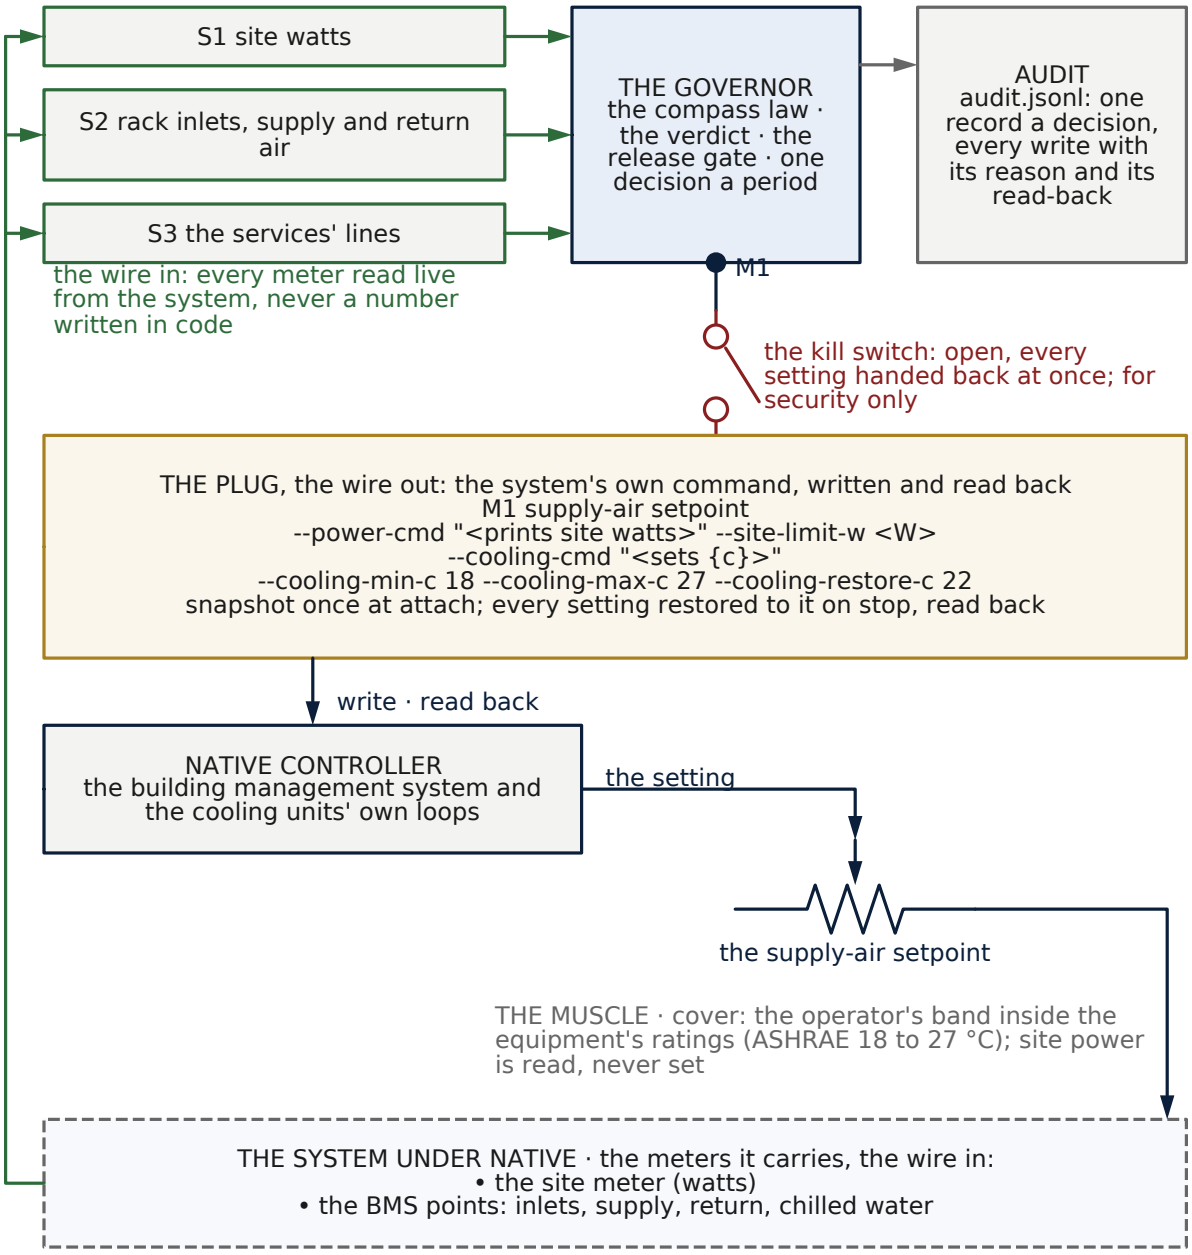


Figure 47. Wiring schematic: the data center under the servers. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the site watts, the rack inlets with the supply and return air, and the services' lines; the one motor is the supply-air setpoint, inside the operator's band. Warmer while every reading is cool, colder as heat rises; a step allowed only where the paired trial at the site meter shows the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

site's energy no higher for the same work, every inlet inside its band and no LOSS on any service gauge. A reserve held for an outage (the UPS) is never a lever. Modelled today (class S); no live facility has run yet.

Muscle	Native controller	The knob Omni-Compass may hold	Switch	Status
Uninterruptible power and batteries held as reserve	the UPS's own reserve	**none, ever**: a reserve held for an outage is never a lever (the physics criterion)		native by design
Batteries held for shifting energy	the site's dispatch	the charge window		designed as an organ, not yet wired

How the cooling muscle moves. The setpoint is moved by the heat state between the operator's minimum and maximum: a warmer setpoint while every reading is cool, which saves the chiller's energy, and a colder one as heat rises. The band must sit inside what the equipment is rated for; for most data-center equipment that is the 18 to 27 °C inlet range of the ASHRAE thermal guidelines, and inside any narrower limit the equipment's own warranty sets. The restore value is the operator's own setpoint, handed back and read back on OFF, at the end of every run, and by the lease if the governor dies.

The do-no-harm gate at the site meter. A warmer setpoint saves chiller energy only up to the point where the servers' own fans spend the saving: fan power rises steeply with inlet temperature. That is why the cooling knob is judged at the site meter and not at the chiller: a step is allowed only where the paired trial shows the site's energy for the same work no higher, every rack inlet inside its band, and no LOSS on any service gauge. Where it does not, the setpoint stays the operator's, and the result says so.

Wiring it, in order.

1. **Watch.** Give Omni-Compass read access to the building management system's points (supply and return air, every rack inlet, the chilled-water temperatures) and to the site meter, and let it watch at least one full cycle of the site's demand. Nothing is written.
2. **Write the band.** The minimum, the maximum and the restore value of the supply-air setpoint, inside the equipment's ratings, signed off by the facility's engineer; the site limit in watts.
3. **The wire check** (section 8.4). The cooling command must read back the setpoint it wrote; a building schedule that rewrites the setpoint is another writer, and Omni-Compass stops writing that lever by itself (section 7.2).
4. **One hall first.** A test hall or a single row, paired against its own native weeks, before any other hall.
5. **Keep the switches in reach.** The master switch and the kill file work at the facility level exactly as at every other level.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What is proven, and what is not. The facility muscles are modelled today (class S): the data-hall cooling family of the catalog, the power distribution family, and the site budget shared by groups of cards, which held out with no minute over its budget (`docs/REGISTER.md`: the families of rows 29 and 38 of its catalog table, and row 20 of its benchmark table). No live facility has run yet. A class P result needs a building management system's point list, read access, a site meter and a test hall; until a facility pilot has produced its own paired receipts, this section is a wiring instruction, not a claim of savings.

CHAPTER 37

The Integration Manual

Before you wire anything: read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

Which knobs to wire in at all: `docs/WIRING_VERDICTS.md` gives every knob in every published result one of three words from the tables themselves: **write** (wire both ways), **watch** (wire out only: Omni reads, the native controller lives by itself) or **operator's choice** (a trade). A knob that showed nothing, or lost, stays native. How to wire for superiority, step by step (watch first, the observation run, the brain's own verdict on each knob, the recheck): the manual, section 9.4.

How to wire Omni-Compass into your own systems yourself, from watching only to running your stack from the top. This manual ships in the box with the code and the license. Nobody from The Omni-Compass LLC needs to be on site.

Read section 1 once, then take the levels in section 4 in order. Each level has a pass condition; go to the next level only when it holds. The OFF switch (section 2) works at every level.

1. What is in the box

Item	Where
The engine, nervous system, safety shield, compass and conveyance law	`omnicompass/`
The Kubernetes controller and its muscles	`omni_controller/controller.py`, `omni_controller/muscles.py`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Item	Where
The GPU governor (one GPU box, no Kubernetes needed)	`omni_controller/gpu_governor.py`
Container image recipe; install and permission files	`deploy/Dockerfile`, `deploy/install/omni-compass.yaml`, `deploy/rbac-*.yaml`, `deploy/pilot/`
Proof tools: paired tests on your own stack, the GPU test, simulations	`scripts/`, `tools/`, `hardware/`
Every check the code must pass	`python3 verify.py` (ends with `VERIFICATION: PASS`)
The C++ engine: every law twinned in C++20, proven equal to the Python	`cpp/` (build: `cmake -S cpp -B cpp/build && cmake --build cpp/build`)
The seal: the fingerprints that lock each Python law to its C++ twin	`results/SEAL.json`, `python3 tools/seal.py --check`
Metrics: every gauge and where it comes from	`docs/METRICS_CATALOG.md`
How it compares with what you run today	`docs/COMPARISON.md`
The license and notices	`LICENSE`, `NOTICE`

License, in short (the `LICENSE` file governs): you may download, run, modify and test Omni-Compass free of charge only to evaluate it and to reproduce its published results, including in shadow or test mode on systems you own or control (`LICENSE`, section 1). Every other use, commercial or not (running it for your business or in production, selling it, hosting it, or building it into a product or service), needs a signed, paid Omni-Compass Enterprise License from The Omni-Compass LLC. The copyright, patent and trademark notices, the `LICENSE`, the `NOTICE` and `DISCLOSURES.md` stay with every copy.

2. The rules Omni-Compass keeps on your system

1. **One OFF switch for the whole harness, in a human hand.** `python3 tools/omni_switch.py off` turns every Omni-Compass governor on the machine off at once: each returns every setting it changed to the value it recorded before it acted, reads each back and exits, and no governor starts again until `python3 tools/omni_switch.py on` (`omnicompass/master.py`; the switch file is `OMNI_MASTER_OFF`, by default `/tmp/omni-compass/OFF`). Each governor also has its own switch for one muscle at a time: creating its kill file (or setting `OMNI_KILL=1`).
   - Kubernetes controller: `--kill-file` (default `/tmp/omni.kill`).
   - GPU governor: `--kill-file` (default `/tmp/omni-gpu-kill`), or send it SIGTERM.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. **It records before it acts.** Every original setting is written down first (annotations on the Kubernetes objects, the `snapshot` line in the GPU audit), so the OFF switch always knows what to restore.
3. **It watches before it writes.** Every level starts in watch mode: it decides and logs, and writes nothing.
4. **It never goes blind and keeps acting.** If a reading fails (nvidia-smi, metrics, the response-time feed), it returns what it changed to the recorded setting at once and gives nothing back until it can see again.
5. **Service first.** While response time is over your target, and for a few decisions after (`--slo-clear`), it may not cap power or pack tighter than your own settings.
6. **Every change is read back.** No new order goes on top of one that has not landed.
7. **The living band.** No organ is driven below 5% or above 95% of its range; machines are marked idle, never switched off by Omni-Compass; it never evicts or moves a pod.
8. **Everything is logged.** Every read, decision, write and its reason goes to the audit log (`--audit`).

3. Before you start: what your system needs

You run	You need
Kubernetes (any: vanilla, EKS, GKE, AKS, OpenShift/OKD, Rancher, kind)	Kubernetes 1.34 or newer (in-place pod resize); metrics-server (`kubectl top nodes` works); an HPA with a CPU target on each service to be governed; a readiness probe and a short preStop pause on each service
A response-time feed (strongly recommended at every level)	a CSV per service, `elapsed_seconds,latency_ms,ok`, written continuously; `scripts/latency_probe.py` writes one against any HTTP endpoint
NVIDIA GPUs	driver with `nvidia-smi`; root (or the capability to run `nvidia-smi -pl`); on a VM, full GPU passthrough (container or "pod" GPU rentals usually block power-limit changes)
CPU power control	Linux cpufreq with the schedutil governor (`/sys/devices/system/cpu/cpufreq`); RAPL for package watts (`/sys/class/powercap/intel-rapl`); usually bare metal only, since cloud VMs rarely expose these

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

You run	You need
Site power and cooling	a command that prints site watts, and (for cooling) a command that sets the supply-air setpoint through your building management system

Build the image once:

```
docker build -f deploy/Dockerfile -t <your-registry>/omni-compass:<tag
    ↪ > .
docker push <your-registry>/omni-compass:<tag>
```

It runs as non-root, with a read-only root filesystem and no Linux capabilities.

4. The levels, from watching to running the stack

Level 0. Evaluate without touching anything

```
pip install -r requirements.txt
python3 verify.py                          # every check; ends with VERIF
    ↪ ICATION: PASS
python3 tools/gpu_physics_sim.py           # the GPU governor against a m
    ↪ odelled NVIDIA card
python3 hardware/node_exchange.py          # CPU and GPU on one power bud
    ↪ get, modelled
```

Pass condition: `VERIFICATION: PASS`. Nothing in your systems is touched.

Level 1. Watch (read-only)

```
kubectl apply -f deploy/install/omni-compass.yaml     # set the image
    ↪ line; it runs --mode observe
kubectl -n omni-compass logs deploy/omni-compass -f
```

- The install file grants a read-only identity. `scripts/pilot_shadow.sh` records `kubectl auth can-i` receipts that show it cannot write.
- Every decision it would take is logged with its reason; nothing is written.

Pass condition: zero writes, and readings your operators agree with.

Level 2. The pods, on top of your autoscalers

1. Grant `patch horizontalpodautoscalers` and `patch pods/resize` (`deploy/rbac-target.yaml`).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. Run with `--mode target --latency-file <feed> --slo-ms <your p95 target>`.
3. Optional pod muscles, one at a time:

Muscle	Switch	What it does
convey	on with `--latency-file` and `--cap-deployments ns/name`	gives each machine's idle CPU to the serving pods on it (default: always); `--convey-on 0.5 --convey-off 0.25` engages it only while response time is over half the target
rightsize	`--rightsize-deployments ns/name`	each pod's CPU request follows its measured use × (1 + headroom), in place
coldstart	`--coldstart-deployments ns/name --coldstart-signal ns/configmap`	scales a service to zero while no work waits, wakes it the moment work arrives
batch	`--batch`	admits held Jobs labelled `omnicompass.io/batch=true` when there is load and power headroom
batch pace	`--batch-pace`	pauses Jobs labelled `omnicompass.io/pausable=true` under power or heat stress, resumes them after
rollout guard	`--rollout-guard ns/name`	pauses a rollout while change is not permitted, undoes one past its deadline when rollback is authorised
contain	`--contain-namespaces ns --contain-cpu-m <m>`	holds an agent namespace to a CPU budget with a quota
security hold	`--security-configmap ns/name`	key `hold: "true"` blocks every expansion

Your HPAs keep scaling as before. Omni-Compass sets their targets and raises floors ahead of bursts.

Pass condition: p95, p99 and failed requests never behind than your own, over paired runs (section 6).

Level 3. The machines

1. Grant `patch nodes` and `patch pods` (`deploy/kind/rbac-omni.yaml`).
2. Run with `--mode nodepool --active-nodes-only --closure /app/law/closure.json --node-scale-cmd "<command with {n}>"`.

Your platform	The park/wake command
any cluster, bare metal, kind	`bash scripts/kind_nodepool.sh {n}`: close machines to new work and mark them first to go; open again, warm machines first

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Your platform	The park/wake command
Karpenter / EKS Auto Mode	the NodePool CPU limit at `{n} × node CPU`, parked nodes kept, not consolidated away
Cluster Autoscaler node group	the group's desired size, scale-down through parking, not deletion
OpenShift / OKD	the worker MachineSet replicas, parked, not deleted

A machine is given back only when every sense is live, the last order landed, pods are not scaling up, nothing waits for a place, and the remaining machines stay inside the band.

Pass condition: fewer machines in service and less energy, with no LOSS on any service gauge.

Level 4. Omni-Compass decides; Kubernetes is the muscle

Add `--strict-replicas`: Omni-Compass decides each service's replica floor and when to shrink; your HPA stays as the fast reflex upward; the node law sizes the machines.

Pass condition: as level 3.

Level 5. A GPU box (with or without Kubernetes)

The GPU governor runs on any Linux machine with NVIDIA GPUs:

```
# watch: decides and logs, writes nothing
sudo python3 -m omni_controller.gpu_governor --mode watch --gpus 0,1,2
    ↪ ,3 --audit /var/log/omni/gpu.jsonl \
     --latency-file <feed> --slo-ms <p95 target>
# cap: writes the power limits
sudo python3 -m omni_controller.gpu_governor --mode cap   --gpus 0,1,2
    ↪ ,3 --audit /var/log/omni/gpu.jsonl \
     --latency-file <feed> --slo-ms <p95 target>
# OFF
sudo touch /tmp/omni-gpu-kill
```

What it does, every `--interval` seconds (default 2):

- reads each GPU's own meter: power draw, temperature, utilization, power limit;
- the engine sets a power cap; the shield keeps it above `--min-share` × the start limit (0.70) and above draw × (1 + `--headroom`);
- a busy card (smoothed utilization at or over `--util-gate`, 0.5) gets its full limit back at once;
- a response-time breach or a failed reading returns the start limit at once.

Speed lock (optional). Keep every response-time gauge at least `--speed-gain` (1%) faster than without Omni-Compass, and spend any speed won elsewhere on watts:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
python3 tools/gpu_baseline.py baseline.json native-run/latency.csv
    ↪  # a run without Omni-Compass, other days
sudo python3 -m omni_controller.gpu_governor --mode cap --baseline-fil
    ↪ e baseline.json --latency-file <feed> ...
```

Prove it on your card: `sudo bash scripts/gpu_paired.sh` runs native, watch and Omni-Compass back to back on the same machine and prints the table and verdict (`docs/GPU_RUN_GUIDE.md`).

Pass condition: work per energy up, and requests served and p95 inside the guardrails.

Level 6. CPU clock and power

Add to the Kubernetes controller, on bare metal:

```
--cpufreq-policy-root /sys/devices/system/cpu/cpufreq --cpufreq-requir
    ↪ e-schedutil \
--rapl-cmd "<prints CPU package watts>"
```

The CPU frequency ceiling follows the engine's cap inside the nervous system's envelope; the OFF switch writes every policy's recorded maximum back exactly. GPUs can be wired the same way from the controller: `--gpu-query-cmd "nvidia-smi --query-gpu=power.draw,temperature.gpu --format=csv,noheader,nounits" --gpu-power-cmd "nvidia-smi -pl {w}" --gpu-max-w <max>`.

Pass condition: energy per unit of work down, no LOSS on any service gauge.

Level 7. Site power, cooling, batteries

Organ	Switch	Status
site power stress	`--power-cmd "<prints site watts>" --site-limit-w <limit>`	wired: power stress enters the engine; batch pace and caps respond
cooling setpoint	`--cooling-cmd "<sets {c}>" --cooling-min-c 18 --cooling-max-c 27 --cooling-restore-c 22`	wired: warmer supply air while cool, colder as heat rises
CPU + GPU on one power budget	`hardware/node_exchange.py` (the conveyance law over CPU and GPU organs)	**simulation only.** The live levers exist (levels 5 and 6); the exchange between them has not run on hardware
GPU groups sharing a site budget	`hardware/site_exchange.py`	**simulation only**

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organ	Switch	Status
on-site batteries as an organ	designed (`docs/DOMAIN_MAP.md`)	**not built**

5. Stack by stack

Stack	Levels available	Notes
Vanilla Kubernetes, kind, Rancher	1-6	as written
Amazon EKS	1-5	nodes via Cluster Autoscaler node group or Karpenter NodePool (level 3 table); CPU power control is not exposed on EC2 VMs; GPUs on bare-metal or full-GPU instances
Google GKE, Azure AKS	1-5	as EKS, with the provider's node-pool size as the park/wake command
Red Hat OpenShift / OKD	1-5	OpenShift is Kubernetes underneath; grant the same permissions through a Role; machines via the worker MachineSet
NVIDIA GPU servers without Kubernetes	5	the GPU governor alone
Bare-metal CPU servers	6	cpufreq and RAPL through sysfs
Slurm / HPC schedulers	5 on the GPU nodes	a Slurm connector for job-level decisions is not built
Building management (cooling, power meters)	7	through your BMS's command line or API, wrapped in the command templates
Azure AKS, the bill as the gauge	1-3	Azure's managed cluster autoscaler stays native and deletes the machines Omni-Compass idles; one or several work pools (`worker_pools`), the replica ceiling raised with the fleet (`hpa_max`); a fleet of 4 cannot show a saving of one machine, 39 can (manual, section 7.1; `docs/AZURE_SETUP.md`)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Stack	Levels available	Notes
PostgreSQL behind PgBouncer, or any pooler with a console	one knob	the pool size through the pooler's own admin console, cover [2, 90], one writer, restored on OFF (manual, section 7.2; `docs/POSTGRES_PREREGISTRATION.md`)
Apache Kafka, or any consumer group an operator sizes	one knob	the consumer count inside [1, partitions], the group's own end-to-end latency as the reading, the rebalance paid on every move, handed back on OFF (manual, section 7.4; `docs/KAFKA_PREREGISTRATION.md`)
Redis, or any cache with a console and a memory ceiling	one knob	`maxmemory` through the cache's own console, cover [16, 512] MB, grown only while the cache is full (a cold miss is not the ceiling's), one writer, restored on OFF (manual, section 7.5; `docs/REDIS_PREREGISTRATION.md`)
Drone swarms (gym-pybullet-drones; PX4 and ArduPilot next)	one knob a drone	the cruise override inside the autopilot's limits, a separation wall, the paired physics trial, collisions void the cell (manual, section 7.6; `docs/SWARM_PREREGISTRATION.md`)
MongoDB, or any store whose engine exposes its cache size at run time	one knob	the storage-engine cache through the server's own console, cover [256, 2,048] MB, grown only while the cache is full, one writer, restored on OFF (manual, section 7.7; `docs/YCSB_PREREGISTRATION.md`)
MySQL, or any store whose engine resizes its buffer pool online	one knob	the InnoDB buffer pool through the server's own console (`SET GLOBAL innodb_buffer_pool_size`), cover [128, 2,048] MB in the server's own 128 MB chunks, grown only while the pool is full, the plug waiting for the server's asynchronous resize before reading back, one writer, restored on OFF (manual, section 7.8; `docs/MYSQL_PREREGISTRATION.md`)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Stack	Levels available	Notes
A rented cloud machine running the big organisms	the whole harness	`big-organism-detached`: start, collect, survey; the clock rule sets the window (`.github/workflows/big-organism-detached.yml`)
Independent simulators (CityLearn, pandapower, MuJoCo)	one knob each	the simulator's own controller is native; preregistered, A/B/C (manual, section 7.3)
The machine itself: Linux's frequency governor under the processor's meter	one knob	the frequency ceiling of every CPU through the kernel's own files, cover [half the top clock, the top], the governor still running under it; every notch down tried on the machine first by the brain's verdict; energy from RAPL and a wall plug where fitted; root on a machine on the metal, never a virtual one (manual, section 7.9; `docs/CPU_POWER_PREREGISTRATION.md`; `sudo bash scripts/cpu_power_run.sh`)

6. Proving it on your own system

1. **Paired runs.** Run your service the same way twice, once as you run it today and once with Omni-Compass on top, back to back on the same machines, order rotated, at least 5 times (10 for a result you publish). `scripts/kind_paired.sh` and `tools/live_reps.py` do this and print each gauge with its 95% interval. A change is proven only when its interval excludes zero.
2. **The switch drill,** after every run: turn Omni-Compass OFF, check every setting is back at its recorded original and no `omnicompass.io/*` annotation remains, turn it ON.
3. **Read the results** with `docs/METRICS_CATALOG.md`: every gauge says whether it is measured or modelled.

7. Reading the log

Line	Meaning
`gate: a sense is blind`	a reading failed; nothing is given back until it returns
`gate: pods scaling up`	pods first, machines after

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Line	Meaning
`decision failed (n in a row)`	the cluster could not be reached; nothing was written. Turn it OFF for native at once
`convey: <machine> idle CPU to its k serving pod(s), limit c`	that machine's idle CPU now reaches the work on it
`convey: response time calm, operator's limit`	the pods are back at your own CPU limit
`busy gate: utilization u, the limit read at start`	a busy GPU got its full power limit back
`speed lock: worst ratio r vs line 0.99 (spend / hold / release)`	the speed lock's reading and what it did
`response-time reflex: the limit read at start`	response time went over target; full power at once
`reset: the limit read at start`	the OFF switch restored this setting

8. What is proven, and how

Claim	Evidence	Kind
On real Kubernetes, Omni v1, three runs of ten pairs each: more work inside the response line (+42% to +48%), p95 −57% to −69%, machines fewer where a paired trial allowed it (steady −1.5% to −3.4%, batch −15% to −24%)	`results/live/V1_ALL_FOUR.md`, `V1_STEADY.md`, `V1_WANDERING.md`, `V1_FAULTS.md`, `V1_BATCH.md`, `V1_FAIRNESS.md`	measured on kind; read by the three-run rule (`docs/OMNI_V1.md`)
On a real database, Omni v3: 61% to 72% fewer connections held open for the same work and latency, at +14% to +28% host CPU-seconds (power given in all three of our runs, reported)	`results/live/V3_PGBENCH.md`	measured on GitHub's machines
Claim	**Evidence**	**Kind**
On Azure's bill, 4 workers: no difference beyond the noise on any	`results/live/V1_AKS_STEADY.md`, `V1_AKS_BURST.md`	a real bill

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Claim	Evidence	Kind
gauge (the fleet is too small for the lever)		
Energy on Kubernetes	declared model on kind, no meter	modelled
GPU: more work per energy within the speed guardrail	earlier card controller, obsolete; rerun on rented cards pending	hardware meter
CPU and GPU on one power budget: more work, never over the budget	`results/hardware/NODE_EXCHANGE_*.json`	modelled
Safety: OFF switch restores everything; watch mode writes nothing	every live run's switch drill; `verify.py`	measured / checked

9. Python, C++ and the seal

Omni-Compass exists in two languages. The laws are twinned: each has a Python version and a C++20 version that give the same answers, proven by a parity test on every build.

Law	Python	C++	Proven by
core engine (six-state equations)	`omnicompass/core.py`	`cpp/src/core.cpp`	500 frozen fixtures
governor (allocation laws)	`omnicompass/adapter.py`	`cpp/src/governor.cpp`	`tests/test_cpp_governor_parity.py`
safety shield	`omnicompass/shield.py`	`cpp/src/shield.cpp`	`tests/test_cpp_shield_parity.py` (plus adversarial cases)
HPA replica law	`fleet/harness.py`	`cpp/src/hpa.cpp`	`tests/test_cpp_hpa_parity.py`
closure law (machines)	`omnicompass/closure.py`	`cpp/src/closure.cpp`	`tests/test_cpp_closure_parity.py`
conveyance law (the conserved budget)	`omnicompass/conveyance.py`	`cpp/src/conveyance.cpp`	`tests/test_cpp_conveyance_parity.py` (identical to the last bit)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Law	Python	C++	Proven by
nervous system (authority per organ, living band)	`omnicompass/nervous_system.py`	`cpp/src/nervous_system.cpp`	`tests/test_cpp_twins_parity.py`
compass and ledger (composite storage)	`omnicompass/compass.py`, `omnicompass/storage.py`	`cpp/src/compass.cpp`	`tests/test_cpp_twins_parity.py`
GPU governor rules (shield limit, busy gate, speed lock, window, baseline)	`omni_controller/gpu_governor.py`	`cpp/src/gpu_rules.cpp`	`tests/test_cpp_twins_parity.py`

The seal (`results/SEAL.json`) holds the SHA-256 fingerprint of every file of every twin, written only after all parity tests pass (`python3 tools/seal.py`). `verify.py` fails if any sealed file changes afterwards, and names it. So the Python and the C++ cannot drift apart unnoticed. What stays in Python is the plumbing that talks to Kubernetes, nvidia-smi and sensors (`omni_controller/controller.py`, `muscles.py`, the device I/O of `gpu_governor.py`) and the simulation harnesses; every decision they take goes through the twinned laws. The seal lists them as Python only.

Keep this manual with the code. When Omni-Compass changes, this manual, the C++ twin and the seal change in the same commit.

CHAPTER 38

Running the GPU Benchmark

> **Before you wire anything:** read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

There are three ways to get real-machine numbers:

- **Your own tower:** a machine you control, with a smart plug measuring the whole machine at the wall (section A).
- **GitHub's GPU machines:** they run the test from the repository with one click (section B).
- **A rented cloud GPU:** sections 1 to 6.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

A. Your own tower, measured at the wall

You need:

- an NVIDIA graphics card (a GeForce RTX works);
- Linux on that machine (a spare drive or a USB boot is fine);
- a smart plug that reports watts, for example a Shelly Plus Plug or any plug running Tasmota, which cost about $20 to $30.

Plug the tower into the smart plug, and connect the plug to your home Wi-Fi with its own app. Note its IP address, shown in the app or on your router's device list. Then on the tower:

```
python3 tools/wall_meter.py shelly2:192.168.1.50 --once        # print
    ↪ s the tower's watts right now
sudo WALL_METER=shelly2:192.168.1.50 bash scripts/gpu_paired.sh
    ↪            # trial run
sudo WALL_METER=shelly2:192.168.1.50 PHASE=confirm bash scripts/gpu_pa
    ↪ ired.sh    # the real test
```

Use `shelly1:` for older Shelly plugs and `tasmota:` for Tasmota plugs. The table then adds whole-machine energy at the wall and requests served per wall kilojoule. The plug is read by the test only; Omni never sees it, so its number is independent of Omni.

B. GitHub's own GPU machines

1. **One-time setup, by an owner of the Omni-Compass organisation on GitHub:**
   1. Go to **Settings → Actions → Runners → New runner → New GitHub-hosted runner**.
   2. Choose the image **NVIDIA GPU-Optimized Image for Linux** and a GPU size.
   3. Name its label `gpu-t4`, or set the repository variable `GPU_RUNNER` to the label you chose.

GPU runners are billed per minute on paid plans.

2. **To run:** go to **Actions → gpu-bench → Run workflow**, then choose `smoke` or `confirm`.
3. **Results:** each repetition runs on its own GPU machine. The results are pooled into one table, shown on the run's summary page, and every raw file is committed back to the branch under `results/gpu/github-<run id>/`.

If GitHub's machines don't allow changing the GPU power limit, the job stops in its first minute and says so.

C. A rented cloud GPU

This costs roughly $10 to $25 in rented GPU time. You type a handful of commands; the machine does the rest.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1. Rent the right kind of machine

The test changes the GPU's power limit, so you need a machine where you are the full administrator of the GPU:

- **Use a virtual machine (VM) or a bare-metal server.** Lambda Cloud "on-demand instances" are VMs; so are the GPU instances on AWS, Google Cloud and Azure.
- **Avoid "container" or "pod" rentals.** Their GPUs usually block power-limit changes. This is common on the cheapest per-hour marketplaces.
- **Any single NVIDIA data-center GPU works:** A10, L4, A100, H100, L40S. One GPU is enough.
- **Choose an image that already has PyTorch.** On Lambda that is the default "Lambda Stack" image.

You don't have to guess whether a machine allows it. In its first minute the test checks, and stops with *"cannot set the power limit (run as root)"* if the machine doesn't allow it. If you see that, shut the machine down (you pay only for the minutes used) and rent a different kind.

2. Connect to it

The rental site shows a command like `ssh ubuntu@123.45.67.89`. Paste it into Terminal (Mac) or PowerShell (Windows).

3. Get the code

On the rented machine (the repository is public while the benchmarks run; if it is private, use a read-only fine-grained token in the URL):

```
git clone https://github.com/The-Omni-Compass-LLC/The-Omni-Compass the
    ↪ -omni-compass
cd the-omni-compass
git log --oneline -1       # the commit you are about to test; write i
    ↪ t down
pip install -r requirements.txt

nvidia-smi                 # should show your GPU
```

4. The whole test, one command (about 36 hours)

```
sudo nohup bash scripts/gpu_rented_run.sh > run.log 2>&1 &
tail -f run.log            # Ctrl+C stops watching; the test keeps run
    ↪ ning
```

It runs, in order, and stops at the first failure:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1. the machine check (one copy only, nothing else on the card, the card's default limit and clock range restored);
2. the **wire check**, which must end `WIRED RIGHT` (manual, section 4.4);
3. the smoke test, about 40 minutes, never counted;
4. the preregistered counted run on compute-bound work: 10 repetitions × native / watch / Omni, 600 s each, about 6 hours;
5. the second preregistered counted run on AI token generation (memory-bound), the same design, about 6 hours (`SKIP_DECODE=1` skips it); each is its own result, never pooled. Both are packed into one file as soon as they finish: `results/gpu/omni-gpu-<stamp>-confirmations.tar.gz`;
6. **an operator's power cap underneath** (70% of the card's default limit): the cap alone vs the cap with Omni-Compass on top, at the usual load and fully loaded (more work from the same watts), about 3 hours (`SKIP_CAP=1` skips it);
7. **the GPU fault drill**, about 10 minutes: the governor killed outright, the master switch pulled, the response feed blind; every check must pass (`SKIP_DRILL=1` skips it). Everything so far is then packed into `results/gpu/omni-gpu-<stamp>-partial.tar.gz`;
8. the seven organisms with this card inside, each as **1, 10 and 100 copies** on one clock (5, 3 and 2 repetitions; no 1,000 copies, the founder's order of 12 October, amendment 13), at least 16 hours (60 paired repetitions, each arm 240 steps of 2 s); a size whose step needs longer than 2 s gets a longer step, measured on the machine and stated in the receipt (`SKIP_HIL=1` skips this stage);
9. **real AI serving** last: a small open language model served by vLLM, about 2 hours (`SKIP_LLM=1` skips it); if vLLM cannot install on the machine, the stage says so and nothing before it changes;
10. one packed file: `== send this one file back: results/gpu/omni-gpu-<stamp>.tar.gz`, with the label each table chose by rule.

To stop everything at any moment: `sudo python3 tools/omni_switch.py off` turns every Omni-Compass governor off and hands the card back to its own settings.

Do not start it twice and do not use the card for anything else while it runs.

5. Bring the results back

Download `results/gpu/omni-gpu-<stamp>.tar.gz` (in JupyterLab: right-click, Download; or `scp` from your own computer). It holds every raw reading, every table, the verdict and the checksums. **Then shut the rented machine down** on the rental site, so the billing stops.

6. Read it before you believe it

Open `results/gpu/run-<stamp>/GPU_REPS.md` and check the rows of the manual's section 4.5 (*Wired right or wired wrong*): watch equal to native, requests equal, the card's busy clock under Omni at or above its own, the lid while busy at or above its own busy draw, fail-up rare in the credit-per-write table. If a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

row reads wired wrong, the run says nothing about Omni-Compass until the wiring is fixed (`DISCLOSURES.md`, section 3).

D. The 8-GPU result: every card of one server at once

The same test as section C, on a machine with several cards (Lambda "8x A100" or "8x H100", a VM, the Lambda Stack image). Every card runs its own paired test at the same moment, sharing the server's power supply, cooling and neighbours' heat, as in a real data center. Each card starts its arm rotation one step later than the card before it, so at any moment some cards run native and some run Omni-Compass.

Get the code as in step 3, then:

```
sudo nohup bash scripts/gpu_8card.sh > run8.log 2>&1 &
tail -f run8.log
```

Each card: wire check, envelope, smoke, the compute counted run, the AI token generation counted run, the operator's power cap underneath (about 15 to 16 hours, all cards together). Then the fault drill once on card 0, with every other card idle. Then one pooled table per workload (every repetition of every card, each paired within its own card: 80 repetitions per workload on 8 cards) and each card's own table. `SKIP_DECODE=1 SKIP_CAP=1` runs the compute counted run alone, about 6.5 hours. **Every 8-GPU run has a hard time budget** (`MAX_HOURS`; by default 10.5 hours with `POOLED=1`, 4 with `FAST=1`, 26 for the whole design): at the budget the master switch hands every card back, the stages still running stop, and what finished is packed and printed as the file to send back. Lambda bills until the instance is terminated, so terminate it when that line appears. `sudo POOLED=1 nohup bash scripts/gpu_8card.sh &` **runs every stage with the repetitions pooled across the cards (3 per card per counted run, 24 per test on 8 cards; 2 per power cap load; 1 per organism size), about 9 to 10 hours.** `sudo FAST=1 nohup bash scripts/gpu_8card.sh > run8.log 2>&1 &` is a short look, about 3.5 hours: 3 repetitions per card (24 on 8 cards), then one model across every card; it leaves AI token generation, the power cap and the whole stacks out, so it is never the result to show. Last, the whole server as one: a language model (Qwen2.5-7B-Instruct, open) served across every card at once by vLLM, one Omni-Compass governor per card, the server's total GPU energy, about 2 hours (`SKIP_LLM=1` skips it). Before it, **the whole stacks with a real card inside**: the seven organisms at 1, 10 and 100 copies (no 1,000 copies, amendment 13), native and Omni, the full repetitions (5, 3, 2 by size), each organism on its own card at the same time, so the stage that takes at least 16 hours on one card takes the time of its longest organism, about 3 hours (`SKIP_HIL=1` skips it). The whole design, every stage: about 20 to 22 hours. Progress: `tail -f results/gpu/8card-<stamp>/card-*.log`. At the end: `== send this one file back: results/gpu/omni-8card-<stamp>.tar.gz`. The master switch (`sudo python3 tools/omni_switch.py off`) stops every card's governor at once.

E. Your own serving engine

own vLLM? Start it as you always do, then:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
sudo LLM_URL=http://127.0.0.1:8000 LLM_MODEL=<your model name> GPU=0 E
    ↪ NVELOPE=<envelope.json> OUT=results/gpu/mine \
  bash scripts/gpu_vllm.sh
```

The same paired test (your engine alone against your engine with Omni-Compass on top) runs against it; nothing is installed or started. `GPU=0,1,2,3,4,5,6,7` when your engine spans several cards. Make the envelope once with `python3 tools/declare_envelope.py envelope.json --gpu 0`.

F. Whole-server power from the server itself

The bench records the whole machine's watts beside the cards' own when you give it a meter: `WALL_METER=redfish:<BMC address>` (with `REDFISH_USER` and `REDFISH_PASSWORD`, read only), `WALL_METER=ipmi:local` (the server's management controller, read on the machine), or a smart plug (`tools/wall_meter.py` lists them). Omni-Compass never reads it.

Before any machine: the simulated card

`python3 tools/gpu_physics_sim.py --out results/gpu/sim/after` runs Omni's own GPU governor, with its current settings, against a modelled card for 10 paired repetitions in about two minutes. No GPU is needed. Every number it prints comes from the card model, not from a meter, so it is a preview of what the governor does and never the result. `results/gpu/sim/before` holds the same run with the settings before the share floor and busy gate were added.

What you will get

A table from the GPU's own power meter:

- native against Omni watching only, and native against Omni governing;
- the preregistered primary result: work per energy, in requests served per kilojoule, with its 95% interval.

It ends with one verdict line, one of:

- **GAIN, proven**;
- **LOSS, proven**;
- **not proven**;
- **more requests per kJ, fails the service guardrail**.

Whatever it says is the answer, and it is the first number in this project that Omni-Compass's own code did not compute.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

PART SIX

Operating It

The OFF switch, the rules the governor obeys, the log it keeps, and the care of a running installation.

CHAPTER 39

The OFF Switch, the Rules, and the Log

The rules Omni-Compass keeps on your system.

1. **The master switch, for the whole harness, in a human hand:** `python3 tools/omni_switch.py off` turns every Omni-Compass governor on the machine off at once (the Kubernetes controller and the GPU governors). Each puts every setting it ever wrote back to the value it read before its first write, reads it back and exits; the command waits until all have, and says so. While the switch is OFF, no governor will start. `python3 tools/omni_switch.py on` allows them to be started again (nothing restarts by itself); `status` shows the switch and every governor running. Use it the moment anything looks wrong, including a suspected breach. Each governor also keeps its own switch for one muscle at a time: the kill file (or `OMNI_KILL=1`, or SIGTERM to the GPU governor). **If a governor dies without handing back** (killed outright, the machine crashed, it hung), nothing it wrote is left in place: every governor records, before its first write, the exact commands that put every setting back, and renews a lease every decision. Run `python3 tools/omni_switch.py watchdog` as its own service next to the governors: it hands back for any governor whose process is gone or whose lease has run out (a hung one is stopped first). `status` names any governor that died without handing back.
2. It records before it acts (annotations on Kubernetes objects; the `snapshot` line in the GPU audit).
3. It watches before it writes.
4. It never acts blind.
5. Service first: while response time is over its target, and for `--slo-clear-s` seconds after (180 by default), nothing is given back.
6. Every change is read back; no new order goes on top of one that has not landed.
7. The living band and the cover: no organ is driven outside its range; machines are parked, never switched off by Omni-Compass; it never evicts or moves a pod.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

8. One writer: if anyone else changes a knob, Omni-Compass stops writing it and leaves it alone.
9. Everything is logged: every read, decision, write and reason goes to the audit log.

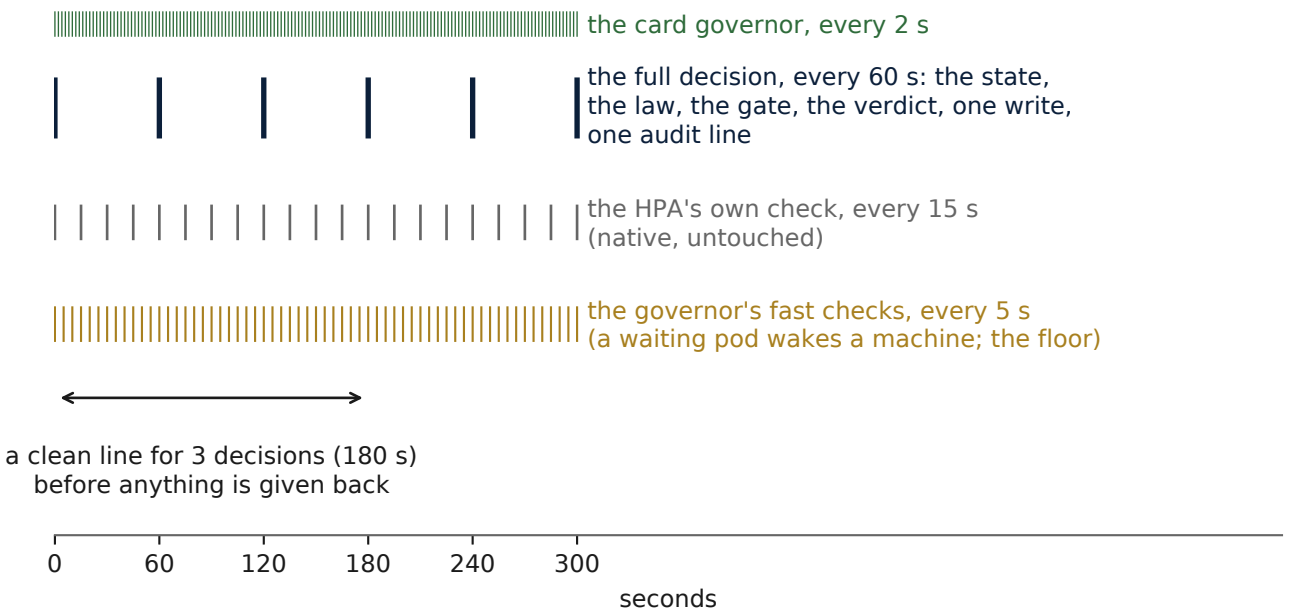


Figure 48. Timing diagram: the governor's clocks against the native controllers' own, over five minutes. The card governor decides every 2 s; the Kubernetes governor's fast checks run every 5 s (a waiting pod wakes a machine; the floor); native's own autoscaler keeps its 15-second check underneath, untouched; the full decision (the state, the law, the gate, the verdict, one write, one audit line) runs every 60 s, and nothing is given back until the line has been clean for three decisions, 180 s.

On autopilot: why nobody babysits it. Omni-Compass is an autopilot: a closed-loop supervisory controller that runs, steers and corrects itself inside the system it governs, as a self-driving car's controller does inside the car. Once the paired trial on a muscle has passed and the governor is set to govern, nobody turns a knob and nobody has to react. Every change is the governor's own, and the governor audits itself: every write is read back from the system, every machine it gives back is kept only after its own paired trial shows the response time holds, every reading, decision and reason is in its audit, and it hands every setting back at the end; nobody has to check its work either. It holds the response time at the centre of its band, under the line, and acts as the reading approaches the line, so the correction lands before the line is crossed, not after a person is paged. What a native stack pays in people for the same service (an engineer watching dashboards, paged while the service is over its line, retuning an autoscaler's target or a node pool by hand) is the **babysitting tax**, and every Kubernetes and cloud receipt counts it in both arms: the **alert minutes** (whole minutes whose 95th percentile, failed requests counted over, was over the line: the minutes an on-call page would be open; judged, the aim lower), the **settings commands the governor wrote on its own**, and the **share of its additions decided while the service was still inside its line** (both shown, not judged). No person touches either arm of a paired run. The aim in the cloud is **no alert minute at all**: a minute over the line is a person woken, so an alert minute in the omni arm is a LOSS of the aim, its cause found and fixed and the test run again. Where native

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

itself is short of machines (over its line on its own), the receipt says so beside the row: the same machines can be made to carry more, but no governor creates compute that the machines do not have.

The three ways a governor stops, and what each leaves behind. A referee or an underwriter should know exactly what happens to a governed system in each of the three ways Omni-Compass can stop, because the answer is the same in all three: every setting at native, read back, with no record left.

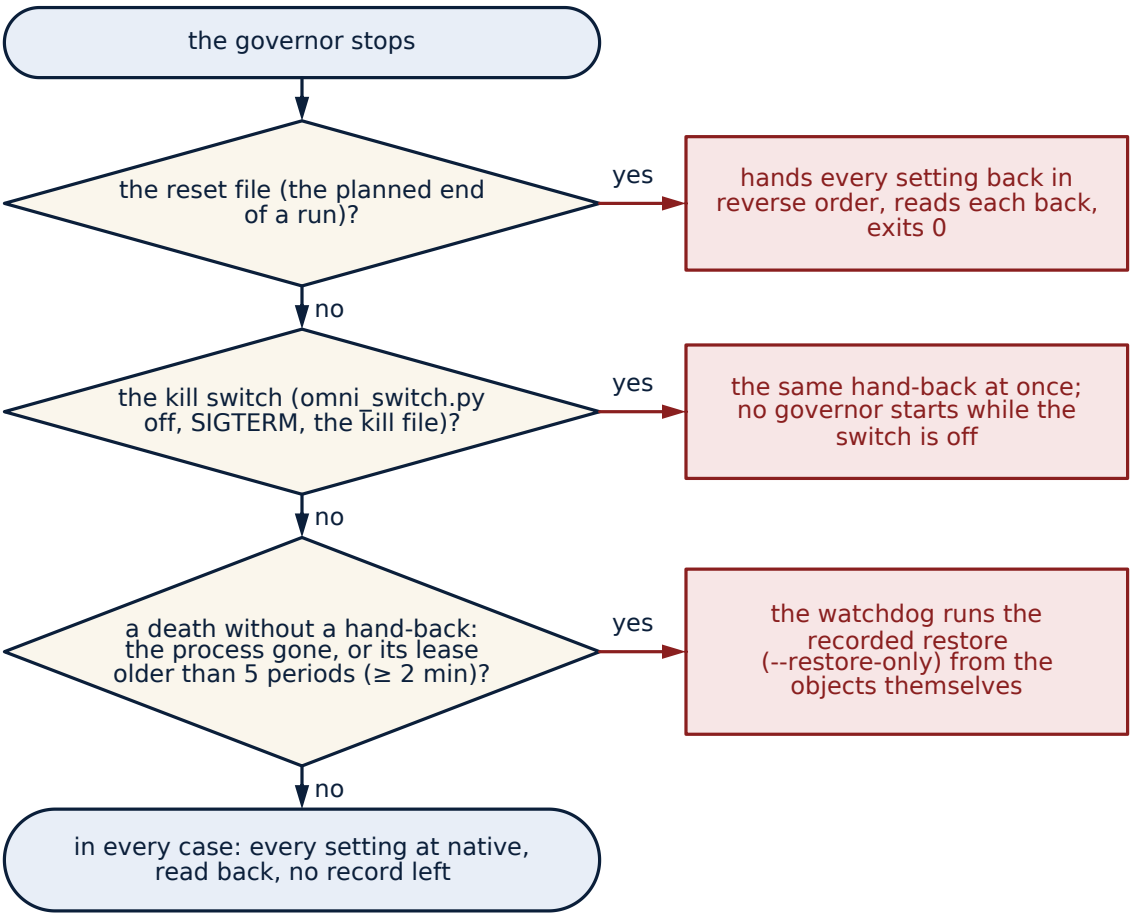


Figure 49. Flowchart: the three ways a governor stops. The reset file at the planned end of a run hands every setting back in reverse order, reads each back and exits 0; the kill switch (omni_switch.py off, SIGTERM or the kill file) does the same at once, and no governor starts while the switch is off; a death without a hand-back (the process gone, or its lease older than five periods) is caught by the watchdog, which runs the recorded restore from the objects themselves. In every case every setting ends at native, read back, with no record left.

- **The reset** (every setting handed back to native) is the planned end of a run. The governor sees its reset file, hands every setting back in reverse order of power-up, reads each back, writes its last audit line and exits 0. Every benchmark arm ends with one and then checks the cluster from outside the governor: the HPA target at the operator's, the replica range as set, every pod's CPU limit at its shipped value, every worker back in service, no `omnicompass.io/` annotation left on any object. An arm whose reset check fails is invalid and is left out of the table, never counted.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **The kill switch** (security) is the unplanned end of trust. `tools/omni_switch.py off` writes the switch file and sends every registered governor SIGTERM; each performs the same hand-back as a reset and exits; the command waits until all have and reports any that have not. No governor starts while the switch is off. It is one switch for the whole machine, not one per muscle, because the case it exists for, something driving a system through Omni-Compass's brain, is not a case for picking which muscle to stop.
- **A death without a hand-back** (killed outright, a crash, a hang) is the case the lease covers. Before its first write every governor registers itself with the exact command that puts every setting back (`omni_controller.controller --restore-only`, which restores from the snapshot annotations on the objects themselves, so it needs no memory of the dead process), and renews a lease every decision. The watchdog (`tools/omni_switch.py watchdog`), run as its own service beside the governors, finds any governor whose process is gone or whose lease is older than its limit (five decision periods, at least two minutes), stops a hung one, runs its recorded restore command, and records what it did. The robustness benchmark (Chapter 48, in preparation) kills the governor outright in the middle of a governed run and measures how many seconds pass before every setting is back and what the service saw in that gap.

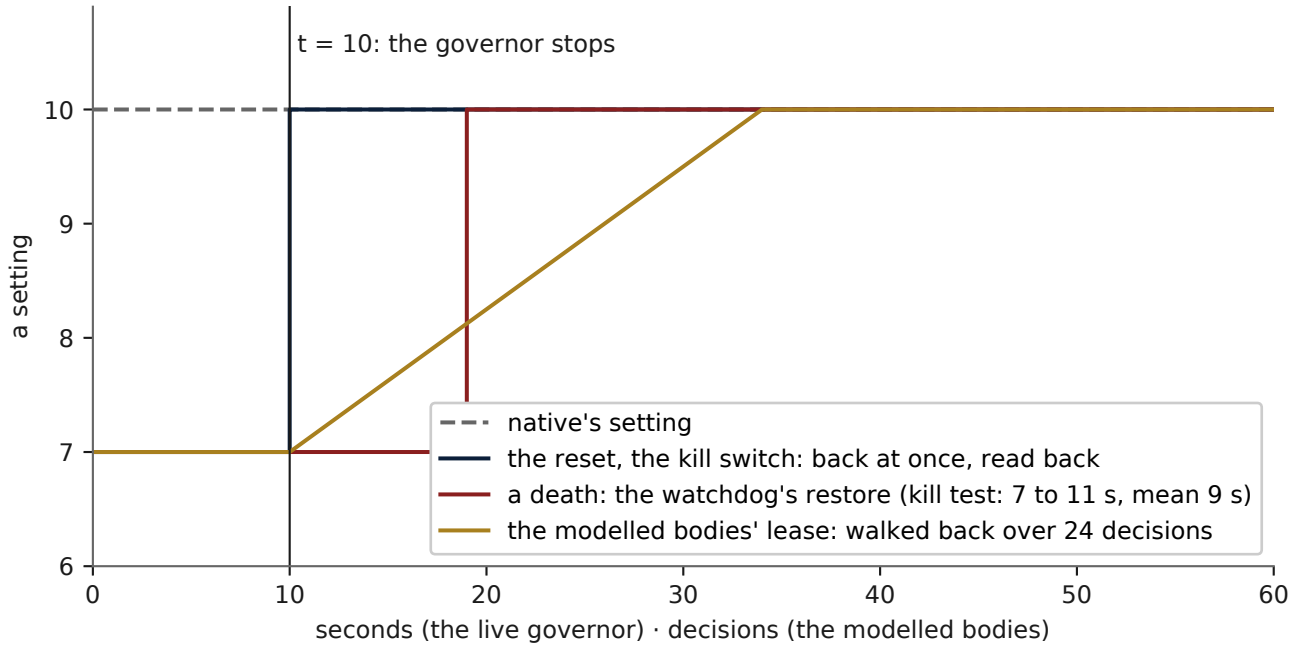


Figure 50. Timing diagram: the hand-back after a reset, a kill and a death. At t = 10 the governor stops. A reset or the kill switch writes every setting back at once and reads it back; a death without a hand-back is caught by the watchdog, which restored within 7 to 11 s (mean 9 s) in the kill test; in the modelled bodies the lease walks the setting back to native over 24 decisions.

Reading the log.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Line	Meaning
`gate: a sense is blind`	a reading failed; nothing is given back until it returns
`gate: pods scaling up`	pods first, machines after
`decision failed (n in a row)`	the cluster could not be reached; nothing was written; turn it OFF for native
`decided_by: compass`	the compass set the wires this decision
`decided_by: fail_up` / `blind_fail_up`	the service crossed the 0.95 wall, or a sense went blind: full capacity at once
`decided_by: thermal_hold`	the card reported a heat slowdown; nothing was tightened
`foreign_writer`	someone else changed a knob; Omni-Compass now observes only
`restored ... ok: true`	the OFF switch put every setting back and read it back
`"watchdog": "handed back"` (in the watchdog's own log)	a governor died or hung without handing back; the watchdog ran its recorded restore command; `ok` says whether every command exited 0
`cruise: on` / `cruise: off`	work waited for a place for two decisions: machines in service up to the pool's own top; the line has been empty for two: cruise ends
`idle_floor`	the work is done and demand is at zero: the pedal lifted all the way, straight to the floor in one move
`verdict_state: left native`	no step of the slow knob passed the paired trial: the knob is never moved on this muscle
`shield_interventions`	the shield clipped a write to its bounds or its step limit; the count says how often
`overhead` (the last line of the audit)	the governor's own CPU over the window: its process and every command it ran

How to read an audit from end to end. The audit (`audit.jsonl`, one JSON record a line, every line timestamped) is the governor's complete account of itself, and a reader can follow a run through it without the manual: the first lines are the snapshot (every setting as found, written to the objects as annotations so a watchdog can restore from them); then, every decision, the readings (the response time and its age, the pods waiting, the machines seen, whether any sense is blind), the compass's position and force (`compass`), the authority the nervous system granted and the release gate's reason (`authority`, `node_gate`), the decision itself (the machines recommended against the machines seen, the HPA target set), every write with the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

command that made it and the value read back, and the decision's wall time (`decision_ms`); in cruise, the floor step's silence; at the end, the reset's writes and read-backs and the `overhead` record. The benchmark harness prints a decision trail from the audit at the end of every omni arm (`scripts/kind_bench.sh`), one line a decision, so a reviewer reading a run's log sees what the governor saw and did at each minute.

CHAPTER 40

Maintenance, Upgrades and Security

- Run `python3 verify.py` after every upgrade; it must end `VERIFICATION: PASS`.
- Upgrade in watch mode first; take the levels again from level 1.

What an upgrade is, and what it is not. The engine is frozen and fingerprinted (Chapter 15). An upgrade that changes any engine file, a rule, a gain, a guard, a preset or a muscle, is by definition the next engine version, and every published result is run again on it before it is quoted beside the old ones; `tools/omni_version.py` says which version a checkout carries, and a checkout that matches none says which files differ. An upgrade that changes only the harness, the tools, the tables or this manual leaves the engine's fingerprint as it was and every result standing; the robustness harness of section 16.8 is an example, built without touching an engine file. An operator can therefore tell, from one command, whether a new checkout is the engine the results were made on or something that must prove itself again.

- The container runs non-root, read-only, with no capabilities; the Kubernetes identity has only the permissions of the level you run.
- The GPU governor needs root only for `nvidia-smi -pl` and `-lgc`.
- Report a security issue as `SECURITY.md` describes.

Least privilege, proven on every run. The Kubernetes governor runs as its own service account (`deploy/kind/rbac-omni.yaml`) with exactly the verbs the level needs: patch on the governed HPA, nodes, pods and the governed deployment, get on its security ConfigMap, create on pod evictions. It cannot delete nodes, create or delete pods or deployments, touch the load generator or anything in `kube-system`, read any secret, create a namespace, or write its own security hold. Every benchmark arm records `kubectl auth can-i` for each of these and fails if a "cannot" reads yes or a "can" reads no (`bench-*/rbac_omni.txt` in every archived run). The security hold itself is a ConfigMap another identity owns: when its key reads `hold: "true"` every expansion is blocked, and the governor cannot clear it.

What never leaves the repository. Cloud credentials live only in the repository's encrypted secrets and are used only by the workflows that need them; no credential, key or token appears in any file, log, table or commit, and the founder is never asked for one in conversation. The repository carries SPDX license identifiers on every source file so that license scanners (Black Duck, FOSSA, Snyk) read the evaluation

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

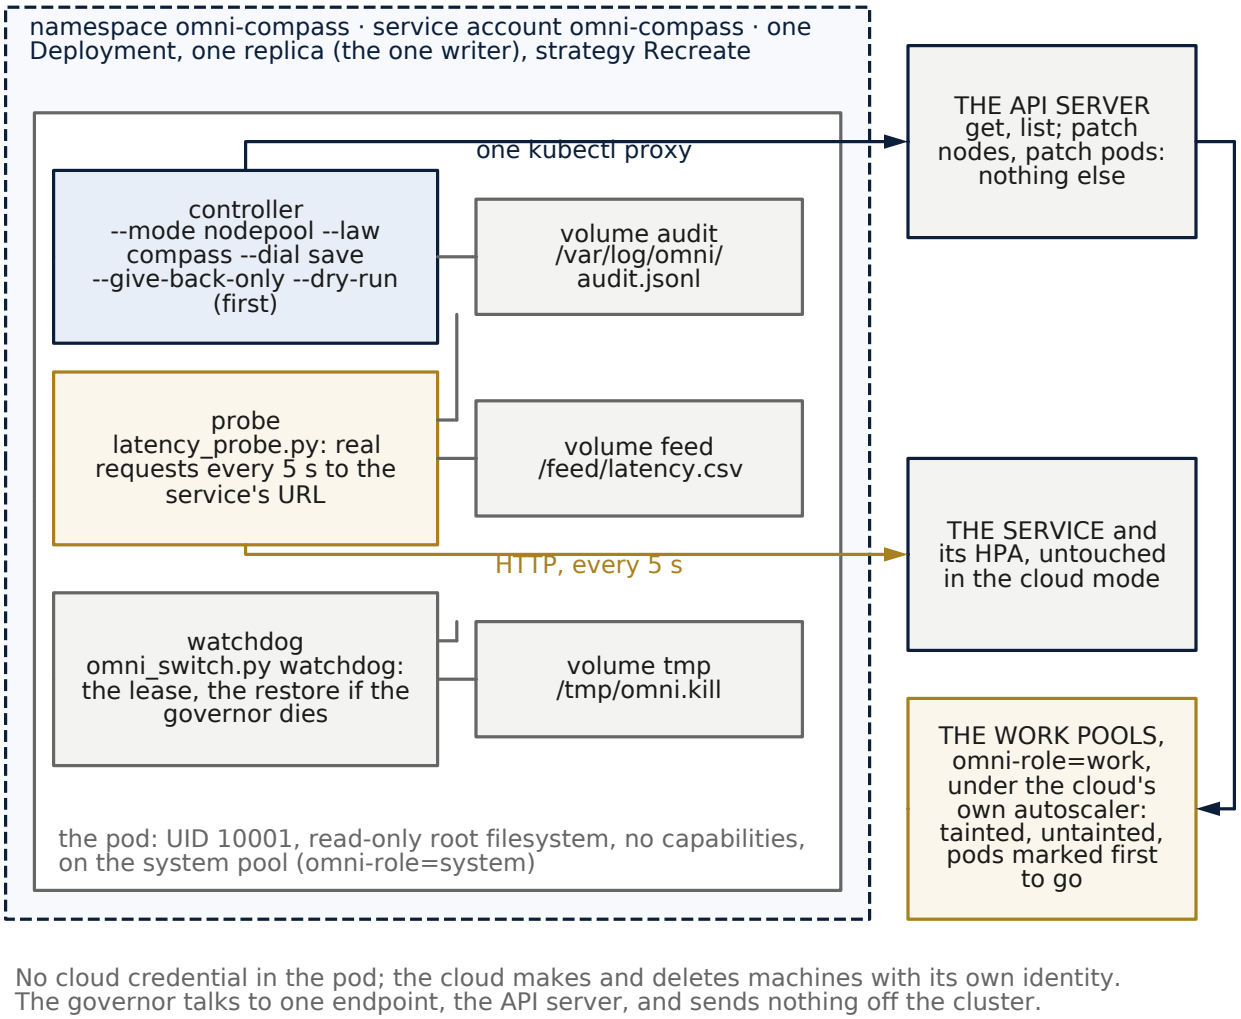


Figure 51. Deployment diagram: the governor on a managed cluster. One namespace, one service account, one Deployment of one replica (the one writer): the controller container with its command line, the probe beside it writing the feed to a shared volume, and the watchdog holding the lease; the audit, the feed and the kill file each on their own volume.

Outside the pod: the API server, reached through one kubectl proxy and granted get, list, patch nodes and patch pods, nothing else; the service and its autoscaler, untouched in the cloud mode; and the work pools under the cloud's own autoscaler, where machines are tainted, untainted and their pods marked first to go. No cloud credential is in the pod.

license correctly, and every generated report carries the legal notice at its head and foot (`tools/legal.py`). Patent, copyright and trademark filings are referred to as filed; no filing number appears anywhere.

Supply chain. Everything the benchmarks download is pinned and checked: metrics-server by version and SHA-256 (`scripts/kind_bench.sh`), Apache Kafka against the Apache Software Foundation's own SHA-512 file for that release, Redis as the Ubuntu runner's own package, MongoDB from its publisher's own

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

repository signed by the publisher's key and YCSB against the SHA-256 written in its preregistration, gym-pybullet-drones at one named commit, Python packages by `requirements.txt`. A download whose checksum does not match stops the run before anything else happens.

The upgrade drill, step by step. An operator who receives a new checkout does five things, in order, and stops at the first that fails. First, `python3 tools/omni_version.py`: if it prints the version the operator's results were made on, the engine is unchanged and the rest of the drill is about the harness; if it prints a list of differing files, the checkout is a new engine and nothing the operator measured before applies to it until measured again. Second, `python3 verify.py`, which must end with its pass line; the verifier runs every unit test, the shield's adversarial cases, the Python-against-C++ agreement and the release manifest, and a checkout that fails it is not installed anywhere. Third, the wire check on the operator's own stack, which proves that every wire the new checkout would use still follows, reads back and returns. Fourth, watch mode for at least one full cycle of the operator's load, reading the log the governor would have written and comparing its would-be decisions against what the operator would have done. Fifth, the levels again from level one, each with its paired receipt. An upgrade that skips a step has not been upgraded; it has been installed.

The security hold, and who holds it. The hold is the one control that outranks the governor's own judgment, and it is deliberately not the governor's to hold. It lives in a ConfigMap owned by another identity (the operator's security team, in practice); while its key reads true, every expansion the governor would make is blocked and every contraction is still allowed, so a governor under a hold can only give capacity back, never take more. The governor reads the hold on every decision and records in its audit that it read it; it has no verb that could write it. The kill switch (Chapter 39) is the blunter instrument beside it: the hold constrains a running governor, the switch stops every governor on the machine and hands everything back. An operator who suspects anything untoward uses the switch first, reads the audit second, and rotates the governor's identity third; the hold is for the slower case of a change window or an incident elsewhere during which no one wants capacity added.

What has been reviewed, and what has not. Reviewed and tested on every run: the governor's permissions against the list above, read from the cluster itself; the shield's refusal of every write past a cover, of every give-back while blind, and of every move under a hold, on two million generated cases; the lease and the watchdog's hand-back on a real cluster, thirty times (section 16.4b); the checksums of every download. Not yet done, and said so: an independent security review of the code by a party outside the company, which is in the open program (section 16.8), and a penetration test of the deployed governor on a customer-like cluster. Until those are done, the operator's own review stands in for them, and this section tells the operator exactly what to look at.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 41

The Operator Manual

Before you wire anything: read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

The current manual is `docs/INTEGRATION_MANUAL.md` (every stack, every level, every switch). This page is kept for its first-person account of the laws; where the two differ, the integration manual is current.

I am Omni-Compass. I am the brain and the nervous system; your stack is the muscle. Everything below is what I am and what I do, in my own terms and in my own mathematics. Every command and flag here exists in this repository.

I. My face

My face is the compass. It is not decoration: it is how I read myself, every decision, and it is written into my code (`omnicompass/compass.py`).

The wheel

My deviation E, over its ceiling E[max], runs along the horizontal. Its rate of change runs along the vertical. Where I stand on that wheel is my heading, measured clockwise from north:

Point	Letter	Heading	Where I am
+	A	0°	rising through rest
⇄	Δ	45°	expansion: above rest and rising, exchange under way
>	B	90°	peak extension: the turn, where my metric flips (k → −k)
⊤	Λ	135°	dispersion: above rest and easing, my ceiling holds
−	Ω	180°	falling through rest
≈	Π	225°	compression: below rest, settling into my basin

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Point	Letter	Heading	Where I am
<	Γ	270°	deepest compression: the turn at my floor
✦	Ψ	315°	re-alignment: below rest and rising, ignition ahead

My rim carries twenty-four letters, fifteen degrees apart, clockwise from A:

A E Z Δ H Θ B I K Λ M N Ω Ξ O Π P Σ Γ T Y Ψ Φ X

Every reading names its letter.

The four strokes

My quadrants are the strokes of the closed circle:

Quadrant	Stroke	Where I am
I	Expansion	above rest, rising
II	Dispersion	above rest, easing
III	Compression	below rest, falling
IV	Re-alignment	below rest, rising

The wheel turns I → II → III → IV → I:

- **Ignition:** crossing from IV into I.
- **Metric flip:** the turn at peak extension.
- **Continuity:** I am continuous through every crossing:

$\lim X(t^-) = \lim X(t^+)$

Nothing in me switches off, and nothing restarts.

- **Counting:** I count every circle I close.

The axle

My axle is the structural basin S. Its rest point S* solves my equation (6):

$\delta - \alpha_s S - \tfrac{3}{4} \beta_s S^2 = 0$

Without the axle, deviation diverges. With it, deviation circulates.

Closing the circle

I hold the three conditions of the Unified Circle Principle and report them every decision:

- **$\dot{X} = G(X), X(0) \in \Omega$.** Ω is my living band: every level I hand out lies between 5% and 95% of its range.
- **$G(X) \cdot n(X) \leq 0$ on $\partial\Omega$.** At a boundary, my next move points inward, never outward.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **$\nabla L(X) \cdot G(X) \le 0$.** My ledger $L = E^2/2 + \Phi(S) - \Phi(S^*)$ descends when nothing forces me. When outside load forces me, I say so; I never hide it.
- **$\Rightarrow \lim X(t) \in M^*$.** I settle into my basin.

A reading, as I print it on every decision trail:

```
Ψ ✦ 318.2° Re-alignment: re-alignment, ignition ahead | Ω: machine_fil
    ↪ l below the floor, returning | G·n≤0 yes | L 0.4121 -0.0133 | ax
    ↪ le S 0.19 (rest 1.90) | circles 3
```

II. My laws in your system

1. One switch, for all of me, in a human hand

I have one switch, the Unified Control Switch. A human turns it; I never turn it myself.

- **ON:** I am the primary control authority inside the scope you granted me.
- **OFF:** every setting I changed returns to what it was, and your native control takes full custody.

```
# OFF (all of me, at once, at any moment, for any reason, including a
    ↪ suspicion that someone has taken my brain):
kubectl -n omni-compass exec deploy/omni-compass -- touch /tmp/omni.ki
    ↪ ll
# ON:
kubectl -n omni-compass exec deploy/omni-compass -- rm /tmp/omni.kill
```

What OFF restores. Every HPA CPU target and replica range, pod CPU limit, idle mark, paused rollout or job, GPU and CPU frequency ceiling, and containment quota. Each restore is recorded, and each lever restores on its own.

What never trips the switch.

- The switch never turns one organ off.
- No boundary, no error and no failed decision trips it.
- A decision that fails writes nothing, and my next decision comes on time.

2. My living band: 5% to 95%

Every level I hand out lives inside $\Omega = [0.05, 0.95]$ of its range:

- frequency ceilings, GPU power limits and the site power envelope;
- each organ's share of the energy budget;
- how full I run any machine.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

No part of the body is driven to zero: a part with no work idles at its floor, alive and ready. No part is driven to its absolute top: I never spend the last five percent.

Tested over 300,000 of my states and 60,000 of my energy allocations (`tests/test_living_band.py`).

3. Machines idle; I never switch them off, and I never move a pod

When I need fewer machines, I idle the rest by letting their work leave on its own:

1. **Prefer not:** the machine is marked `omnicompass.io/idle:PreferNoSchedule`. New pods go to the open machines first, but a pod that finds them full lands here at once, so no pod ever waits because of me.
2. **Marked:** its pods are marked first to go (`controller.kubernetes.io/pod-deletion-cost`), the machine with the least work first. When the load falls, your autoscaler's own scale-down removes exactly those pods, emptying one machine at a time.
3. **Idle:** once its work is gone, the machine stays powered and Ready, gauged down to its idle floor.

While it still carries work, a machine counts as in service at full power. No pod is ever evicted, moved or restarted to idle a machine. When work returns, I remove the mark, the warm machines still carrying work first; it is in service at once, with no boot and no power cycling.

An idle machine draws `park_frac × idle power` (0.25), never zero.

4. Every change is continuous

- I idle at most one machine per decision.
- I wake a machine within five seconds of a pod waiting for a place.
- My pod reflex reads the queue every five seconds.

Nothing jumps, and nothing is restarted.

5. My pod sense: the muscle makes the pods

Your autoscaler is the muscle that makes and removes pods. I never start or stop a pod it would not.

Its rule is replicas = current × busy ÷ target. I read the same rule from the live queue every five seconds:

- a replica serving requests answers in R = S / (1 − u), so u = 1 − S/R;
- S is the bare service time: the fastest tenth of the recent requests;
- R is the recent mean response, over the same window;
- your target, in queue terms, is target × request ÷ limit.

I record what the queue needs (`pod_reflex_reading`) and act only through the energy I give the pods and the target I hold for the muscle.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The target I hold. g is the CPU each pod is guaranteed with your autoscaler's largest count spread over the machines in service, divided by your limit. That target moves only when a machine idles or wakes, never each time a pod starts or leaves.

The muscle's own clock. I hold each target for your autoscaler's scale-down window (300 s unless you set one), the time it takes to answer a target. A target moved faster would pull the muscle mid-movement and start pods it then removes. A response-time breach returns your own target at once.

The reflex that raises the floor itself exists (`--pod-reflex-writes`); it is off unless you turn it on.

6. My energy is moved, never created

One budget comes in, and I convey it across the body by need (`omnicompass/conveyance.py`):

- $da_i/dt = \kappa\, a_i\, (e_i - \bar{e})$;
- the budget is conserved exactly, and each organ converges to its share of the demand;
- organs with no work idle at their floor, and what they do not need goes where it is needed;
- nothing leaves Ω.

On each machine, I hand its idle CPU to the pods serving on it:

$$c_i = \min\left(\max\left(L_i,\ (0.95\, A_j - Q_j) / |P_j|\right),\ 0.95\, A_j \right)$$

- A_j is the machine's CPU.
- Q_j is what every other pod on it has requested.
- P_j is its serving pods.
- L_i is the limit you gave the pod.

A pod's CPU limit is a quota. A request that needs more than one quota period waits for the next one while the machine stands idle. That wait is energy withheld from the work, not saved, because the request spends the same CPU-seconds either way.

I change the limit in place: the pod is not restarted, its request is untouched, and it never gets less than you gave it. Every fifteen seconds a new pod gets its share. The OFF switch returns every pod to your limit.

7. I see before I act

My nervous system runs both ways:

- **Afferent:** a sense that is stale, frozen or unreadable is blind, and while any sense is blind I give nothing back.
- **Efferent:** I read back every order I give. An order that did not land blocks my next release.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

III. Wiring me in, step by step

Take the steps in order. Take the next step only when this step's pass condition holds. The switch works at every step.

Step 0. What your stack needs

1. Kubernetes 1.34 or newer, with metrics-server (`kubectl top nodes` answers).
2. An HPA with a CPU target on each service I govern.
3. A PodDisruptionBudget on each service, for your own maintenance; I never evict a pod.
4. A readiness probe and a short preStop pause on each service, so a new pod never takes traffic before it answers and a pod your autoscaler removes never drops a request as it leaves (`deploy/kind/demo.yaml`).
5. A response-time feed for each governed service, as CSV `elapsed_seconds,latency_ms,ok`. `scripts/latency_probe.py` writes one.

Step 1. Build me

```
docker build -f deploy/Dockerfile -t <registry>/omni-compass:<tag> .
docker push <registry>/omni-compass:<tag>
```

I run as non-root, with a read-only root filesystem and no Linux capabilities. I carry my engine, my nervous system, my compass and my frozen law.

Step 2. Let me watch (monitor only)

```
kubectl apply -f deploy/install/omni-compass.yaml     # set the image
    ↪ line; --mode observe
kubectl -n omni-compass logs deploy/omni-compass -f
```

Identity. I hold a read-only identity. `scripts/pilot_shadow.sh` records `kubectl auth can-i` receipts showing I cannot write.

Pass condition. Zero writes, and readings your operators agree with.

Step 3. Give me the pods (on top of your autoscalers)

1. Grant `patch horizontalpodautoscalers` and `patch pods/resize` (`deploy/rbac-target.yaml`, `deploy/kind/rbac-omni.yaml`).
2. Run me with `--mode target --latency-file <feed> --slo-ms <your p95 target>`.

Your HPAs keep scaling. My pod reflex raises floors ahead of the CPU averages.

Targets. I hold your promise in queue terms: busy = target × request ÷ limit.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- g is the CPU each pod is guaranteed (section II.5), divided by your limit; the target that keeps each pod exactly as busy is g times yours.
- The pod answers faster, because it has g times the CPU, at the same busy share.
- Apart from that, I only tighten, never loosen.
- While response time is over your target, and for three decisions after, your own target stands.

Pass condition. p95, p99 and failed requests never behind native.

Step 4. Give me the machines

1. Grant `patch nodes` and `patch pods` for the first-to-go mark (`deploy/kind/rbac-omni.yaml`).
2. Run me with `--mode nodepool --active-nodes-only --closure /app/law/closure.json --node-scale-cmd "<park/wake command with {n}>"`.

Your platform	The park/wake command
any cluster, kind, bare metal	`bash scripts/kind_nodepool.sh {n}` (close to new work and mark first to go; open again, warm machines first)
Karpenter / EKS Auto Mode	the NodePool CPU limit at `{n} × node CPU`, parked nodes kept, not consolidated away
Cluster Autoscaler node group	the group's desired size, with scale-down through parking, not deletion
OpenShift	the worker MachineSet replicas, parked, not deleted

I give a machine back only when all of these hold:

- every sense is live;
- my last order landed;
- pods are not scaling up;
- nothing is waiting for a place;
- the machines that remain stay inside Ω.

Pass condition. Fewer machines in service and less energy, with no LOSS on any service gauge.

Step 5. Let me decide alone (Kubernetes as the muscle only)

Add `--strict-replicas`:

- I decide each service's replica floor and when to shrink;
- your HPA stays as the fast up-reflex;
- my node law sizes the machines.

Pass condition. As step 4.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Step 6. Give me the hardware

Organ	How to wire it
CPU frequency	`--cpufreq-policy-root /sys/devices/system/cpu/cpufreq --cpufreq-require-schedutil --rapl-cmd "<prints package watts>"`
GPU	`--gpu-query-cmd "nvidia-smi --query-gpu=power.draw,temperature.gpu --format=csv,noheader,nounits" --gpu-power-cmd "nvidia-smi -pl {w}" --gpu-max-w <max>`
Power and cooling	`--power-cmd "<prints site watts>" --site-limit-w <limit> --cooling-cmd "<sets {c}>"`
Batch and rollouts	`--batch --batch-pace --rollout-guard <ns/deployment>`

Pass condition. Energy per unit of work down, with no LOSS on any service gauge.

Step 7. The switch drill, at every step

1. Turn me OFF.
2. Check every setting is back to its recorded original, and no `omnicompass.io/*` annotation remains.
3. Turn me ON.

`scripts/kind_bench.sh` does exactly this after every live run.

IV. How to see me work

- **Live, paired, on real Kubernetes:** `benchmark-reps.yml` (a commit with `[reps]`, or by hand). Each repetition runs native, me on top, and me alone, back to back on one machine.
- **On your own machine:** `bash RUN_LIVE.sh 3`.
- **Every run leaves:**
  - my audit log of every read, write and compass reading;
  - my decision trail;
  - my identity receipts;
  - a SHA-256 fingerprint of every file.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

V. When you read these lines

I say	I mean
`gate: a sense is blind`	I cannot see, so I give nothing back until I can
`gate: pods scaling up`	pods first, machines after
`decision failed (n in a row)`	I could not reach the cluster and wrote nothing; turn me OFF if you want native now
`pod_reflex_reading`	what the queue needs now; the autoscaler decides the pods
`convey: <machine> idle CPU to its k serving pod(s), limit c`	that machine's idle CPU now reaches the work on it
`Ω: machine_fill below the floor, returning`	the machines are underfilled and my move is bringing them back into the band

PART SEVEN

Proving It

Paired runs, receipts, rules written before the runs, and every result to date with its evidence class.

CHAPTER 42

The Receipts, in Their Totality

A **receipt** here is a result file in this repository made by a paired run: the system as it runs on its own (native) and the same system with Omni-Compass on top, the same work in both arms, the rules written down before the counted runs, the engine identified by its fingerprint (`tools/omni_version.py --commit`), every row reported, losses included. A receipt is read in the class of evidence it is: **P** a physical meter, **L** real software (a real Kubernetes cluster, a real database), **S** our own models, **V** a property of the code. S is never presented as proof of a physical saving. A result belongs to the engine it ran on (v1, v3, v5) and is never read across engines. How to read a single table: `docs/HOW_TO_READ_THE_RESULTS.md`. The wording of every three-run row: `tools/readings.py`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1. What the receipts say, read together

1. **More work in time, and a faster tail, on the same machines (L, v3).** On a real Kubernetes cluster, Omni-Compass on top of the pod autoscaler cut the 95th-percentile response by 57% to 67% in the steady, wandering, all-four, fault and public-trace tests, in all three runs each; where demand outran what native served in time, the work done inside the response line rose 54% to 68% (the all-four test); failed requests fell 11% to 18% where demand swung or machines failed. On top of KEDA the 95th percentile fell 51% to 53%, and on top of KEDA's HTTP add-on 73% to 76%. Read together: the governor turns capacity the native controller leaves unused into service, on the same machines.
2. **The same service on less, where less is enough (L, v3).** PostgreSQL held 6% to 11% fewer connections open on `select`, MySQL's buffer pool 10% to 20% less on `read_write`, MongoDB's cache 3% to 13% less on `f`, each at the same service, each GAIN in all three runs, every other workload inside the noise; machines 1.7% to 2.0% fewer at steady load, 16% to 20% fewer on a batch queue (26% to 33% after it), 7% to 9% fewer under the Google trace of 2011, 5.9% to 7.8% fewer on top of KEDA's HTTP add-on.
3. **What it cost, shown beside it.** On top of KEDA, the energy of workers left on at idle power (a declared model) rose 1.0% to 2.6%, power given in all three runs, in both setups: power given for the faster service. Kafka and Redis read nothing at all in their sets of 10 October, because the rule of that day ended every spend trial before it could be judged; that was our wiring, amended the same day (amendment 3), and the sets on it are the result of record when they land.
4. **Everything handed back (L, v3).** The governor killed outright at 40% of the window: every setting back with the operator's within 11 seconds (9 on average), in 30 of 30 repetitions; the long run (two hours an arm): no leak, every decision valid, no slowing.
5. **On our own models, no LOSS, alone or inside a body (S, v5).** Of the 1,107 muscles of the catalog (the founder's nine open-source pieces among them), each alone on the preregistered seeds under its own load and under work waiting in line: 527 toward their aims, 421 at their limit on native (the max writes nothing to them), 159 no difference beyond the noise, none LOSS and none mixed. Inside the seven organisms (the spine the seventh, 16 October) every organism read GAIN as a whole under all three loads, and not one plant is behind native in any organism under any load (the living body is `docs/FORMAL_V5.md`, section 4; every muscle its own card, which removes more misses than one global setting with less power given, is section 5).
6. **What is not yet shown.** No energy saving on a real chip: the physical receipt (P), the GPU's own meter on the current governor, on the same clock as the Kubernetes runs, is the decisive one still to be produced; every earlier card result ran on a controller since replaced and is obsolete. No cloud-bill saving: Azure's bill on four workers read no difference beyond the noise (a fleet too small to give back one machine), and the larger fleet waits on Azure's capacity. More completed work at one fixed resource cap: the capacity test's three runs of 13 October read no difference beyond the noise at any of its four caps; the cap is a quota on the service's CPU, and it blocks the one lever Omni-Compass has there, more copies of the service.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. Receipt by receipt

Newest first within each class. "In all three" means the same sign in runs A, B and C with every 95% interval clear of zero; "noise" means an interval includes zero.

Real software (L)

Test	Engine	Native	What moved	Reading	It shows	It does not show	File
On top of Goldilocks and the VPA's recommender	v5	the service rightsized by Goldilocks 4.16.2 (the VPA 1.7.1 recommender), HPA	response mean −44% to −48%; p95 −59% to −62%; p99 −68% to −69%; time over the line −99% to −100%; energy +1.9% to +2.6% (model)	response times GAIN in all three; energy power given in all three (model: the power given); machines the same	a faster service on top of a rightsized one, on the same machines	a measured energy saving (the model shows 2% to 3% more, for about 40% more CPU work done)	`results/live/V5_GOLDILOCKS.md`
Capacity at a fixed cap (four cap levels, rising load)	v5	Kubernetes HPA under a CPU quota	nothing judged	noise at every cap in all three runs (one run at 2 cores −1.8% completed work, the other two noise)	no harm under a cap	more work under the cap: the quota blocks Omni-Compass's one lever there, more copies of the service	`results/live/V5_CAPACITY.md`
Test	**Engine**	**Native**	**What moved**	**Reading**	**It shows**	**It does not show**	**File**
On top of KEDA's HTTP add-on	v3	KEDA 2.21, HTTP add-on 0.16	p95 −73% to −76%; machines −5.9% to	p95 and machines GAIN in all three; energy	faster service and fewer machines on top of a	a measured energy saving (the energy is a	`results/live/V3_KEDA_REQUEST`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Engine	Native	What moved	Reading	It shows	It does not show	File
			−7.8%; idle-power energy +1.0% to +2.6%	power given in all three (model)	second autoscaler	model)	S.md
On top of KEDA on CPU and requests	v3	KEDA 2.21	p95 −51% to −53%; idle-power energy higher	as above	as above	as above	results/live/V3_KEDA_CPU_REQUESTS.md
The Google cluster trace of 2011, replayed	v3	HPA	p95 −64% to −67%; failed requests −11% to −18%; machines −7% to −9%	GAIN in all three	a public day of real demand served faster on fewer machines	a cloud bill	results/live/V3_TRACE_GOOGLE2011.md
All four at once	v3	HPA	work inside the line +54% to +68%; p95 −57% to −63%	GAIN in all three	more work in time on the same machines	energy (inside the noise, model)	results/live/V3_ALL_FOUR.md
Steady work in steps	v3	HPA	p95 −64% to −66%; machines −1.7% to −2.0%	GAIN in all three	a faster tail on fewer machines	a measured energy saving (model −1.3% to −1.8%)	results/live/V3_STEADY.md
Demand that wanders	v3	HPA	p95 −57% to −64%; failed requests −12% to −13%	GAIN in all three	service held as demand moves	machines (noise)	results/live/V3_WANDERING.md

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Engine	Native	What moved	Reading	It shows	It does not show	File
Faults: a machine down, a spike, a runaway pod, a blind probe	v3	HPA	p95 −58% to −63%; failed requests −14% to −18%	GAIN in all three	service held through faults	machines (noise)	`results/live/V3_FAULTS.md`
A queue of batch jobs	v3	Jobs and HPA	machines −16% to −20% (−26% to −33% after the queue); standby-model energy −11% to −14%; queue finish noise	GAIN in all three	the same queue on fewer machines	a measured energy saving (model)	`results/live/V3_BATCH.md`
A noisy neighbour	v3	HPA	—	noise on every row	no harm beside a noisy neighbour	a gain there	`results/live/V3_FAIRNESS.md`
PostgreSQL behind PgBouncer	v3	the operator's pool of 20	connections −6% to −11% on `select`; the add above 20 refused on `simple_update`	GAIN in all three on `select`; the rest noise	memory given back at the same service, proved on the stack first	more throughput	`results/live/V3_PGBENCH.md`
MySQL under sysbench	v3	the operator's 512 MB buffer pool	pool −10% to −20% on `read_write`	GAIN in all three; the rest noise	memory given back at the same service	more throughput	`results/live/V3_SYSBENCH.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Engine	Native	What moved	Reading	It shows	It does not show	File
MongoDB under YCSB	v3	the operator's 512 MB cache	cache −3% to −13% on `f`	GAIN in all three; the rest noise	memory given back at the same service	more throughput	`results/live/V3_YCSB.md`
Apache Kafka; Redis	v3	the operator's settings	nothing judged	noise everywhere; every spend trial ended unjudged (our wiring, amendment 3)	no harm	a gain (none judged yet)	`results/live/V3_KAFKA.md`, `results/live/V3_REDIS.md`
The governor killed at 40% of the window	v3	HPA	every setting back within 11 s (9 on average), 30 of 30; the window's p95 −27% to −48%	held in every repetition	the hand-back works under a crash	—	`results/live/V3_ROBUST_KILL.md`
The long run, two hours an arm	v3	HPA	no leak; decisions valid; no slowing	held in every repetition	it runs for hours unchanged	—	`results/live/V3_ROBUST_LONG.md`
The six organisms with the real cluster inside, 10 and 100 copies	v3	HPA	the cluster's p95 lower in all 12 cells (−1% to −52%); failed requests lower in 11	per cell	the organisms and a real cluster on one clock	machines (6 in both arms under kind)	`results/live/V3_SIX_KUBE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Engine	Native	What moved	Reading	It shows	It does not show	File
Azure's managed Kubernetes, its own bill, 4 workers	v1	AKS with its cluster autoscaler	bill −4.7% steady, +5.0% burst	noise on every gauge (p99 −34% clear in one run)	the method on a real cloud bill	a bill saving (the fleet is too small to give back a machine)	`results/live/V1_AKS_STEADY.md`, `V1_AKS_BURST.md`

Our own models (S)

Test	Engine	Reading	File
The 1,107 muscles and the six organisms, preregistered seeds	v5 (digest 5648f290, every muscle its own card)	527 toward their aims, 421 at their limit on native, 159 noise, 0 LOSS or power given; every organism with fewer misses under all three loads; 0 plants with less work or more misses in any organism under any load	`results/realms_v5/REALMS_V5.md`
Power grids: 11 SimBench grids in pandapower	v3	energy drawn and net import lower in all 11; losses lower in 7, power given in 4; tap operations fewer in 10, more in 1	`results/live/V3_PANDAPOWER.md`
CityLearn districts	v3	electricity bought, peak and unevenness lower in all 11 battery districts; the bill higher in 7, ramping higher in 7	`results/live/V3_CITYLEARN.md`
Robot arms, MuJoCo Menagerie	v3	Gen3 and Panda peak torque −29% and −10%, tracking error −21%; the Panda's copper +14% higher; UR5e and iiwa left native	`results/live/V3_MUJOCO.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Engine	Reading	File
Drone swarms, 20 drones in three cells	v3	energy a mission −7% to −20%, missions a charge +8% to +25%, GAIN in all three; no late mission, reserve breach, near miss or collision	`results/live/V3_SWARM.md`

A physical meter (P)

Test	Status
One card, the card inside the organisms, eight cards, on the current governor	to be run by the founder on rented cards, at one exact commit, after the CPU side (`docs/GPU_RUN_GUIDE.md`); every earlier card result is obsolete

The code (V)

The max's guarantees, one by one, with the code path that makes each one true: `docs/FORMAL_V5.md`. The budget law's conservation and convergence, the safety shield's 2,000,000 adversarial cases, the C++ twins equal to the Python: `docs/STATE_OF_PLAY.md`, "Verified in code".

3. What would change these readings

- A P run on a real card that shows no difference in the card's own energy at the same work would leave the energy claim at "not shown"; it is not claimed now.
- An A, B or C run that disagrees with the others turns a row into "the runs disagree"; it is looked into, never dropped.
- A loss in all three runs is reported as it stands, its cause looked for in our own wiring, setup and scoring first, and the next set run on the fix.

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 43

How to Read the Results

The key: GAIN, EVEN and LOSS

Every judged reading in Omni-Compass is one of three words: **GAIN**, **EVEN** or **LOSS**. Better, same and worse are not used anywhere. The word is decided by what the gauge is for, never by the plus or minus sign of its number: who sets the aim differs from one system to the next, and each gauge's aim is written in its preregistration before the runs.

Word	What each letter stands for	Its sense in underwriting	What it means in a table
GAIN	**G** Growth (asset appreciation); **A** Advantage (risk reduction); **I** Improvement (margin expansion); **N** Net-positive (profitable outcome)	surplus and positive variance	the gauge moved toward its declared aim against native: more work done, a shorter wait, fewer misses or failures, or a resource cut
EVEN	**E** Equalized (zero variance); **V** Verified baseline (expected norm); **E** Equilibrium (balanced risk); **N** Neutral (no net change)	the break-even baseline: equilibrium	native and Omni could not be told apart: the same, or no difference beyond the noise; a knob native already runs at the top of its range is EVEN, at its limit on native
LOSS	**L** Leakage (capital drain); **O** Off-track (adverse selection); **S** Setback (claim liability); **S** Subpar (negative variance)	actuarial deficit and exposure	the gauge moved away from its declared aim: less work done, a longer wait, more misses or failures

How the sign of a number becomes a word:

- **Time waited, missed or failed** (a response time, time over the line, failed requests): a fall is GAIN, a rise is LOSS.
- **Work done** (work inside the line, throughput, a hit rate): a rise is GAIN, a fall is LOSS.
- **A resource spent or held** (energy, machines, memory, processor time, a bill, wear on a part): a fall is a **cut**, and a cut is GAIN. A rise is **power given**: what Omni put in to buy the work and the speed shown

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

beside it. Power given is always shown and never hidden, and it is never called a loss (the founder's order of 12 October 2026: the max rides every muscle's edge; it never shaves).

- So a minus can read GAIN (a response time cut 65%, a bill cut 30%) and a plus can read LOSS (failed requests up).

Some preregistrations name their outcome with a label written before the runs (for example SUPERIOR WITHIN GUARDRAILS in the card protocol). The label stays as it was frozen, and every table shows it with its word first: TOWARD ITS AIMS reads GAIN; BOTH WAYS reads GAIN AND LOSS; AWAY FROM ITS AIMS reads LOSS; SAME AS NATIVE reads EVEN (the same as native); AT ITS LIMIT ON NATIVE reads EVEN (at its limit on native); SUPERIOR WITHIN GUARDRAILS reads GAIN (within the guardrails); ENERGY IMPROVEMENT WITH SERVICE TRADEOFF reads GAIN AND LOSS (energy cut, service traded for it); SERVICE IMPROVEMENT WITH ENERGY TRADEOFF reads GAIN, power given (service GAIN, energy given for it); NONINFERIOR / INCONCLUSIVE reads EVEN (inside the noise, within the guardrails); NOT ESTABLISHED reads EVEN (not established: inside the noise, a guardrail crossed on the mean). A run that breaks its own validity checks reads INVALID and carries no word.

A reading counts only when it holds the same way in all three of our runs, A, B and C, with every 95% interval clear of zero: "GAIN in all three of our runs". The other readings are **EVEN, no difference beyond the noise** (in a run the interval includes zero, so native and Omni could not be told apart: that is the result), **the runs disagree** (clear runs pointing different ways: the test is unstable there and is looked into) and **shown, not judged** (a gauge declared in advance as shown only, such as the knob's own setting).

Why these three words: they are the words of underwriting and actuarial work, where every outcome is graded as surplus, break-even or deficit, and each letter spells out the same rule. Omni-Compass is there to add (GAIN), never to take (LOSS), and to hand a muscle back to its own native setting where it cannot add (EVEN). Its first rule is do no harm, so **LOSS should never appear**: where it does, the row stays in the table, its cause is found and fixed (our own wiring first, then native's setup, then the scoring) and the test is run again.

Disclosure and disclaimer: GAIN, EVEN and LOSS, and the letters behind them, are The Omni-Compass LLC's own convention for reading its own results. The underwriting senses explain the words; they are not an actuarial, financial or insurance opinion, and no outside body defined, reviewed or approved them. A reading states what our own runs measured against native under the declared aims, not a promise about any other system; every number stands beside its word, so a reader can judge it by any other convention. Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

This chapter teaches you to read every table Omni-Compass produces. You do not need to know Kubernetes or GPUs to follow it. Read the five ideas first, then go to the table you have in front of you.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The five ideas behind every table

1. **Native, and native with Omni-Compass on top.** Omni-Compass never runs a machine by itself. Every result compares a system running alone ("native": Kubernetes alone, the card's own firmware alone, a building's own controller alone) with the same system with Omni-Compass sitting on top of it. Same machine, same work, same moment: the only difference is Omni-Compass.
2. **Paired runs.** Each comparison is run many times ("repetitions" or "runs"), each time with both arms on the same seed (the same pattern of work). Each repetition gives one difference; the table reports the average difference.
3. **The 95% interval.** Next to each average is a range, for example `+0.092% (+0.090 to +0.093)`. It means: if we ran this again and again, the true answer would land inside that range 95 times out of 100.
   - If the whole range is on one side of zero, the difference is **proven** (the table says "yes" or "significant").
   - If the range crosses zero, the difference is **not proven**: it could be noise.
4. **The word, not the sign.** Every judged reading is GAIN, EVEN or LOSS (the key above). For response time, failures and time over the line a fall is GAIN; for work and work per energy a rise is GAIN; for energy, machines and every other resource spent or held a fall is a cut, a GAIN, and a rise is **power given**, never a loss. Every table gives the word beside the number.
5. **Evidence class.** Every result is marked with how it was measured:
   - **T**: a theorem;
   - **V**: verified in code;
   - **S**: our own model (modelled);
   - **L**: live software (real Kubernetes);
   - **P**: a physical meter (a real card's own power meter).

Only **P** speaks for hardware energy.

The words in the tables

Word	What it means	Its aim
Work per energy	work done for each unit of energy (requests per kilojoule on a card)	higher
Energy (J, Wh)	the energy used	lower
Work, requests served	how much was done; both arms must serve the same work	equal
Response time, median (p50)	half of the answers were faster than this	lower

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Word	What it means	Its aim
Response time, p95	95 of 100 answers were faster than this: the slow answers, what service promises are written on	lower
Response time, p99	99 of 100 answers were faster than this: the slowest answers	lower
Time over the line, violations (pp)	the share of time the service was past its promise, in percentage points	lower
Failed requests, not served	answers that never came	zero
Machines in service, node-hours	how many machines were kept on, and for how long	lower
Band first	the founder's rule: no win unless time over the line is no higher than native's	"held"
Knobs handed back, restored	at the end every setting Omni-Compass touched was put back exactly	True / yes
Label	the verdict, chosen by a rule written before the run, never by hand	see each table

The GPU card (`results/gpu/run-<stamp>/GPU_REPS.md`)

One card, three arms, many repetitions:

- **native**: the card's firmware alone;
- **watch**: Omni-Compass running and deciding but writing nothing. It must equal native: this proves Omni-Compass watching costs nothing;
- **omni**: Omni-Compass on top, moving the card's clock ceiling and power limit.

Read it in this order:

1. **The verdict line** at the top, one of: *GAIN, proven*; *LOSS, proven*; *not proven*; *more requests per kJ, fails the service guardrail*.
2. **Work per energy** (requests per kilojoule): the headline. A plus sign with a range wholly above zero is a proven gain.
3. **Requests served** must be equal in every arm. More energy saved by serving less work would be cheating; the bench checks it.
4. **p95 and p99**: the slow answers. With the verdict rule (`omnicompass/verdict.py`), Omni-Compass never takes a step that makes a request more than 2% slower.
5. **Writes and restore**: how many settings were changed, and that every arm ended at the card's own limit.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The file `omni-gpu-<stamp>-confirmations.tar.gz` holds two such tables: compute-bound work (matrix products) and AI token generation (memory-bound work).

The card inside the seven organisms (`results/hil/run-<stamp>/HIL.md`)

The real card is wired into each of the seven organisms (the spine, the four realms, the four stacked, the whole tower) at four sizes (1, 10, 100 and 1,000 copies). Each row is one size, one organism and one part:

- **stacks (model)**: the modelled machines (evidence S);
- **card (meter)**: the real card, its own meter (evidence P);
- **both**: the two added together.

The second table lists the card's own receipts for every arm: its energy, requests served, p95, and its power limit at the start and at the end, which must be equal.

Real Kubernetes (`results/live/LIVE_REPS_<n>.md`)

Each set is 10 paired repetitions on a real Kubernetes cluster (kind): native Kubernetes (its HPA and scheduler) against the same Kubernetes with Omni-Compass on top. Read:

1. **worker nodes in service** and **node-hours**: how many machines were kept busy. A fall is GAIN.
2. **response time p95 and p99**: a fall is GAIN (faster).
3. **failed requests**: must be zero on both sides.
4. **CPU used with Omni's own**: Omni-Compass's own cost included; "no" in the significant column means it costs nothing measurable overall.
5. **The label** at the bottom, by the rule written before the run.

Energy on kind is a declared model, not a meter: kind keeps every machine powered.

The three-run tables (`results/live/V1_<TEST>.md`, `V3_<TEST>.md`)

Every benchmark since the engine was frozen runs three separate times, A, B and C, on the same bytes, and the table shows all three beside each gauge. Read the last column first: **GAIN** or **LOSS in all three of our runs** (the same sign in all three, every interval clear of zero; a resource spent that rose reads **power given**), **EVEN, no difference beyond the noise** (an interval over zero in at least one run: that is the result), or **the runs disagree** (the test is unstable there and is looked into). Nothing reads "confirmed" or "not confirmed": nobody outside The Omni-Compass LLC has reviewed or approved these results. The `V1_` or `V3_` in the name is the engine the runs carried (`python3 tools/omni_version.py --commit <sha>`); a table never mixes engines, and a reading is never carried from one engine to another. Every LOSS and every power given is in the table beside the GAINs: the database's host CPU-seconds, the grid's dissipated energy in four grids, the Panda's copper heating, CityLearn's bill (power given), CityLearn's energy not served and time uncomfortable (LOSS).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The workload tables (`V3_PGBENCH.md`, `V3_KAFKA.md`, `V3_REDIS.md`, `V3_YCSB.md`) and the swarm table (`V3_SWARM.md`)

The database, the broker and the cache share one shape. The head names the three runs, their commits and the engine each carried. Then one section per **workload**: the tuning workload first, marked "shown and not counted" because the rules were fitted on it, then the untouched workloads, which are the judged ones. Each section says what the workload is (value sizes, rates, steps) and what native's own capacity measured on that run, so the reader knows how hard native was pushed. The rows are the gauges with their direction in the name: the first row is always **work inside the response line**, the product number; then throughput, the latency percentiles, failures (any increase in any run is marked), **the resource held** (connections, consumers, the memory ceiling: the aim is lower, and Omni-Compass holds more of it wherever it bought a gain, so expect it higher there), the host's CPU (the compass's own cost included), and the knob's moves (shown, not judged). The last line of each section says whether every arm handed the knob back; the last line of the table counts the rows toward their aims, away from them and disagreeing across the untouched workloads. The swarm table reads the same way with cells instead of workloads, with collisions voiding a cell, and with a declared reproduction tolerance (one part in a thousand) because PyBullet does not reproduce to the bit across machines; its amendment says so.

The governor's own cost (`V3_OWN_COST.md`) and the robustness tables

`V3_OWN_COST.md` is Omni-Compass's own CPU, from the `overhead` record every omni arm's audit carries, by organism and copies, under the engine each run carried; it is shown and not judged, and it is a few thousandths of one core at every size. The robustness tables (V3_ROBUST_KILL.md and V3_ROBUST_LONG.md in `results/live/`, when they land) add rows that belong to the omni arm alone, since native has no governor to kill: the seconds from the kill until every setting was back at the operator's (the allowance is 60 s, declared before the run), whether a second governor started and governed to the end, and the governor's memory in the last ten minutes over the first ten (a quarter's growth is a leak, declared before the run); the 120 s after the kill are compared between the arms like any paired gauge.

The organisms with a real cluster inside (`V1_SIX_KUBE.md`, `V3_SIX_KUBE.md`, `V1_BIG_ORGANISM.md`)

Two kinds of rows, kept apart: **the cluster** (real Kubernetes, measured) and **the organism** (the modelled stacks around it, evidence S). "Organism behind its window (s)" is shown and not judged; a repetition reads **OFF THE CLOCK** when either arm ended more than 5% of its window late (its last steps saw a cluster whose load had already ended). The pairing stands, the mark stays, and the remedy is a longer window for that size on that machine.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The one number (`results/OMNI_INDEX.md`)

Every measure is a ratio oriented so that above 1 is a GAIN for Omni-Compass on top of native: work, speed, machines, energy. A test's index is the geometric mean of its ratios, a category's of its tests, the headline of the real categories, each weighted the same. A measure enters only as its three-run reading allows; no difference beyond the noise enters as exactly 1. Modelled muscles are shown beside the index, never inside it.

The six organisms grid (`results/scale/GRID.md`)

Columns are **size × runs**: 1, 10, 100 and 1,000 clusters, each at 1, 10, 100 and 1,000 paired runs. Rows are the six organisms. There is one table each for work per energy, energy, time over the line and work done. Read a cell as "with Omni-Compass on top, against native, at this size, over this many runs". Cells that are still computing say so; 1,000 runs at 1,000 clusters is beyond the machines available and says so.

Kubernetes at scale (`KWOK.md`, from the `kwok-scale` workflow)

Real Kubernetes at 50, 500 and 1,000 nodes (KWOK nodes: real Kubernetes objects with no machines behind them):

- **decision time** is how long Omni-Compass takes to decide, at that size;
- **memory** is what it uses;
- **master switch** must read "yes": everything handed back.

One number, one word (`docs/BENEFIT_SHEET.md`)

In the tables a change keeps its raw sign: a response time that fell reads "-65%", a cache that grew reads "+300%", and the Reading column gives its word, GAIN, EVEN or LOSS, by what the gauge is for (the key above). The benefit sheet turns every gauge the same way round against **its declared aim**: plus is a GAIN, minus a LOSS or power given, whatever the gauge measures, and 0% is EVEN, nothing beyond the noise. Beside it every change the same in all three of our runs is written out in words, never as a bare sign: "p95 cut 65% (GAIN)", "memory ceiling held up 215% (power given)", so neither can be misread against a table that shows the same changes as "-65%" and "+215%". One number per benchmark, by the index's own rule, with its word beside it. Read that sheet first; read the tables for the rows behind a number, and read their Reading column, never the sign alone. The wiring page uses the same words.

Wire in, or watch (`docs/WIRING_VERDICTS.md`)

One of three words per knob, by one rule from the tables above. **Write**: a gauge GAIN in all three of our runs and none LOSS or power given in all three of our runs; Omni holds the knob. **Watch**: nothing GAIN in all three of our runs; the knob stays native and Omni only reads it (one wire out, no wire in), and a loss in all three of our runs is named with its cause. **Operator's choice**: gains and losses both the same in all three of our runs, a trade, shown with both readings of the index. Rows marked "shown, not judged" never count. A modelled

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

muscle takes its word from its label: superior is write, a tradeoff label is the operator's choice, the rest is watch. The CSV beside the page (`results/WIRING_VERDICTS.csv`) has one row per knob and per muscle.

Where to start

1. `docs/STATE_OF_PLAY.md`: one page, every result and how strong it is.
2. `docs/DOSSIER.md`: every result with its chart.
3. This chapter, next to the table in front of you.
4. `DISCLOSURES.md`: what a result is and is not.

Reading the benefit: more work, or the same work for less

With the work held equal in both arms, the gain from Omni-Compass on top is $G = C[native] / C[omni] - 1$, where C is a resource (machine-hours, CPU core-hours, joules). The same work then needs $1 / (1 + G)$ of the resources, a saving of $G / (1 + G)$: a third more work is a quarter off the bill. The full explanation, the three rules for reading a receipt and where every number stands today are in the manual, section 3 (`docs/OMNI_COMPASS_MANUAL.md`).

CHAPTER 44

The Benefit Sheet: One Number per Benchmark

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

How to read this receipt. Every judged row reads one of three words, decided by what its gauge is for and never by the plus or minus sign of its number. **GAIN**: the gauge moved toward its declared aim against native (more work done, a shorter wait, fewer misses or failures, or a resource cut). **EVEN**: native and Omni-Compass could not be told apart (the 95% interval includes zero: no difference beyond the noise), or the knob is at its limit on native. **LOSS**: the gauge moved away from its aim (less work done, a longer wait, more misses or failures). A resource spent or held (energy, machines, memory, processor time, a bill) that fell is a cut, a GAIN; one that rose is **power given**, what Omni-Compass put in to buy the work and the speed shown beside it, always shown and never called a loss. So a minus can read GAIN (a response time cut) and a plus can read LOSS (failed requests up). A reading counts when it holds the same way in all three of our runs, A, B and C, with every interval clear of zero; **the runs disagree** names a test unstable there; **shown, not judged** is

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

a gauge declared shown only. The output follows the input: every reading is the result of the tune, the wiring and the load it names, and where a reading elsewhere differs the first presumption is the wiring (`DISCLOSURES.md`, section 4). The full key, letter by letter: `docs/HOW_TO_READ_THE_RESULTS.md`. Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

The founder's orders of 9 and 13 October 2026: next to every benchmark, say whether Omni-Compass on top was a benefit to the system and by how much, in one number whose sign always means the same thing, and say it in **GAIN**, **EVEN** and **LOSS**, judged by what each gauge is for and never by the sign of its number (the key: `docs/HOW_TO_READ_THE_RESULTS.md`). **On this sheet the sign is the system's own declared aims, gauge by gauge: a plus is a GAIN; a minus is a LOSS on work, speed, misses or failures, and power given on a resource spent (energy, machines, memory).** The number carries its word. Beside it every change the same in all three of our runs is written out with which way it went and its word: "p95 cut 65% (GAIN)", "memory ceiling held up 215% (power given)". An operator whose aims differ reads the same numbers the other way.

The result tables (the files in the last column) keep every change with its raw sign: a response time that fell reads "-65%" there, and the Reading column beside it says GAIN.

The number is the Omni index's rule (`results/OMNI_INDEX.md`): each judged gauge becomes a ratio oriented so that above one is a GAIN; it counts only where the same in all three of our runs, anything else counts as exactly one; the number is the geometric mean of the ratios, minus one, in percent. For the tests inside the index the number is the index's own resource reading of that test; for a stack with several workloads it is the stack's index category; for the simulators and the organisms the same arithmetic runs over every judged gauge of their tables. Built from the tables by `tools/benefit_sheet.py`, checked by `verify.py`.

Benefit? reads **GAIN** (gauges GAIN in all three of our runs, none LOSS or power given), **GAIN, power given** (a GAIN bought with a resource put in, named beside it), **GAIN AND LOSS** (both; the number says which way the trade nets by this scoring, and the wiring page `docs/WIRING_VERDICTS.md` says what pays for what), **LOSS** (a LOSS and no GAIN), **power given** (a resource put in and nothing gained) or **EVEN** (nothing moved the same way in all three of our runs). LOSS should never appear: where it does, the row stands and its cause is found and fixed.

Every row names the engine its table ran on (read from the table). Results are never read across engines: a row on an older engine stands as that engine's result until the same benchmark's three runs on the engine that stands replace it here, and every benchmark is rerun on the engine that stands.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
2026-10-10	Every real test together: the Omni index	omni-v3	**GAIN, power given**	**+5.2% GAIN**	the six real categories together; each stack's own words are in its row	`results/OMNI_INDEX.md`
2026-10-16	Real Kubernetes, a service rightsized by Goldilocks and the VPA's recommender, Omni-Compass on top, ten pairs, three runs	omni-v7	**GAIN, power given**	**+18% GAIN**	parked-worker energy up 1.6% to 2.3% (power given); standby-model energy up 1.6% to 2.3% (power given); mean response cut 45% to 47% (GAIN); p95 cut 60% to 62% (GAIN); p99 cut 67% to 69% (GAIN)	`results/live/V7_GOLDILOCKS.md`
2026-10-16	Real Kubernetes, a service rightsized by CruiseKube applying its own recommendations, Omni-Compass on top, ten pairs, three runs	omni-v7	**EVEN**	**0%: EVEN**	EVEN: nothing moved the same way in all three of our runs	`results/live/V7_CRUISEKUBE.md`
Date	**Benchmark**	**Engine**	**Benefit?**	**How much**	**Every change the same in all three of our runs, in words**	**Table**
2026-10-16	Real Kubernetes, With its add-ons: KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top, ten pairs, three runs	omni-v7	**GAIN, power given**	**+78% GAIN**	parked-worker energy up 2.2% to 2.3% (power given); standby-model energy up 2.2% to 2.3% (power given); mean response cut 57% to 58% (GAIN); p95 cut 71% to 75% (GAIN); p99 cut 55% to 57% (GAIN); time over the line cut 94% to 95% (GAIN); alert minutes (whole minutes whose 95th percentile, failed requests	`results/live/V7_KEDA_REQUESTS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
					counted over, was over the line) cut 93% to 96% (GAIN); replicas cut 15% to 19% (GAIN); pods started cut 17% to 23% (GAIN)	
2026-10-16	Real Kubernetes, With its add-ons: KEDA on the CPU target and the live requests in flight, Omni-Compass on top, ten pairs, three runs	omni-v7	**GAIN, power given**	**+45% GAIN**	parked-worker energy up 1.1% to 1.7% (power given); standby-model energy up 1.1% to 1.7% (power given); mean response cut 36% to 38% (GAIN); p95 cut 52% to 53% (GAIN); p99 cut 57% to 58% (GAIN); time over the line cut 98% to 100% (GAIN)	`results/live/V7_KEDA_CPU_REQUESTS.md`
2026-10-10	The six organisms with the real cluster inside, 10 and 100 copies	omni-v3	**GAIN, power given**	**+5.3% GAIN**	p95 cut 32% to 52% (GAIN); time over the line cut 8% to 36% (GAIN); replicas up 0.6% (power given); failed requests cut 8.4% to 8.5% (GAIN); parked-worker energy cut 0.3% (GAIN); standby-model energy cut 0.3% (GAIN)	`results/live/V3_SIX_KUBE.md`
2026-10-10	The big organisms with the real cluster inside, 1,000 copies on Azure	omni-v3	**GAIN**	**+155% GAIN**	p95 cut 95% to 98% (GAIN); p99 cut 97% to 98% (GAIN)	`results/live/V3_BIG_ORGANISM.md`
2026-10-10	The 945 modelled muscles as one tower, every muscle written at once	omni-v3	**GAIN**	**+0.3% GAIN**	work per energy up 0.3% (GAIN)	`results/realms/REALMS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
2026-10-10	Robustness: the two-hour run	omni-v3	**EVEN**	**0%: EVEN**	EVEN: nothing moved the same way in all three of our runs	`results/live/V3_ROBUST_LONG.md`
2026-10-10	Robustness: the governor killed outright mid-run	omni-v3	**GAIN**	**+8.6% GAIN**	mean response cut 33% to 40% (GAIN); p95 cut 27% to 48% (GAIN); time over the line cut 32% to 36% (GAIN)	`results/live/V3_ROBUST_KILL.md`
2026-10-10	Robot arms (MuJoCo), the three untouched robots	omni-v3	**GAIN**	**+3.8% GAIN**	energy per takt cut 0.8% (GAIN); copper heating per cycle cut 11% (GAIN); mechanical work per cycle cut 6.6% (GAIN); peak joint torque cut 29% (GAIN); tracking error, RMS cut 21% (GAIN); end-point error at the waypoints cut 11% (GAIN)	`results/live/V3_MUJOCO.md`
2026-10-10	Redis, the cache's memory ceiling	omni-v3	**EVEN**	**0%: EVEN**	EVEN: nothing moved the same way in all three of our runs	`results/live/V3_REDIS.md`
2026-10-10	Real Kubernetes, steady work	omni-v3	**GAIN**	**+31% GAIN**	machines cut 1.7% to 2.0% (GAIN); machine-hours cut 1.7% to 2.0% (GAIN); standby-model energy cut 1.3% to 1.8% (GAIN); mean response cut 47% to 48% (GAIN); p95 cut 64% to 66% (GAIN); p99 cut 69% to 73% (GAIN); time over the line cut 97% to 99% (GAIN)	`results/live/V3_STEADY.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
2026-10-10	Real Kubernetes, faults	omni-v3	**GAIN**	**+37% GAIN**	mean response cut 34% to 51% (GAIN); p95 cut 58% to 63% (GAIN); time over the line cut 27% to 43% (GAIN); failed requests cut 14% to 18% (GAIN)	`results/live/V3_FAULTS.md`
2026-10-10	Real Kubernetes, demand that wanders	omni-v3	**GAIN**	**+37% GAIN**	parked-worker energy cut 0.1% to 0.4% (GAIN); mean response cut 45% to 50% (GAIN); p95 cut 56% to 64% (GAIN); time over the line cut 36% to 42% (GAIN); failed requests cut 12% to 13% (GAIN)	`results/live/V3_WANDERING.md`
2026-10-10	Real Kubernetes, all four at once	omni-v3	**GAIN**	**+42% GAIN**	work inside the line up 54% to 68% (GAIN); mean response cut 43% to 48% (GAIN); p95 cut 57% to 62% (GAIN); time over the line cut 38% to 41% (GAIN); failed requests cut 11% to 14% (GAIN)	`results/live/V3_ALL_FOUR.md`
2026-10-10	Real Kubernetes, a queue of jobs	omni-v3	**GAIN**	**+16% GAIN**	machines cut 16% to 20% (GAIN); machine-hours cut 16% to 20% (GAIN); standby-model energy cut 11% to 14% (GAIN); mean response cut 11% to 13% (GAIN); machines after the queue cut 26% to 33% (GAIN)	`results/live/V3_BATCH.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
2026-10-10	Real Kubernetes, a public day of demand (Google 2011)	omni-v3	**GAIN**	**+46% GAIN**	machines cut 7.3% to 9.2% (GAIN); machine-hours cut 7.4% to 9.2% (GAIN); parked-worker energy cut 0.3% to 0.4% (GAIN); standby-model energy cut 5.3% to 6.7% (GAIN); mean response cut 51% to 53% (GAIN); p95 cut 64% to 66% (GAIN); p99 cut 60% to 62% (GAIN); time over the line cut 81% to 82% (GAIN); failed requests cut 11% to 18% (GAIN); replicas cut 3.8% to 8.3% (GAIN)	`results/live/V3_TRACE_GOOGLE2011.md`
2026-10-10	Real Kubernetes, a noisy neighbour	omni-v3	**EVEN**	**0%: EVEN**	EVEN: nothing moved the same way in all three of our runs	`results/live/V3_FAIRNESS.md`
2026-10-10	Power grids (SimBench), both load models	omni-v3	**GAIN, power given**	**+5.8% GAIN**	energy the loads drew cut 1.3% to 1.5% (GAIN); energy dissipated in lines and transformers cut 0.0% to 2.4% (GAIN); net import from the upstream grid cut 0% to 15% (GAIN); tap operations cut 16% to 38% (GAIN); energy dissipated in lines and transformers up 0.6% to 1.5% (power given); tap operations up 100% (power given); net import from the upstream grid up 0.0% (power given)	`results/live/V3_PANDAPOWER.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
2026-10-10	PostgreSQL, the pooler's pool size	omni-v3	**GAIN, power given**	**+0.9% GAIN**	connections most at once up 8% to 12% (power given); connections held open cut 7% to 13% (GAIN)	`results/live/V3_PGBENCH.md`
2026-10-10	MySQL, the buffer pool's size	omni-v3	**EVEN**	**0%: EVEN**	EVEN: nothing moved the same way in all three of our runs	`results/live/V3_SYSBENCH.md`
2026-10-10	MongoDB, the storage engine's cache size	omni-v3	**GAIN**	**+1.7% GAIN**	cache size held cut 10% to 15% (GAIN); cache in use cut 10% to 14% (GAIN)	`results/live/V3_YCSB.md`
2026-10-10	Kafka, the consumer group's size	omni-v3	**GAIN**	**+0.1% GAIN**	consumers running cut 0.8% (GAIN)	`results/live/V3_KAFKA.md`
2026-10-10	Drone swarms, the three untouched cells	omni-v3	**GAIN**	**+5.9% GAIN**	energy per mission cut 7% to 20% (GAIN); fleet energy over the window cut 7% to 20% (GAIN); missions per charge at the autopilot's reserve up 8% to 25% (GAIN)	`results/live/V3_SWARM.md`
Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
2026-10-10	Buildings and batteries (CityLearn), the districts with batteries	omni-v3	**GAIN AND LOSS**	**+0.8% GAIN**	electricity bought cut 0% to 15% (GAIN); daily peak draw cut 1% to 14% (GAIN); highest peak cut 2.7% to 3.5% (GAIN); ramping cut 1.3% to 7.2% (GAIN); daily load unevenness cut 0.3% to 4.7% (GAIN); monthly load	`results/live/V3_CITYLEARN.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Date	Benchmark	Engine	Benefit?	How much	Every change the same in all three of our runs, in words	Table
					unevenness cut 0.2% to 1.9% (GAIN); distance from zero net energy cut 0.0% to 6.1% (GAIN); electricity bill cut 8.6% (GAIN); carbon cut 0% to 12% (GAIN); monthly load unevenness up 0.1% (LOSS); energy not served up 2.0% to 9.8% (LOSS); time uncomfortable up 0.0% to 0.1% (LOSS); electricity bill up 0.2% to 0.3% (power given); ramping up 4.5% to 6.2% (power given); time uncomfortable cut 0.0% (GAIN); highest peak up 2.5% (power given); distance from zero net energy up 0.0% (power given)	

The parts behind a row

Where a row sums several workloads, grids, districts, cells or robots, each part with its own number, the same way round:

- **The six organisms with the real cluster inside, 10 and 100 copies**: compute_ai_cloud at 10 copies +14% GAIN (GAIN: p95 cut 50% (GAIN); time over the line cut 32% (GAIN)); physics_robotics_autonomous at 10 copies 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); energy_facility_industrial at 10 copies +5.0% GAIN (GAIN, power given: time over the line cut 33% (GAIN); replicas up 0.6% (power given)); distribution_specialized at 10 copies +16% GAIN (GAIN: p95 cut 52% (GAIN); time over the line cut 36% (GAIN)); tower at 10 copies +11% GAIN (GAIN: p95 cut 42% (GAIN); time over the line cut 20% (GAIN); failed requests cut 8.4% (GAIN)); stack at 10 copies +2.8% GAIN (GAIN: time over the line cut 12% (GAIN); failed requests cut

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

8.5% (GAIN)); compute_ai_cloud at 100 copies +1.3% GAIN (GAIN: time over the line cut 9.8% (GAIN)); physics_robotics_autonomous at 100 copies +1.1% GAIN (GAIN: time over the line cut 8.4% (GAIN)); energy_facility_industrial at 100 copies +2.1% GAIN (GAIN: time over the line cut 15% (GAIN); parked-worker energy cut 0.3% (GAIN); standby-model energy cut 0.3% (GAIN)); distribution_specialized at 100 copies +8.2% GAIN (GAIN: p95 cut 32% (GAIN); time over the line cut 22% (GAIN)); tower at 100 copies +1.3% GAIN (GAIN: time over the line cut 8.7% (GAIN)); stack at 100 copies +2.3% GAIN (GAIN: time over the line cut 15% (GAIN)).

- **The big organisms with the real cluster inside, 1,000 copies on Azure**: tower at 1000 copies +159% GAIN (GAIN: p95 cut 98% (GAIN); p99 cut 98% (GAIN)); stack at 1000 copies +151% GAIN (GAIN: p95 cut 95% (GAIN); p99 cut 97% (GAIN)).
- **Robot arms (MuJoCo), the three untouched robots**: kinova_gen3 +12% GAIN (GAIN: energy per takt cut 0.8% (GAIN); copper heating per cycle cut 11% (GAIN); mechanical work per cycle cut 6.6% (GAIN); peak joint torque cut 29% (GAIN); tracking error, RMS cut 21% (GAIN); end-point error at the waypoints cut 11% (GAIN)); kuka_iiwa_14 (left native by the engine's own trial) 0%: EVEN (EVEN: EVEN: nothing moved); universal_robots_ur5e (left native by the engine's own trial) 0%: EVEN (EVEN: EVEN: nothing moved).
- **Redis, the cache's memory ceiling**: burst 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); large 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); small 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs).
- **Power grids (SimBench), both load models**: 1-MV-comm--0-sw (ZIP loads) +9.7% GAIN (GAIN: energy the loads drew cut 1.5% (GAIN); energy dissipated in lines and transformers cut 1.0% (GAIN); net import from the upstream grid cut 2.9% (GAIN); tap operations cut 34% (GAIN)); 1-MV-comm--1-sw (ZIP loads) +13% GAIN (GAIN: energy the loads drew cut 1.4% (GAIN); energy dissipated in lines and transformers cut 0.8% (GAIN); net import from the upstream grid cut 15% (GAIN); tap operations cut 36% (GAIN)); 1-MV-comm--2-sw (ZIP loads) +11% GAIN (GAIN: energy the loads drew cut 1.4% (GAIN); energy dissipated in lines and transformers cut 0.3% (GAIN); net import from the upstream grid cut 6.4% (GAIN); tap operations cut 36% (GAIN)); 1-MV-rural--1-sw (ZIP loads) -13% power given (GAIN, power given: energy the loads drew cut 1.4% (GAIN); net import from the upstream grid cut 1.4% (GAIN); energy dissipated in lines and transformers up 0.8% (power given); tap operations up 100% (power given)); 1-MV-rural--2-sw (ZIP loads) +6.8% GAIN (GAIN, power given: energy the loads drew cut 1.3% (GAIN); net import from the upstream grid cut 1.1% (GAIN); tap operations cut 27% (GAIN); energy dissipated in lines and transformers up 1.5% (power given)); 1-MV-semiurb--0-sw (ZIP loads) +12% GAIN (GAIN: energy the loads drew cut 1.4% (GAIN); energy dissipated in lines and transformers cut 1.0% (GAIN); net import from the upstream grid cut 7.0% (GAIN); tap operations cut 38% (GAIN)); 1-MV-semiurb--1-sw (ZIP loads) +9.0% GAIN (GAIN, power given: energy the loads drew cut 1.4% (GAIN); net import from the upstream grid cut 1.1% (GAIN); tap operations cut 34% (GAIN); energy dissipated in lines and transformers up 0.7% (power given)); 1-MV-semiurb--2-sw (ZIP loads) +5.8% GAIN (GAIN, power given: energy the loads drew cut 1.4% (GAIN); net import from the upstream grid cut 0.9% (GAIN); tap operations cut 24% (GAIN); energy

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

dissipated in lines and transformers up 1.1% (power given)); 1-MV-urban--0-sw (ZIP loads) +8.9% GAIN (GAIN: energy the loads drew cut 1.5% (GAIN); energy dissipated in lines and transformers cut 2.4% (GAIN); net import from the upstream grid cut 2.0% (GAIN); tap operations cut 31% (GAIN)); 1-MV-urban--1-sw (ZIP loads) +8.6% GAIN (GAIN: energy the loads drew cut 1.5% (GAIN); energy dissipated in lines and transformers cut 2.4% (GAIN); net import from the upstream grid cut 2.2% (GAIN); tap operations cut 30% (GAIN)); 1-MV-urban--2-sw (ZIP loads) +6.8% GAIN (GAIN: energy the loads drew cut 1.5% (GAIN); energy dissipated in lines and transformers cut 2.2% (GAIN); net import from the upstream grid cut 3.1% (GAIN); tap operations cut 23% (GAIN)); 1-MV-comm--0-sw (constant-power loads) +7.8% GAIN (GAIN: energy dissipated in lines and transformers cut 0.5% (GAIN); net import from the upstream grid cut 0.0% (GAIN); tap operations cut 31% (GAIN)); 1-MV-comm--1-sw (constant-power loads) +7.7% GAIN (GAIN: energy dissipated in lines and transformers cut 0.4% (GAIN); net import from the upstream grid cut 0.0% (GAIN); tap operations cut 31% (GAIN)); 1-MV-comm--2-sw (constant-power loads) +7.8% GAIN (GAIN: energy dissipated in lines and transformers cut 0.0% (GAIN); net import from the upstream grid cut 0.0% (GAIN); tap operations cut 31% (GAIN)); 1-MV-rural--1-sw (constant-power loads) -13% power given (power given: energy dissipated in lines and transformers up 0.6% (power given); net import from the upstream grid up 0.0% (power given); tap operations up 100% (power given)); 1-MV-rural--2-sw (constant-power loads) +3.3% GAIN (GAIN, power given: tap operations cut 16% (GAIN); energy dissipated in lines and transformers up 1.2% (power given); net import from the upstream grid up 0.0% (power given)); 1-MV-semiurb--0-sw (constant-power loads) +7.4% GAIN (GAIN: energy dissipated in lines and transformers cut 0.9% (GAIN); net import from the upstream grid cut 0.1% (GAIN); tap operations cut 29% (GAIN)); 1-MV-semiurb--1-sw (constant-power loads) +7.6% GAIN (GAIN, power given: tap operations cut 31% (GAIN); energy dissipated in lines and transformers up 0.6% (power given); net import from the upstream grid up 0.0% (power given)); 1-MV-semiurb--2-sw (constant-power loads) +4.7% GAIN (GAIN, power given: tap operations cut 21% (GAIN); energy dissipated in lines and transformers up 0.9% (power given); net import from the upstream grid up 0.0% (power given)); 1-MV-urban--0-sw (constant-power loads) +7.7% GAIN (GAIN: energy dissipated in lines and transformers cut 1.9% (GAIN); net import from the upstream grid cut 0.0% (GAIN); tap operations cut 30% (GAIN)); 1-MV-urban--1-sw (constant-power loads) +6.8% GAIN (GAIN: energy dissipated in lines and transformers cut 1.9% (GAIN); net import from the upstream grid cut 0.0% (GAIN); tap operations cut 27% (GAIN)); 1-MV-urban--2-sw (constant-power loads) +5.4% GAIN (GAIN: energy dissipated in lines and transformers cut 1.8% (GAIN); net import from the upstream grid cut 0.0% (GAIN); tap operations cut 22% (GAIN)).

- **PostgreSQL, the pooler's pool size**: select 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); simple_update 0%: EVEN (power given: connections most at once up 8% to 12% (power given)); tpcb_hot +2.8% GAIN (GAIN: connections held open cut 7% to 13% (GAIN)).
- **MySQL, the buffer pool's size**: burst 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); read_only 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

runs); read_write 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); update_index 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs).

- **MongoDB, the storage engine's cache size**: b 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); burst +3.1% GAIN (GAIN: cache size held cut 10% to 13% (GAIN); cache in use cut 10% to 13% (GAIN)); c 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); f +3.7% GAIN (GAIN: cache size held cut 13% to 15% (GAIN); cache in use cut 12% to 14% (GAIN)).
- **Kafka, the consumer group's size**: burst +0.2% GAIN (GAIN: consumers running cut 0.8% (GAIN)); heavy 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs); light 0%: EVEN (EVEN: EVEN: nothing moved the same way in all three of our runs).
- **Drone swarms, the three untouched cells**: long +7.6% GAIN (GAIN: energy per mission cut 20% (GAIN); fleet energy over the window cut 20% (GAIN); missions per charge at the autopilot's reserve up 25% (GAIN)); mixed +6.8% GAIN (GAIN: energy per mission cut 18% (GAIN); fleet energy over the window cut 18% (GAIN); missions per charge at the autopilot's reserve up 22% (GAIN)); short +3.4% GAIN (GAIN: energy per mission cut 7.4% (GAIN); fleet energy over the window cut 7.4% (GAIN); missions per charge at the autopilot's reserve up 8.0% (GAIN)).
- **Buildings and batteries (CityLearn), the districts with batteries**: ca_alameda_county_neighborhood +1.7% GAIN (GAIN: electricity bought cut 5.9% (GAIN); daily peak draw cut 3.6% (GAIN); highest peak cut 3.0% (GAIN); ramping cut 3.9% (GAIN); daily load unevenness cut 1.0% (GAIN); monthly load unevenness cut 0.7% (GAIN); distance from zero net energy cut 0.1% (GAIN)); citylearn_challenge_2022_phase_all_robustness +8.3% GAIN (GAIN AND LOSS: electricity bill cut 8.6% (GAIN); electricity bought cut 15% (GAIN); carbon cut 12% (GAIN); daily peak draw cut 14% (GAIN); highest peak cut 2.7% (GAIN); ramping cut 7.2% (GAIN); daily load unevenness cut 2.9% (GAIN); distance from zero net energy cut 6.1% (GAIN); monthly load unevenness up 0.1% (LOSS)); citylearn_challenge_2023_phase_2_local_evaluation -0.7% LOSS (GAIN AND LOSS: electricity bought cut 0.3% (GAIN); carbon cut 0.2% (GAIN); daily peak draw cut 1.6% (GAIN); daily load unevenness cut 2.9% (GAIN); distance from zero net energy cut 0.1% (GAIN); monthly load unevenness up 0.1% (LOSS); energy not served up 6.0% (LOSS); time uncomfortable up 0.1% (LOSS); electricity bill up 0.3% (power given); ramping up 6.2% (power given)); citylearn_challenge_2023_phase_2_online_evaluation_1 -0.2% LOSS (GAIN AND LOSS: electricity bought cut 0.1% (GAIN); carbon cut 0.2% (GAIN); daily peak draw cut 1.3% (GAIN); highest peak cut 3.5% (GAIN); daily load unevenness cut 2.0% (GAIN); monthly load unevenness cut 1.9% (GAIN); distance from zero net energy cut 0.1% (GAIN); energy not served up 5.5% (LOSS); time uncomfortable up 0.0% (LOSS); electricity bill up 0.3% (power given); ramping up 5.6% (power given)); citylearn_challenge_2023_phase_2_online_evaluation_2 -0.3% LOSS (GAIN AND LOSS: electricity bought cut 0.2% (GAIN); carbon cut 0.2% (GAIN); daily peak draw cut 1.3% (GAIN); highest peak cut 3.5% (GAIN); daily load unevenness cut 1.7% (GAIN); monthly load unevenness cut 1.9% (GAIN); distance from zero net energy cut 0.1% (GAIN); energy not served up 6.2% (LOSS); time uncomfortable up 0.1% (LOSS); electricity bill up 0.3% (power given); ramping up 5.6% (power given));

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

citylearn_challenge_2023_phase_2_online_evaluation_3 -0.5% LOSS (GAIN AND LOSS: electricity bought cut 0.2% (GAIN); carbon cut 0.2% (GAIN); daily peak draw cut 1.5% (GAIN); highest peak cut 3.5% (GAIN); daily load unevenness cut 2.3% (GAIN); monthly load unevenness cut 1.9% (GAIN); distance from zero net energy cut 0.1% (GAIN); time uncomfortable cut 0.0% (GAIN); energy not served up 9.8% (LOSS); electricity bill up 0.3% (power given); ramping up 5.5% (power given)); citylearn_challenge_2023_phase_3_1 -0.1% LOSS (GAIN AND LOSS: electricity bought cut 0.1% (GAIN); carbon cut 0.1% (GAIN); daily peak draw cut 2.2% (GAIN); daily load unevenness cut 4.0% (GAIN); monthly load unevenness cut 1.2% (GAIN); distance from zero net energy cut 0.0% (GAIN); energy not served up 2.0% (LOSS); time uncomfortable up 0.0% (LOSS); electricity bill up 0.3% (power given); highest peak up 2.5% (power given); ramping up 4.5% (power given)); citylearn_challenge_2023_phase_3_2 -0.4% LOSS (GAIN AND LOSS: electricity bought cut 0.1% (GAIN); carbon cut 0.1% (GAIN); daily peak draw cut 2.2% (GAIN); daily load unevenness cut 4.1% (GAIN); monthly load unevenness cut 0.5% (GAIN); energy not served up 4.1% (LOSS); time uncomfortable up 0.1% (LOSS); electricity bill up 0.2% (power given); highest peak up 2.5% (power given); ramping up 4.9% (power given); distance from zero net energy up 0.0% (power given)); citylearn_challenge_2023_phase_3_3 -0.1% LOSS (GAIN AND LOSS: electricity bought cut 0.1% (GAIN); carbon cut 0.1% (GAIN); daily peak draw cut 2.6% (GAIN); daily load unevenness cut 4.7% (GAIN); monthly load unevenness cut 1.0% (GAIN); distance from zero net energy cut 0.0% (GAIN); energy not served up 2.2% (LOSS); time uncomfortable up 0.0% (LOSS); electricity bill up 0.3% (power given); highest peak up 2.5% (power given); ramping up 4.8% (power given)); tx_travis_county_neighborhood +0.9% GAIN (GAIN: electricity bought cut 3.0% (GAIN); daily peak draw cut 1.9% (GAIN); ramping cut 2.9% (GAIN); daily load unevenness cut 1.1% (GAIN); monthly load unevenness cut 0.7% (GAIN); distance from zero net energy cut 0.6% (GAIN)); vt_chittenden_county_neighborhood +0.5% GAIN (GAIN: electricity bought cut 2.1% (GAIN); daily peak draw cut 0.8% (GAIN); ramping cut 1.3% (GAIN); daily load unevenness cut 0.3% (GAIN); monthly load unevenness cut 0.2% (GAIN); distance from zero net energy cut 0.3% (GAIN)).

Not on the sheet, and why

- **Azure's managed Kubernetes, the bill** (`results/live/V1_AKS_STEADY.md`, `V1_AKS_BURST.md`): Omni v1, a 4-worker fleet, every gauge EVEN, inside the noise: 0%, and too small a fleet to show one machine.
- **The governor's own share of the machine** (`results/live/V3_OWN_COST.md`): 0.6% to 1.3% of one core at every size; shown, not a benchmark against native.
- **The card (NVIDIA)**: every earlier result is obsolete; the current governor has not run on a real card.
- **The index's second reading** (service alone, `results/OMNI_INDEX.md`): a second true number for the same tests, not repeated here; this sheet carries the preregistered one.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 45

The Dossier: Every Result in One Place

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

Every mechanism, harness, receipt and result, read from the files named beside it. Built by `tools/dossier.py` at commit `26bcc0b6d`. Evidence classes: **T** theorem, **V** verified in code, **S** a model, **L** live software (real Kubernetes), **P** a physical meter. A model is not a meter, and a model written by the people who wrote the law is not an independent test; where a result is a model it says so.

1. The mechanism, and proof that it is the one that ran

Check	Result	Where
The whole repository re-runs and checks itself (`python3 verify.py`)	**PASS**	`results/VERIFY_RECEIPT.txt`
The eight-line engine and its six states, fingerprinted (`omnicompass/core.py`)	sha256 `bd615f156169f679…`	`RELEASE_MANIFEST.json`
Python and C++20 twins of every law, proven equal and sealed	seal intact: 9 Python/C++ twins	`results/SEAL.json`
The mechanism's identity against the code	mechanism identity matches the code	`results/MECHANISM_IDENTITY.json`
The engine's convergence to its pole under the bounded command	proved	`docs/TRACKING_THEOREM.md`
Safety shield: 2,000,000 adversarial cases	0 violations	`tests/test_shield_properties.py`
The compass law (push and pull, 5% cushions, fail up, plug contract) on every muscle, the card and Kubernetes	one law, one file	`omnicompass/compass_law.py`
Every file the results depend on, by fingerprint	written after the check passes	`RELEASE_MANIFEST.json`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The engine is the founder's eight-line equation, integrated by RK4 with the bounded command held across all four stages; it is frozen and fingerprinted, and the C++ twin matches it. The compass law is the outer loop that moves each muscle's own setting: it reads one service position (0 calm, 1 the line), pulls it to the compass's center, pushes against whatever is rising, bounds its force by tanh, fails up past the wall, and writes through a plug that reads every lever once before the first write, reads back every write, yields to any other writer and restores the snapshot at the end.

2. Real Kubernetes, Omni v3, every test three times (evidence class L)

Seven tests, ten paired repetitions each, three separate GitHub runs on the frozen engine (A the result, B and C the replications): native Kubernetes (its HPA and scheduler) against the same Kubernetes with Omni-Compass on top, a fresh six-worker cluster per arm, order rotated, the same work sent to both arms. A row reads **GAIN** or **LOSS in all three of our runs** (by what the gauge is for, never by its sign: a response time cut is a GAIN; machines or energy up is **power given**) only when all three runs move the same way with every 95% interval clear of zero; otherwise it reads EVEN, no difference beyond the noise, which is the result. Every Omni arm ends with every setting handed back and read back. Steady runs: A 38013195851 (omni-v3); B 38013200499 (omni-v3); C 38013204648 (omni-v3); the other tests' runs are named in their tables.

Test	Work	Response time (p95; the batch queue's mean)	Machines in service	Energy (declared model)	Failed requests	Table
Steady work in steps	EVEN, equal by design	**-66% to -64%, GAIN in all three of our runs**	**-2% to -2%, GAIN in all three of our runs**	**-2% to -1%, GAIN in all three of our runs**	EVEN, the same	`results/live/V3_STEADY.md`
Demand that wanders	not taken	**-64% to -56%, GAIN in all three of our runs**	EVEN, inside the noise	EVEN, inside the noise	**-13% to -12%, GAIN in all three of our runs**	`results/live/V3_WANDERING.md`
All four in one run	**+54% to +68%, GAIN in all three of our runs**	**-62% to -57%, GAIN in all three of our runs**	EVEN, inside the noise	EVEN, inside the noise	**-14% to -11%, GAIN in all three of our runs**	`results/live/V3_ALL_FOUR.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Work	Response time (p95; the batch queue's mean)	Machines in service	Energy (declared model)	Failed requests	Table
Fairness, a noisy neighbour	not taken	EVEN, inside the noise	EVEN, the same	EVEN, inside the noise	EVEN, inside the noise	`results/live/V3_FAIRNESS.md`
Faults: machine down, spike, runaway pod, blind probe	not taken	**-63% to -58%, GAIN in all three of our runs**	EVEN, inside the noise	EVEN, inside the noise	**-18% to -14%, GAIN in all three of our runs**	`results/live/V3_FAULTS.md`
A queue of batch jobs	not taken	**-13% to -11%, GAIN in all three of our runs**	**-20% to -16%, GAIN in all three of our runs**	**-14% to -11%, GAIN in all three of our runs**	EVEN, inside the noise	`results/live/V3_BATCH.md`
A public day of demand: the Google cluster trace of 2011, replayed one step at a time	not taken	**-66% to -64%, GAIN in all three of our runs**	**-9% to -7%, GAIN in all three of our runs**	**-7% to -5%, GAIN in all three of our runs**	**-18% to -11%, GAIN in all three of our runs**	`results/live/V3_TRACE_GOOGLE2011.md`

Energy on kind is a declared model: the machines are containers on one runner, so a machine out of service cuts modelled watts, not a metered bill. Omni-Compass gives a machine back only after a paired trial shows the service no slower without it (the verdict, `omnicompass/verdict.py`); on these clusters one machine fewer made requests 30-45% slower in most trials, so the machines stayed and were spent on speed and work. The v1 tables (`results/live/V1_*.md`, `docs/OMNI_V1.md`) read the same; the sets before v1 are in `docs/history/`.

3. A real database: PostgreSQL behind PgBouncer, Omni v3, three runs (evidence class L)

PostgreSQL 16 as shipped behind PgBouncer's shipped pool of 20 is native; omni is the compass law on one knob, the pool size, through PgBouncer's own console, inside the cover [2, 90] (`docs/POSTGRES_PREREGISTRATION.md`). Three paired repetitions a run, three runs, pgbench's own log for the gauges. Runs: A 38054754511; B 38054758150; C 38054761503.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	Work inside the 50 ms line	p95	Connections held open	Host CPU-seconds (the compass's own cost)
`select`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise
`simple_update`	EVEN, inside the noise	EVEN, inside the noise	the runs disagree	EVEN, inside the noise
`tpcb_hot`	EVEN, inside the noise	EVEN, inside the noise	**-13% to -7%, GAIN in all three of our runs**	EVEN, inside the noise

The compass takes connections back only while the pooler's clients wait for one under 1% of the time and gives them back the moment anyone waits (amendment 2 of `docs/POSTGRES_PREREGISTRATION.md`, 8 October: the first counted set's CPU cost was measured and traced to the harness's own psql launches, not to the pooler, and its first table is kept whole in `docs/history/V3_PGBENCH_set1.md`). Where it reads a cut it is connections held open for the same work, a GAIN, with the host's CPU EVEN (`tpcb_hot`: cut 7% to 13% in all three of our runs); where the add rule buys connections above the operator's setting on a slow write workload (`simple_update`: the most at once up 8% to 12%), that reads power given and counts below 1 in the index. The earlier counted sets are kept whole in `docs/history/V3_PGBENCH_set1.md` to `V3_PGBENCH_set3.md`. Table: `results/live/V3_PGBENCH.md`.

3b. Real messaging: Apache Kafka, a consumer group's operator-set size, Omni v3, three runs (evidence class L)

Apache Kafka as shipped (one broker, a topic of 8 partitions) with the consumer group at the operator's 2 consumers is native; omni is the compass law on one knob, the consumer count, inside the cover [1, 8], holding the group's own end-to-end latency at 40% of the 500 ms line (`docs/KAFKA_PREREGISTRATION.md`). Three paired repetitions a run, three runs, the consumers' own records for the gauges; the tuning workload is shown and not counted. Runs: A 38054742933; B 38054746778; C 38054750788.

Workload	Work inside the 500 ms line	End-to-end p95	Consumers running (the resource held)	Host CPU-seconds (the compass's own cost)
`tuning` (tuning, shown, not counted)	EVEN, inside the noise	EVEN, inside the noise	**-0% to -0%, GAIN in all three of our runs**	EVEN, inside the noise
`burst`	EVEN, inside the noise	EVEN, inside the noise	**-1% to -1%, GAIN in all three of our runs**	EVEN, inside the noise

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	Work inside the 500 ms line	End-to-end p95	Consumers running (the resource held)	Host CPU-seconds (the compass's own cost)
`heavy`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise
`light`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise

On the counted set that stands (the brain's own verdict on the knob, amendment 2, run on 10 October: `docs/RERUN_2026-10-10.md`), the consumer count was handed back where the queue allowed: consumers running cut 0.8% on `burst` (0.3% on the tuning workload, shown and not counted), a GAIN in all three of our runs, with work, latency and CPU EVEN; `heavy` and `light` read EVEN on every gauge. No message went unconsumed in any arm; every count was handed back. The earlier counted sets are kept whole in `docs/history/V3_KAFKA_set1.md` and `V3_KAFKA_set2.md`. Table: `results/live/V3_KAFKA.md`.

3c. A real cache: Redis, the operator's memory ceiling, Omni v3, three runs (evidence class L)

Redis as Ubuntu ships it with the operator's 64 MB ceiling and allkeys-lru is native; omni is the compass law on one knob, the ceiling, inside the cover [16, 512] MB through Redis's own console, growing only while the cache is full and giving a notch back when calm and nothing is evicted (`docs/REDIS_PREREGISTRATION.md`). An application with a declared 5 ms store trip on a miss and a working set that steps up and down; three paired repetitions a run, three runs; the tuning workload is shown and not counted. Runs: A 38054731163; B 38054735302; C 38054739168.

Workload	Work inside the 2 ms line	Cache hit rate	p95	Memory ceiling held, MB (the resource held)	Host CPU-seconds
`tuning` (tuning, shown, not counted)	**+4% to +5%, GAIN in all three of our runs**	**+4% to +5%, GAIN in all three of our runs**	EVEN, inside the noise	**+19% to +26%, power given in all three of our runs**	EVEN, inside the noise
`burst`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	Work inside the 2 ms line	Cache hit rate	p95	Memory ceiling held, MB (the resource held)	Host CPU-seconds
`large`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise
`small`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise

On the counted set that stands (the brain's own verdict on the knob, amendment 2), every untouched workload reads EVEN on every gauge: under the resource objective the verdict left the ceiling where the operator set it, as the preregistration expected before the runs. The tuning workload, shown and never counted, bought a GAIN in work inside the line (+4% to +5%) and in the hit rate with memory given (+19% to +26%, power given). The earlier counted sets are kept whole in `docs/history/V3_REDIS_set1.md` and `V3_REDIS_set2.md`. Table: `results/live/V3_REDIS.md`.

3d. A real database's storage-engine cache: MongoDB under YCSB, the operator's cache size, Omni v3, three runs (evidence class L)

MongoDB 8.0 as its publisher ships it with the operator's WiredTiger cache of 512 MB is native; omni is the compass law on one knob, the cache size, inside the cover [256, 2,048] MB through the server's own console, growing by notches of 64 MB only while the cache is full and reads are slow, and giving a notch back when calm and the cache holds its working set (`docs/YCSB_PREREGISTRATION.md`; the first counted set's gate was 'nothing evicted', which its amendment 1 of 8 October records as satisfied by a cold cache, and the table named below says which set it is). YCSB's published core workloads with the key space stepping through the cache and past it, drawn uniformly, at 3,000 operations a second from 32 threads; three paired repetitions a run, three runs; the tuning workload (workload A) is shown and not counted. Runs: A 38054777807; B 38054782696; C 38054787517.

Workload	Work inside the 1 ms line	p95	Cache size held, MB (the resource held)	Pages read into the cache	Host CPU-seconds
`tuning` (tuning, shown, not counted)	EVEN, inside the noise	the runs disagree	EVEN, inside the noise	shown, not judged	EVEN, inside the noise
`b`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	Work inside the 1 ms line	p95	Cache size held, MB (the resource held)	Pages read into the cache	Host CPU-seconds
`burst`	EVEN, inside the noise	EVEN, inside the noise	**-13% to -10%, GAIN in all three of our runs**	shown, not judged	EVEN, inside the noise
`c`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise
`f`	EVEN, inside the noise	EVEN, inside the noise	**-15% to -13%, GAIN in all three of our runs**	shown, not judged	EVEN, inside the noise

On this machine the data files sit in the operating system's page cache as well, so a storage-engine miss is a read from memory, not a disk, as disclosed before the run. On the counted set that stands, the cache size held was cut 10% to 15% on `burst` and `f`, a GAIN in all three of our runs, with work inside the line, p95, mean latency and CPU EVEN; `b` and `c` read EVEN on every gauge; the cache was handed back on every omni arm. The earlier counted sets are kept whole in `docs/history/V3_YCSB_set1.md` to `V3_YCSB_set3.md`. Table: `results/live/V3_YCSB.md`.

3e. A real database's buffer pool: MySQL under sysbench, the operator's InnoDB pool size, Omni v3, three runs (evidence class L)

MySQL 8.0 as Ubuntu ships it with the operator's 512 MB InnoDB buffer pool is native; omni is the compass law on one knob, the pool size, inside the cover [128, 2,048] MB in the server's own 128 MB chunks through its own console, growing only while the pool is full and the server's own statement latency is slow, and giving a chunk back only while the pool's misses are under 1% of its reads (`docs/MYSQL_PREREGISTRATION.md`). sysbench's OLTP scripts as shipped with the tables in use stepping through the pool and past it, at a fixed offered rate from 32 threads; three paired repetitions a run, three runs; the tuning workload (point select) is shown and not counted. Runs: A 38054765202; B 38054768832; C 38054773573.

Workload	Work inside the line	p95	Buffer pool held, MB (the resource held)	Pages read from disk	Host CPU-seconds
`tuning` (tuning, shown, not counted)	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	Work inside the line	p95	Buffer pool held, MB (the resource held)	Pages read from disk	Host CPU-seconds
`burst`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise
`read_only`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise
`read_write`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise
`update_index`	EVEN, inside the noise	EVEN, inside the noise	EVEN, inside the noise	shown, not judged	EVEN, inside the noise

On the counted set that stands (the brain's own verdict on the knob, amendment 3), every untouched workload reads EVEN on every gauge, and the pool was handed back on every omni arm. The earlier counted sets are kept whole in `docs/history/V3_SYSBENCH_set1.md` to `V3_SYSBENCH_set4.md` (the first: 15 of 45 arms not handed back because the plug's restore was issued while the server was still withdrawing the blocks of a shrink, which MySQL ignores; the plug fixed and the fix declared). The update_index work-inside-the-line row counts almost nothing in either arm (a single update's client round trip exceeds the server-side 0.6 ms line) and is disclosed. Table: `results/live/V3_SYSBENCH.md`.

4. The bill on a real cloud: Azure Kubernetes Service, Omni v1 (evidence class L, a metered bill)

Azure's own cluster autoscaler is native; omni is the same autoscaler with Omni-Compass idling the machines it gives back; the bill is Azure's own count of machines every 15 s at list price, a fresh cluster per arm, deleted after it (`.github/workflows/aks-metered.yml`, `docs/K8S_COMPASS_PREREGISTRATION.md`, the bill on a real cloud). Transcribed from the receipts they cite:

Test	Fleet	Bill	Response time	Reading	Receipt
Steady load, 5 pairs	4 workers	−4.7%, interval across zero	inside the noise	EVEN, no difference beyond the noise on any gauge	`results/live/V1_AKS_STEADY.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test	Fleet	Bill	Response time	Reading	Receipt
A burst sized to the cluster, 5 pairs	4 workers	+5.0%, interval across zero	p99 −34% clear of the noise in this one run (a GAIN in one run, not a reading of three); p95 inside the noise	the bill EVEN, inside the noise	`results/live/V1_AKS_BURST.md`

One machine is a quarter of a 4-worker fleet, so only a cut of about 30% or more can clear the noise there; the expected machine cut is a few percent. The fleet that can show one machine (40 workers in nine machine families, the subscription's per-family allowance being 10 vCPUs) is preregistered and dispatched on v3; its first dispatches were refused by the subscription's allowances and by Azure's own cluster capacity in eastus before any arm ran, each refusal recorded in the preregistration's amendments.

4b. The GPU governor on the modelled card: each base alone, and with Omni on top (evidence class S)

Omni-Compass never runs the card. It sits on the card's own firmware (or on an operator's power cap) and moves the clock ceiling and the power limit, which that base already accepts (`omni_controller/gpu_compass.py`, the same law in `realms/gpu_card.py`). A step down is taken only after a paired trial on the card shows it adds at most 2% to the card's own time on a request (`omnicompass/verdict.py`); where no step passes, the card runs as it does alone.

Work	Base	Energy (tuning / fresh)	Median response	p95	p99
Compute-bound	firmware + Omni vs firmware alone	-0.70% / -0.48%	+1.56% / +1.47%	-0.84% / +0.01%	-0.09% / +0.02%
Compute-bound	105 W cap + Omni vs the cap alone	+0.02% / -0.11%	-12.29% / -25.59%	-6.41% / -7.06%	-3.15% / -5.82%
AI token generation	firmware + Omni vs firmware alone	-3.25% / -3.72%	+0.55% / +0.70%	+0.29% / +0.26%	+0.02% / -0.52%
AI token generation	105 W cap + Omni vs the cap alone	-2.10% / -2.38%	+0.07% / +0.12%	+0.03% / -0.02%	-0.06% / -1.57%

Source: `results/sim/gpu_two_wire/RESULT.md` and `fresh/RESULT.md`. The rule, and why the allowance is 2%, is amendment 8 of `docs/GPU_PREREGISTRATION.md`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

5. The six organisms at 1, 10, 100 and 1,000 runs and sizes, Omni v3 (evidence class S)

Each organism runs native (its own controllers) and with the compass law on every muscle, same seed, same load, same clock. Size is the number of copies of the organism governed together on one clock (1,000 copies of the four stacked is 1.7 million modelled muscles); runs are the first N of the same paired set, so 1, 10, 100 and 1,000 nest. 84 of 90 cells are done; the six left (100 and 1,000 runs at 1,000 copies) are beyond the machines available and say so.

The full grid with every cell: `results/scale/GRID.md`; the receipts, one per size: `results/scale/receipts/`. Work per energy is up in every cell, a GAIN, the same figure at every size (+0.07% for Physics to +0.37% for Energy, the four stacked and the tower); the time over the service line is at or under native's in every cell, so the band-first rule holds and every cell of 10 runs or more reads GAIN within the guardrails by the preregistered rule. Every knob was handed back in every run.

6. The 945 muscles and the four realms, Omni v3 (evidence class S)

The catalog (`realms/catalog.csv`): 945 muscles in 59 families, 430 in Compute / AI / Cloud, 376 in Physics / Robotics / Autonomous, 470 in Energy / Facility / Industrial and 440 in Distribution / Specialized (1,716 counting a muscle once per realm, a shared spine of 257). Every muscle alone and every organism whole ran as A, B and C on v3 and reproduced to the last digit (`results/realms/REALMS.md`): 0 muscles with a LOSS, every organism GAIN within the guardrails (work per energy +0.1% to +0.3%, work EVEN, time over the line not above native's). On v2 the Physics realm and the tower read GAIN AND LOSS (a service traded for energy); the cause was a missing do-no-harm gate on speed knobs, which made v3 (`docs/OMNI_V3.md`). Three independent simulators with their own native controllers are wired the same way and read by the same rule: the power grid (`results/live/V3_PANDAPOWER.md`: energy drawn and net import cut in all 11 SimBench grids with ZIP loads, a GAIN; the energy dissipated in the lines up in 4 and tap operations 4 → 8 a year in one, power given), robot arms (`results/live/V3_MUJOCO.md`: Gen3 peak torque cut 29%, tracking error cut 21%, energy per takt cut 0.8%, each a GAIN; the Panda's copper heating up 14%, power given; two arms left native, EVEN) and CityLearn (`results/live/V3_CITYLEARN.md`: electricity bought, peak and unevenness cut in all 11 battery districts, a GAIN; the bill up in 7, power given). Every row stands in every table, whichever way it went.

7. Harnesses and receipts

Harness	What it proves	Receipt
`scripts/kind_paired.sh`, `tools/live_reps.py`, workflow `benchmark-reps`	native against Omni on real Kubernetes, paired on one runner, the reset checked	`results/live/raw/run-*/live-reps/`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Harness	What it proves	Receipt
`tools/confirm_abc.py` (and `pgbench_abc.py`, `kafka_abc.py`, `redis_abc.py`, `swarm_abc.py`, `mujoco_abc.py`, `pandapower_abc.py`, `citylearn_abc.py`)	three separate runs read by one rule: GAIN or LOSS in all three of our runs (power given for a resource spent that rose), EVEN, the runs disagree; each run's engine checked against the fingerprint	`results/live/V3_*.md`, `V1_*.md`
`tools/omni_version.py`	which frozen engine a checkout or any result's commit carries	`OMNI_V1.json`, `OMNI_V2.json`, `OMNI_V3.json`
`scripts/aks_paired.sh`, workflow `aks-metered`	the same on Azure's managed Kubernetes, Azure's own bill, a fresh cluster per arm, the fleet pre-flighted against the subscription's allowances	`results/live/V1_AKS_*.md`
`tools/run_kil.py`, workflows `six-kube`, `big-organism`, `big-organism-detached`; `tools/six_kube_report.py`	the six organisms with a real cluster inside at 1 to 1,000 copies, on GitHub and on a rented machine; the clock rule	`results/live/V1_SIX_KUBE.md`, `V3_SIX_KUBE.md`, `V1_BIG_ORGANISM.md`
`tools/run_pgbench.py`, workflow `pgbench`	a real database behind its pooler, one knob through the pooler's console	`results/live/V3_PGBENCH.md`
`tools/run_kafka.py`, workflow `kafka`	a real message broker as shipped, one knob (the consumer group's size) read from the consumers' own records	`results/live/V3_KAFKA.md`
`tools/run_redis.py`, workflow `redis`	a real cache as shipped, one knob (the memory ceiling) through its own console, growing only while the cache is full	the three-run table V3_REDIS.md in `results/live/` when its runs land
`tools/run_swarm.py`, workflow `swarm`	Omni on top of each drone's shipped autopilot in gym-pybullet-drones, collisions voiding the cell	`results/live/V3_SWARM.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Harness	What it proves	Receipt
`tools/run_scale.py`, `tools/pool_scale.py`, workflow `six`; `tools/grid.py`	the six organisms at every run count and size	`results/scale/GRID.md`, `results/scale/receipts/`
`tools/run_realms.py`, workflow `realms`	every muscle alone and every organism whole	`results/realms/REALMS.md`
`tools/run_pandapower.py`, `run_mujoco.py`, `run_citylearn.py`	Omni on top of an independent simulator's own controller	`results/live/V3_PANDAPOWER.md`, `V3_MUJOCO.md`, `V3_CITYLEARN.md`
`tools/omni_index.py`	the one combined number, read only from the three-run tables	`results/OMNI_INDEX.md`
`scripts/gpu_rented_run.sh`, `tools/gpu_wire_check.py`	one command on a rented card: wire check, smoke, the organisms with the card inside, the preregistered counted run	the founder's runs, to come
workflow `archive-run`	every finished run's files copied with the code, one SHA-256 manifest per repetition	`results/live/raw/run-<id>/`
`verify.py`, `tools/release_manifest.py`	everything above re-runs and checks itself; the manifest fingerprints the result	`results/VERIFY_RECEIPT.txt`, `RELEASE_MANIFEST.json`

The rules for each run were written and committed before it ran (`docs/*_PREREGISTRATION.md`); every row is reported, LOSS included; nothing is read across engine versions.

8. What is not yet shown

- A cloud bill or energy cut on real machines: the 4-worker Azure fleet reads EVEN, inside the noise, as a fleet too small to show one machine must; the 40-worker fleet runs are the test of that.
- The real card on the current governor: every earlier card result ran on a controller since replaced and is obsolete; the one-card, card-inside-the-organisms and eight-card runs are the founder's, on rented cards, at one named commit.
- The grid stops at 100 copies and 100 runs (the founder's order of 12 October, to cut the time and the bill): no 1,000 copies and no 1,000 runs are run on any engine from that day; the v3 cells at 1,000 above stand as they were run.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- The queue in `docs/REGISTER.md` section 4 (drone swarms on gym-pybullet-drones and Kafka done; Redis running): PX4 and ArduPilot swarms, YCSB and HammerDB, Spark, OpenSearch, fio, Open-RMF, the 24-hour robustness run, Basilisk, Orekit and GMAT, RocketPy, Cantera.

CHAPTER 46

Paired Runs and Receipts on Your Own System

The method of every benchmark in this manual is the method a reader can use on their own system, and it is deliberately simple: the same system, the same work, native and then omni back to back on the same machines, repeated with the order rotated, each gauge reported with the 95% interval of its paired difference. Pairing is what makes a difference of a few percent visible on a shared machine whose own noise is larger than that: two arms run minutes apart on one runner see the same neighbours and the same hour, so their difference is a difference between arms, while two arms on separate machines differ by about 15% in p95 on their own. The order rotates so that no arm always runs first, warm or cold. The work is held equal by an open-loop load, a fixed rate of requests at fixed moments, so that a lower resource count can never mean that less work was done. The steps below are the whole method.

1. **Paired runs.** Run your service the same way twice, once native and once with Omni-Compass on top, back to back on the same machines, the order rotated, at least 5 times (10 for a result you publish). `scripts/kind_paired.sh` and `tools/live_reps.py` do this on Kubernetes; `scripts/gpu_rented_run.sh` does it on a GPU box, in one command: wire check, smoke, the seven organisms with the card inside, then the preregistered counted run.
2. **The switch drill** after every run: turn Omni-Compass OFF; check every setting is back at its recorded original; turn it ON.
3. **The receipt.** Each gauge: native, Omni-Compass, the change, the 95% interval of the difference, and whether the interval excludes zero. A change is proven only when it does.
4. **The label, by rule written before the run:** SUPERIOR WITHIN GUARDRAILS / ENERGY IMPROVEMENT WITH SERVICE TRADEOFF / NONINFERIOR / NOT ESTABLISHED / LESS WORK PER ENERGY / INVALID. Guardrails: work not lower by more than 1%; the share of time outside the service line not higher by more than 1 percentage point. The band-first rule is stricter: no win is claimed while the time outside the service line is above native's.

At scale (modelled). The seven organisms run on GitHub's machines (Actions, workflow `six`) or on any machine (`bash scripts/scale_ladder.sh`) at 1, 10, 100 and 1,000 paired runs and at 1, 10, 100 and 1,000 copies of each organism on one clock. Real Kubernetes runs on GitHub's machines (workflow `benchmark-reps`); the seven organisms with a real cluster inside as one more muscle run in `six-kube` (1

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

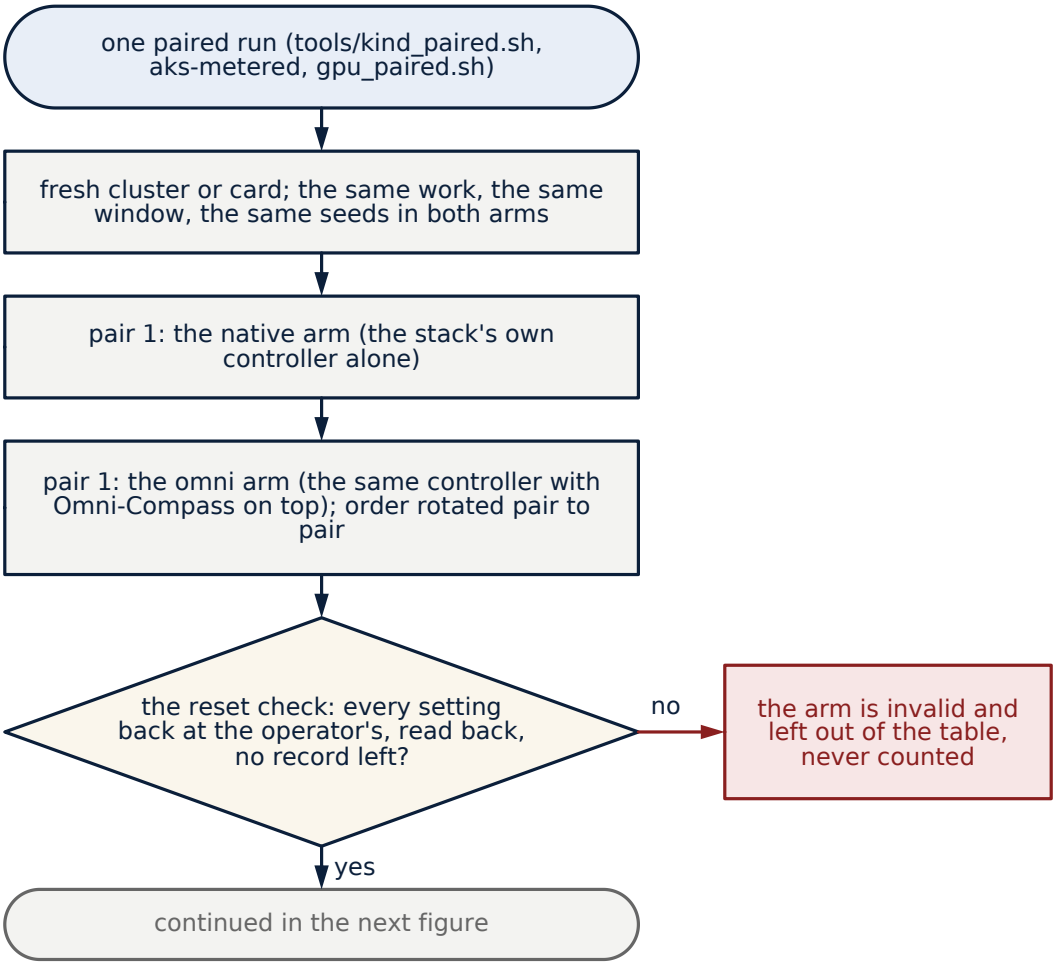


Figure 52. Flowchart: one paired run, the pairs. A fresh cluster or card; the same work, the same window and the same seeds in both arms; each pair runs the native arm (the stack's own controller alone) and the omni arm (the same controller with Omni-Compass on top), the order rotated pair to pair; the reset check after each arm (every setting back at the operator's, read back, no record left) invalidates an arm that fails it, and that arm is never counted. Continued in the next figure.

to 100 copies on GitHub) and `big-organism` and `big-organism-detached` (1,000 copies on a rented machine).

5. **Preregister, then run.** The arms, the knob, the cover, the gauges and the readings are written before the first counted run (`docs/*_PREREGISTRATION.md`); the rules are frozen on one tuning case and then applied unchanged to untouched cases. A rule changed after a result is a new version of the engine (Chapter 15), never a footnote.
6. **The clock rule.** An organism must keep its window. `tools/run_kil.py` records how long after the window its last step ended; the report shows it as "organism behind its window (s)", shown and not judged, and marks a repetition **OFF THE CLOCK** when either arm ended more than 5% of the window late, because its last steps then saw a cluster whose load schedule had already ended. The pairing stands

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

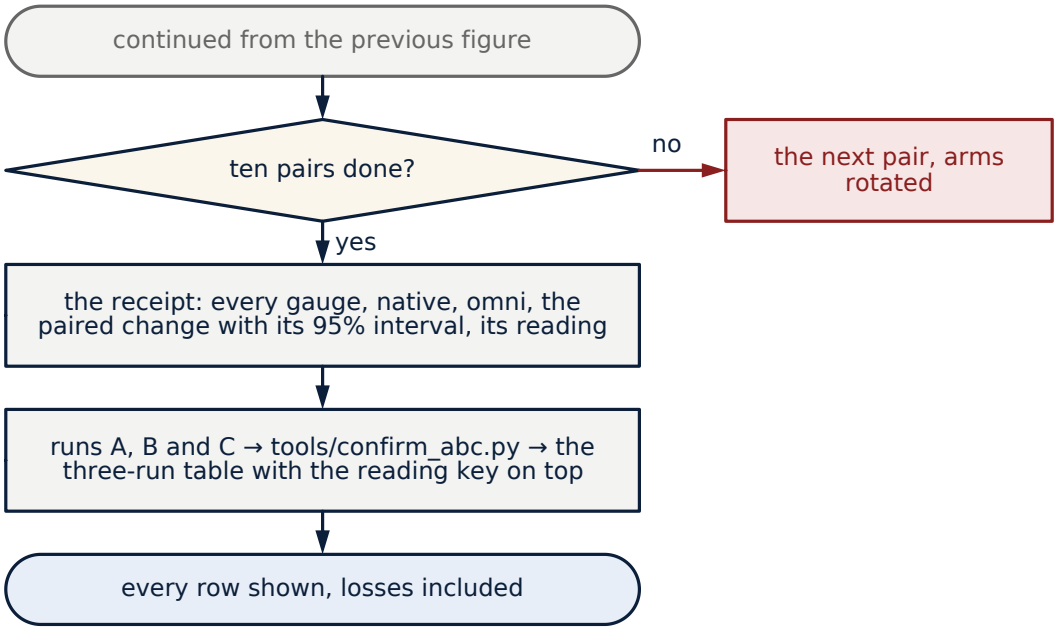


Figure 53. Flowchart: one paired run, from the pairs to the three-run table. After ten pairs the receipt is written: every gauge, native, omni, the paired change with its 95% interval and its reading; runs A, B and C go through tools/confirm_abc.py into the three-run table with the reading key on top; every row is shown, losses included.

(both arms slip alike) and the mark stays on the cell. The remedy is a longer window for that size on that machine, never a faster reading of the same run.

7. **Every row, losses included.** A row that went against Omni-Compass is reported with the others. If Omni-Compass loses, the first suspect is our own wiring, native setup or scoring; that is fixed and the test run again, and the loss stays in the record. A benchmark may be left unpublished; it is never published with rows cut out.
8. **The raw files live with the code.** Every finished run's files (capture, response times, audit log, controller log, one SHA-256 manifest per repetition) are copied into `results/live/raw/run-<id>/` by the `archive-run` workflow (one run id per line in `.github/archive_request.txt`; a run still going is left for a later pass), and every table names the runs and the commit it was made from.

How many repetitions, and why. The width of a paired interval shrinks with the square root of the number of pairs, so going from five pairs to ten narrows it by about a third, and from ten to forty by half again. On GitHub's runners, ten pairs of a 900 s window put the interval on work inside the line at about ±10 points of native and on p95 at ±13 to ±29 points (the all-four table: +48.6% with an interval of +38.7 to +58.4; p95 −61.6% with −74.8 to −48.4), wide intervals that still clear zero because the gains are tens of percent; the energy intervals on the same runs are ±0.2 to ±3%, narrow because the gauge is a declared formula over counts of machines, and that is why energy there reads "no difference beyond the noise" honestly rather than as a small claimed gain. A gain of a few percent on a cluster would need forty pairs or more to clear zero at these widths, and the manual does not claim one anywhere a table shows it inside the noise. Three pairs of a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

7,200 s window, the long run's shape, give a wider interval on each run but three such runs, each read on its own, still have to agree in sign for a reading the same in all three of our runs. On a stack with a finer knob (connections, consumers, megabytes) the intervals are narrower at three pairs than the cluster's at ten, because the knob moves in hundreds of small steps rather than in whole machines. An operator planning their own receipt should run five pairs first, look at the interval widths on the gauges they care about, and set the count for the published run from those widths, never from the result.

Why the load is open-loop. A closed-loop load generator waits for each answer before sending the next request, so a slower system is offered less work and its throughput "improves" its own latency; two arms under closed-loop load are not doing the same work. An open-loop generator sends requests at fixed moments whatever the system does, so both arms are offered the same work to the request, a queue forms when the system falls behind, and the time over the line and the failed requests record the cost. Every real-stack test in this program (the cluster's load generator, pgbench's rate limit, Kafka's producer at a fixed rate, Redis and YCSB at a fixed target rate) offers its work open-loop, and a lower resource count in the omni arm can therefore never mean less work was asked.

What a receipt looks like. One row per gauge: the gauge's name and direction; native's value and omni's; the paired change as a percentage of native with its 95% interval; the reading. A head naming the system, the knob, the cover, the window, the number of pairs, the order rotation, the engine's fingerprint and the commit; a foot saying whether every arm was handed back and whether any repetition was off the clock. `tools/live_reps.py` prints exactly this for a Kubernetes run and the three-run tools print it for three runs side by side; a receipt from any other tool should be laid out the same way so that a reader of this manual can read it without learning a new shape.

The readings to expect, and what it means when you do not see them. The published tables are the reference an installer reads their own receipt against: not the numbers, which belong to our systems and our loads, but the signs and the words. On the engine that stands, omni-v7, on real Kubernetes, ten pairs a run and three runs each (`results/live/V7_*.md`):

The service	Reads GAIN in all three of our runs	Reads EVEN	Power given
Rightsized with Goldilocks and the VPA's recommender	response time −45% to −47% mean, −60% to −62% at the 95th percentile, −67% to −69% at the 99th; time over the line −100%	machines, failed requests, replicas, pods started, pod start wait, alert minutes	parked-worker energy +1.6% to +2.3%
The service	**Reads GAIN in all three of our runs**	**Reads EVEN**	**Power given**
Scaled by KEDA's HTTP add-on	response time −57% to −58% mean, −71% to −75% at the 95th percentile; alert minutes	machines, failed requests, pod start wait	parked-worker energy +2.2% to +2.3%

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The service	Reads GAIN in all three of our runs	Reads EVEN	Power given
	−93% to −96%; replicas −15% to −19%; pods started −17% to −23%		
Scaled by KEDA on CPU and requests	response time −36% to −38% mean, −52% to −54% at the 95th percentile, −57% to −59% at the 99th; time over the line −98% to −100%	machines, failed requests, replicas, alert minutes	parked-worker energy +1.1% to +1.7%
Governed by CruiseKube's own recommendations	nothing: no setting written	every gauge	none
Held at a fixed CPU cap, four caps	nothing: the cap blocks the one lever	completed work and work inside the line at every cap	none

Read your receipt against this table in three steps. **First the words.** A service gauge that reads LOSS on your receipt, where the table reads GAIN or EVEN for the same kind of service, is read as a wiring fault before anything else (`DISCLOSURES.md`, Chapter 9): the feed's freshness and its line, the sensed autoscaler's name, the identity's permissions (Chapter 40), the window's length against the interval widths above. **Second the direction.** Where the table reads GAIN, your receipt should read GAIN or EVEN; a smaller gain is your stack's, not a fault, because the gain is bounded by how far native stood from its own best. **Third the power given.** A resource that rose on your receipt is read beside the work and the speed it bought; a rise with nothing bought is a question for the audit (the Operator's Manual, Appendix L): what did the governor write, and why. Two readings are not faults: EVEN on every gauge where native already runs at the top of its range (the knob is at its limit on native, and the governor leaves it there by design, Chapter 22), and a machine count that does not fall where no machine can be given back without a LOSS (the audit's `node_gate.reason` names the gate that held). What the table cannot give is your number: the same engine on another stack is another result, and it is yours (section 3.7).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 47

Evidence Classes and How to Read a Result


One number, one word. In every table a change keeps its raw sign: a response time that fell reads "-65%", a cache that grew reads "+300%", and the Reading column beside it gives its word, GAIN, EVEN or LOSS, decided by what the gauge is for and never by its sign (the key at the front of this manual): a response time cut 65% is GAIN, a cache grown 300% is **power given**, a fall in work is LOSS. The benefit sheet (`docs/BENEFIT_SHEET.md`, built from the tables by `tools/benefit_sheet.py` and checked by `verify.py`) turns every gauge the same way round against **each gauge's declared aim** (each preregistration's): plus is a GAIN, minus a LOSS or power given, whatever the gauge measures, and 0% is EVEN, nothing beyond the noise. Beside it every change the same in all three of our runs is written in words, never as a bare sign: "p95 cut 65% (GAIN)", so it cannot be misread against a table that shows the same change as "-65%". One number per benchmark, by the index's own rule, with its word beside it (GAIN, GAIN with power given, GAIN AND LOSS, EVEN, power given or LOSS). The wiring page (section 16.6b) uses the same words. A reader who wants one figure for a benchmark reads that sheet; a reader who wants the rows behind it reads the table it names, and reads its Reading column, never the sign alone.

Class	Rung	What it is	What it can show
T / V	E1	deterministic tests, proofs, Python against the C++ twin	the law is what it says, and both languages agree
S	E2	a run on a modelled plant, our own model	whether the law helps the model, and where it breaks
L	E3	real software (Kubernetes on kind), no hardware meter	real decisions on real software; energy there is a declared model
P	E4	a physical meter (the GPU's own power reading)	the hardware's own answer

Read every number with its class beside it. A modelled number is never quoted as a hardware result. When a receipt's energy line is modelled, the receipt says so.

What each class can and cannot carry, with the examples in this manual. A class **T / V** result (the C++ twin agreeing with the Python to 3.6×10^{-15} on 500 trajectories; two million adversarial cases through the shield with zero violations) says that the law is what the text says it is and that both implementations compute it; it says nothing about whether the law helps any machine. A class **S** result (the 1,107 muscles and seven organisms, the organisms at 1,000 copies, the power grid in pandapower, the robot arms in MuJoCo, the buildings in CityLearn, the drones in PyBullet) says what the law does to a published model of a plant under

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

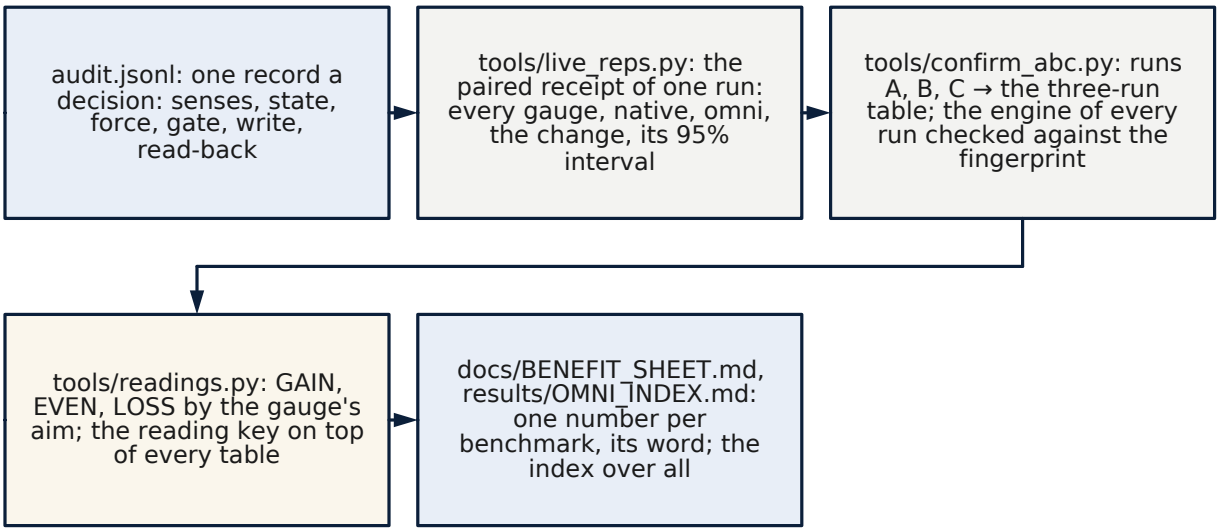

Every table is made by a tool, never by hand; raw records keep their recorded values, every page that shows them uses the words. A reader can follow one run from its audit line to its row in the benefit sheet.

Figure 54. Flowchart: from the audit to the receipt, the table and the one number. The audit (one record a decision) is read by tools/live_reps.py into the paired receipt of one run; runs A, B and C go through tools/confirm_abc.py into the three-run table, each run's engine checked against the fingerprint; tools/readings.py sets GAIN, EVEN or LOSS by the gauge's aim and puts the reading key on top of every table; the benefit sheet and the Omni index carry one number per benchmark. Every table is made by a tool, never by hand.

that model's own native controller; it carries exactly the model's fidelity and no more, which is why S results are shown beside the Omni index and never inside it, and why the manual says "the energy is a declared model" on every S line that reports energy. A class **L** result (real Kubernetes on kind, PostgreSQL behind PgBouncer, Apache Kafka, Redis, the organisms with the real cluster inside) says what the law did to real software making real decisions on real requests; the machines, where they are containers on one runner, are counted in machine-hours in service and their energy, where it is reported, is a declared formula, which the table says; the CPU seconds of the host are measured. A class **P** result would say what a physical meter read, and the one P instrument in this program, the GPU's own power reading, has no current result: every earlier card result ran on a controller since replaced and is obsolete. Azure's bill is an L result with a real bill: the machines billed are Azure's own count, the price is Azure's list price, and the energy is still not a meter.

How to read a row. Every row in every three-run table has the same shape: the gauge and its direction; native's value in run A and omni's value in run A, so the size of the numbers is visible; the paired change in each of the three runs as a percentage of native with its 95% interval; and the reading. Read the reading first, then the intervals, then the sizes. A reading of "GAIN in all three of our runs" with intervals of −0.5% to −0.1% is a small, real effect; a reading of "no difference beyond the noise (3 of 3 runs)" with intervals of −30% to +25% is a test that could not see an effect of that size either way, which is a statement about the test's

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

power, and the manual says so where it applies (the 4-worker Azure fleet). A "LOSS in all three of our runs" row stands in the table, and enters the index as a loss.

A worked reading, from the cache table. Take the Redis table's `large` workload (`results/live/V3_REDIS.md`). The product row, work inside the 2 ms line, reads GAIN in all three of our runs, with the three runs' paired changes each clear of zero and of the same sign; that is the gain. The resource row, the memory ceiling held, reads power given in all three of our runs: Omni held a ceiling of about 256 MB on average where the operator had set 64 MB, in every run, clear of zero. The two rows together are the result: the cache answered more requests inside the line because it was given more memory, and the table says both. A reader who quotes the first row without the second has misread the table, and the index is built so that this cannot happen there: the cache's category enters the one number as a loss (about 0.75 on its own), because the resource it spent is counted at full weight against the work it gained. The CPU row, inside the noise, says the host did not pay in processor time; the failed-request row, zero in both arms, says nothing was refused to get there. Four rows, three directions, one honest sentence: more work inside the line, bought with memory, at no cost in CPU or refusals. That is how every table in Chapter 48 should be read, row by row, before any sentence about it is written.

Three questions to ask of any class L result. First, what was native, exactly: which controller, at which published version, with which settings, and were those settings an operator's or ours? (Every preregistration names them; the broker's native was set at its knee by design and says so.) Second, what did the governor spend: machines, memory, connections, CPU, its own cost? (Every table has the resource rows; a result with a gain and no resource row is not in this program.) Third, who else could have produced the gain: the order of the arms, the warm-up, the runner's neighbour, the clock? (Rotation of the arm order, the warm-up before every window, the paired design on one machine and the clock rule are the answers, and section 16.7 names the residue they do not remove.)

CHAPTER 48

Results to Date

Every result below, read together in one place with what each shows and what it does not, by evidence class and engine, newest first: *The Receipts, in Their Totality* (`docs/THE_RECEIPTS.md`). The decisive receipt not yet produced is the physical one: the chip's own energy meter on a real GPU, on the current governor, on the same clock as the Kubernetes runs.

Every result below is Omni-Compass **on top of** a native system against the same native system alone, with the same work in both arms, read by the three-run rule of Chapter 15, on the engine named. Losses are in the tables beside the gains. The whole list, benchmark by benchmark with its native engine, its knob, its gauges

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

and its file, is `docs/REGISTER.md`; the program that takes every benchmark to full size is `docs/PROOF_PROGRAM.md`.

How to read the chapter. Each section names the stack, the native controller Omni-Compass sat on, the one knob it moved, the result file in `results/live/` or `results/`, the three GitHub run numbers (or the rented machine's start and collect runs) and the engine version those runs were on; a reader can open the file, find the runs under the repository's Actions tab, and check the commit with `tools/omni_version.py --commit`. The figures quoted in prose are the table's figures and no others; where a range is given ("−13% to −37%") it is the span of the three runs' point estimates, not an interval. Every row of every table has one of the readings of the three-run rule (Chapter 15): GAIN in all three of our runs, LOSS in all three of our runs, no difference beyond the noise with the count of runs, or the runs disagree; rows that are shown and not judged say so and why. A loss is written in the same sentence as the gain it came with, never in a footnote, and the index (section 16.6) counts every loss in all three of our runs against Omni at full weight.


Two cautions a referee should hold while reading. The real-software results (evidence class L) were taken on GitHub's shared runners or on single rented machines, with the host's CPU-seconds as the only measure of energy and no meter on the wall; Chapter 46 and 14 say what that does and does not allow. And the modelled results (evidence class S) are reported as what they are, our own plant models run whole, and are never summed with the live ones; the index is built from the real categories alone, and the modelled realms sit beside it as a separate finding about the law's coherence at scale.

Real Kubernetes: seven tests, ten pairs each, three runs each

The six Kubernetes tests were designed to ask six different questions of the same cluster, and they are read together; a seventh, added on 8 October, asks the same questions under a day of demand that somebody else measured. The cluster is kind: a real Kubernetes control plane and six worker nodes as containers on one 4-core GitHub runner, with a real metrics-server, a real HPA at the operator's target of 50% CPU, a real PHP service behind a NodePort, and a real load generator whose replica count steps through a schedule identical in both arms. A real probe times HTTP requests every five seconds from outside the service. Native is that cluster with its HPA alone; omni is the same cluster with the compass law on the HPA target inside [30%, 50%] and on the machines through the release gate and the verdict. Both arms start from the same fresh cluster, run for 900 s after a 120 s warm-up, and end with the reset check.

- **Steady work in steps** (`V3_STEADY.md`) asks: at a fixed, stepped load, does the governor hold the same work with fewer machines or faster answers? Work is equal by design. On the sets of 10 October the 95th percentile fell 64% to 66% and the 99th 69% to 73% in all three runs; machines in service fell 1.7% to 2.0% and the standby-model energy 1.3% to 1.8%; time over the line fell 97% to 99%; failed requests were zero in both arms. The machine saving is small because the verdict kept every machine whose removal made requests slower in the paired trial.
- **Demand that wanders** (`V3_WANDERING.md`) asks: when load goes up and down one step at a time, does the governor follow it without harm? p95 fell 57% to 64%, the mean 45% to 50%, time over the line

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

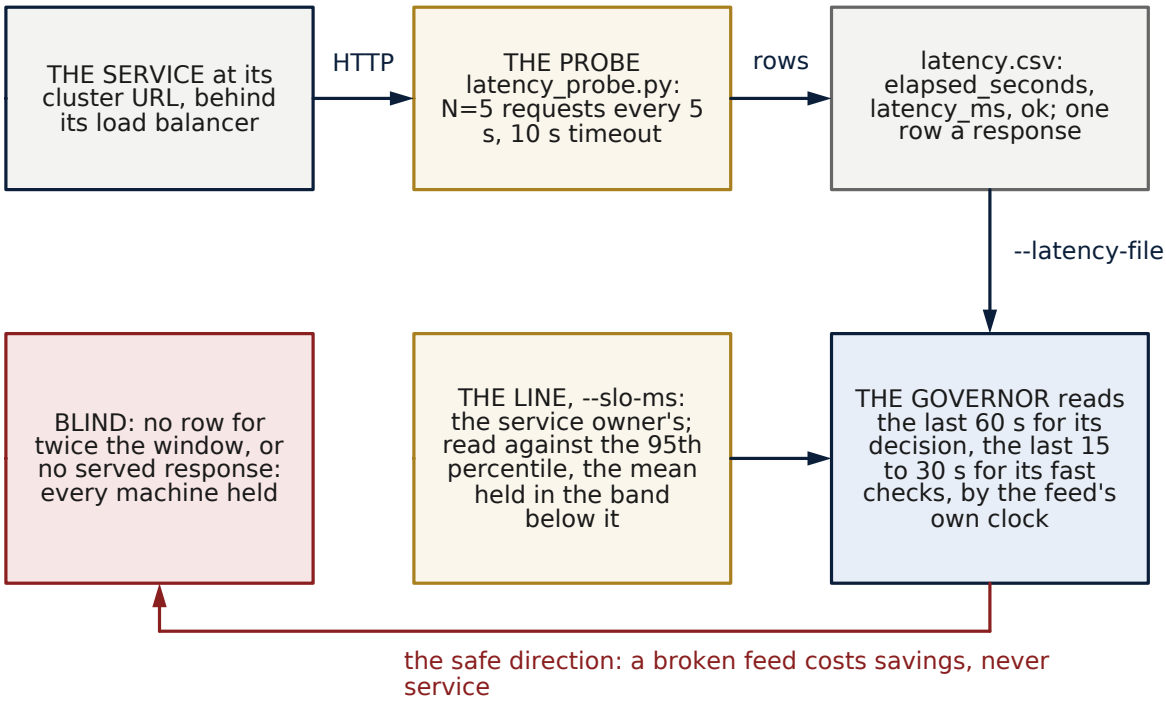

Feed two: the service's own timings (an ingress, a mesh, the application's histogram) written in the same three columns, measured at the same place as the line, never pre-smoothed. One feed for one governor.

Figure 55. Wiring schematic: the response-time feed and the line. The probe times real requests to the service and writes one row a response to latency.csv (elapsed_seconds, latency_ms, ok); the governor reads the file by its own clock, the last 60 s for its decision and the last 15 to 30 s for its fast checks, against the line the service owner wrote (--slo-ms).

A feed that has not advanced for twice the window, or holds no served response, reads as blind, and a blind sense holds every machine: the safe direction. A second feed, the service's own timings, may be written in the same three columns, measured at the same place as the line and never pre-smoothed.

36% to 42%, and failed requests 12% to 13%, all GAIN in all three of our runs; machines read inside the noise and the idle-power energy model fell 0.1% to 0.4%.

- **All four in one run** (`V3_ALL_FOUR.md`) asks the product question: more work, faster, on fewer machines, with less energy, in one run. Work inside the response line rose **54% to 68%**, p95 fell 57% to 63%, the mean 43% to 48%, time over the line 38% to 41%, failed requests 11% to 14%, all GAIN in all three of our runs; machines and energy inside the noise.
- **Faults** (`V3_FAULTS.md`) asks: when a machine dies, traffic triples, a pod runs away and the probe goes blind, at the same moments in both arms, does the governor slow recovery? p95 fell 58% to 63%, the mean 34% to 51%, time over the line 27% to 43% and failed requests 14% to 18%, all GAIN in all three of our runs; machines and energy inside the noise.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **A queue of batch jobs** (`V3_BATCH.md`) asks: when the work is a pile, do cruise and idle finish it no later and hand the machines back? Machines fell 16% to 20% over the window and 26% to 33% after the queue finished, the standby-model energy 11% to 14%, the mean response 11% to 13%, all GAIN in all three of our runs; the queue finished no differently beyond the noise in all three runs (on v1 it had read 0.7% to 0.9% later, a loss that stayed in the record).
- **Fairness** (`V3_FAIRNESS.md`) asks: does the governor help or hurt a noisy neighbour on the same workers? No difference beyond the noise on every row, the neighbour's own p95, p99, failures and time over the line included.
- **A public day of demand** (`V3_TRACE_GOOGLE2011.md`, `docs/TRACES_PREREGISTRATION.md`) asks: when the shape of the load is not ours, does the governor still read the same way? The first day of the Google cluster trace of 2011 (jobs submitted an hour, 18 public parts named with their SHA-256) was turned into the wandering test's schedule by a rule written before the runs (min-max onto 1 to 8 generators, one step a bin, 24 steps of 108 s), and everything else was the wandering test's. p95 fell 64% to 67%, p99 60% to 62%, the mean 51% to 53%, time over the line 81% to 82%, failed requests 11% to 18%, machines in service 7% to 9%, HPA replicas 4% to 8%, the standby-model energy 5% to 7% and the idle-power model 0.3% to 0.4%, all GAIN in all three of our runs (ten pairs each); no pod was ever without a machine. The machines row is the same in all three of our runs here, where the wandering test's was inside the noise, because the trace has a long quiet stretch (six hours at two generators) in which machines are given back and our own schedule had none.
- **On top of Kubernetes with its add-ons** (`V3_KEDA_CPU_REQUESTS.md`, `V3_KEDA_REQUESTS.md`, `docs/ADDONS_PREREGISTRATION.md`) asks: when native is the stack clusters actually run, with KEDA 2.21 and its HTTP add-on 0.16 owning the service's autoscaler, does the governor still add anything on top? Its moves reach KEDA's ScaledObject through the plug (`scripts/kubectl_keda.py`), because KEDA rebuilds the autoscaler from it and would undo a move written anywhere else. With KEDA on the CPU target and the requests in flight, p95 fell 51% to 53%, p99 60% to 62%, the mean 36% to 39% and time over the line 97% to 100%, all GAIN in all three of our runs; machines did not change beyond the noise. With the HTTP add-on alone, p95 fell 73% to 76%, the mean 59%, machines in service 5.9% to 7.8% and replicas 14%, all GAIN in all three of our runs. In both setups the energy counted with every parked worker at idle power rose 1.0% to 2.6%, **power given in all three of our runs**, and it counts against the governor in the index: the load is closed-loop, so the faster answers drew 24% to 54% more work through the service (its CPU, shown and not judged), and the modelled watts rose with the work while the energy per core-hour fell 18% to 36%. The next run counts the requests served and gives native a node autoscaler (Karpenter, on Azure).

The first v3 sets of 7 and 8 October read the same way (the all-four work +35% to +49%, the batch machines −19% to −23%) and are whole in `docs/history` as `_set1`; the numbers above are the sets of 10 October, every test run again on one commit. The same six tests were run on Omni v1 with the same readings (`V1_*.md`), the controllers being the same bytes, and the v1 tables stay as the first engine's record. The earlier engines' sets, before the verdict, parked 29% to 36% of the machines and paid for it in response time

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

(`docs/history/`); the frozen engine puts service first, and that choice is visible in every machines row above.

16.1b The engine that stands on the add-ons: four receipts and the capacity test (omni-v7)

The engine that stands, omni-v7 (Chapter 15), has five three-run tables of its own, every run on one commit (`b1eb8294f4a7`, 16 October), ten pairs a run and five a cap in the capacity test, on the same kind cluster as section 16.1 with the add-on named as native. They are read here gauge by gauge, native against Omni-Compass on top; the charts under each paragraph picture the table named and add nothing to it. Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results.

On top of Goldilocks and the VPA's recommender (`V7_GOLDILOCKS.md`; runs 38843260818, 38843263401, 38843266098). Native is the service rightsized by Goldilocks from the VPA recommender's figures, with the HPA under it; omni is the same with Omni-Compass on top. The response time fell at the mean 45% to 47%, at the 95th percentile 60% to 62% and at the 99th 67% to 69%, and the time over the line fell 100%, GAIN in all three of our runs; failed requests were zero in both arms. Machines in service and node-hours read EVEN. The energy counted with every parked worker at idle power rose 1.6% to 2.3%, power given in all three of our runs: the governor's own settings commands (14 to 18 a run, shown and not judged) conveyed processor time to the pods, the service drew 41% to 46% more CPU and answered faster for it, and the energy per core-hour fell 27% to 29% (shown). HPA replicas, pods started and the pod start wait read EVEN; the alert minutes fell 100% in every run and still read EVEN, because at ten pairs two of the three intervals include zero.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

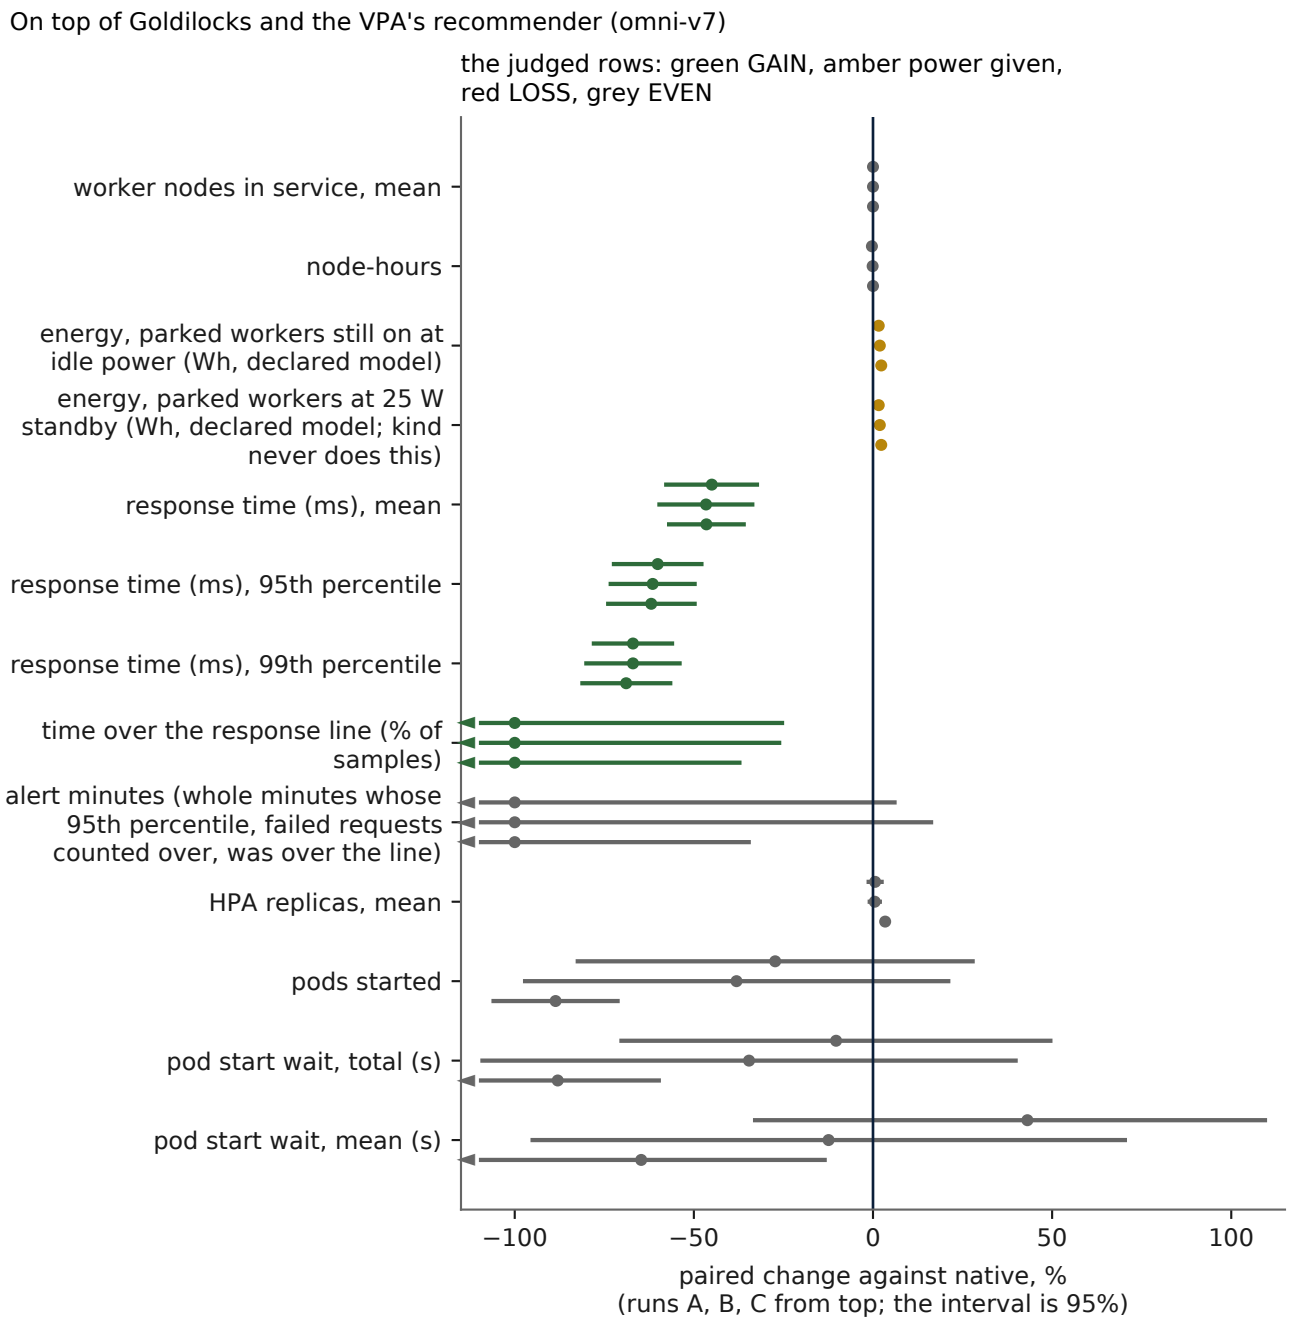


Figure 56. Receipt chart: Omni-Compass on top of Goldilocks and the VPA's recommender (omni-v7), the judged rows. Each row is one gauge; each line is one run's paired change against native with its 95% interval (runs A, B, C from top); green GAIN, amber power given, red LOSS, grey EVEN, by the reading key. The chart pictures results/live/V7_GOLDILOCKS.md and adds nothing to it.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

On top of Goldilocks and the VPA's recommender (omni-v7)

	shown, not judged, runs A, B, C: the governor's own inputs and the mechanism's traces
settings commands the governor wrote on its own (no person touched either arm)	+17.8 +16.6 +14.1
pending pods in a 15 s snapshot, pod-minutes (a pod being started counts too: shown, not judged)	+0.135 +0.0533 +106
utilisation (used / allocatable)	+41% +43.3% +46.3%
CPU used (cores), mean	+41% +43.3% +46.3%
Omni's own CPU (cores), mean	+0.00796 +0.00774 +0.00839
CPU used with Omni's own (cores), mean	+42% +44.3% +47.3%
energy per core-hour (Wh, the 25 W standby model; a ratio over CPU used: shown, not judged)	-26.8% -27.7% -29.4%
host CPU busy, the real machine under kind (%)	+38.1% +39.3% +40.6%
host cores (the real machine under kind)	+0% +0% +0%

Figure 57. Receipt chart: on top of Goldilocks, the rows shown and not judged. The governor's own inputs and the mechanism's traces (the settings commands it wrote, the pods pending, the utilisation, the CPU used, its own CPU, the energy per core-hour, the host's busy share and cores), as the change in runs A, B and C. These rows explain how the judged rows came to be; they are not judged themselves.

On top of KEDA's HTTP add-on (`V7_KEDA_REQUESTS.md`; runs 38843268161, 38843270386, 38843272786). Native is KEDA 2.21 with its HTTP add-on 0.16 scaling the service on the requests in flight; omni reaches KEDA's ScaledObject through the plug, as section 16.1 describes. The response time fell at the mean 57% to 58%, at the 95th percentile 71% to 75% and at the 99th 55% to 57%; the time over the line fell 94% to 95% and the alert minutes 93% to 96%; HPA replicas fell 15% to 19% and pods started 17% to 23%: all GAIN in all three of our runs. Machines and node-hours read EVEN, and the pod start wait read EVEN. The energy at idle power rose 2.2% to 2.3%, power given in all three of our runs, the service drawing 53% to 56% more CPU for its faster answers while the energy per core-hour fell 33% (shown).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

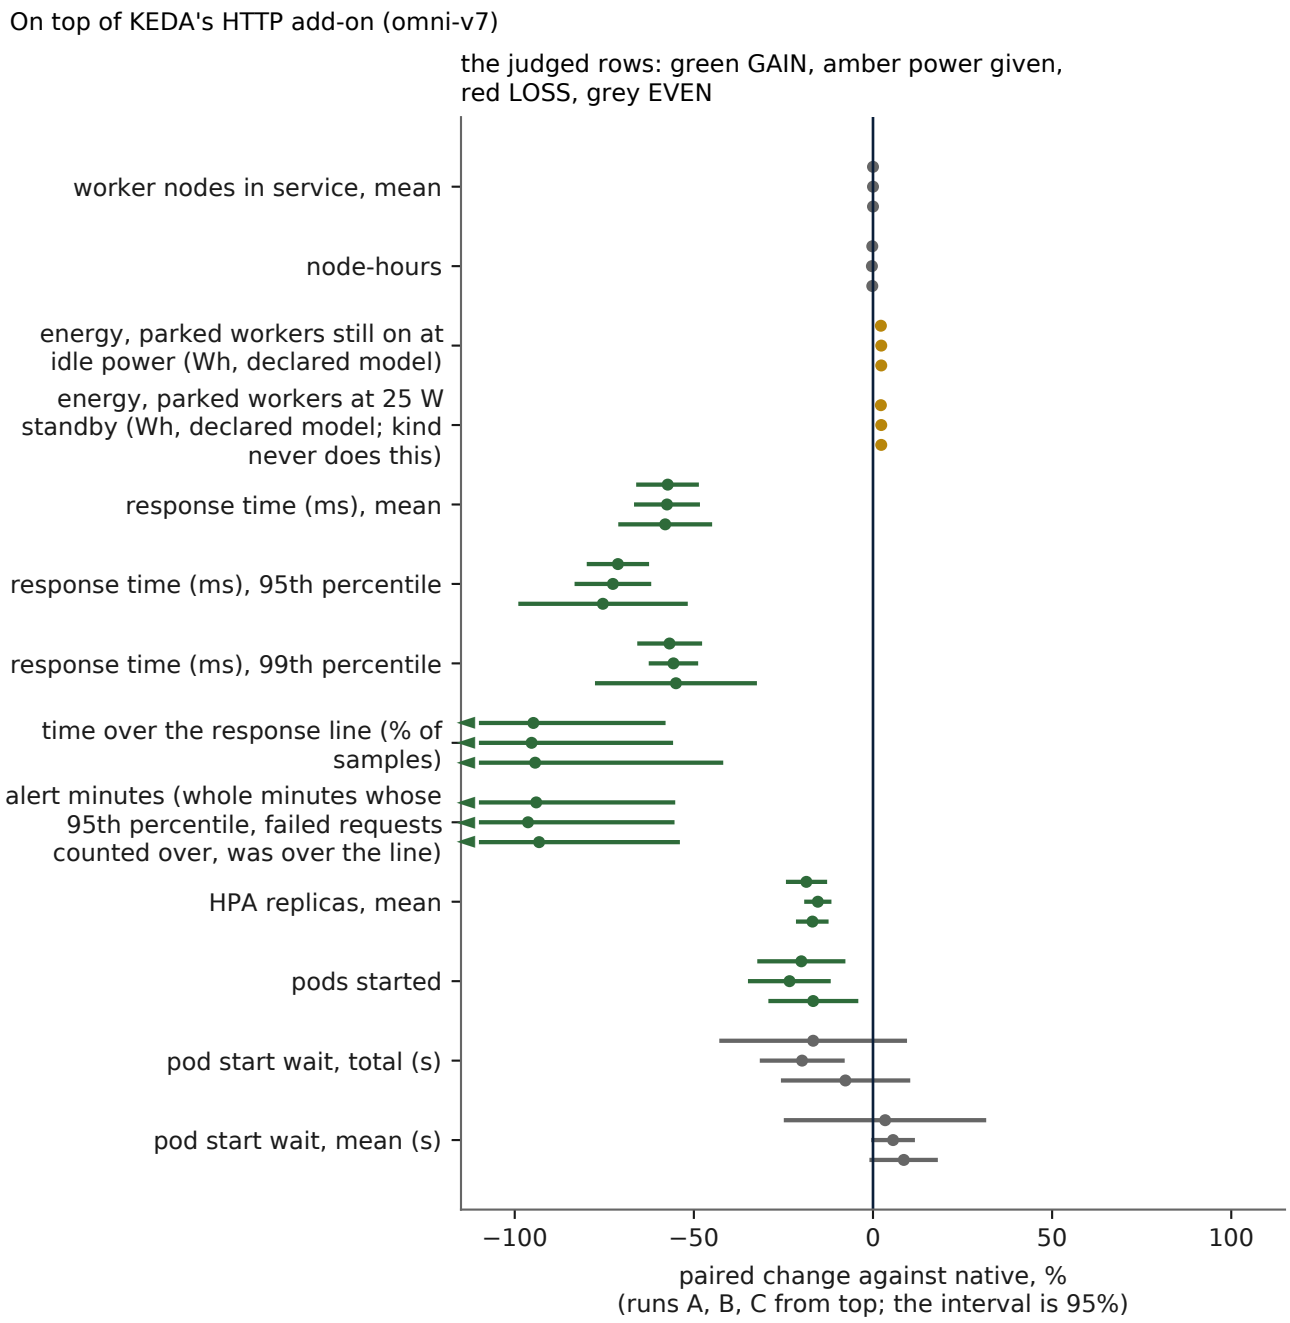


Figure 58. Receipt chart: Omni-Compass on top of KEDA's HTTP add-on (omni-v7), the judged rows, read as in the Goldilocks chart; it pictures results/live/V7_KEDA_REQUESTS.md.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

On top of KEDA's HTTP add-on (omni-v7)	shown, not judged, runs A, B, C: the governor's own inputs and the mechanism's traces
settings commands the governor wrote on its own (no person touched either arm)	+4.4 +4.3 +4.9
pending pods in a 15 s snapshot, pod-minutes (a pod being started counts too: shown, not judged)	-27.3% -37.8% +3.7%
utilisation (used / allocatable)	+52.8% +55.8% +53.8%
CPU used (cores), mean	+52.8% +55.8% +53.8%
Omni's own CPU (cores), mean	+0.00962 +0.00969 +0.0097
CPU used with Omni's own (cores), mean	+54.1% +57% +55.1%
energy per core-hour (Wh, the 25 W standby model; a ratio over CPU used: shown, not judged)	-32.6% -33.6% -32.9%
host CPU busy, the real machine under kind (%)	+49.2% +49.4% +50%
host cores (the real machine under kind)	+0% +0% +0%

Figure 59. Receipt chart: on top of KEDA's HTTP add-on, the rows shown and not judged: the governor's inputs and the mechanism's traces, as the change in runs A, B and C.

On top of KEDA on the CPU target and the requests in flight (`V7_KEDA_CPU_REQUESTS.md`). The response time fell at the mean 36% to 38%, at the 95th percentile 52% to 54% and at the 99th 57% to 59%, and the time over the line 98% to 100%, GAIN in all three of our runs. Failed requests, the alert minutes (down 100% in every run, two intervals including zero), HPA replicas, pods started and the pod start wait read EVEN; machines and node-hours EVEN. The energy at idle power rose 1.1% to 1.7%, power given in all three of our runs, for 27% to 33% more CPU drawn by the service and 19% to 23% less energy per core-hour (shown).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

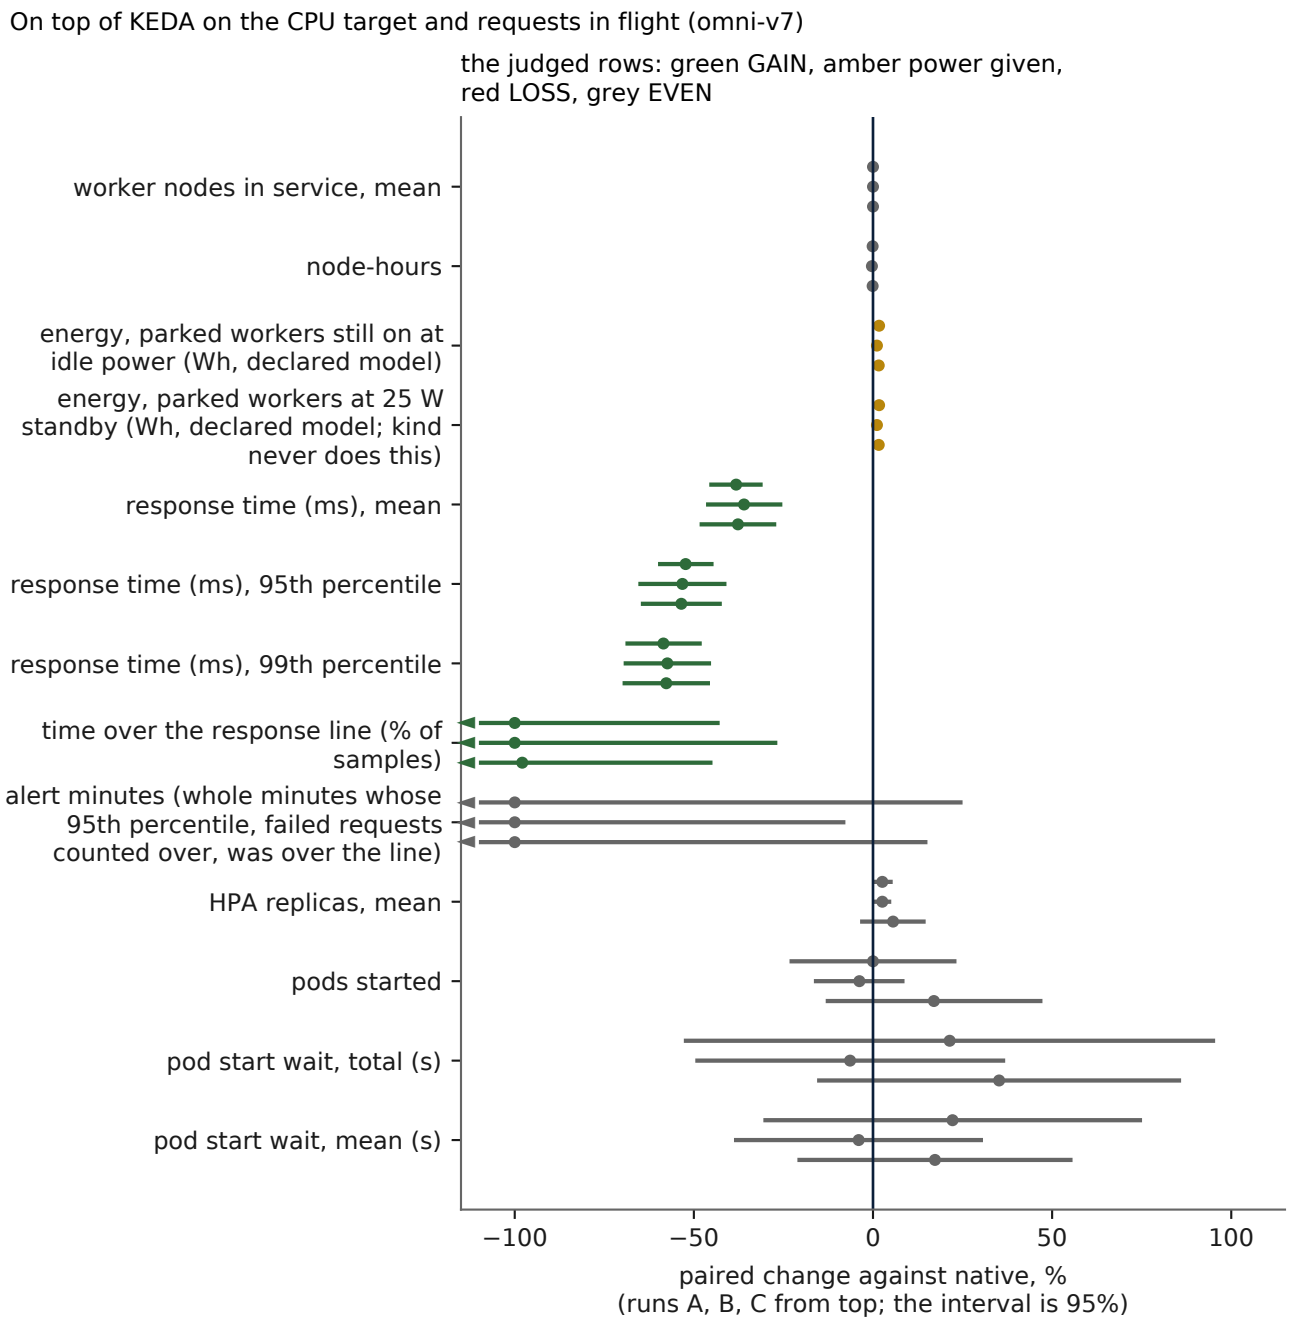


Figure 60. Receipt chart: Omni-Compass on top of KEDA on the CPU target and requests in flight (omni-v7), the judged rows, read as in the Goldilocks chart; it pictures results/live/V7_KEDA_CPU_REQUESTS.md.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

On top of KEDA on the CPU target and requests in flight (omni-v7)	shown, not judged, runs A, B, C: the governor's own inputs and the mechanism's traces
settings commands the governor wrote on its own (no person touched either arm)	+16.7 +17.4 +19.7
pending pods in a 15 s snapshot, pod-minutes (a pod being started counts too: shown, not judged)	-29.3% -15.5% +70.5%
utilisation (used / allocatable)	+33% +27.3% +31.9%
CPU used (cores), mean	+33% +27.3% +31.9%
Omni's own CPU (cores), mean	+0.0125 +0.0119 +0.0129
CPU used with Omni's own (cores), mean	+34.4% +28.6% +33.4%
energy per core-hour (Wh, the 25 W standby model; a ratio over CPU used: shown, not judged)	-23.1% -19.1% -22%
host CPU busy, the real machine under kind (%)	+32.6% +26.9% +30.7%
host cores (the real machine under kind)	+0% +0% +0%

Figure 61. Receipt chart: on top of KEDA on the CPU target and requests in flight, the rows shown and not judged: the governor's inputs and the mechanism's traces, as the change in runs A, B and C.

On top of CruiseKube applying its own recommendations (`V7_CRUISEKUBE.md`; runs 38843284578, 38843287341, 38843289946). Native is CruiseKube 0.3.4 rightsizing the service's requests from its own recommendations; omni is the same with Omni-Compass on top. Every judged row reads EVEN: the response time at its mean, 95th and 99th percentile within 3% of native with an interval including zero in at least one run; the time over the line, failed requests and alert minutes zero in both arms; machines, node-hours and energy inside the noise. The governor wrote no settings command of its own in any run (shown): on the service CruiseKube had rightsized, nothing passed its rules for a move, and it took nothing away. The rows are the do-no-harm reading, native's work, speed and failures with Omni-Compass on top, and the receipt is kept as such.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

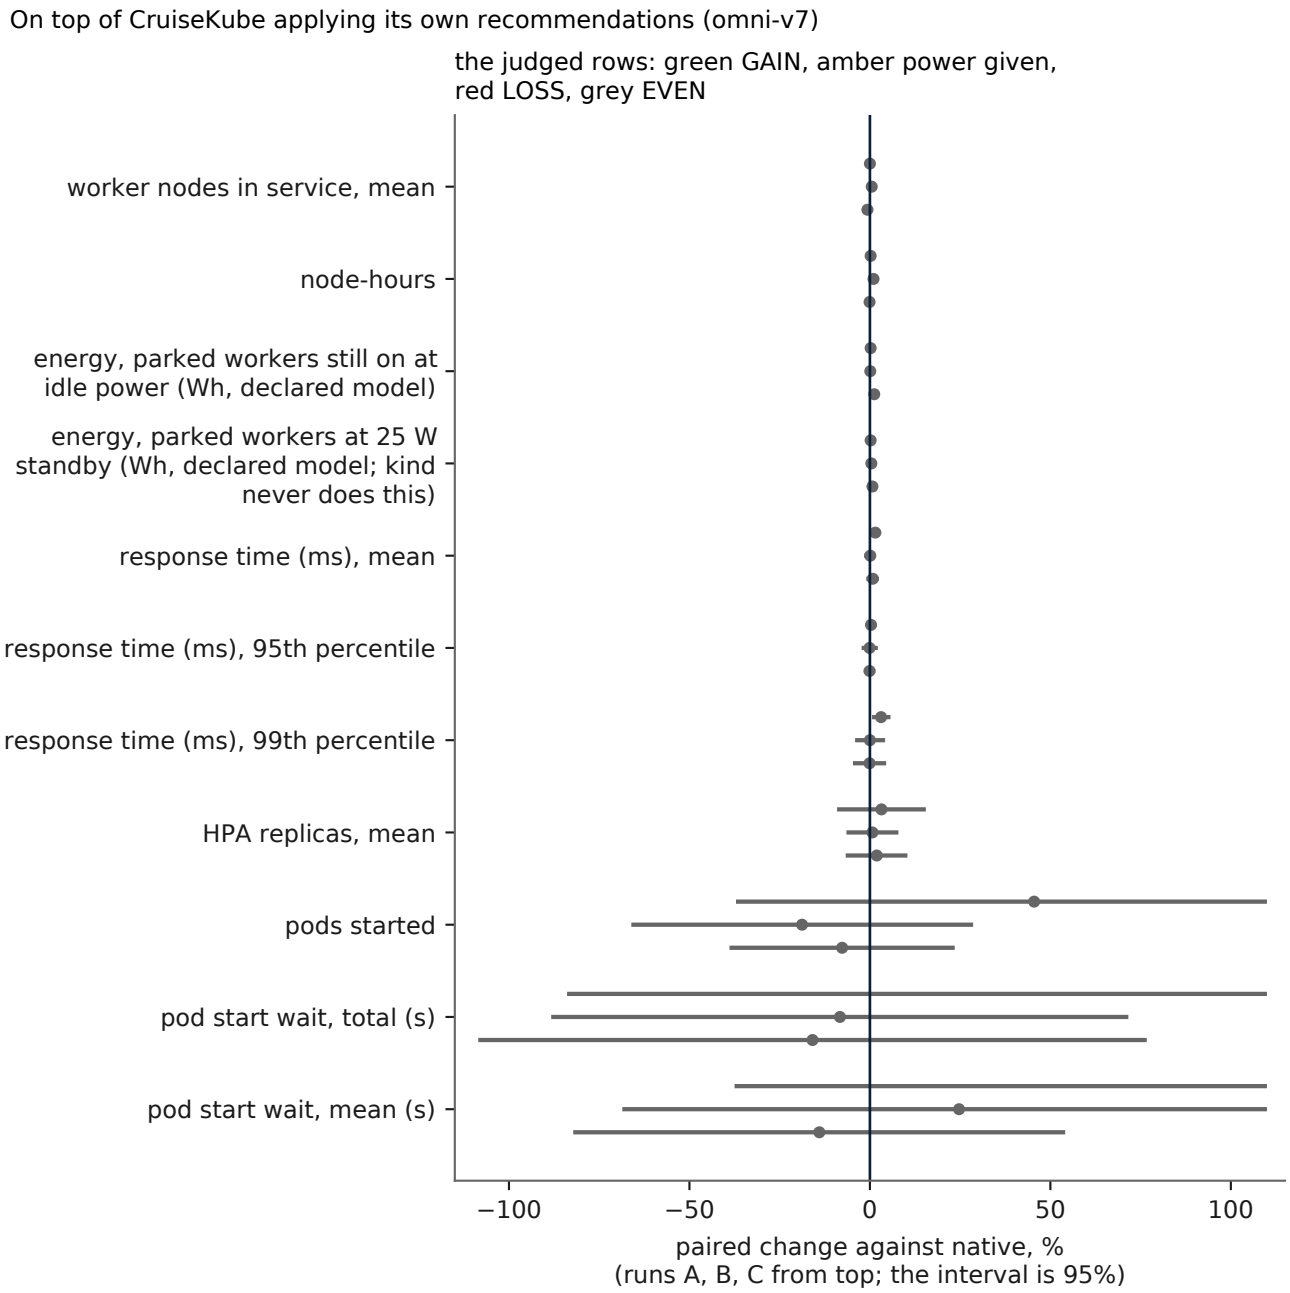


Figure 62. Receipt chart: Omni-Compass on top of CruiseKube applying its own recommendations (omni-v7), the judged rows, read as in the Goldilocks chart; it pictures results/live/V7_CRUISEKUBE.md.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

On top of CruiseKube applying its own recommendations (omni-v7)	shown, not judged, runs A, B, C: the governor's own inputs and the mechanism's traces
settings commands the governor wrote on its own (no person touched either arm)	+0 +0 +0
pending pods in a 15 s snapshot, pod-minutes (a pod being started counts too: shown, not judged)	+2.1% -57.8% -80.2%
utilisation (used / allocatable)	+0.9% -0.7% +1.1%
CPU used (cores), mean	+0.9% -0.1% +0.4%
Omni's own CPU (cores), mean	+0.00953 +0.00853 +0.00964
CPU used with Omni's own (cores), mean	+1.6% +0.6% +1.2%
energy per core-hour (Wh, the 25 W standby model; a ratio over CPU used: shown, not judged)	-0.7% +0.3% -0.2%
host CPU busy, the real machine under kind (%)	+2% +0.2% +1.6%
host cores (the real machine under kind)	+0% +0% +0%

Figure 63. Receipt chart: on top of CruiseKube, the rows shown and not judged: the governor's inputs and the mechanism's traces, as the change in runs A, B and C.

The capacity test at four caps (`V7_CAPACITY.md`; runs 38843275163, 38843278442, 38843281639). Native and Omni-Compass on top run under the same CPU quota on the served app, 1, 1.5, 2 and 3 cores, enforced by the cluster, five pairs a cap, with work waiting in line. The completed work and the work inside the line read EVEN at every cap (seven rows in all three runs, one in two of three): under a cap that holds both arms, the governor on top did no less than native, and at these caps neither arm answered more inside the line than the other beyond the noise. Where a cap holds native back and Omni-Compass answers more within it, the row reads GAIN; on this cluster at these caps it did not, and the table says so.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

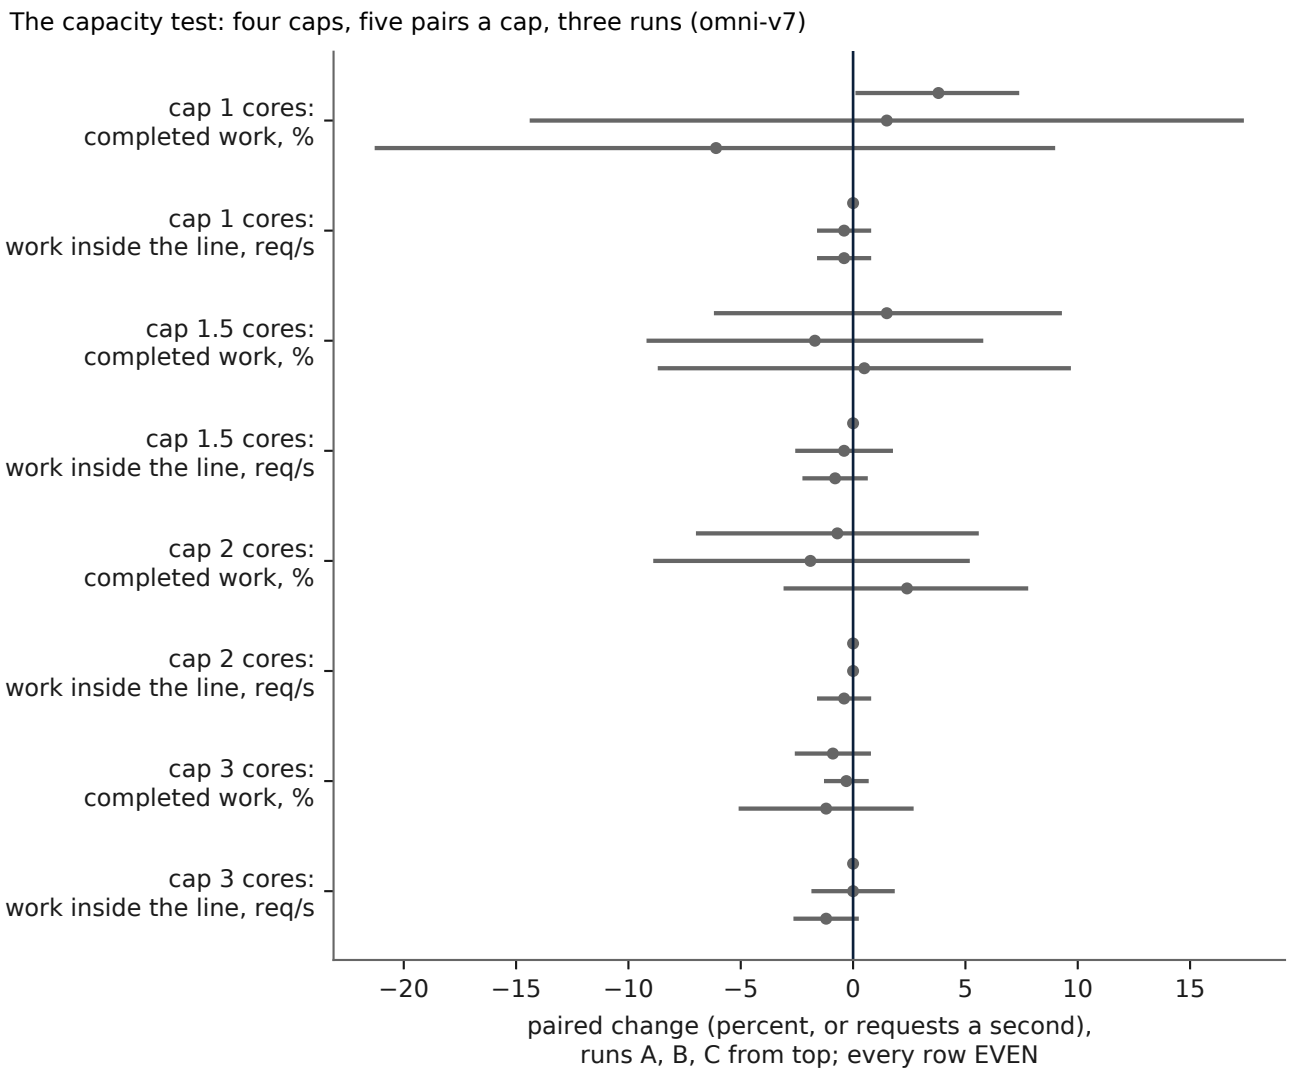


Figure 64. Receipt chart: the capacity test at four caps (omni-v7), native and Omni-Compass at the same resource cap of 1, 1.5, 2 and 3 cores, five pairs a cap, three runs. The completed work and the work inside the line, as the paired change with its 95% interval in runs A, B and C: every row EVEN, no difference beyond the noise, as results/live/V7_CAPACITY.md reads.

How a receipt comes to be. Every one of these tables carries the governor's inputs beside the service's outputs, and a referee reads them together. The inputs are the settings commands the governor wrote on its own, the host's busy share and the utilisation and CPU it raised, and its own CPU (eight to thirteen thousandths of a core, shown); the outputs are the response time at its mean, 95th and 99th percentile, the time over the line and the alert minutes, and the energy of the declared idle-power model. Where the outputs fell and the energy rose, the rise is the power the faster answers took, read as power given; where the governor wrote nothing, the outputs read EVEN. The Goldilocks table drawn that way is the mechanism in one picture.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

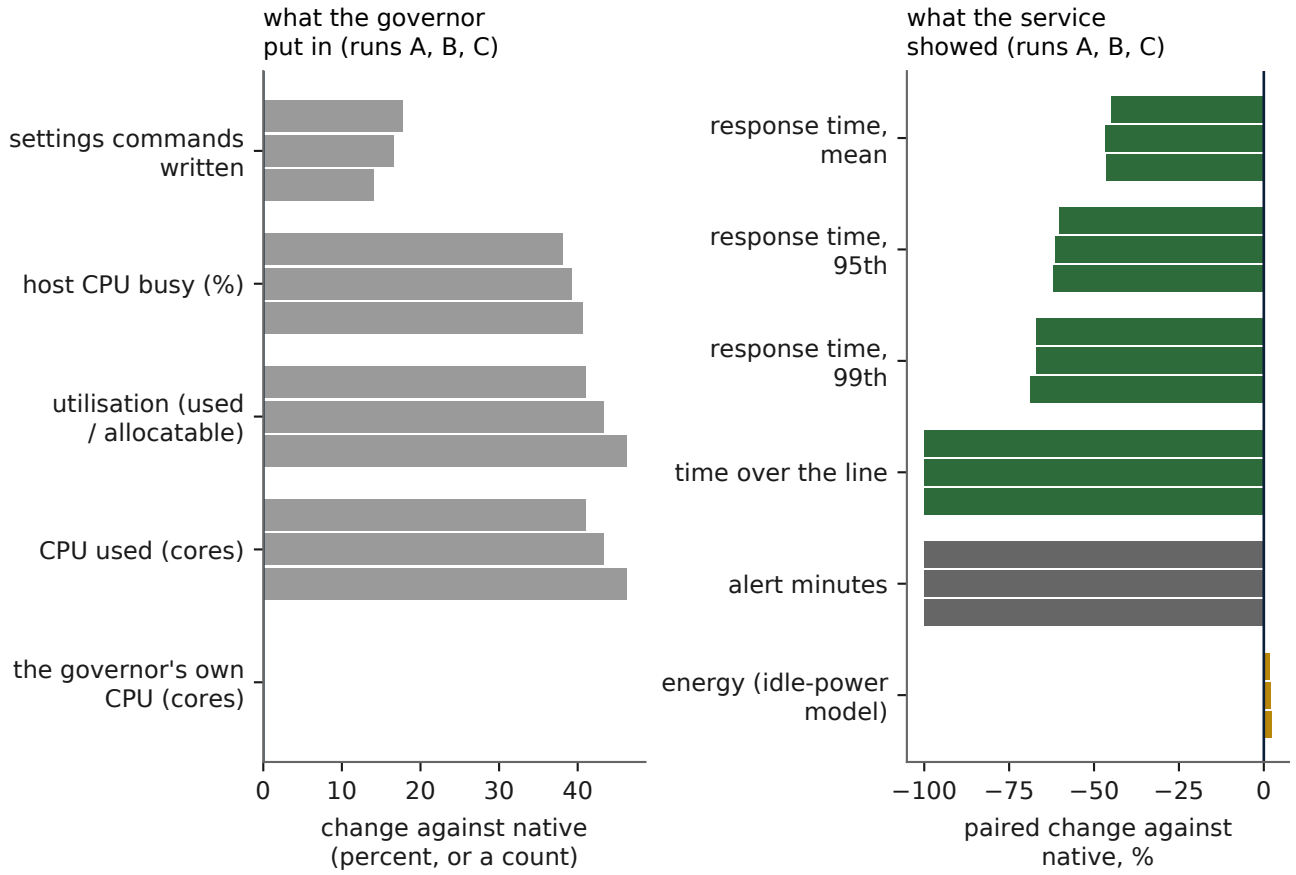


Figure 65. How a receipt came to be: the governor's inputs beside the service's outputs, from the Goldilocks table (runs A, B, C). Left, what the governor put in: the settings commands it wrote on its own, the host's busy share, the utilisation and the CPU used it raised, and its own CPU. Right, what the service showed: the response time at its mean, 95th and 99th percentile, the time over the line and the alert minutes, all down, and the energy of the idle-power model, up and read as power given.

The organisms with the real cluster inside, and the big organisms

The six modelled organisms were run with the kind cluster inside as one more muscle at 1, 10 and 100 copies on GitHub (`V1_SIX_KUBE.md`, `V3_SIX_KUBE.md`) and at 1,000 copies on a rented Azure machine (`V1_BIG_ORGANISM.md`). At 10 and 100 copies on v3, every one of the twelve cells read GAIN on four to six gauges (response time, time over the line, the organism's energy and its time over its own line) and LOSS on none beyond the noise, except a rounding-level work loss of six to eleven parts in a million in four cells, which the table shows. The four stacked at 100 copies ran off the clock in four of five repetitions (up to 277 s past a 1,440 s window): the machine could not step 170,000 muscles inside the window, both arms slipped alike, the pairing stands and the mark stays on the cell. At 1,000 copies on v1 the tower answered its slowest 5% in 0.2 s against native's 4.1 s and was over its line 0.2% of the time against 64%; the four stacked read p95 −74% and p99 −83% with the compass arm 300 to 615 s past its 2,880 s window in all three repetitions, marked off the clock, which is why the v3 stack was run with a 10,800 s window. **On v3 the four stacked at**

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

1,000 copies (`V3_BIG_ORGANISM.md`: 1.7 million muscles on one clock with the real cluster inside, three paired repetitions on one rented machine over 29 hours, 240 steps of 45 s an arm) **kept the clock in both arms**, 22 s behind a 10,800 s window (0.2%), and read: the cluster's slowest 5% answered in 150 ms against native's 2,882 ms (−95%), its slowest 1% in 165 ms against 5,405 ms (−97%), time over the response line 51% of samples to none, failed requests 0.14% to none, all clear of zero with three pairs; replicas, pods started and machines (six in both arms) the same; the standby-model energy −0.6% inside the noise; the host's CPU −1%, shown. The organism's own model (class S, shown beside the cluster and never inside the index) read energy −0.4% and work per energy +0.4% higher, time over its own line −0.7% lower, and work −0.0006%, a rounding-level model difference that the rule reads as LOSS and the table shows as such. The v1 stack's loss, the compass arm falling off the clock, is gone with the longer window; the gain, the cluster's tail, is the same shape at 1,000 copies as at 10 and 100. **The whole tower at 1,000 copies** (945,000 modelled muscles; started by run 37756284680, collected by run 37945866426 on 9 October after 25 hours on a second machine of the same type, commit `6f0f93e5`, Omni v3) read the same way and harder: the cluster's p95 6,690 → 160 ms (−98%), p99 9,068 → 187 ms (−98%), time over the response line 76% of samples to none, failed requests 4.8% to none, all clear of zero with three pairs; replicas (9.97 in both arms), pods started (4 against 3.7) and machines (6) the same or inside the noise; the standby-model energy −0.3% inside the noise; CPU with the governor's own −2.5% and the host −1.2%, shown; both arms 14 s behind the 10,800 s window (0.13%), on the clock in every repetition; the organism's own model energy −0.4% lower and work −0.0004%, the rounding-level loss the rule reads as LOSS. Native's own tail was longer under the tower than under the stack (6.7 s against 2.9 s at the 95th percentile) because that engine's tower (945 distinct muscles on omni-v3; 1,107 on the catalog that stands) drives the load generator harder at its peaks, and the governor's answer was the same 150 to 160 ms under both.

The bill on a real cloud

Azure Kubernetes Service with Azure's own cluster autoscaler as native (`V1_AKS_STEADY.md`, `V1_AKS_BURST.md`): five paired repetitions each on a 4-worker fleet, every machine billed every 15 s at list price, a fresh cluster per arm. Every gauge read no difference beyond the noise; the bill read −4.7% on steady load and +5.0% on the burst, both with intervals across zero; the burst's p99 read −34% clear of the noise in that one run. This is the honest reading of a fleet in which one machine is a quarter of the fleet, so that only a saving of about 30% could clear the noise against an expected saving of a few percent (section 10.1). The fleet of 40 workers in nine machine families that can show one machine is preregistered (`docs/K8S_COMPASS_PREREGISTRATION.md`, amendments 1 to 4) and has been refused by Azure's own cluster capacity in its region on every dispatch so far, each refusal recorded; it runs the moment the region admits a cluster.

The refusals are themselves part of the record, and the preregistration's amendments 5 to 7 keep the count: six dispatches and 29 refused repetitions in eastus, each with Azure's own reason (its managed-Kubernetes capacity in the region, not the subscription's quota), a survey of every other region showing none with the vCPU quota the fleet needs, one dispatch cancelled by hand and recorded as such, and the seventh dispatch

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

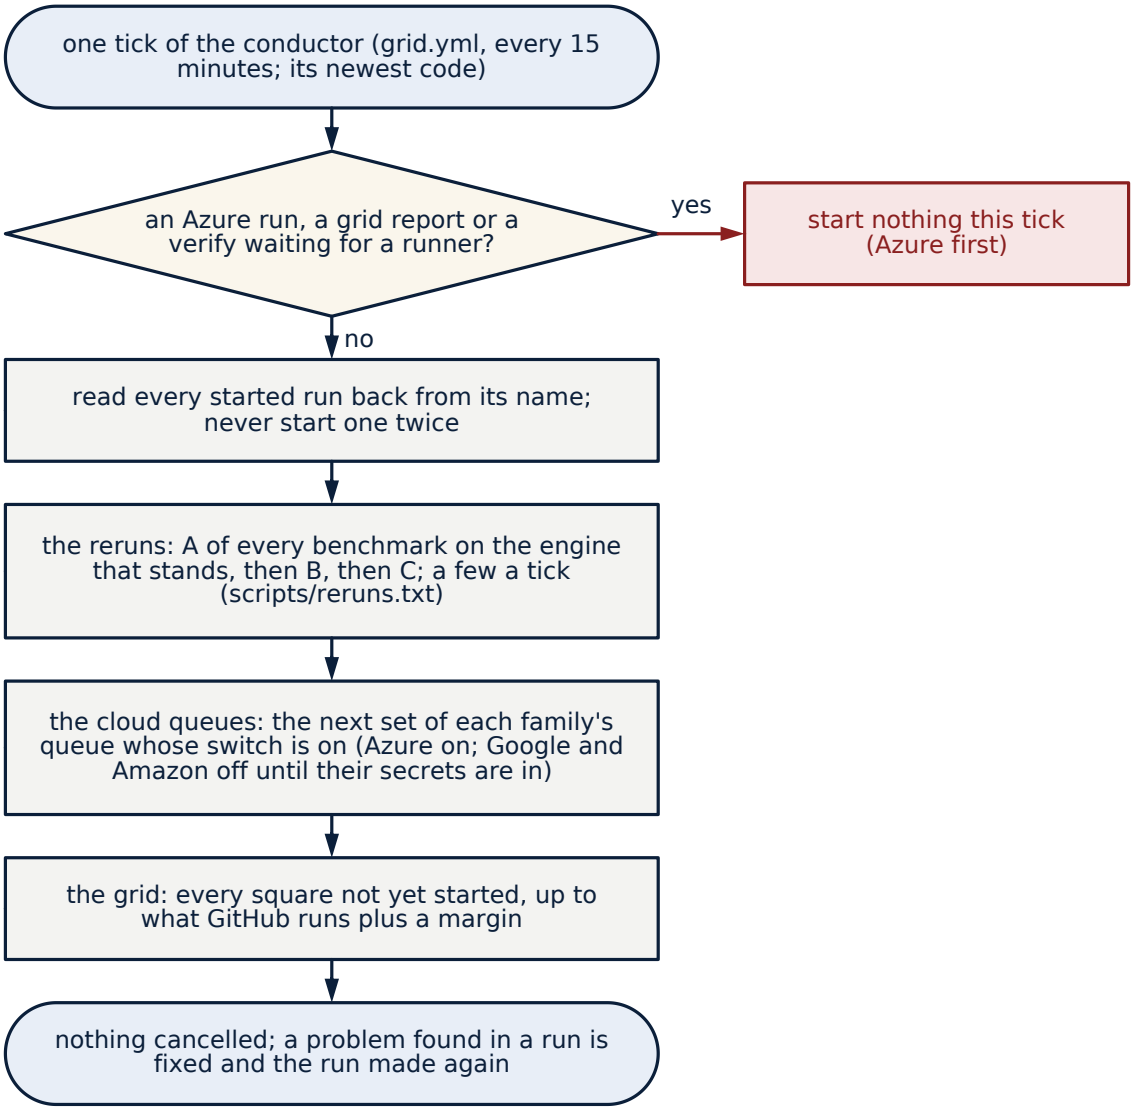


Figure 66. Flowchart: one tick of the grid conductor (grid.yml, every 15 minutes, on its newest code). It starts nothing while an Azure run, a grid report or a verify waits for a runner; it reads every started run back from its name and never starts one twice; it releases the reruns of every benchmark on the engine that stands (A of every benchmark, then B, then C), the next set of each cloud queue whose switch is on, and every grid square not yet started, up to what GitHub runs plus a margin. Nothing is cancelled.

left to try. That seventh dispatch was refused on all five of its repetitions over the morning of 8 October, 34 refusals in all (amendment 8); whatever the region admits on a later dispatch is read by the same table as the four-worker runs, with the refused repetitions counted in the amendment, not in the table. A reader should take from this what it says and no more: the small fleet's bill reading is inside the noise by the arithmetic of its size, the large fleet's reading does not exist yet, and nothing about the bill on a real cloud is claimed in the index until it does.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

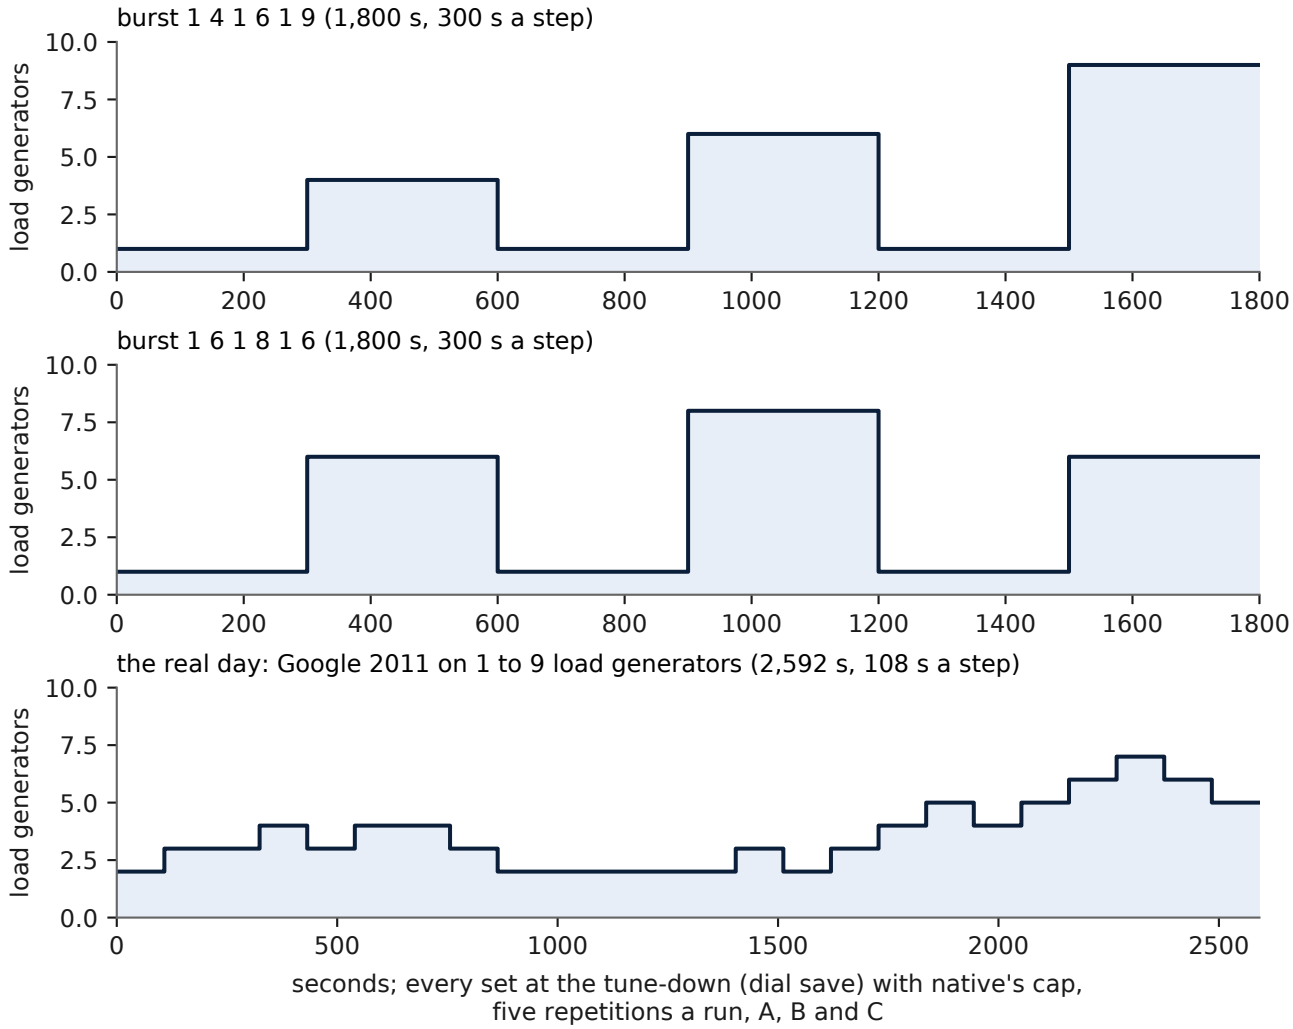


Figure 67. The load schedules of the cloud sets: the two bursts (1 4 1 6 1 9 and 1 6 1 8 1 6, 300 s a step) and the real day (the Google 2011 trace on one to nine load generators, 108 s a step). Every set runs at the tune-down with native's cap, five repetitions a run, as runs A, B and C; the load generator alone reads the schedule, never the governor.

A real database, a real message broker, a real cache

Three stacks whose knob is a resource an operator sizes once and leaves, run as the same shape of test: three paired repetitions a run, three runs, the operator's fixed setting as native, the compass on that setting through the stack's own console as omni, a tuning workload shown and not counted, and untouched workloads judged.

- **PostgreSQL 16 behind PgBouncer** (`V3_PGBENCH.md`, the second counted set of 8 to 9 October on amendment 2; the first set's table kept whole in `docs/history/V3_PGBENCH_set1.md`): the first set had read connections held open −61% to −72% on `select` and `tpcb_hot` with the host's CPU +14% to +28% and the median latency +15% to +17%, all the same in all three of our runs. The CPU was then measured and found to be the harness's own `psql` launches, one per reading, not the pooler (+55.9

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CPU-seconds on the launches against a +52.8 s host difference on a metered repetition; PgBouncer +1.2 s), and the median was the pool shrunk into a queue the pooler itself reported (section 10.2). On the amended harness (one console connection an arm; a server taken back only while clients waited under 1% of the pooler's time, servers added back one per percent of waiting up to the operator's 20) the costs are gone: host CPU and median latency inside the noise on all three workloads. The gain is smaller and real: **connections held open −36% to −38% on `select`, GAIN in all three of our runs**, with p95 inside the noise and the tails higher as point estimates in two runs, inside the noise by the rule; the runs disagree on `tpcb_hot` (+5%, −46%, −48%: on one runner the add rule fired, on two it did not); on `simple_update` the add rule of amendment 1 bought servers above the operator's 20 on a slow write workload and **connections most at once read +72% to +80%, power given in all three of our runs**, nothing bought for them, as in the first set. 1 gauge-row GAIN, 1 LOSS or power given, 1 where the runs disagree; the category entered the index at +4.0%. **The set of 10 October, the first with the brain's own verdict on the pool (amendment 3), is the result of record:** connections held open **−6% to −11% on `select`, GAIN in all three of our runs**; the add above the operator's 20 on `simple_update` refused by the trial, as the amendment expected, so that workload reads inside the noise with nothing bought and nothing lost; `tpcb_hot` inside the noise; work, latency and host CPU inside the noise everywhere; every pool handed back. 1 gauge-row GAIN, 0 LOSS or power given, 0 disagree; the category enters the index at +0.8%. The second set's table is whole in `docs/history/V3_PGBENCH_set2.md`. Amendment 4 (a spend trial runs to its samples) is declared and the next set runs.

- **Apache Kafka 3.9.1** (`V3_KAFKA.md`): on light, heavy and burst, work inside the 500 ms line rose 16% to 21%, the end-to-end 95th percentile fell from about 1.6 s to 9 to 14 ms, the mean lag fell 92% to 97%, all GAIN in all three of our runs; no message was lost in any arm; consumers running rose from 2 to 5.8 to 7.9, power given in all three of our runs; host CPU-seconds rose 10% to 20% on light, power given in all three of our runs, and read inside the noise on heavy and burst; CPU per thousand messages inside the line fell 10% to 12% on burst. Native sat at nine tenths of its measured capacity by design, so its queue grew at the high steps and Omni's did not; the gain is the queue kept short and the cost is the consumers that kept it so. 21 gauge-rows toward their aims, 8 LOSS or power given, 0 where the runs disagree. **The set of 10 October, the first with the brain's own verdict on the group's size (amendment 2), read exactly nothing under both objectives**: every spend trial in all 36 omni arms was abandoned before it could be judged, the group stayed at the operator's two consumers (1.98 to 1.99 on average, the trials' reference seconds included, a fraction of a consumer GAIN in all three of our runs), and every other gauge read inside the noise, the earlier set's queue and tail gains with them. The cause is ours and is said in amendment 3: the rule ended a spend trial when the service turned calm, and a consumer that drains the queue calms the service within seconds, so no spend could reach its samples. From amendment 3 a spend trial runs to its samples whatever the compass's force; the next set runs on it and becomes the result of record. The first set's table is whole in `docs/history/V3_KAFKA_set1.md`; the category stands at +0.1% meanwhile.
- **Redis 7.0.15** (`V3_REDIS.md`): on small, large and burst, work inside the 2 ms line rose 14% to 27%, the hit rate 14% to 27% and the mean latency fell 30% to 61%, all GAIN in all three of our runs; no request

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

failed; the 95th percentile stayed within a hair of native's, because a miss costs the declared 5 ms trip in both arms and 5% of requests still miss; the memory ceiling held rose from 64 MB to 200 to 270 MB and the memory used with it, both power given in all three of our runs, the resource the gain costs; the host's CPU-seconds read inside the noise on all three; keys evicted fell 76% to 92% (shown); every ceiling was handed back. 12 gauge-rows toward their aims, 6 LOSS or power given, 0 where the runs disagree. The tuning workload, shown and not counted, read the same way (hit rate 75% to 87%, the ceiling 64 to 299 MB). **The set of 10 October, the first with the brain's own verdict on the ceiling (amendment 2), read exactly nothing under both objectives**: the allowance stayed at one notch each way (56 to 72 MB), most trials were abandoned before they were judged (the same trial rule as Kafka's, amendment 3), and every gauge read inside the noise. The next set runs on amendment 3 and becomes the result of record; the first set's table is whole in `docs/history/V3_REDIS_set1.md`; the category stands at exactly nothing meanwhile.

- **MongoDB 8.0.32 under YCSB 0.17.0** (`V3_YCSB.md`, `docs/YCSB_PREREGISTRATION.md`): the knob is the storage engine's cache size, the operator's 512 MB as native, and the question is the opposite of the Redis one: not whether the governor will buy service with memory, but whether it will give memory back without losing service. On workloads c and burst the cache held fell by about half (512 to about 260 MB) and on f by 13% to 37%, GAIN in all three of our runs; on b it fell 27% to 50% but one run's interval included zero, so that row reads no difference beyond the noise; work inside the 1 ms line, p95 and p99 read inside the noise on all four workloads (work between −2.7% and +1.1%, every interval over zero); no operation failed in any arm; the host's CPU-seconds read inside the noise on all four, +12% to +15% on c with intervals over zero; pages read into the cache rose 14% to 58% (shown, not judged: the misses the smaller cache costs); and one row is a loss in all three of our runs, the mean latency on burst, +2.2% to +3.7% in all three runs, clear of zero, which stands. Every cache size was handed back in every arm. 6 gauge-rows toward their aims, 1 LOSS or power given, 0 where the runs disagree. The tuning workload, shown and not counted, read the same way (the cache 12% to 15% smaller, everything else inside the noise). The disclosure made before the run held: on this machine the data sits in the operating system's page cache too, so a storage-engine miss costs a memory read and a decompression, not a disk read, which is why half the cache could be given back at no measurable cost in work or p95 and a few percent of mean latency; on a machine whose data does not fit in memory the same knob would be asked a harder question, and this table does not answer it. That was the first counted set, kept whole in `docs/history/V3_YCSB_set1.md`. Its audits showed the memory given back in the first five seconds of every burst and c arm, before the first eviction, because a cold cache evicts nothing while it fills (amendment 1, section 10.8: the give-back gate is now the miss share under 1% of requests, as MySQL's). **The second counted set (8 to 9 October) is the result of record:** the cache held **−21% to −36% on all four untouched workloads, GAIN in all three of our runs**, settling at 330 to 405 MB, where the gate finds the working set, instead of at the floor; the burst mean latency inside the noise (the cost gone); work, p95, p99 and CPU inside the noise everywhere; every cache handed back. 8 gauge-rows toward their aims, 0 LOSS or power given, 0 where the runs disagree; the category entered the index at +8.5% (the first set's +10.2% included the artefact). **The set of 10 October, the first with the brain's**

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

own verdict on the cache (amendment 2), is the result of record: the cache held **−3% to −13% on `f`, GAIN in all three of our runs**, with `b`, `c` and `burst` inside the noise (two or three trials an arm, one or two allowed, the rest refused or abandoned), work, p95, p99, mean latency and CPU inside the noise on all four, no failed operation, every cache handed back. 2 gauge-rows toward their aims, 0 LOSS or power given, 0 disagree; the category enters the index at +0.7%. The second set's table is whole in `docs/history/V3_YCSB_set2.md`; amendment 3 is declared and the next set runs.

- **MySQL 8.0.46 under sysbench 1.0.20** (`V3_SYSBENCH.md`, `docs/MYSQL_PREREGISTRATION.md`): the knob is the InnoDB buffer pool, 512 MB at the operator's setting, moved in the server's own 128 MB chunks inside [128, 2,048] MB through the server's own console. Two counted sets were run on the same engine. The first (runs 37757840760, 37757850988, 37757861572) read every gauge inside the noise and its hand-back row read NO on 15 of 45 omni arms, because the plug's restore was issued while the server was still carrying out a shrink the law had asked for, which MySQL ignores; the plug, not the law, was fixed (the restore waits for the server's resize and writes again), the fix was declared as an amendment, and the first set's table is kept whole in `docs/history/V3_SYSBENCH_set1.md`. The second set on the amended plug (runs 37770617236, 37770620582, 37770624805, commit `a033fd09`) is the result: on the four untouched workloads **the pool held fell −67% on burst and −50% to −56% on read_only, GAIN in all three of our runs**, with the pages holding data falling the same; work inside the line, throughput, p95, p99 and host CPU inside the noise on every workload; on read_write, where the working set is written as well as read, the compass bought pool for the wide notches and **the pages holding data rose +53% to +70%, power given in all three of our runs**, the pool held +59% to +79% as point estimates (one run clear of zero), while p95 read −11% to −18% and CPU −4% to −5% inside the noise; update_index inside the noise on every row; no error in any arm; **the pool handed back and read back on all 45 omni arms**. 4 gauge-rows toward their aims, 1 LOSS or power given, 0 disagree; the category enters the index at +12.2%. The update_index "work inside the line" row counts almost nothing in either arm (a single update's client round trip exceeds the server-side 0.6 ms line) and is disclosed as such. That was the second counted set, kept whole in `docs/history/V3_SYSBENCH_set2.md`. Amendment 2 (8 October, section 10.9) followed its read_write row: 36 of that workload's 82 grows bought chunks while the pool missed under 1% of its reads, for slow writes the pool cannot mend, so the pool now grows only while missing, and no chunk goes back in a second without a read request. **The third counted set (8 to 9 October) is the result of record:** burst pool held **−49% to −56%, GAIN in all three of our runs**; read_write pages holding data **+44% to +52%, power given in all three of our runs**, with host CPU **−4% to −6%, GAIN in all three of our runs**, a trade of memory for CPU with latency unchanged; read_only inside the noise (the second set's −50% to −56% was in part the first chunk given back before any read, a cold-start artefact now refused, and the pool is then bought back on real misses as the notches widen); update_index the runs disagree; every pool handed back. 4 gauge-rows toward their aims, 1 LOSS or power given, 1 where the runs disagree; the category entered the index at +5.2%. **The set of 10 October, the first with the brain's own verdict on the pool (amendment 3), is the result of record:** the pool held **−10% to −20% on `read_write`, GAIN in all three of our runs**, the pages holding data

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

with it, the earlier set's memory bought for the written working set gone; `burst`, `read_only` and `update_index` inside the noise (the give-back trials judged, the grow trials mostly abandoned by the trial rule amendment 4 corrects); work, p95, p99 and CPU inside the noise on every workload; no error; every pool handed back. 2 gauge-rows toward their aims, 0 LOSS or power given, 0 disagree; the category enters the index at +1.0%. The third set's table is whole in `docs/history/V3_SYSBENCH_set3.md`; amendment 4 is declared and the next set runs.

16.4b Robustness: the governor killed outright, and its own cost

The robustness benchmark (`docs/ROBUSTNESS_PREREGISTRATION.md`) is a test of Omni-Compass itself, not of a gain. In the kill scenario (`V3_ROBUST_KILL.md`, ten pairs in each of three runs), the governor received SIGKILL at 40% of a 900 s window on the wandering load, with the watchdog running beside it from the start as it would in service. In all thirty repetitions the watchdog found the dead lease on its next pass, ran the governor's recorded restore command, and every setting (the HPA target, the replica range, every pod's CPU limit, every worker, the records on the objects) was back at the operator's **7 to 11 s after the kill**, mean 9 s against a preregistered allowance of 60 s; a second governor started at 50% and governed to the end in every repetition; and the 120 s after the kill read no difference beyond the noise against native's same window in all three runs, so the service did not measurably notice the governor's death. The whole window, with a kill and a restart inside it, still read mean response 32% to 39% faster, p95 42% to 45% faster, time over the line 28% to 34% lower and failed requests 9% to 15% fewer, GAIN in all three of our runs, with machines and energy inside the noise. Run again on 10 October (`V3_ROBUST_KILL.md`, the set of record): every setting back within the allowance in every repetition of every run, a second governor to the end in every one, and the whole window read mean response 33% to 40% faster, p95 27% to 48%, time over the line 32% to 36% lower, GAIN in all three of our runs, with failed requests, machines and energy inside the noise; the first set's table is whole in `docs/history/V3_ROBUST_KILL_set1.md`. The governor's own CPU over every archived run with the real cluster inside (`V3_OWN_COST.md`) is 0.006 to 0.013 of one core at every size from 1 to 1,000 copies, 0.1% to 0.3% of the host's cores, each run under its own engine; the cost of governing a real cluster does not grow with the modelled organism around it.

The long run (`V3_ROBUST_LONG.md`, three pairs of 7,200 s an arm in each of three runs) asks whether the governor drifts, leaks or slows over hours. Its resident memory after two hours was at most 1.048, 1.067 and 1.052 times its first ten minutes in the three runs, against a preregistered limit of a quarter: no leak. It made 117 to 119 of the 120 decisions its 60-second interval predicts in every repetition, 97.5% at the fewest against a threshold of 95%: valid. Its decision time, read as the gap between consecutive decisions less the interval it sleeps, was at most 1.20 times in the last hour what it was in the first: no slowing. Every setting was handed back at the end of every repetition and read back at the operator's with no record left. Two things are shown rather than judged, as the preregistration said they would be. First, failed decisions: 2, 3 and 3 in the three runs, all in one repetition's omni arm, all the same cause, the cluster's own API answering 500 to the governor's read of the HPA for two or three decisions in a row; the governor held, wrote nothing, and resumed on the next good read, which is the blind-means-hold rule doing what section 7.3 says it does. Second, the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

whole window's service: with three pairs a run the intervals are wide, and mean response, p95, p99 and time over the line read GAIN in all three of our runs in run A and inside the noise in B and C, so the reading is no difference beyond the noise in two of three runs; machines, energy and failed requests read inside the noise in all three. The long run is a test of the governor's constancy, and on that question every row answered as the preregistration required. Run again on 10 October (`V3_ROBUST_LONG.md`, the set of record): no leak (memory under its limit in every repetition), every decision valid, no slowing, every setting handed back; the service GAIN in all three of our runs in run B and inside the noise in A and C; the first set's table is whole in `docs/history/V3_ROBUST_LONG_set1.md`. The 24-hour run on three rented machines was collected the same day and its table follows.

The modelled realms and the independent simulators

Every result here is evidence class S: a statement about a published model under its own native controller, never about hardware, and never counted in the Omni index.

- **The 945 muscles and six organisms** (`results/realms/REALMS.md`, A/B/C on v3): reproduced to the last digit in three of three runs; zero muscles LOSS or power given; every organism superior within guardrails, with work per energy +0.1% to +0.3%, work unchanged and time over the line not above native's. On v2 the Physics realm and the tower had read a service tradeoff; the slack gate on speed knobs corrected it and made v3.
- **The grid of copies and runs** (`results/scale/GRID.md`, 84 of 90 cells on v3): every organism superior within guardrails in every cell of ten runs or more; work per energy +0.07% (Physics) to +0.37% (Energy, the four stacked, the tower), the same figure at every size; every knob handed back; the six cells left are beyond the machines available.
- **The power grid** (`V1_PANDAPOWER.md`, `V3_PANDAPOWER.md`, the same table to the digit): eleven SimBench grids solved by pandapower, the tap changer's own controller as native, one whole tap per move as the knob. With ZIP loads the energy the loads drew fell 1.3% to 1.5% and the net import fell in all eleven grids; losses fell in seven and **rose in four** (the rural and semi-urban grids with their own generation, +0.6% to +1.5%); tap operations fell in ten grids and rose from 4 to 8 a year in one, the declared cost, power given in all three of our runs; no grid was more often outside its voltage band. 67 gauge-rows toward their aims, 14 LOSS or power given.
- **Robot arms** (`V1_MUJOCO.md`, `V1_MUJOCO_PANDA.md`, `V3_MUJOCO.md`): four arms from the MuJoCo Menagerie with their shipped controllers as native and the joint speed of an axis with slack as the knob, after a paired physics trial. The trial left the UR5e and the iiwa 14 native ("nothing for Omni to move"); on the Gen3 and the Panda, peak torque fell 29% and 10%, tracking error 21%, energy per takt 0.8% and 0.5%, GAIN in all three of our runs; the Panda's copper loss **rose 14%**, power given in all three of our runs.
- **Buildings with batteries** (`V1_CITYLEARN.md`, `V3_CITYLEARN.md`): every district CityLearn ships, its own rule-based control as native, each building's battery charge and discharge inside the simulator's limits as the knob. In the eleven battery districts electricity bought, the daily peak and the daily

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

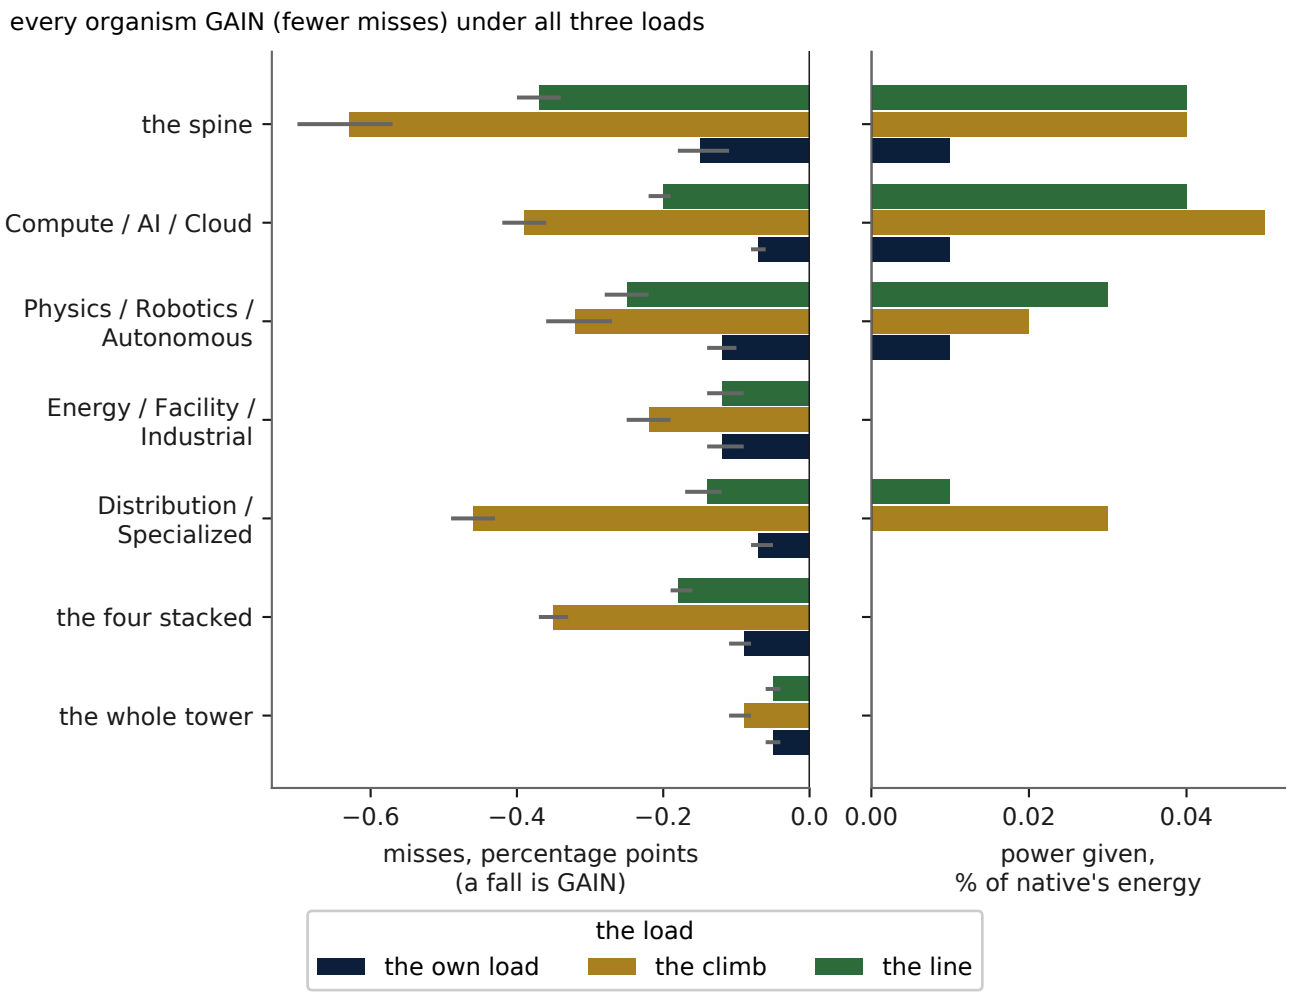


Figure 68. Receipt chart: the seven organisms under the three loads (the own load, the climb and the line), from results/realms_v5/REALMS_V5.md. Left, the change in misses in percentage points with its 95% interval, a fall read GAIN; right, the power given as a share of native's energy. Every organism reads GAIN (fewer misses) under all three loads; the organisms are class S, our own models.

unevenness fell in all eleven and carbon in eight, GAIN in all three of our runs; the bill **rose in seven** (the 2023 districts) and ramping rose in seven, power given in all three of our runs; 71 score-rows toward their aims, 33 LOSS or power given, 1 where the runs differ by the simulator's own variation; three districts had nothing to move and eight the simulator cannot run.

- **Drone swarms** (`V3_SWARM.md`): twenty Crazyflie 2.x quadrotors in gym-pybullet-drones with the shipped position controller as native and the cruise override inside the autopilot's limits as the knob, three untouched cells. Energy a mission fell 7% (short), 18% (mixed) and 20% (long) and missions a charge rose 8%, 22% and 25%, GAIN in all three of our runs; no late mission, reserve breach, near miss or collision in any arm; the tracking error rose from 0.07 to 0.13 m inside its 0.25 m band, shown; every override handed back. PyBullet reproduced to a part in a thousand across GitHub's machines and not to

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

the bit, so the table's reproduction tolerance was set to one part in a thousand after the runs were seen, and the preregistration's amendment 1 says so with its time.

The one number, and the table

The one number. The Omni index over the real categories the same in all three of our runs, on the sets of 10 October: **+4.8%** (real Kubernetes on v3 +28.9% over seven tests, the real database on v3 +0.8%, real messaging on v3 +0.1%, the real cache on v3 exactly nothing, the real database's storage-engine cache on v3 +0.7%, the real database's buffer pool on v3 +1.0%, each category weighed the same; Azure and the card join as their three-run tables land). How it got here, set by set, follows; the figures of 7 to 9 October below are history, kept in the tables of `docs/history`. The fifth category lowered the headline from +30.2% to +25.9% when it joined on 8 October; the sixth, MySQL's buffer pool, entered the same day at exactly nothing on its first counted set (every row inside the noise, the headline at +21.2%) and at +12.2% on the second set run the same afternoon on the amended plug, the headline at +23.5%; the public-trace test (section 16.1) joined the Kubernetes category as its seventh test the same evening, moving that category from +25.5% to +28.8% and the headline to +24.1%; and on 9 October the three database categories were re-read on their second or third counted sets, after the costs the first sets had charged to the governor were measured and found to be our own harness (section 16.4): the database fell from +14.2% to +4.0%, the storage-engine cache from +10.2% to +8.5%, the buffer pool from +12.2% to +5.2%, and the headline from +24.1% to +20.5%. The number went down because the costs came out and took the gains they had been propping up with them; what is left is smaller and has nothing of ours under it. The same day a **second reading** was declared beside the first, at the founder's question about what a cache is for (`docs/K8S_COMPASS_PREREGISTRATION.md`, the service reading): the same tests and the same three-run rule scored on work and speed only, the resources spent or saved shown and not scored, computed for every test alike. It stood, on the day it was declared, at **+71.8%**: Kubernetes +83%, Kafka +1,193% (its hundredfold tail), Redis +8.8% where the resource reading said −24.9%, and the three database stacks exactly nothing, because their gains are resources given back for the same service; on the sets of 10 October it stands at **+10.7%** (Kubernetes +84.5%, the five stacks nothing). The two readings are two true sentences about the same tables: one says what the governor did for the service, the other what it cost or saved in resources to do it. The resource reading stays the headline because it was the one preregistered; the service reading is printed in the same file, in the same tables, as a second column. A category enters at whatever its tables show in all three of our runs, nothing included, which is the reader's guarantee that the number is not built from the categories that happened to work. That is how the number is meant to move: every real category enters at equal weight as its table lands, whatever it does to the mean.

10 October: every table remade, the stacks under the brain's own verdict. Every benchmark was run again on one commit and every table read from the new runs. The five stacks ran for the first time with the brain's verdict on the knob (section 9.4), and the headline moved from +20.5% to **+4.8%**, the service reading from +71.8% to **+10.7%**. The number came down for one reason: the spends that had bought the earlier gains at a resource cost were refused by the verdict where they did not pay (MySQL's pool for the written working set, PostgreSQL's add on the slow write workload) and, on Kafka and Redis, not yet judged at all, because the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

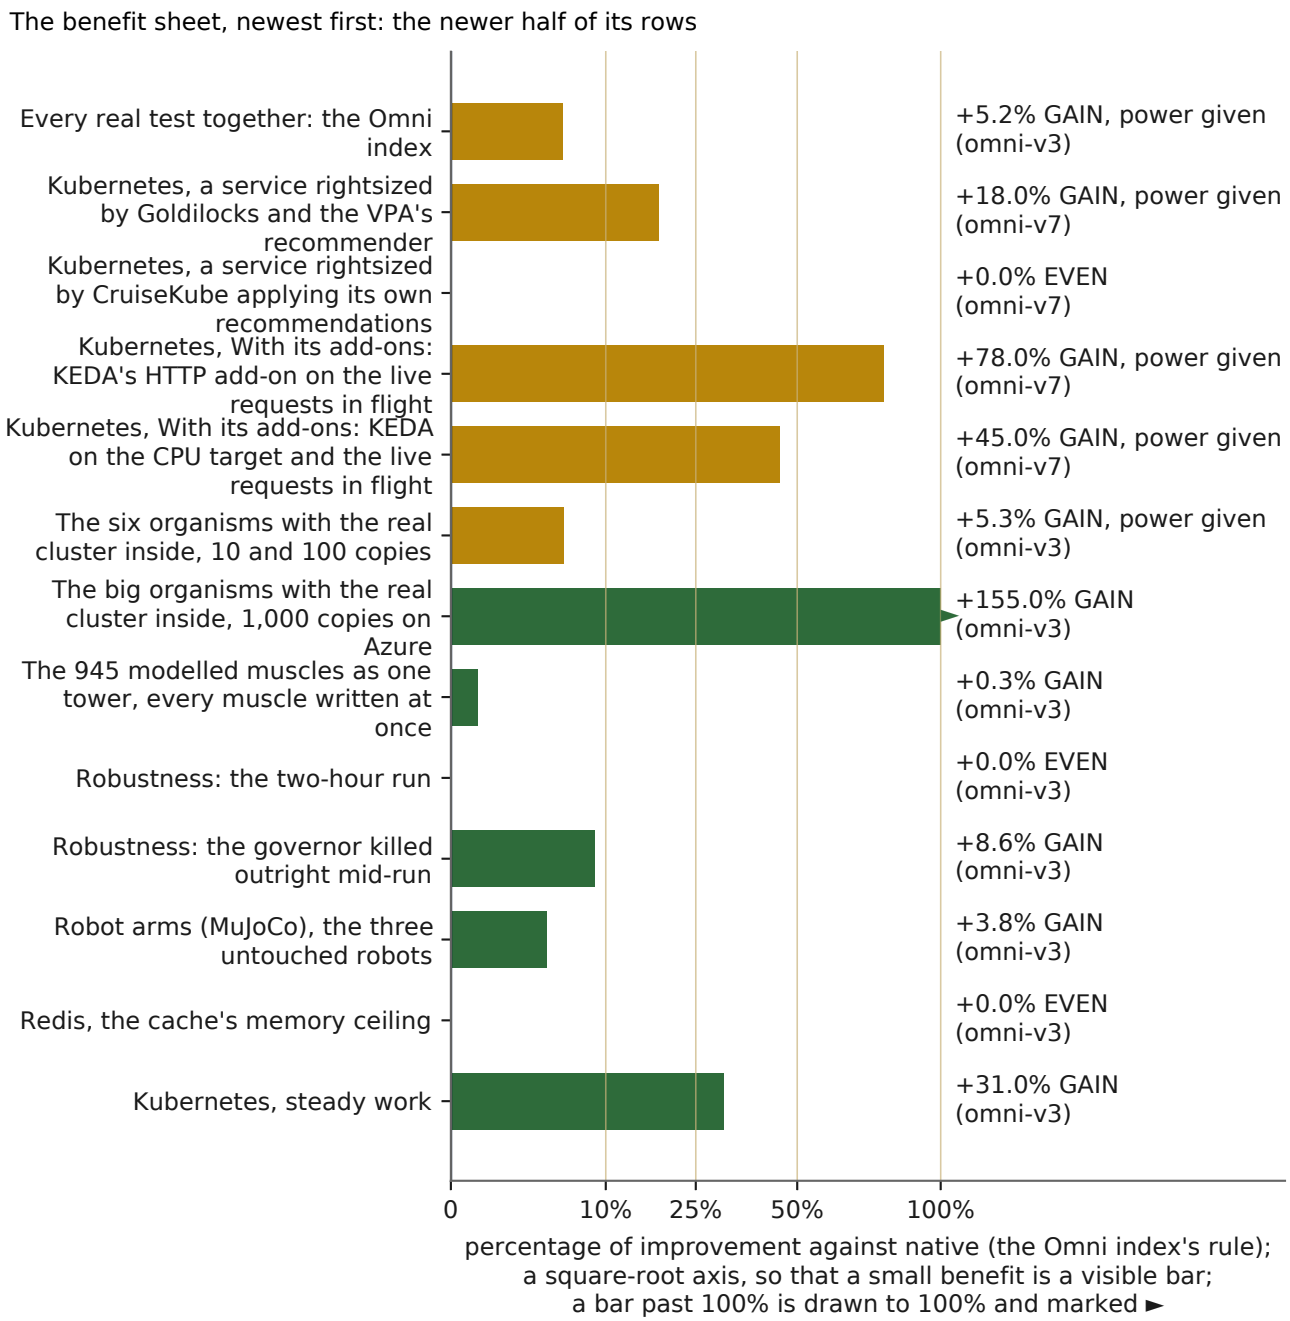


Figure 69. Chart: the benefit sheet, one number per benchmark, the newer half of its rows, from docs/BENEFIT_SHEET.md: the benefit by the Omni index's rule, its word, and the engine its table ran on; a result is never read across engines. Continued in the next figure.

trial rule of 9 October ended a spend trial on the calm the spend itself produced (amendment 3, section 16.4; the next set runs on the corrected rule). What is left is smaller than before and has two properties the earlier number did not: every gain in it was proved on the stack itself before the knob was written, and no category carries a loss in all three of our runs. The storage-engine cache's figure is positive for the reason the Redis figure is negative, read the other way: there the governor gave memory back (the cache held halved on two

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

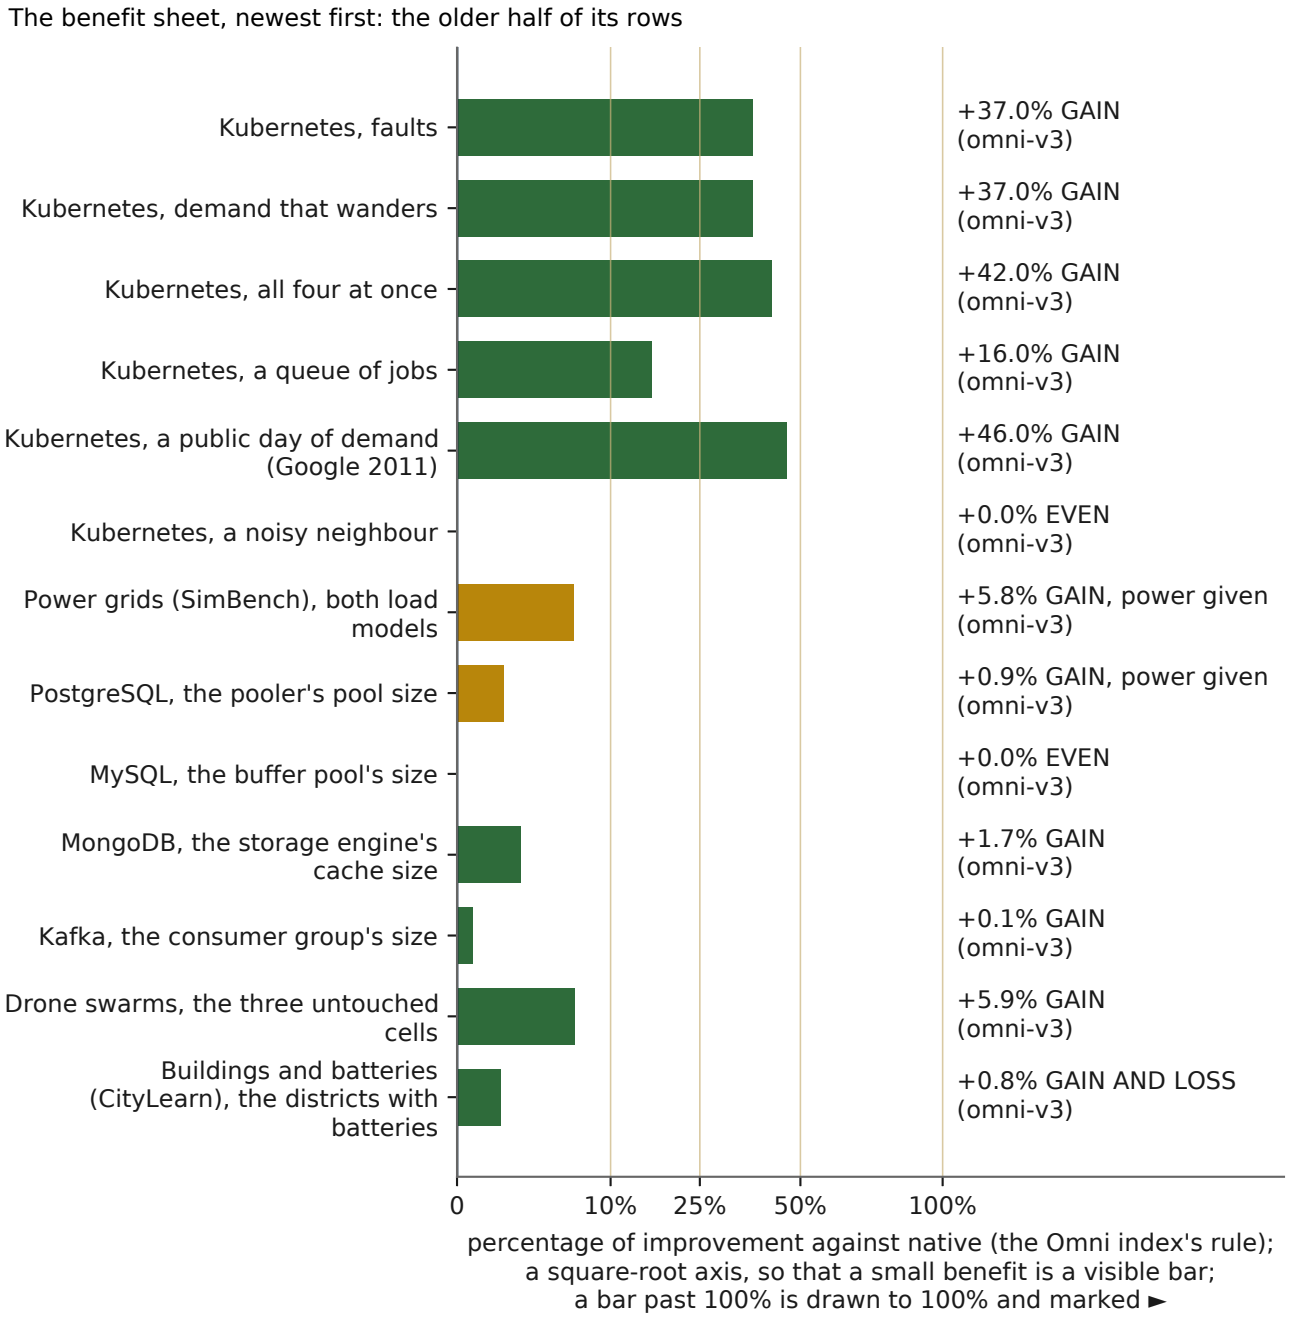


Figure 70. Chart: the benefit sheet, one number per benchmark, the older half of its rows, read as in the previous figure.

workloads) while work, p95 and CPU stayed inside the noise, so its resource column is a gain and its other columns are exactly one; its one loss in all three of our runs, the burst mean latency, is not an index column and stands in its table. The messaging figure is large because its speed ratio is: native sat at nine tenths of its measured capacity by design, so its queue grew at the high steps and its slowest 5% waited 1.6 s, while Omni's waited 9 to 14 ms; the resource that bought it, three to four times the consumers, stands beside it as a loss in all three of our runs. The cache's figure is negative because the memory held is its resource column: the ceiling

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

rose from 64 MB to 200 to 270 MB (a ratio of about 0.25 in the index's "fewer machines" sense) while work and the hit rate rose 14% to 27%, and a geometric mean of those four columns is below one. That is the arithmetic of a resource bought, reported as such; a reader who weighs memory as cheaper than a consumer or a machine will read the cache's rows for themselves, which is why every row is in its table.

Result	Engine	Class	Reading	Source
Real Kubernetes, all four in one run (load up and down one step at a time, 10 pairs × 3 runs)	v1	L	work inside the response line **+42% to +48% in all three runs, GAIN in all three of our runs**; p95 −57% to −63% GAIN in all three of our runs; failed requests −12% to −13% GAIN in all three of our runs; machines no difference beyond the noise	`results/live/V1_ALL_FOUR.md`
Real Kubernetes, steady work in steps (10 pairs × 3 runs)	v1	L	p95 **−65% to −69%** and time over the line GAIN in all three of our runs; machines −1.5% to −3.4% GAIN in all three of our runs; failed requests zero in both arms	`results/live/V1_STEADY.md`
Real Kubernetes, demand that wanders (10 pairs × 3 runs)	v1	L	p95 **−56% to −60%** GAIN in all three of our runs; failed requests GAIN in all three of our runs; modelled standby energy −0.4% to −0.8%, GAIN in all three of our runs	`results/live/V1_WANDERING.md`
Result	**Engine**	**Class**	**Reading**	**Source**
Real Kubernetes, faults (a machine down, a spike, a runaway pod, a blind probe, 10 pairs × 3	v1	L	p95 **−61% to −64%** GAIN in all three of our runs; failed requests, machines and energy no	`results/live/V1_FAULTS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
runs)			difference beyond the noise	
Real Kubernetes, a queue of batch jobs (cruise, then idle, 10 pairs × 3 runs)	v1	L	machines **−15% to −24%** and modelled energy −11% to −17% GAIN in all three of our runs; p95 no difference beyond the noise	`results/live/V1_BATCH.md`
Real Kubernetes, fairness (a noisy neighbour on the same workers, 10 pairs × 3 runs)	v1	L	no difference beyond the noise on every row: Omni-Compass neither helps nor hurts the neighbour	`results/live/V1_FAIRNESS.md`
The same six Kubernetes tests on v3 (10 pairs × 3 runs each)	v3	L	the same readings as v1, the controllers being v1's bytes: all four work inside the line +35% to +49%, p95 −47% to −66% across steady, wandering, all four and faults, failed requests −9% to −14% where they occur, steady machines −1.5% to −2.9%, batch machines −19% to −23% and standby-model energy −13% to −16%, all GAIN in all three of our runs; fairness no difference beyond the noise on every row	`results/live/V3_STEADY.md`, `V3_WANDERING.md`, `V3_ALL_FOUR.md`, `V3_FAIRNESS.md`, `V3_FAULTS.md`, `V3_BATCH.md`
Result	**Engine**	**Class**	**Reading**	**Source**
Real Kubernetes under a public day of demand (the Google cluster trace of 2011 replayed one step	v3	L	p95 **−65% to −71%**, p99 −49% to −61%, time over the line −81% to −84%, failed requests	`results/live/V3_TRACE_GOOGLE2011.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
at a time, 10 pairs × 3 runs)			−8% to −17%, machines in service **−6% to −10%**, replicas −5% to −6%, standby-model energy −4% to −7%, all GAIN in all three of our runs; pods started +23% to +35% as point estimates, inside the noise in one run; 9 rows toward their aims, 0 LOSS or power given	
Real Kubernetes with its add-ons: Omni-Compass on top of KEDA (KEDA 2.21 and its HTTP add-on 0.16, two native setups, 10 pairs × 3 runs each)	v3	L (energy S)	p95 **−51% to −53%** (KEDA on CPU and requests) and **−73% to −76%** (the HTTP add-on alone), time over the line −96% to −100%, GAIN in all three of our runs; machines **−5.9% to −7.8%** with the HTTP add-on, GAIN in all three of our runs, inside the noise with the CPU target; idle-power energy **+1.0% to +2.6%, power given in all three of our runs** in both (more work put through by the closed-loop load, shown, not judged)	`results/live/V3_KEDA_CPU_REQUESTS.md`, `results/live/V3_KEDA_REQUESTS.md`
Result	**Engine**	**Class**	**Reading**	**Source**
The six organisms with the real cluster inside, 1 to 1,000 copies, 5 paired repetitions a cell (3 at 1,000)	v1	L + S	98 of 100 cells: p95 and time over the line GAIN in every cell; 0 gauges LOSS beyond the noise except a rounding-level work loss (−0.0003%)	`results/live/V1_SIX_KUBE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
			and HPA replicas +0.7% in one cell; machines stay at 6 in both arms (no autoscaler under kind); the Physics realm and the tower at 1,000 copies off the clock in 2 of 3 repetitions (marked)	
The same at 10 and 100 copies	v3	L + S	12 cells, 5 pairs each: every cell GAIN on 4 to 6 gauges, LOSS on none beyond the noise except a rounding-level work loss in 4 cells; the stack at 100 copies off the clock in 4 of 5 repetitions (marked)	`results/live/V3_SIX_KUBE.md`
The big organisms at 1,000 copies on rented machines, on v3: the tower (3 of 3) and the four stacked (3 of 3), each on its own machine with a 10,800 s window, every repetition on the clock	v3	L + S	tower: the cluster's p95 **6.7 s → 160 ms (−98%)**, p99 −98%, time over the line 76% → 0, failed requests 4.8% → 0, clear of zero; stack: p95 **2.9 s → 150 ms (−95%)**, p99 −97%, time over the line 51% → 0, failed requests 0.14% → 0, clear of zero; machines 6 in both arms of both; energy inside the noise; the organisms' model work rounding-level lower by rule, energy −0.4%	`results/live/V3_BIG_ORGANISM.md`
Result	**Engine**	**Class**	**Reading**	**Source**
The big organisms at 1,000 copies on a rented machine: the tower (3 of 3) and the four stacked (3	v1	L + S	tower: p95 **−95%** (4.1 s → 0.2 s) and time over the line −99.7% clear of the noise, machines 6 in	`results/live/V1_BIG_ORGANISM.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
of 3, detached)			both arms, energy −0.2%, work rounding-level lower, repetition 3 off the clock; stack: p95 **−74%** and p99 −83% clear of the noise, the compass arm 300 to 615 s past the 2,880 s window in all three (marked OFF THE CLOCK; native kept the clock), which is why the v3 stack runs with a 10,800 s window	
Azure AKS, the bill, steady load, 4 workers, 5 pairs	v1	L (a real bill)	no difference beyond the noise on any gauge; the bill −4.7% with its interval across zero; a fleet of 4 cannot show the lever (10.1)	`results/live/V1_AKS_STEADY.md`
Azure AKS, the bill, a burst sized to the cluster, 4 workers, 5 pairs (repetition 4 lost its native cluster to an Azure API error in the first attempt and was run again by itself)	v1	L (a real bill)	the bill +5.0% with its interval across zero; machines, p95 and failed requests inside the noise; p99 −34% clear of the noise in this one run; B and C to follow	`results/live/V1_AKS_BURST.md`
Result	**Engine**	**Class**	**Reading**	**Source**
PostgreSQL behind PgBouncer, the three untouched workloads, 3 pairs × 3 runs (the set of 10 October, the brain's verdict on the pool, amendment 3)	v3	L	connections held open **−6% to −11% on `select`, GAIN in all three of our runs**; the add above the operator's 20 on `simple_update` refused, nothing bought, nothing lost; `tpcb_hot` inside the noise; work,	`results/live/V3_PGBENCH.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
			latency and host CPU inside the noise everywhere; every pool handed back; the earlier sets whole in `docs/history`	
MySQL under sysbench, the four untouched workloads, 3 pairs × 3 runs (the set of 10 October, the brain's verdict on the pool, amendment 3)	v3	L	the pool held **−10% to −20% on `read_write`, GAIN in all three of our runs**, the pages holding data with it; `burst`, `read_only` and `update_index` inside the noise; work, p95, p99 and CPU inside the noise on every workload; no error; every pool handed back; the three earlier sets whole in `docs/history`	`results/live/V3_SYSBENCH.md`
The 945 muscles and six organisms, modelled, A/B/C	v3	S	reproduced to the last digit in 3 of 3; 0 muscles LOSS or power given; **every organism superior within guardrails** (work per energy +0.1% to +0.3%, work unchanged, time over the line not above native's); on v2 Physics and the tower read a service tradeoff, which the slack gate corrected	`results/realms/REALMS.md`
Result	**Engine**	**Class**	**Reading**	**Source**
The organisms at 1, 10, 100 and 1,000 copies, 1 to 1,000 paired runs a	v3	S	every organism superior within guardrails in every cell of 10 runs or more;	`results/scale/GRID.md`, `results/scale/receipts/`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
cell, 84 of 90 cells			work per energy +0.07% to +0.37%, the same figure at every size; the six cells left (100 and 1,000 runs at 1,000 copies) are beyond the machines available	
Power grid: 11 SimBench grids solved by pandapower, both load models, A/B/C	v1 and v3 (the same table to the digit)	S	with ZIP loads the energy the loads drew GAIN in all three of our runs in all 11 (−1.3% to −1.5%) and the net import in all 11; losses GAIN in all three of our runs in 7 and **power given in 4** (the rural and semi-urban grids with their own generation, +0.6% to +1.5%); tap operations fewer in 10 grids, 4 → 8 a year in one (power given in all three of our runs, the declared cost); no grid more often outside its band	`results/live/V1_PANDAPOWER.md`, `V3_PANDAPOWER.md`
Robot arms, MuJoCo Menagerie, A/B/C	v1 and v3	S	where Omni-Compass moved (Gen3, Panda): peak torque −29% and −10%, tracking error −21%, energy per takt −0.8% and −0.5%, GAIN in all three of our runs; the Panda's copper loss +14% **power given in all three of our runs**; UR5e and iiwa 14 left native by the paired physics trial	`results/live/V1_MUJOCO.md`, `V1_MUJOCO_PANDA.md`, `V3_MUJOCO.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
CityLearn, every district it ships, A/B/C	v1 and v3	S	11 battery districts: electricity bought, daily peak and daily unevenness GAIN in all three of our runs in all 11, carbon in 8; the bill **power given in 7** (the 2023 districts) and ramping higher in 7; 71 score-rows toward their aims, 33 LOSS or power given, 1 where the runs differ (the simulator's own variation); 3 districts with nothing to move; 8 the simulator cannot run	`results/live/V1_CITYLEARN.md`, `V3_CITYLEARN.md`
Drone swarms, gym-pybullet-drones (Crazyflie 2.x, the shipped autopilot as native; Omni on the cruise override inside the autopilot's limits), 20 drones × 4 missions, three cells, A/B/C	v3	S	energy a mission −7% (short), −18% (mixed), −20% (long) and missions a charge +8% to +25%, GAIN in all three of our runs; no late mission, reserve breach, near miss or collision in any arm; tracking error 0.07 → 0.13 m inside its 0.25 m band	`results/live/V3_SWARM.md`
Result	**Engine**	**Class**	**Reading**	**Source**
Apache Kafka as shipped, a consumer group's operator-set size (one broker, 8 partitions; the group at the operator's 2 consumers as native; Omni on the count inside [1, 8]), three untouched	v3	L	exactly nothing: every spend trial abandoned before it was judged, the group at the operator's two, every gauge inside the noise; our trial rule, amended as amendment 3, the next set running; the first set (work inside	`results/live/V3_KAFKA.md`, `results/live/V3_KAFKA_SERVICE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
workloads, 3 pairs × 3 runs, under both objectives (the set of 10 October, the brain's verdict on the count, amendment 2)			the line +16% to +21%, p95 1.6 s → 9 to 14 ms, consumers 2 → 6 to 8 power given in all three of our runs) whole in `docs/history/V3_KAFKA_set1.md`	
Redis as shipped, a cache's operator-set memory ceiling (64 MB, allkeys-lru as native; Omni on the ceiling inside [16, 512] MB through Redis's own console), three untouched workloads, 3 pairs × 3 runs, under both objectives (the set of 10 October, the brain's verdict on the ceiling, amendment 2)	v3	L	exactly nothing: the allowance one notch each way, most trials abandoned before they were judged, every gauge inside the noise; amendment 3, the next set running; the first set (work inside the line +14% to +27%, the ceiling 64 → 200 to 270 MB power given in all three of our runs) whole in `docs/history/V3_REDIS_set1.md`	`results/live/V3_REDIS.md`, `results/live/V3_REDIS_SERVICE.md`
MongoDB as its publisher ships it, a database's operator-set storage-engine cache size (512 MB as native; Omni on the cache size inside [256, 2,048] MB through the server's own console), YCSB's workloads b, c, f and burst untouched, 3 pairs × 3 runs (the set of 10 October, the brain's verdict on the cache, amendment 2)	v3	L	the cache held **−3% to −13% on `f`, GAIN in all three of our runs**; `b`, `c` and `burst` inside the noise; work, p95, p99, mean latency and CPU inside the noise on all four; no failed operation; every cache handed back; the two earlier sets whole in `docs/history`	`results/live/V3_YCSB.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
Robustness: the governor killed outright mid-run (SIGKILL at 40% of the window, the watchdog beside it), 10 pairs × 3 runs (the set of 10 October)	v3	L	every setting back within the allowance in every repetition of every run, a second governor to the end in every one; the whole window mean response −33% to −40%, p95 −27% to −48%, time over the line −32% to −36%, GAIN in all three of our runs; failed requests, machines and energy inside the noise; the first set (7 to 11 s to hand back) whole in `docs/history/V3_ROBUST_KILL_set1.md`	`results/live/V3_ROBUST_KILL.md`
The governor's own cost at 1, 10, 100 and 1,000 copies with the real cluster inside	v3 and v1, each under its own engine	L	0.006 to 0.013 of one core at every size, 0.1% to 0.3% of the host's cores; shown, not judged	`results/live/V3_OWN_COST.md`
Scale: the controller governing 50, 500 and 1,000 stand-in nodes (KWOK's nodes, no machines behind them), decision time and correctness	every push	L	runs on every push	`results/scale/`
Result	**Engine**	**Class**	**Reading**	**Source**
GPU, one card and the card inside the organisms	earlier card controller	P	**obsolete**: every earlier card result ran on a controller since replaced; the one-card, card-inside-1,000-copies and eight-card runs are run again by the founder on rented cards after the	`docs/GPU_PREREGISTRATION.md`, `docs/GPU_RUN_GUIDE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Engine	Class	Reading	Source
			CPU and cloud work, at one named commit	

Running now (9 October): both big organisms at 1,000 copies done on rented machines (the four stacked and the whole tower, 3 of 3 on the clock each, section 16.2); the three database tables re-read on their second or third counted sets after the costs the first sets charged to the governor were traced to our own harness and removed (section 16.4; the amendments in sections 10.2, 10.8 and 10.9); the robustness test (`docs/ROBUSTNESS_PREREGISTRATION.md`), the kill scenario and the two-hour long run both done (section 16.4b), the 24-hour run on three rented machines in its second (omni) arm (one pair a machine, two arms of a day each, collected on 10 October); the real cluster under a public demand trace done (the Google cluster trace of 2011, `V3_TRACE_GOOGLE2011.md`, section 16.1), the Azure Functions trace next by the same rule; the real cluster with its add-ons done for KEDA and its HTTP add-on (`V3_KEDA_CPU_REQUESTS.md`, `V3_KEDA_REQUESTS.md`, section 16.1), Karpenter on Azure next; YCSB on MongoDB done (`V3_YCSB.md`, section 16.4), MySQL's buffer pool under sysbench done (`V3_SYSBENCH.md`, section 16.4), the other stores of register row 24 after; and Azure steady and burst on the fleet of several machine families (seven dispatches refused by Azure's own cluster capacity in eastus or held by our own machines' quota, 34 refusals, amendments 5 to 8; the eighth dispatch follows the 24-hour machines' collect). **Queued, in order, in `docs/REGISTER.md` Chapter 9**: drone swarms and defense edge (PX4 and ArduPilot multi-vehicle, Crazyswarm), databases and caches at large (YCSB, HammerDB), Spark, OpenSearch, fio, Open-RMF, the 24-hour robustness run, spacecraft attitude and thrusters (Basilisk), station-keeping (Orekit, GMAT), constellations, rockets (RocketPy, OpenRocket) and combustion (Cantera). Pure physics solvers (OpenFOAM, SU2, REBOUND, GADGET, MESA) are not benchmarked: they have no controller and no knob, so Omni-Compass has no place on them; their value is the HPC cluster that runs them.

16.6b Wire in, or watch: the verdict per knob

The founder's order of 9 October 2026 made a principle of what section 1.2 describes as a mechanism: Omni-Compass need not be wired into every muscle. Where it cannot beat the native controller on the muscle's own gauges, the muscle lives by itself and Omni only reads it, one wire out and no wire in. `tools/wiring_verdicts.py` applies that principle to every published result and prints the page `docs/WIRING_VERDICTS.md` (one row per knob and per muscle in `results/WIRING_VERDICTS.csv`; `verify.py` fails if the page differs from what the tables give). The rule is the same for every table: a knob reads **write** where at least one judged gauge is GAIN in all three of our runs and none is LOSS or power given in all three of our runs; **watch** where nothing is GAIN in all three of our runs, whether the rows are inside the noise, the runs disagree, or a gauge is LOSS or power given in all three of our runs with nothing against it (the LOSS is then named with its cause); and **operator's choice** where GAIN and LOSS (or power given) both hold in all three of our runs, a trade shown with both readings of the index. A modelled muscle takes its word from its realms label (`results/realms_v5`): a GAIN on work,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

speed or misses is write, the energy the max took for it power given and never a trade; SAME AS NATIVE and AT ITS LIMIT ON NATIVE are watch.

What the page says on the engine that stands (16 October). On the real stacks, 10 of 26 knob-cases write, 2 are the operator's choice and 14 watch (the sets of 10 October on omni-v3 and the four v6 tables; each row names its engine and the v3 rows run again on v6). Of the independent simulators' 39 cases, 21 write, 15 are trades (the four SimBench grids that export, where the lower voltage costs line losses; the seven 2023 CityLearn districts, where the bill read power given) and 3 watch (two robots the engine itself left native, one grid where nothing was bought). Of the 1,107 modelled muscles on the v5 realms result, 527 write and 580 watch: 421 of the 580 are at their limit on native (every admission knob, 96 power knobs and 50 capacity and setpoint knobs that native already runs at the top of their range: nothing to push, read and left native) and 159 read the same as native (40 wrote and nothing moved beyond the noise, 119 wrote nothing). Every one of the seven organisms writes under every load, the power given shown beside its gain. Of the 14 organism cells with the real cluster inside, 12 write on the cluster's gauges, one is the operator's choice and one watches. Nothing on the page changes the engine, which stays the engine that stands (omni-v6); it changes what an operator connects.

The same verdict, live (built 9 October, running since 10 October). The page judges after the fact; the founder's order is that the brain judge in real time, on the knob, before it writes. On the five live stacks that is now in the harnesses (section 9.4; `tools/knob_verdict.py` around the engine's own verdict, the engine unchanged): every knob starts in watch and is written only inside the allowance a paired trial on the stack itself has earned under the declared objective, one notch a trial; a refused step is not taken, a trial holds the knob, a fail-up never spends beyond the allowance, the operator's setting is always free. The amendments are declared in the five preregistrations with the expectation written before the runs (Redis left native under the resource objective, the first notch refused; Kafka allowed step by step while each consumer pays; PostgreSQL's add above the operator's setting refused on `simple_update`; MySQL's `read_write` chunks refused; MongoDB's cache given back a notch a trial). The runs were dispatched on 10 October, three a stack and objective, in the day's rerun of every benchmark on one commit (`docs/RERUN_2026-10-10.md`), and the tables, the index and the page are then read again from them.

16.6c The second set of 10 October, and the four rules it taught the trial

The five live products ran a second time on 10 October on the amended trial rule (a spend trial runs to its samples; it is never ended by the calm it causes). The trials finished. The brain still refused the Kafka consumer almost every time, and in the one repetition where it allowed the third consumer early, the whole gain of the earlier law came back at a fraction of the spend: the 95th-percentile delay fell from 2,450 ms to 57 ms, the queue from 3,375 waiting messages to 253, the work inside the line rose 17%, with 2.52 consumers on average where the earlier law had spent 5.8 to 7.9. On Redis with the large working set the brain allowed 15 MB more memory and bought more hits, more work and less host CPU, a row the earlier law never showed because it spent 200 MB; with the small working set nothing changed. PostgreSQL gave back about a tenth of its pool with the service inside the noise.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The Kafka reading is the finding. The gain is real and cheap; the brain's test of it is unreliable, and the fault is in how the harness measures, not in the law or the engine's judge. The cost sample it is shown is the age of the backlog, which does not fall until the backlog is gone. A consumer joining the group rebalances it and the settle time is eaten by the pause. The reference and the trial phases, fourteen seconds each, straddle a thirty-second load step and compare different loads. Four rules follow for the trial, written into the next engine (`docs/OMNI_V4_PLAN.md`): samples count only once the muscle reports itself settled; a spend on a queue or a cache is judged by the muscle's own reading, the lag and its drain rate, the misses, with the body's cost taken at the settled state; the reference and the trial are compared at the same load, else the trial waits for a steady step; and coarse to fine, one scout step to the far side of the cover when single notches read flat, so a hill of forty notches is not refused one notch at a time. The founder's words of the same day say it in one line: what the brain sends to a muscle has to coincide with what the muscle reports about itself and where it stands.

The next engine, Omni v4, is ordered on that day: one body, one brain, one tick a second; the body's cost judged; nothing anywhere pushed to a LOSS to move one thing to a GAIN; one trial at a time inside a body; nothing permanent; the wall belonging to the body; every wire forced through it. Part II gains its chapter when v4 is written and run, and every result in this chapter is run again on it.

Threats to validity, stated by us

A referee will look for the ways these results could mislead. We list the ones we know, what each would do to the numbers, and what the record does about it.

1. **The machines are shared.** Every Kubernetes, database, broker and cache run is on one GitHub runner with four cores, and the governor, the load generator, the probe and the system under test share it. A governor that costs CPU can slow the service it governs, and a noisy neighbour on the host can move a run. The pairing on one runner with rotated order removes the between-machine noise; the host's own busy share is recorded beside every run; the governor's own CPU is a gauge in every table and a loss in all three of our runs where it is one (the database, Kafka's light workload); and three separate runs on separate machines must agree before anything counts.
2. **kind is not a cloud.** Idle machines stay powered and native has no node autoscaler, so a machine given back on kind is a machine-hour in service, not a watt and not a dollar. The energy rows on kind are a declared model and say so on every line. The bill is Azure's test, and its only result so far is inside the noise on a fleet too small to show one machine.
3. **Native is at its knee by design in the broker test.** The Kafka producer's peak offers nine tenths of the capacity measured for the operator's two consumers, so native's queue grows at the high steps and omni's does not. This is the situation the benchmark is of (a group sized for the quiet hours and overrun at the peak), it is preregistered, and it is why the latency ratios are large; the index page and the table say so. A native group sized for the peak would show a smaller latency gain and a smaller consumer cost, and would be a different, also legitimate, benchmark.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

4. **Declared penalties.** The cache's 5 ms store trip on a miss and the broker's 1, 2 or 5 ms of CPU per message are declared parameters of our own application, not measurements of anyone's store. The gauges that depend on them (work inside the line, the request latency) scale with them; the hit rate, the lag, the consumers and the memory held do not.
5. **Simulators are models.** Every S result is a statement about a published model under its own controller. A model may flatter or punish the governor in ways the real plant would not. S results are therefore shown beside the index and never inside it, and the muscles' models are the simplest physics that reproduces the meter's response to the knob, with the native controllers tuned as their authors ship them.
6. **The tuning case was seen.** Every benchmark's rules were set on one tuning case, and that case is shown and not counted. Where a rule changed after a counted result was seen (the swarm table's reproduction tolerance), the amendment is written in the preregistration with its time and reason, the table says so, and the runs were not rerun.
7. **The engine changed twice.** v1 to v2 added muscles without touching the law; v2 to v3 added one gate. Every result is labelled with its engine, the tools refuse to mix engines, and the v1 results stay as v1 results. A reader comparing a v1 number with a v3 number is comparing two engines, and the manual never does so except to say that the controllers were the same bytes and the readings the same.
8. **Three runs are three, not thirty.** The three-run rule is a replication standard, not a large sample. A row the same in all three of our runs of ten pairs is a row whose paired difference cleared zero in each of three independent samples of ten; the intervals are shown so a reader can judge their width. Where the intervals are wide, the manual says the test lacked power rather than calling the result a null.
9. **The founder's own harness.** The application in front of the cache, the producer in front of the broker, the load generator and the probe are ours. They are declared, versioned, archived with every run and reproducible from the repository; they are not independent of us. The independent pieces are the systems under test, their native controllers, the simulators and their shipped controllers, and the benchmark tools (pgbench, kind, Kubernetes, PyBullet, MuJoCo, pandapower, CityLearn) that others wrote. The load schedules of the Kubernetes tests were ours too, written one step at a time; the public-trace test (`docs/TRACES_PREREGISTRATION.md`) answers that by replaying a day of demand somebody else measured (the Google cluster trace of 2011, then the Azure Functions trace) under the wandering test's own rules, the derivation receipted and committed before the runs; its result (section 16.1) read the same way as the six, p95 65% to 71% faster and machines 6% to 10% fewer, the same in all three of our runs, with no row LOSS.

What is not yet shown, and the open program

Three things this manual does not show, and the program that will show them or show their absence:

- **An energy or bill saving on real machines.** The fleet of 40 workers in nine Azure machine families that can show one machine is preregistered and dispatched on v3; it runs when Azure's region admits a cluster. If the saving is a few percent, a 40-worker fleet can see it; if the saving is not there, the table will say "no difference beyond the noise" on a fleet that could have seen it, and that will be the result.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **The real card.** Every earlier GPU result ran on a controller since replaced. The two-wire governor with the verdict runs on rented cards at one named commit, with the wire check first (`docs/GPU_RUN_GUIDE.md`, `docs/GPU_PREREGISTRATION.md`); until then the card has no result and the manual says so.
- **Robustness over a day.** The governor killed outright is a measured result (section 16.4b: every setting back in 7 to 11 s, thirty times out of thirty), its own cost is tabulated, and the two-hour run is measured three times (no leak, no slowing, every decision expected but a few the cluster's API refused, every setting handed back); the 24-hour run, one pair on each of three rented eight-core machines of three families, is under way (`docs/ROBUSTNESS_PREREGISTRATION.md`, scenario 2b) and is read when its machines are collected; the same test on the other stacks remains open.
- **A demand shape that is not ours, on more than one trace.** The first public trace (a day of the Google cluster trace of 2011, section 16.1) read the same way as our own schedules, nine rows GAIN in all three of our runs and none LOSS; it is one day of one batch cluster's job arrivals. The Azure Functions invocation trace, a request-driven shape, follows by the same rule, and the "our own schedules" threat of section 16.7 is answered in full only when a second, differently shaped day reads the same way.

The queue beyond these, in order, is `docs/REGISTER.md` Chapter 9, one or two at a time, each preregistered before it runs: PX4 and ArduPilot swarms, YCSB and HammerDB, Spark, OpenSearch, fio, Open-RMF, Basilisk, Orekit and GMAT, RocketPy and OpenRocket, Cantera. When the founder declares the engine final, the engine that stands then is published as Omni-Compass 1.0, and the older fingerprints go to `docs/history` as the road to it.

CHAPTER 49

Wire In, or Watch: The Verdict per Knob

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

How to read this receipt. Every judged row reads one of three words, decided by what its gauge is for and never by the plus or minus sign of its number. **GAIN**: the gauge moved toward its declared aim against native (more work done, a shorter wait, fewer misses or failures, or a resource cut). **EVEN**: native and Omni-Compass could not be told apart (the 95% interval includes zero: no difference beyond the noise), or the knob is at its limit on native. **LOSS**: the gauge moved away from its aim (less work done, a longer wait, more misses or failures). A resource spent or held (energy, machines, memory, processor time, a bill) that fell is a cut, a GAIN; one that rose is **power given**, what Omni-Compass put in to buy the work and the speed shown beside it, always shown and never called a loss. So a minus can read GAIN (a response time cut) and a plus

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

can read LOSS (failed requests up). A reading counts when it holds the same way in all three of our runs, A, B and C, with every interval clear of zero; **the runs disagree** names a test unstable there; **shown, not judged** is a gauge declared shown only. The output follows the input: every reading is the result of the tune, the wiring and the load it names, and where a reading elsewhere differs the first presumption is the wiring (`DISCLOSURES.md`, section 4). The full key, letter by letter: `docs/HOW_TO_READ_THE_RESULTS.md`. Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

Omni-Compass is wired **out of** every muscle: it reads every reading. It is wired **into** a knob only where the paired measurement shows no gauge of the muscle read **LOSS** against native. Where the measurement shows nothing (**EVEN**), or shows a LOSS, the muscle stays native and Omni only watches it: one wire out, no wire in. This is not a new rule. It is what the engine does on the muscle itself before it moves anything (`omnicompass/verdict.py`: the paired trial, and the verdict **left native** where no step is allowed), and it is the watch arm of every realms run (`docs/REALMS_PREREGISTRATION.md`: the governor reads every period and writes nothing). This page applies the same principle to every published result, one verdict per knob, so that an operator can see which knobs earn a wire in and which stay native. The founder's order of 9 October 2026: where Omni cannot beat native, the muscle lives by itself; we only wire out of it.

Every verdict here is computed by `tools/wiring_verdicts.py` from the test's own result file; nothing is typed in, and `verify.py` fails if this page differs from what the tables give. One row per knob and case: `results/WIRING_VERDICTS.csv` (1215 rows, the 1,107 modelled muscles included one by one, and the seven organisms under three loads).

The rule

Every judged gauge of a table counts (rows marked "shown, not judged" never do). Every reading is **GAIN**, **EVEN** or **LOSS**, decided by what the gauge is for and never by the sign of its number (the key: `docs/HOW_TO_READ_THE_RESULTS.md`): response times and failed requests are time waited, missed or failed, so a fall is GAIN; work done is GAIN when it rises; machines, energy, memory, connections, consumers and processor time are resources spent, so a fall is a cut, a GAIN, and a rise is **power given**, the price named beside what it bought. Each gauge's aim is its preregistration's; an operator whose aim differs reads the same numbers the other way. A knob reads:

- **write**: at least one gauge GAIN in all three of our runs, and no LOSS and no power given. Omni holds the knob.
- **watch**: no GAIN in all three of our runs. The knob stays native; Omni reads it and writes nothing. Where a gauge read LOSS or power given in all three of our runs, it is named and its cause given below. Where the runs disagree, nothing is settled and the knob stays native until it is.
- **operator's choice**: GAIN, and LOSS or power given, both the same in all three of our runs: a trade. Both readings of the Omni index are shown where the test is in it (the resource reading, the preregistered

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

headline, and the service reading, work and speed alone), and the side that pays is named. The operator who wants the gain and can pay the price wires in; every other operator watches.

A modelled muscle (the 1,107 on their plants under its own load and work waiting in line, `results/realms_v5/MUSCLES_V5.csv`, engine omni-v5 at the max, the law omni-v6 carries unchanged) takes its verdict from its label by rule: a GAIN on work, speed or misses (MORE WORK, FASTER, FEWER MISSES, alone or together, on every load it ran) is write, and the energy the max took for it is power given, shown beside it and never a trade (the founder's order of 13 October); SAME AS NATIVE is watch, nothing moved beyond the noise; AT ITS LIMIT ON NATIVE is watch by design, the knob already at the top of its range on native, read and left native.

The count

Where	Knobs or cases	Write	Operator's choice	Watch
Real stacks, three runs each (Kubernetes under seven demands; the pool, the consumer group, the memory ceiling, the storage-engine cache and the buffer pool, each under its untouched workloads)	26	10	2	14
Independent simulators, three runs each (robot arms, grids, districts, swarms; evidence class S)	39	21	15	3
The 1,107 modelled muscles, alone on their plants under two loads (evidence class S)	1107	527	0	580
The organisms with the real cluster inside (GitHub at 10 and 100 copies; Azure at 1,000)	14	12	1	1

In words: on the real stacks Omni earns its wire in on 10 of 26 knob-cases, trades on 2 and watches on 14. Of the 1,107 modelled muscles, 527 earn a wire in and 580 stay native: 421 of the 580 are at their limit on native (the knob already at the top of its range: nothing to push, read and left native) and 159 read the same as native (nothing moved beyond the noise). A knob left native costs nothing and earns nothing; it needs no wire in, and the page below says so muscle by muscle.

The real stacks (evidence class L: live software, three separate GitHub runs on the frozen engine)

The reading of every judged gauge is in the test's own table (the Source column). The index columns are the two readings of `results/OMNI_INDEX.md` for that test, where it has one.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Real Kubernetes: one knob under seven demands

The knob: the autoscaler's replicas, the floor and the machines, on top of the Horizontal Pod Autoscaler (kind clusters on GitHub, ten pairs a run).

Demand	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
steady work	machines cut 1.7% to 2.0%, machine-hours cut 1.7% to 2.0%, standby-model energy cut 1.3% to 1.8%, mean response cut 47% to 48%, p95 cut 64% to 66%, p99 cut 69% to 73%, time over the line cut 97% to 99%	none	**write**	+30.5%	+68.8%	7 gauges GAIN in all three of our runs (machines cut 1.7% to 2.0%, machine-hours cut 1.7% to 2.0%, standby-model energy cut 1.3% to 1.8%, mean response cut 47% to 48% and 3 more), none LOSS or power given; 5 gauges EVEN, inside the noise. Omni holds the knob	`results/live/V3_STEADY.md`
Demand	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
demand that wanders	parked-worker energy cut 0.1% to 0.4%, mean response cut 45% to 50%, p95 cut 56% to 64%, time over the line cut	none	**write**	+37.0%	+156.5%	5 gauges GAIN in all three of our runs (parked-worker energy cut 0.1% to 0.4%, mean response cut 45%	`results/live/V3_WANDERING.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Demand	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
	36% to 42%, failed requests cut 12% to 13%					to 50%, p95 cut 56% to 64%, time over the line cut 36% to 42% and 1 more), none LOSS or power given; 8 gauges EVEN, inside the noise. Omni holds the knob	
all four at once	work inside the line up 54% to 68%, mean response cut 43% to 48%, p95 cut 57% to 62%, time over the line cut 38% to 41%, failed requests cut 11% to 14%	none	**write**	+41.7%	+100.9%	5 gauges GAIN in all three of our runs (work inside the line up 54% to 68%, mean response cut 43% to 48%, p95 cut 57% to 62%, time over the line cut 38% to 41% and 1 more), none LOSS or power given; 9 gauges EVEN, inside the noise. Omni holds the knob	`results/live/V3_ALL_FOUR.md`
Demand	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
a noisy neighbour	none	none	**watch**	+0.0%	+0.0%	every judged gauge EVEN (16	`results/live/V`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Demand	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
						inside the noise, 3 the same), the neighbour's own rows included: beside a noisy neighbour no gauge moved, so under this demand the knob has nothing to move. The same knob writes under the other six demands	`3_FAIRNESS.md`
faults	mean response cut 34% to 51%, p95 cut 58% to 63%, time over the line cut 27% to 43%, failed requests cut 14% to 18%	none	**write**	+36.6%	+154.8%	4 gauges GAIN in all three of our runs (mean response cut 34% to 51%, p95 cut 58% to 63%, time over the line cut 27% to 43%, failed requests cut 14% to 18%), none LOSS or power given; 9 gauges EVEN, inside the noise. Omni holds the knob	`results/live/V3_FAULTS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Demand	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
a queue of jobs	machines cut 16% to 20%, machine-hours cut 16% to 20%, standby-model energy cut 11% to 14%, mean response cut 11% to 13%, machines after the queue cut 26% to 33%	none	**write**	+16.5%	+14.1%	5 gauges GAIN in all three of our runs (machines cut 16% to 20%, machine-hours cut 16% to 20%, standby-model energy cut 11% to 14%, mean response cut 11% to 13% and 1 more), none LOSS or power given; 10 gauges EVEN, inside the noise. Omni holds the knob	`results/live/V3_BATCH.md`
Demand	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
a public day of demand (Google 2011)	machines cut 7.3% to 9.2%, machine-hours cut 7.4% to 9.2%, parked-worker energy cut 0.3% to 0.4%, standby-model energy cut 5.3% to 6.7%, mean response cut 51%	none	**write**	+46.4%	+187.5%	10 gauges GAIN in all three of our runs (machines cut 7.3% to 9.2%, machine-hours cut 7.4% to 9.2%, parked-worker energy cut 0.3% to 0.4%, standby-model energy cut 5.3%	`results/live/V3_TRACE_GOOGLE2011.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Demand	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
	to 53%, p95 cut 64% to 66%, p99 cut 60% to 62%, time over the line cut 81% to 82%, failed requests cut 11% to 18%, replicas cut 3.8% to 8.3%					to 6.7% and 6 more), none LOSS or power given; 3 gauges EVEN, inside the noise. Omni holds the knob	
With its add-ons: KEDA on the CPU target and the live requests in flight, Omni-Compass on top, ten pairs, three runs	mean response cut 36% to 38%, p95 cut 51% to 53%, p99 cut 60% to 62%, time over the line cut 97% to 100%	power given: parked-worker energy up 1.0% to 1.6%	**operator's choice**	+27.5%	+110.1%	GAIN in all three of our runs: mean response cut 36% to 38%, p95 cut 51% to 53%, p99 cut 60% to 62%, time over the line cut 97% to 100%; power given in all three of our runs: parked-worker energy up 1.0% to 1.6%	`results/live/V3_KEDA_CPU_REQUESTS.md`
Demand	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
With its add-ons: KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top, ten pairs,	machines cut 5.9% to 7.8%, machine-hours cut 5.8% to 8.2%, mean response cut 59%, p95 cut	power given: parked-worker energy up 1.4% to 2.6%	**operator's choice**	+59.5%	+284.1%	GAIN in all three of our runs: machines cut 5.9% to 7.8%, machine-hours cut 5.8% to 8.2%,	`results/live/V3_KEDA_REQUESTS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Demand	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
three runs	73% to 76%, p99 cut 70% to 72%, time over the line cut 96% to 97%, replicas cut 14%					mean response cut 59%, p95 cut 73% to 76% and 3 more; power given in all three of our runs: parked-worker energy up 1.4% to 2.6%	

Real database (PostgreSQL behind PgBouncer, GitHub)

The knob: the pooler's pool size (server connections).

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
select	none	none	**watch**	+0.0%	+0.0%	everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_PGBENCH.md`
Workload	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
simple_update	none	power given: connections most at once up 8% to 12%	**watch**	+0.0%	+0.0%	the runs disagree on connections held open (-4.0% to +2.2%). Why: connections most at once up 8% to 12%	`results/live/V3_PGBENCH.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
						(power given), because amendment 1's add rule ("slow, clients waiting for a server: add") fired 4 to 15 times an arm on this slow write workload and bought servers above the operator's 20, up to 36 at the peak; work, latency and CPU inside the noise, so nothing was bought for them (`docs/POSTGRES_PREREGISTRATION.md`, the second set). The rule stands as written and the verdict for this workload is to watch.	
tpcb_hot	connections held open cut 7% to 13%	none	**write**	+2.8 %	+0.0 %	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PGBENCH.md`

Real messaging (Apache Kafka, GitHub)

The knob: the consumer group's size.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
tuning (tuning workload: shown, never	consumers running cut 0.3%	none	**write** (not counted)			No LOSS and no power given: Omni holds the knob.	`results/live/V3_KA`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
counted)							FKA.md
burst	consumers running cut 0.8%	none	**write**	+0.2 %	+0.0 %	No LOSS and no power given: Omni holds the knob.	results/live/V3_KAFKA.md
heavy	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (13 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	results/live/V3_KAFKA.md
light	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (13 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	results/live/V3_KAFKA.md

Real cache (Redis, GitHub)

The knob: the cache's memory ceiling.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
tuning (tuning workload: shown, never	work inside the line up 4.4% to 4.9%, hit rate up 4.4% to 5.0%,	power given: memory ceiling held up 19% to 26%, memory	**operator's choice** (not counted)			Why: memory ceiling held up 19% to 26% (power given),	results/live/V3_

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
counted)	mean cut 14% to 16%	used up 16% to 21%				because the knob itself: the ceiling grows while the cache is full and misses, so a wide working set is held instead of evicted; the memory is the price of the hit rate, declared in advance as the gauge expected to rise: the power given (`docs/REDIS_PREREGISTRATION.md`, the gauges); memory used up 16% to 21% (power given), because the memory actually used follows the ceiling: the working set the operator's 64 MB could not hold is held.	`REDIS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
burst	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_REDIS.md`
large	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (10 gauges inside the noise, 2 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_REDIS.md`
small	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_REDIS.md`

Real database cache (MongoDB under YCSB, GitHub)

The knob: the storage engine's cache size.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
tuning (tuning workload: shown, never counted)	none	none	**watch** (not counted)			the runs disagree on p95 (-0.3% to +2.1%); everything EVEN in all three of our runs (9 gauges inside the noise, 1 the same). Nothing is settled here, so the knob stays native until three runs agree.	`results/live/V3_YCSB.md`
b	none	none	**watch**	+0.0%	+0.0%	everything EVEN in all three of our runs (10 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_YCSB.md`
burst	cache size held cut 10% to 13%, cache in use cut 10% to 13%	none	**write**	+3.1%	+0.0%	No LOSS and no power given: Omni holds the knob.	`results/live/V3_YCSB.md`
Workload	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
c	none	none	**watch**	+0.0%	+0.0%	everything EVEN in all three of our runs (10 gauges	`results/live/V3`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
						inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`_YCSB.md`
f	cache size held cut 13% to 15%, cache in use cut 12% to 14%	none	**write**	+3.7 %	+0.0 %	No LOSS and no power given: Omni holds the knob.	`results/live/V3_YCSB.md`

Real database buffer pool (MySQL under sysbench, GitHub)

The knob: the buffer pool's size.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
tuning (tuning workload: shown, never counted)	none	none	**watch** (not counted)			everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_SYSBENCH.md`
Workload	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Index: resource**	**Index: service**	**Why**	**Source**
burst	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs	`results/live`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workload	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Index: resource	Index: service	Why	Source
						(11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`/V3_SYSBENCH.md`
read_only	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_SYSBENCH.md`
read_write	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_SYSBENCH.md`
update_index	none	none	**watch**	+0.0 %	+0.0 %	everything EVEN in all three of our runs (11 gauges inside the noise, 1 the same). EVEN under this workload: the knob stays native and Omni reads it.	`results/live/V3_SYSBENCH.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Every LOSS and every power given in all three of our runs on a real stack, and why

The founder's question was where the negatives are and why each is there. Every gauge that read LOSS or power given in all three of our runs on a real stack, with its cause read from the preregistration that carries the result:

- **Kubernetes, parked-worker energy: With its add-ons: KEDA on the CPU target and the live requests in flight, Omni-Compass on top, ten pairs, three runs up 1.0% to 1.6%, With its add-ons: KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top, ten pairs, three runs up 1.4% to 2.6%, power given** (157.2 / 159.1 → 159.4 to 161.4 in run A). See the table. Verdict: **operator's choice** on every workload named.
- **PostgreSQL, connections most at once: simple_update up 8% to 12%, power given** (20 → 21.67 in run A). Amendment 1's add rule ("slow, clients waiting for a server: add") fired 4 to 15 times an arm on this slow write workload and bought servers above the operator's 20, up to 36 at the peak; work, latency and CPU inside the noise, so nothing was bought for them (`docs/POSTGRES_PREREGISTRATION.md`, the second set). The rule stands as written and the verdict for this workload is to watch. Verdict: **watch**.

What these have in common: every one is power given, a resource spent to buy the service the knob exists for (consumers and the CPU they poll with, memory, pages, connections), each declared in advance in its preregistration as the gauge expected to rise, or found on the first counted set and disclosed. None is a LOSS: on no real stack did work inside the line, p95 or failed requests read LOSS in all three of our runs. Where the resource was given and nothing was bought (PostgreSQL's `simple_update`), the verdict is watch; where it bought service, the verdict is the operator's, and both index readings say what the trade is worth.

The independent simulators (evidence class S: deterministic models with their own native controllers)

Robot arms (MuJoCo Menagerie, Google DeepMind)

The knob: the servo's speed override inside the takt.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
kinova_gen3	energy per takt cut 0.8%, copper heating per cycle cut 11%, mechanical work per cycle cut 6.6%, peak joint torque cut 29%,	none	**write**	No LOSS: the same job inside the same takt, hit more accurately with less force; the cycle is slower inside the takt (shown, not	`results/live/V3_MUJOCO.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
	tracking error, RMS cut 21%, end-point error at the waypoints cut 11%			judged).	
kuka_iiwa_14	none	none	**watch**	The engine's own verdict: one cycle at full speed and one at override 0.8, in native mode before the counted cycles, showed a slower cycle no cheaper on the robot's own figures (the gravity-holding torque is paid for longer), so the override was left at 1.0 and both arms are the same (`omnicompass/verdict.py`, left native). The trial's figures: 3157.3 J at full speed against 3757.3 J at the trial speed, reproduced over A, B, C: yes	`results/live/V3_MUJOCO.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
universal_robots_ur5e	none	none	**watch**	The engine's own verdict: one cycle at full speed and one at override 0.8, in native mode before the counted cycles, showed a slower cycle no cheaper on the robot's own figures (the gravity-holding torque is paid for longer), so the override was left at 1.0 and both arms are the	`results/live/V3_MUJOCO.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
				same (`omnicompass/verdict.py`, left native). The trial's figures: 189.9 J at full speed against 210.5 J at the trial speed, reproduced over A, B, C: yes	

The power grid (pandapower, SimBench grids)

The knob: the substation's voltage setpoint, one tap at a time.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
1-MV-comm--0-sw (ZIP loads)	energy the loads drew cut 1.5%, energy dissipated in lines and transformers cut 1.0%, net import from the upstream grid cut 2.9%, tap operations cut 34%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-comm--1-sw (ZIP loads)	energy the loads drew cut 1.4%, energy dissipated in lines and transformers cut 0.8%, net import from the upstream grid cut 15%, tap operations cut 36%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
1-MV-comm--2-sw (ZIP	energy the loads drew cut 1.4%, energy	none	**write**	No LOSS and no power given: Omni	`results/live/V`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
loads)	dissipated in lines and transformers cut 0.3%, net import from the upstream grid cut 6.4%, tap operations cut 36%			holds the knob.	`3_PANDAPOWER.md`
1-MV-rural--1-sw (ZIP loads)	energy the loads drew cut 1.4%, net import from the upstream grid cut 1.4%	power given: energy dissipated in lines and transformers up 0.8%, tap operations up 100%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table); taps: the declared cost on a grid that barely taps on its own (4 a year, doubled). The operator who wants the loads' energy and the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	`results/live/V3_PANDAPOWER.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
1-MV-rural--2-sw (ZIP loads)	energy the loads drew cut 1.3%, net import from the upstream grid cut 1.1%, bus-steps outside 0.95-1.05 cut 1.4e-04, tap operations cut 27%	power given: energy dissipated in lines and transformers up 1.5%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table). The operator who wants the loads' energy and	`results/live/V3_PANDAPOWER.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
				the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	
1-MV-semiurb --0-sw (ZIP loads)	energy the loads drew cut 1.4%, energy dissipated in lines and transformers cut 1.0%, net import from the upstream grid cut 7.0%, tap operations cut 38%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-semiurb --1-sw (ZIP loads)	energy the loads drew cut 1.4%, net import from the upstream grid cut 1.1%, tap operations cut 34%	power given: energy dissipated in lines and transformers up 0.7%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table). The operator who wants the loads' energy and the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	`results/live/V3_PANDAPOWER.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
1-MV-semiurb --2-sw (ZIP loads)	energy the loads drew cut 1.4%, net import from the upstream grid cut 0.9%,	power given: energy dissipated in lines and transformers up 1.1%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in	`results/live/V3_PANDAPOWER.m`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
	bus-steps outside 0.95-1.05 cut 1.4e-05, tap operations cut 24%			its lines (the analysis under the table). The operator who wants the loads' energy and the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	`d`
1-MV-urban--0-sw (ZIP loads)	energy the loads drew cut 1.5%, energy dissipated in lines and transformers cut 2.4%, net import from the upstream grid cut 2.0%, tap operations cut 31%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-urban--1-sw (ZIP loads)	energy the loads drew cut 1.5%, energy dissipated in lines and transformers cut 2.4%, net import from the upstream grid cut 2.2%, tap operations cut 30%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-urban--2-sw (ZIP loads)	energy the loads drew cut 1.5%, energy dissipated in lines and transformers cut 2.2%, net import from the upstream grid cut 3.1%, tap operations cut 23%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
1-MV-comm--0-sw (constant-power loads)	energy dissipated in lines and transformers cut 0.5%, net import from the upstream grid cut 0.0%, tap operations cut 31%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-comm--1-sw (constant-power loads)	energy dissipated in lines and transformers cut 0.4%, net import from the upstream grid cut 0.0%, tap operations cut 31%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-comm--2-sw (constant-power loads)	energy dissipated in lines and transformers cut 0.0%, net import from the upstream grid cut 0.0%, tap operations cut 31%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-rural--1-sw (constant-power loads)	none	power given: energy dissipated in lines and transformers up 0.6%, net import from the upstream grid up 0.0%, tap operations up 100%	**watch**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table); taps: the declared cost on a grid that barely taps on its own (4 a year, doubled); import: follows the line heating, hundredths of a percent.	`results/live/V3_PANDAPOWER.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
1-MV-rural--2-sw (constant-power loads)	bus-steps outside 0.95-1.05 cut 1.4e-04, tap operations cut 16%	power given: energy dissipated in lines and transformers up 1.2%, net import from the upstream grid up 0.0%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table); import: follows the line heating, hundredths of a percent. The operator who wants the loads' energy and the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	`results/live/V3_PANDAPOWER.md`
1-MV-semiurb--0-sw (constant-power loads)	energy dissipated in lines and transformers cut 0.9%, net import from the upstream grid cut 0.1%, tap operations cut 29%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
1-MV-semiurb--1-sw (constant-power loads)	tap operations cut 31%	power given: energy dissipated in lines and transformers up 0.6%, net import from the upstream grid up 0.0%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table); import: follows the line heating,	`results/live/V3_PANDAPOWER.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
				hundredths of a percent. The operator who wants the loads' energy and the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	
1-MV-semiurb--2-sw (constant-power loads)	bus-steps outside 0.95-1.05 cut 1.7e-05, tap operations cut 21%	power given: energy dissipated in lines and transformers up 0.9%, net import from the upstream grid up 0.0%	**operator's choice**	Why: line heating: an exporting grid pays the lower voltage in energy dissipated in its lines (the analysis under the table); import: follows the line heating, hundredths of a percent. The operator who wants the loads' energy and the upstream import cut wires in and gives the line heating; the operator who runs the grid to its line heating watches.	`results/live/V3_PANDAPOWER.md`
1-MV-urban--0-sw (constant-power loads)	energy dissipated in lines and transformers cut 1.9%, net import from the upstream grid cut 0.0%, tap operations cut 30%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
1-MV-urban--1-sw (constant-power loads)	energy dissipated in lines and transformers cut 1.9%, net import from the upstream grid cut 0.0%, tap operations cut 27%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`
1-MV-urban--2-sw (constant-power loads)	energy dissipated in lines and transformers cut 1.8%, net import from the upstream grid cut 0.0%, tap operations cut 22%	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_PANDAPOWER.md`

Why the line heating rose on four grids (power given). The lower setpoint carries the grid's power at a lower voltage and therefore a higher current, and the energy dissipated in the lines rises with the square of the current. The four grids where it rose are four of the five that export more than they import (net import negative: rural 1 and 2, semiurb 1 and 2); on the importing grids the loads' own draw falls with the voltage under ZIP loads and the line heating falls with it. Under constant-power loads the loads draw the same at any voltage, so the setpoint saves nothing on the loads and the exporting grids give the line heating with nothing bought. Tap operations, declared in advance as Omni's expected cost (`docs/PANDAPOWER_PREREGISTRATION.md`): this grid barely taps on its own (4 a year), so Omni's moves double a very small count. The verdict on those four grids is the operator's: the loads' energy and the upstream import cut (GAIN) against the lines' heating up (power given); under constant-power loads on 1-MV-rural--1-sw, where nothing was bought, it is watch.

Buildings and batteries (CityLearn, UT Austin)

The knob: the electric batteries' charge and discharge commands.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
ca_alameda_county_neighborhood	electricity bought cut 5.9%, daily peak draw cut 3.6%, highest peak cut 3.0%, ramping cut	none	**write**	No LOSS and no power given: Omni holds the knob.	`results/live/V3_CITYLEARN.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
	3.9%, daily load unevenness cut 1.0%, monthly load unevenness cut 0.7%, distance from zero net energy cut 0.1%				
citylearn_challenge_2022_phase_all_robustness	electricity bill cut 8.6%, electricity bought cut 15%, carbon cut 12%, daily peak draw cut 14%, highest peak cut 2.7%, ramping cut 7.2%, daily load unevenness cut 2.9%, distance from zero net energy cut 6.1%	LOSS: monthly load unevenness up 0.1%	**operator's choice**	Why: the monthly load factor moved by a tenth of a percent against a bill cut 8.6%.	`results/live/V3_CITYLEARN.md`
citylearn_challenge_2023_phase_2_local_evaluation	electricity bought cut 0.3%, carbon cut 0.2%, daily peak draw cut 1.6%, daily load unevenness cut 2.9%, distance from zero net energy cut 0.1%	LOSS: monthly load unevenness up 0.1%, energy not served up 6.0%, time uncomfortable up 0.1%; power given: electricity bill up 0.3%, ramping up 6.2%	**operator's choice**	Why: the 2023 pattern: the bill, the ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis under the table). By rule a trade; by what the battery is for (the bill), a watch.	`results/live/V3_CITYLEARN.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
citylearn_challenge_2023_phase_2_online_evaluation_1	electricity bought cut 0.1%, carbon cut 0.2%, daily peak draw cut 1.3%, highest peak cut 3.5%, daily load unevenness cut 2.0%, monthly load unevenness cut 1.9%, distance from zero net energy cut 0.1%	LOSS: energy not served up 5.5%, time uncomfortable up 0.0%; power given: electricity bill up 0.3%, ramping up 5.6%	**operator's choice**	Why: the 2023 pattern: the bill, the ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis under the table). By rule a trade; by what the battery is for (the bill), a watch.	`results/live/V3_CITYLEARN.md`
citylearn_challenge_2023_phase_2_online_evaluation_2	electricity bought cut 0.2%, carbon cut 0.2%, daily peak draw cut 1.3%, highest peak cut 3.5%, daily load unevenness cut 1.7%, monthly load unevenness cut 1.9%, distance from zero net energy cut 0.1%	LOSS: energy not served up 6.2%, time uncomfortable up 0.1%; power given: electricity bill up 0.3%, ramping up 5.6%	**operator's choice**	Why: the 2023 pattern: the bill, the ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis under the table). By rule a trade; by what the battery is for (the bill), a watch.	`results/live/V3_CITYLEARN.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
citylearn_challenge_2023_phase_2_online_evaluation_3	electricity bought cut 0.2%, carbon cut 0.2%, daily peak draw cut 1.5%, highest peak cut 3.5%, daily load unevenness cut 2.3%, monthly load	LOSS: energy not served up 9.8%; power given: electricity bill up 0.3%, ramping up 5.5%	**operator's choice**	Why: the 2023 pattern: the bill, the ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis	`results/live/V3_CITYLEARN.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
	unevenness cut 1.9%, distance from zero net energy cut 0.1%, time uncomfortable cut 0.0%			under the table). By rule a trade; by what the battery is for (the bill), a watch.	
citylearn_challenge_2023_phase_3_1	electricity bought cut 0.1%, carbon cut 0.1%, daily peak draw cut 2.2%, daily load unevenness cut 4.0%, monthly load unevenness cut 1.2%, distance from zero net energy cut 0.0%	LOSS: energy not served up 2.0%, time uncomfortable up 0.0%; power given: electricity bill up 0.3%, highest peak up 2.5%, ramping up 4.5%	**operator's choice**	Why: the 2023 pattern: the bill, the ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis under the table). By rule a trade; by what the battery is for (the bill), a watch.	`results/live/V3_CITYLEARN.md`
citylearn_challenge_2023_phase_3_2	electricity bought cut 0.1%, carbon cut 0.1%, daily peak draw cut 2.2%, daily load unevenness cut 4.1%, monthly load unevenness cut 0.5%	LOSS: energy not served up 4.1%, time uncomfortable up 0.1%; power given: electricity bill up 0.2%, highest peak up 2.5%, ramping up 4.9%, distance from zero net energy up 0.0%	**operator's choice**	Why: the 2023 pattern: the bill, the ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis under the table). By rule a trade; by what the battery is for (the bill), a watch.	`results/live/V3_CITYLEARN.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
citylearn_challenge_2023_phase_3_3	electricity bought cut 0.1%, carbon cut	LOSS: energy not served up 2.2%, time	**operator'**	Why: the 2023 pattern: the bill, the	`results/live`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
	0.1%, daily peak draw cut 2.6%, daily load unevenness cut 4.7%, monthly load unevenness cut 1.0%, distance from zero net energy cut 0.0%	uncomfortable up 0.0%; power given: electricity bill up 0.3%, highest peak up 2.5%, ramping up 4.8%	**s choice**	ramping and the energy not served up, the electricity bought, the carbon and the daily peak down (the analysis under the table). By rule a trade; by what the battery is for (the bill), a watch.	`/V3_CITYLEARN.md`
tx_travis_county_neighborhood	electricity bought cut 3.0%, daily peak draw cut 1.9%, ramping cut 2.9%, daily load unevenness cut 1.1%, monthly load unevenness cut 0.7%, distance from zero net energy cut 0.6%	none	**write**	the runs differ on time uncomfortable (+0.0%). No LOSS and no power given: Omni holds the knob.	`results/live/V3_CITYLEARN.md`
vt_chittenden_county_neighborhood	electricity bought cut 2.1%, daily peak draw cut 0.8%, ramping cut 1.3%, daily load unevenness cut 0.3%, monthly load unevenness cut 0.2%, distance from zero net energy cut 0.3%	none	**write**	the runs differ on time uncomfortable (+0.0%). No LOSS and no power given: Omni holds the knob.	`results/live/V3_CITYLEARN.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
baeda_3dem			**no knob**	no electric battery in the district (4 buildings, 7 water tanks left native): there is nothing for Omni to hold, so there is nothing to decide; any difference between the arms is CityLearn's own run-to-run variation (scores that differ in A: none; reproduced: yes)	`results/live/V3_CITYLEARN.md`
quebec_neighborhood_with_demand_response_set_points			**no knob**	no electric battery in the district (20 buildings, 0 water tanks left native): there is nothing for Omni to hold, so there is nothing to decide; any difference between the arms is CityLearn's own run-to-run variation (scores that differ in A: time uncomfortable +0.09%; reproduced: no)	`results/live/V3_CITYLEARN.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
quebec_neighborhood_without_demand_response_set_points			**no knob**	no electric battery in the district (20 buildings, 0 water tanks left native): there is nothing for Omni to hold, so there is nothing to decide; any difference between the arms is CityLearn's own run-to-run variation (scores that differ in A: time uncomfortable +0.18%; reproduced: no)	`results/live/V3_CITYLEARN.md`

Why the bill is up in the 2023 districts (power given), with the ramping and the energy not served (LOSS). The seven 2023 challenge districts are small (3 to 6 buildings) and short (720 to 2,208 hours), and in them the energy not served and the comfort rows move, where in the county neighbourhoods they read the same: the compass steers the batteries from the district's electricity reading alone (one wire, one muscle, `docs/CITYLEARN_PREREGISTRATION.md`), flattening the draw it sees, and in these districts that leaves less in the batteries for the hours that count against the bill, the hour-to-hour ramping and the energy not served. The bill, what the battery is bought to lower, is up 0.2% to 0.4% in all three of our runs here (power given), so for the operator who pays the bill this is a watch. The cause is a reading of the tables, not yet tested on its own.

Drone swarms (gym-pybullet-drones, University of Toronto)

The knob: the autopilot's cruise override.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
tuning (the tuning swarm: shown, never counted)	energy per mission cut 16%, fleet energy over the window cut 16%, missions per charge at the autopilot's reserve up 19%	none	**write** (not counted)	the runs differ on closest two drones ever came (-51% to -45%), tracking error, RMS (+88% to +91%), cruise override, mean (+49%). No LOSS: the tracking error is spent inside the compass's band (shown, the runs differ on its exact figure) and no safety gauge moved.	`results/live/V3_SWARM.md`
long	energy per mission cut 20%, fleet energy over the window cut 20%, missions per charge at the autopilot's reserve up 25%	none	**write**	the runs differ on closest two drones ever came (-5.7% to -1.5%), tracking error, RMS (+92% to +93%), cruise override, mean (+52%). No LOSS: the tracking error is spent inside the compass's band (shown, the runs differ on its exact figure) and no safety gauge moved.	`results/live/V3_SWARM.md`
Case	**GAIN in all three of our runs**	**LOSS or power given in all three of our runs**	**Verdict**	**Why**	**Source**
mixed	energy per mission cut 18%, fleet energy over	none	**write**	the runs differ on closest two drones	`results/live`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Case	GAIN in all three of our runs	LOSS or power given in all three of our runs	Verdict	Why	Source
	the window cut 18%, missions per charge at the autopilot's reserve up 22%			ever came (-46% to -42%), tracking error, RMS (+83% to +86%), cruise override, mean (+48% to +49%). No LOSS: the tracking error is spent inside the compass's band (shown, the runs differ on its exact figure) and no safety gauge moved.	`/V3_SWARM.md`
short	energy per mission cut 7.4%, fleet energy over the window cut 7.4%, missions per charge at the autopilot's reserve up 8.0%	none	**write**	the runs differ on closest two drones ever came (-49% to -26%). No LOSS: the tracking error is spent inside the compass's band (shown, the runs differ on its exact figure) and no safety gauge moved.	`results/live/V3_SWARM.md`

The 1,107 modelled muscles, alone on their plants (evidence class S)

Every muscle's own row, with its verdict and the reason, is in `results/WIRING_VERDICTS.csv`; the labels and figures are the v5 realms table's (`results/realms_v5/REALMS_V5.md`, `results/realms_v5/MUSCLES_V5.csv`; engine omni-v5 at the max, every muscle its own card; seeds 3000 to 3009, ten paired seeds a muscle, under its own load and under work waiting in line). The label is the muscle's over every load it ran; the Why column gives each load's own.

Reading (the label over every load, its word first)	Muscles	Verdict
EVEN (at its limit on native)	421	**watch**

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Reading (the label over every load, its word first)	Muscles	Verdict
GAIN (faster + fewer misses)	345	**write**
EVEN (the same as native)	159	**watch**
GAIN (faster)	115	**write**
GAIN (fewer misses)	34	**write**
GAIN (more work + faster + fewer misses)	30	**write**
GAIN (more work + faster)	3	**write**

By knob

Knob	Muscles	Write	Watch: at its limit on native	Watch: the same as native	Of the watch, wrote nothing in any run
capacity	539	472	50	17	58
setpoint	174	44	0	130	111
power	119	11	96	12	96
admission	275	0	275	0	275

By family

Realm: family	Muscles	Write	Watch: at its limit on native	Watch: the same as native
Compute / AI / Cloud: AI Inference Serving	24	15	9	0
Compute / AI / Cloud: AI Training	18	16	2	0
Compute / AI / Cloud: Cloud VM & Capacity	21	20	1	0
Compute / AI / Cloud: Container Resources	25	22	3	0
Compute / AI / Cloud: Cross-Cluster, Multi-Region & Edge	18	10	7	1
Compute / AI / Cloud: DPU SmartNIC & Programmable IO	12	10	2	0
Compute / AI / Cloud: Distributed Cluster Managers	15	8	7	0
Compute / AI / Cloud: GPU Fabric & RDMA	18	14	4	0

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Realm: family	Muscles	Write	Watch: at its limit on native	Watch: the same as native
Compute / AI / Cloud: HPC & Distributed Compute	19	11	8	0
Compute / AI / Cloud: Host CPU & Memory	26	10	16	0
Compute / AI / Cloud: Kubernetes Dynamic Device Allocation	8	7	1	0
Compute / AI / Cloud: Kubernetes Placement & Scheduling	21	16	5	0
Compute / AI / Cloud: Kubernetes Workload Scaling	32	24	8	0
Compute / AI / Cloud: GPU Hardware	22	11	11	0
Compute / AI / Cloud: Node Fleet & Karpenter-Class Control	24	19	5	0
Compute / AI / Cloud: OpenShift & Machine API	9	5	4	0
Compute / AI / Cloud: Quantum Computing Control Simulation	16	11	5	0
Compute / AI / Cloud: Work Admission & Demand Shaping	19	0	19	0
Distribution / Specialized: Cache & Memory Services	16	12	4	0
Distribution / Specialized: Commerce & Payment Systems	15	7	8	0
Distribution / Specialized: Data Analytics & ETL	15	11	4	0
Distribution / Specialized: Database & Transactions	19	14	5	0
Distribution / Specialized: Messaging & Streaming	22	13	7	2
Distribution / Specialized: Network Routing & Switching	19	12	7	0
Distribution / Specialized: Observability & Telemetry	9	6	3	0

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Realm: family	Muscles	Write	Watch: at its limit on native	Watch: the same as native
Distribution / Specialized: Reliability, Security & Recovery	18	9	8	1
Distribution / Specialized: Runtime & Application	21	14	5	2
Distribution / Specialized: Search, Indexing & Vector DB	16	10	6	0
Distribution / Specialized: Service Mesh & API Reliability	16	9	7	0
Distribution / Specialized: Storage Block/File/Object	20	17	3	0
Distribution / Specialized: Telecom RAN & Edge Radio	12	8	4	0
Distribution / Specialized: Workflow, Logistics & Fulfillment	15	10	5	0
Energy / Facility / Industrial: Building & Critical Environment HVAC	15	0	4	11
Energy / Facility / Industrial: Cooling, Chillers & Thermodynamics	18	0	4	14
Energy / Facility / Industrial: Energy Storage & Microgrid	19	14	2	3
Energy / Facility / Industrial: Facility & Grid Optimization	15	9	5	1
Energy / Facility / Industrial: Grid Transmission & Distribution	12	0	8	4
Energy / Facility / Industrial: Industrial PLC & Process Automation	18	0	12	6
Energy / Facility / Industrial: PDU, UPS & Electrical Distribution	18	7	3	8
Energy / Facility / Industrial: Semiconductor Fab & Precision Manufacturing	13	0	11	2
Energy / Facility / Industrial: Water Wastewater & Pumping	12	0	8	4

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Realm: family	Muscles	Write	Watch: at its limit on native	Watch: the same as native
Physics / Robotics / Autonomous: Automotive EV & Mobile Powertrain	14	1	13	0
Physics / Robotics / Autonomous: Aviation & Autonomous Flight	28	14	14	0
Physics / Robotics / Autonomous: Robotics Fleet & Warehouse Automation	17	14	3	0
Physics / Robotics / Autonomous: Robotics Motion Control	26	19	5	2
Physics / Robotics / Autonomous: Spacecraft & Flight Software	14	0	14	0
Energy / Facility / Industrial: Healthcare Critical Environments	13	0	3	10
Distribution / Specialized: Medical Imaging & Clinical Systems	12	3	9	0
Energy / Facility / Industrial: Agriculture & Irrigation	14	0	4	10
Energy / Facility / Industrial: Oil & Gas Pipelines	14	0	6	8
Physics / Robotics / Autonomous: Rail Traction & Train Control	14	0	14	0
Physics / Robotics / Autonomous: Marine Propulsion & Vessel Automation	12	5	7	0
Distribution / Specialized: Ports & Maritime Logistics	12	6	6	0
Energy / Facility / Industrial: Mining & Mineral Processing	14	0	6	8
Energy / Facility / Industrial: District Heating & Cooling	13	0	6	7
Energy / Facility / Industrial: Power Generation & Turbine Control	14	0	4	10
Energy / Facility / Industrial: Renewable Generation & Inverter Control	13	0	7	6

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Realm: family	Muscles	Write	Watch: at its limit on native	Watch: the same as native
Physics / Robotics / Autonomous: Elevators & Vertical Transport	12	0	12	0
Energy / Facility / Industrial: Pharmaceutical & Food Manufacturing	14	0	4	10
Compute / AI / Cloud: Linux Kernel & OS Control	20	9	3	8
Compute / AI / Cloud: Serverless & Functions (FaaS)	9	6	2	1
Compute / AI / Cloud: Virtualization & Hypervisor	9	6	2	1
Distribution / Specialized: Content Delivery & Edge Cache	6	2	2	2
Compute / AI / Cloud: Gut: Data-plane Intake & Waste	8	0	5	3
Compute / AI / Cloud: Skin: Perimeter & Admission	5	1	4	0
Distribution / Specialized: Financial Markets & Trading Systems	14	7	3	4
Compute / AI / Cloud: Media Streaming & CDN	14	5	4	5
Compute / AI / Cloud: Game Servers & Real-Time Interactive	12	7	3	2
Compute / AI / Cloud: Blockchain & Ledger Nodes	10	5	3	2
Compute / AI / Cloud: CI/CD & Build Farms	10	6	3	1

Why the watch muscles are watch

- **421 muscles are at their limit on native.** Native already runs the knob at the top of its range: every admission knob lets everything in while change is permitted (275 admission knobs), a power knob runs the full clock or the full battery power (96 power knobs), and 50 capacity and setpoint knobs sit where native's own controller already has what the plant needs. There is nothing for the max to push; the knob is read and left native, EVEN by design, and no wire in is needed.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **159 muscles read the same as native**: 40 of them wrote and nothing moved beyond the noise on work, speed or misses, 119 wrote nothing because native held the reading and the law had nothing to push. Watch, by rule; these are the room the next engine looks for a gain in, in the toy gate first.

Power given, muscle by muscle

The max buys work and speed; the energy it takes is **power given**, shown beside what it bought and never a trade or a loss (the founder's order of 13 October). The write muscles whose power given on their own load is the largest:

Muscle	Family	Knob	Reading	Misses (pp)	Work	Power given
`db_replicas`	Database & Transactions	capacity	GAIN (more work + fewer misses)	-5.54	+0.27%	+104.31%
`io_capacity`	Database & Transactions	capacity	GAIN (more work + fewer misses)	-6.89	+0.35%	+96.73%
`read_route`	Database & Transactions	capacity	GAIN (more work + fewer misses)	-6.31	+0.35%	+90.41%
`synchronous_replication`	Database & Transactions	capacity	GAIN (fewer misses)	-3.90	+0.39%	+89.14%
`payment_failover`	Commerce & Payment Systems	capacity	GAIN (more work + fewer misses)	-5.71	+0.17%	+88.88%
`buffer_pool`	Database & Transactions	capacity	GAIN (fewer misses)	-3.82	+0.23%	+88.65%
`placement_group`	Cloud VM & Capacity	capacity	GAIN (fewer misses)	-2.49	+0.10%	+88.00%
`parallel_workers`	Database & Transactions	capacity	GAIN (more work + fewer misses)	-3.92	+0.24%	+87.92%
`pulse_duration`	Quantum Computing Control Simulation	setpoint	GAIN (fewer misses)	-0.85	+0.00%	+86.36%
`interruption_response`	Cloud VM & Capacity	capacity	GAIN (fewer misses)	-2.32	+0.14%	+83.97%
`multi_cluster_dispatch`	Cross-Cluster, Multi-Region & Edge	capacity	GAIN (fewer misses)	-2.39	+0.14%	+83.95%
`nodepool_weight`	Node Fleet & Karpenter-Class Control	setpoint	GAIN (more work + fewer misses)	-2.99	+0.19%	+83.62%

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Muscle	Family	Knob	Reading	Misses (pp)	Work	Power given
db_failover	Database & Transactions	capacity	GAIN (more work + fewer misses)	-6.15	+0.44%	+83.17%
kubelet_reserved_resources	Node Fleet & Karpenter-Class Control	capacity	GAIN (fewer misses)	-2.22	+0.26%	+82.84%
asg_min	Cloud VM & Capacity	capacity	GAIN (fewer misses)	-1.53	+0.01%	+82.21%
runner_scale_set_max_runners	CI/CD & Build Farms	capacity	GAIN (fewer misses)	-2.57	+0.31%	+82.16%
checkpoint_rate	Database & Transactions	capacity	GAIN (fewer misses)	-5.18	+0.46%	+81.95%
background_writer	Database & Transactions	capacity	GAIN (more work + fewer misses)	-3.94	+0.26%	+81.69%
pulse_phase	Quantum Computing Control Simulation	capacity	GAIN (fewer misses)	-2.01	+0.00%	+81.01%
db_memory	Database & Transactions	capacity	GAIN (fewer misses)	-5.32	+0.09%	+80.86%

Of the 527 write muscles, 523 took power for their gain on their own load and 4 took none (the gain came from timing, not from more energy). Every muscle's figure, on both loads, is in the CSV.

The organisms

The seven modelled organisms under three loads (every muscle written at once, one brain)

Organism and load	Muscles	Reading	Verdict	Figures
The spine, the muscles every stack runs on, the normal load	267 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.145 pp (-0.176 to -0.115), work +0.000%, power given +0.011%; valid: yes
Compute / AI / Cloud, the normal load	540 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.070 pp (-0.084 to -0.057), work +0.000%, power given +0.009%; valid: yes

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism and load	Muscles	Reading	Verdict	Figures
Physics / Robotics / Autonomous, the normal load	404 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.121 pp (-0.145 to -0.097), work +0.000%, power given +0.010%; valid: yes
Energy / Facility / Industrial, the normal load	480 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.118 pp (-0.144 to -0.093), work +0.000%, power given +0.000%; valid: yes
Distribution / Specialized, the normal load	484 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.067 pp (-0.082 to -0.052), work +0.000%, power given +0.002%; valid: yes
The four stacked, every duplicate kept, the normal load	1908 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.092 pp (-0.106 to -0.078), work +0.000%, power given +0.000%; valid: yes
The whole tower, every muscle once, the normal load	1107 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.051 pp (-0.062 to -0.040), work +0.000%, power given +0.000%; valid: yes
The spine, the muscles every stack runs on, the climb load	267 muscles	GAIN (more work + fewer misses)	**write**	GAIN (more work + fewer misses): misses -0.632 pp (-0.697 to -0.567), work +0.003%, power given +0.039%; valid: yes
Compute / AI / Cloud, the climb load	540 muscles	GAIN (more work + fewer misses)	**write**	GAIN (more work + fewer misses): misses -0.390 pp (-0.421 to -0.358), work +0.002%, power given +0.046%; valid: yes
Physics / Robotics / Autonomous, the climb load	404 muscles	GAIN (more work + fewer misses)	**write**	GAIN (more work + fewer misses): misses -0.317 pp (-0.361 to -0.274), work +0.002%, power given +0.021%; valid: yes

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism and load	Muscles	Reading	Verdict	Figures
Energy / Facility / Industrial, the climb load	480 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.217 pp (-0.247 to -0.187), work +0.000%, power given +0.000%; valid: yes
Distribution / Specialized, the climb load	484 muscles	GAIN (more work + fewer misses)	**write**	GAIN (more work + fewer misses): misses -0.460 pp (-0.489 to -0.431), work +0.003%, power given +0.026%; valid: yes
The four stacked, every duplicate kept, the climb load	1908 muscles	GAIN (more work + fewer misses)	**write**	GAIN (more work + fewer misses): misses -0.349 pp (-0.370 to -0.327), work +0.002%, power given +0.000%; valid: yes
The whole tower, every muscle once, the climb load	1107 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.094 pp (-0.107 to -0.082), work +0.000%, power given +0.000%; valid: yes
The spine, the muscles every stack runs on, the line load	267 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.371 pp (-0.402 to -0.340), work +0.000%, power given +0.038%; valid: yes
Compute / AI / Cloud, the line load	540 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.205 pp (-0.217 to -0.193), work +0.000%, power given +0.045%; valid: yes
Physics / Robotics / Autonomous, the line load	404 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.250 pp (-0.275 to -0.225), work +0.000%, power given +0.030%; valid: yes
Energy / Facility / Industrial, the line load	480 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.117 pp (-0.143 to -0.092), work +0.000%, power given +0.000%; valid: yes

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism and load	Muscles	Reading	Verdict	Figures
Distribution / Specialized, the line load	484 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.142 pp (-0.167 to -0.117), work +0.000%, power given +0.006%; valid: yes
The four stacked, every duplicate kept, the line load	1908 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.176 pp (-0.190 to -0.163), work +0.000%, power given +0.000%; valid: yes
The whole tower, every muscle once, the line load	1107 muscles	GAIN (fewer misses)	**write**	GAIN (fewer misses): misses -0.051 pp (-0.062 to -0.040), work +0.000%, power given +0.000%; valid: yes

An organism's label is the whole's: every muscle written at once. The wiring an operator takes from this page is finer: the write muscles wired in, the watch muscles left native with one wire out. The organism result says the whole, written at once, read GAIN (fewer misses, and under the climb more work) in every organism under every load, the power given shown beside it; this page says which parts carried it.

The organisms with the real cluster inside

The knob is the cluster's (the autoscaler's replicas, the floor and the machines), under the organism's own demand, with the modelled muscles around it. The cluster's gauges decide the verdict; the organism's modelled work and energy are shown beside them and are judged muscle by muscle above.

Cell	Verdict	The table's reading, and the figures	Source
compute_ai_cloud at 10 copies (GitHub)	**write**	each gauge's word: GAIN on 5 (response time (ms), 95th percentile; time over the response line (% of samples); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 6. The cluster's gauges: 2 GAIN (p95 -50.3%, time over the line -31.6%), 0 LOSS, 0 power given. The organism's modelled energy -0.1%.	`results/live/V3_SIX_KUBE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Cell	Verdict	The table's reading, and the figures	Source
physics_robotics_autonomous at 10 copies (GitHub)	**watch**	each gauge's word: GAIN on 3 (organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 8. The cluster's gauges: 0 GAIN, 0 LOSS, 0 power given. The organism's modelled energy -0.1%.	`results/live/V3_SIX_KUBE.md`
energy_facility_industrial at 10 copies (GitHub)	**operator's choice**	each gauge's word: GAIN on 4 (time over the response line (% of samples); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 1 (HPA replicas, mean), EVEN (inside the noise) on 6. The cluster's gauges: 1 GAIN (time over the line -32.6%), 0 LOSS, 1 power given (replicas +0.6%). The organism's modelled energy -0.3%.	`results/live/V3_SIX_KUBE.md`
distribution_specialized at 10 copies (GitHub)	**write**	each gauge's word: GAIN on 5 (response time (ms), 95th percentile; time over the response line (% of samples); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 6. The cluster's gauges: 2 GAIN (p95 -51.7%, time over the line -35.9%), 0 LOSS, 0 power given. The organism's modelled energy -0.2%.	`results/live/V3_SIX_KUBE.md`
Cell	**Verdict**	**The table's reading, and the figures**	**Source**
tower at 10 copies (GitHub)	**write**	each gauge's word: GAIN on 6 (response time (ms), 95th percentile;	`results/live/V3_SIX_KUBE.m`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Cell	Verdict	The table's reading, and the figures	Source
		time over the response line (% of samples); failed requests (%); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 5. The cluster's gauges: 3 GAIN (p95 -41.6%, time over the line -20.1%, failed requests -8.4%), 0 LOSS, 0 power given. The organism's modelled energy -0.3%.	`d`
stack at 10 copies (GitHub)	**write**	each gauge's word: GAIN on 5 (time over the response line (% of samples); failed requests (%); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 1 (organism work), power given on 0, EVEN (inside the noise) on 6. The cluster's gauges: 2 GAIN (time over the line -12.1%, failed requests -8.5%), 0 LOSS, 0 power given. The organism's modelled work -0.0006% (6 parts in a million, rounding level) (LOSS or power given) is a model gauge judged muscle by muscle in the realms table and shown here beside the cluster's. The organism's modelled energy -0.4%.	`results/live/V3_SIX_KUBE.md`
Cell	**Verdict**	**The table's reading, and the figures**	**Source**
compute_ai_cloud at 100 copies (GitHub)	**write**	each gauge's word: GAIN on 4 (time over the response line (% of samples); organism energy (J); organism time over the line (% of steps); organism work per energy),	`results/live/V3_SIX_KUBE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Cell	Verdict	The table's reading, and the figures	Source
		LOSS on 1 (organism work), power given on 0, EVEN (inside the noise) on 7. The cluster's gauges: 1 GAIN (time over the line -9.8%), 0 LOSS, 0 power given. The organism's modelled work -0.0008% (8 parts in a million, rounding level) (LOSS or power given) is a model gauge judged muscle by muscle in the realms table and shown here beside the cluster's. The organism's modelled energy -0.1%.	
physics_robotics_autonomous at 100 copies (GitHub)	**write**	each gauge's word: GAIN on 4 (time over the response line (% of samples); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 1 (organism work), power given on 0, EVEN (inside the noise) on 7. The cluster's gauges: 1 GAIN (time over the line -8.4%), 0 LOSS, 0 power given. The organism's modelled work -0.0011% (11 parts in a million, rounding level) (LOSS or power given) is a model gauge judged muscle by muscle in the realms table and shown here beside the cluster's. The organism's modelled energy -0.1%.	`results/live/V3_SIX_KUBE.md`
Cell	**Verdict**	**The table's reading, and the figures**	**Source**
energy_facility_industrial at 100 copies (GitHub)	**write**	each gauge's word: GAIN on 7 (time over the response line (% of samples); energy, parked workers still on at idle power (Wh); energy (Wh); organism work; organism energy (J);	`results/live/V3_SIX_KUBE.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Cell	Verdict	The table's reading, and the figures	Source
		organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 5. The cluster's gauges: 3 GAIN (time over the line -14.9%, parked-worker energy -0.3%, standby-model energy -0.3%), 0 LOSS, 0 power given. The organism's modelled energy -0.4%.	
distribution_specialized at 100 copies (GitHub)	**write**	each gauge's word: GAIN on 6 (response time (ms), 95th percentile; time over the response line (% of samples); organism work; organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 6. The cluster's gauges: 2 GAIN (p95 -31.9%, time over the line -21.9%), 0 LOSS, 0 power given. The organism's modelled energy -0.2%.	`results/live/V3_SIX_KUBE.md`
tower at 100 copies (GitHub)	**write**	each gauge's word: GAIN on 5 (time over the response line (% of samples); organism work; organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 0, power given on 0, EVEN (inside the noise) on 6. The cluster's gauges: 1 GAIN (time over the line -8.7%), 0 LOSS, 0 power given. The organism's modelled energy -0.4%.	`results/live/V3_SIX_KUBE.md`
Cell	**Verdict**	**The table's reading, and the figures**	**Source**
stack at 100 copies (GitHub)	**write**	each gauge's word: GAIN on 4 (time over the response line (% of	`results/live/V3_SIX_KUBE.m`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Cell	Verdict	The table's reading, and the figures	Source
		samples); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 1 (organism work), power given on 0, EVEN (inside the noise) on 6; OFF THE CLOCK in 3 of 5 repetitions (the organism ended up to 277 s after its window: the machine could not step this many muscles in time, and the cell's last steps saw a cluster at rest). The cluster's gauges: 1 GAIN (time over the line -14.6%), 0 LOSS, 0 power given. The organism's modelled work -0.0008% (8 parts in a million, rounding level) (LOSS or power given) is a model gauge judged muscle by muscle in the realms table and shown here beside the cluster's. The organism's modelled energy -0.4%. Off the clock in 3 of 5 repetitions.	d
Cell	**Verdict**	**The table's reading, and the figures**	**Source**
tower at 1000 copies (Azure)	**write**	each gauge's word: GAIN on 7 (response time (ms), 95th percentile; response time (ms), 99th percentile; time over the response line (% of samples); failed requests (%); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 1 (organism work), power given on 0, EVEN (inside the noise) on 4. The cluster's gauges: 4 GAIN (p95 -97.6%, p99 -97.9%, time over the line -100.0%, failed requests	`results/live/V3_BIG_ORGANISM.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Cell	Verdict	The table's reading, and the figures	Source
		-100.0%), 0 LOSS, 0 power given. The organism's modelled work -0.0004% (4 parts in a million, rounding level) (LOSS or power given) is a model gauge judged muscle by muscle in the realms table and shown here beside the cluster's. The organism's modelled energy -0.4%.	
stack at 1000 copies (Azure)	**write**	each gauge's word: GAIN on 7 (response time (ms), 95th percentile; response time (ms), 99th percentile; time over the response line (% of samples); failed requests (%); organism energy (J); organism time over the line (% of steps); organism work per energy), LOSS on 1 (organism work), power given on 0, EVEN (inside the noise) on 3. The cluster's gauges: 4 GAIN (p95 -94.8%, p99 -96.9%, time over the line -100.0%, failed requests -100.0%), 0 LOSS, 0 power given. The organism's modelled work -0.0006% (6 parts in a million, rounding level) (LOSS or power given) is a model gauge judged muscle by muscle in the realms table and shown here beside the cluster's. The organism's modelled energy -0.4%.	`results/live/V3_BIG_ORGANISM.md`

Not decided here

- **Azure's managed Kubernetes (the bill):** the two tables are on Omni v1 (`results/live/V1_AKS_STEADY.md`, `V1_AKS_BURST.md`) on a 4-worker fleet, where every

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

gauge read EVEN, no difference beyond the noise, but the burst's p99 in one run. A fleet too small to show one machine decides nothing; the fleet that can (`docs/K8S_COMPASS_PREREGISTRATION.md`, the fleet that can show one machine) decides this knob on v3 when it runs. Until then the verdict on Azure is watch, for want of a result rather than because of one.

- **The card (NVIDIA, its own meter):** every earlier card result is obsolete; the current governor has not run on a real card. Nothing to decide yet.
- **The 24-hour robustness machines:** running; they test the governor's own staying power, not a knob's value.

What this means for the wiring

The two-way plug stays one wire in and one wire out (`docs/WIRING_GUIDE.md`). This page decides, per knob, whether the wire in is connected. A knob marked **write** is wired both ways. A knob marked **watch** is wired out only: Omni reads it, learns from it, and never writes it; the native controller lives by itself. A knob marked **operator's choice** is wired out, and in only by the operator who wants that trade. The engine's verdict (`omnicompass/verdict.py`) does the same on the muscle itself at run time, and a knob it has left native is a watch knob whatever this page says. Nothing on this page changes the engine, which stays Omni v3; it changes what an operator connects.

The same verdict, live: the brain decides on the knob before it writes

This page judges after the fact, from published tables. The founder's order of 9 October is that the brain judge in real time, on the knob, before it writes, and that a knob which cannot prove it pays stay native. On the five live stacks (the pool, the consumer group, the memory ceiling, the storage-engine cache, the buffer pool) that is now built into the harnesses: `tools/knob_verdict.py` wraps the frozen engine's own verdict (`omnicompass/verdict.py`, unchanged) around every live knob. The knob starts in watch; a paired trial on the stack itself (the knob held at the deepest step already allowed, then one notch further, under the same traffic) allows one notch at a time under the declared objective, the resource reading of the index by default or the service reading at the operator's choice; a refused step is not taken and not retried for a minute; a trial holds the knob; a fail-up never spends beyond the allowance; the operator's setting is always free. The audit carries the cost sample and the verdict's state every second, the arm record sums it, and the three-run tables print the verdict per workload. It is declared as an amendment in each of the five preregistrations with the expectation written before the runs (Redis: left native under the resource objective; Kafka: allowed step by step while each consumer pays; PostgreSQL: the add above the operator's setting refused on `simple_update`; MySQL: the `read_write` chunks refused; MongoDB: the cache given back a notch a trial). The runs on it were dispatched on 10 October 2026 (`docs/RERUN_2026-10-10.md`); this page is then read again from their tables. Inside the modelled realms the organism still takes one directive for every muscle; the verdict per muscle there is the next engine, Omni v4, designed in `docs/OMNI_V4_PLAN.md` and not built.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Where the brain's verdict stands today, knob by knob. Who decides, in real time, whether a knob pays before it is written, and in which directions (spend: more resource for service; give back: less resource where the service holds):

Where	The knob	Who decides it pays, and when	Directions tried	Engine
The five live stacks: Redis's memory ceiling, Kafka's consumers, PostgreSQL's pool, MySQL's buffer pool, MongoDB's cache	one knob each	`tools/knob_verdict.py` around the engine's verdict: the knob starts in watch; a paired trial on the stack itself before every notch, one notch a trial, under the declared objective	spend and give back, both tried; the operator's setting always free	outside the engine (Omni v3 unchanged); running since 10 October
Kubernetes: the machines	nodes in service	the engine's verdict (`omnicompass/verdict.py`): a paired trial before a machine is taken	give back (a machine taken only when the trial shows the service holds); gas and brake on replicas and the floor by the compass law's band, no trial	Omni v3
The card: the clock ceiling	one 15 MHz step at a time	the engine's verdict: a paired trial per step while the service is calm; no step passing, the card runs as it does alone; the power lid stays at the operator's	give back (slower clock for the same service); the speed floor never under the card's own busy clock	Omni v3 (`omni_controller/gpu_compass.py`)
Robot arms: the speed override; drones: the cruise	one knob each	the engine's verdict on the robot and the swarm; two of four robots left native by it	give back	Omni v3
Where	**The knob**	**Who decides it pays, and when**	**Directions tried**	**Engine**
Power grids: the tap; buildings: the batteries	one knob each	the compass law alone, no trial; the trades on four	the law's own push and pull	Omni v3 (a trial there is the next engine)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Where	The knob	Who decides it pays, and when	Directions tried	Engine
		exporting grids and seven 2023 districts are read from the tables above as the operator's choice		
The 1,107 modelled muscles	each muscle's knob	the max on every muscle, every muscle its own card; the knobs native already runs at the top of their range read and left native	the law's own push and pull	Omni v5 at the max (the law omni-v6 carries), `docs/OMNI_V5.md`
The machine itself: the Linux kernel's frequency ceiling (`docs/CPU_POWER_PREREGISTRATION.md`)	one knob	`tools/knob_verdict.py` around the engine's verdict: every notch down tried on the machine first, under the index's reading for one machine (energy x latency / work) or energy per request inside the line	give back only (the ceiling cannot go above the top; the top always free)	outside the engine; built 10 October, waiting for a machine on the metal, no run yet

CHAPTER 50

The Pilot Protocol and Kit

Pilot Protocol

Before you wire anything: read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Phase 0: Simulation evaluation (evaluator's own environment)

Run `python verify.py`. Pass criterion: VERIFICATION: PASS.

Phase 1: Shadow (2 to 4 weeks)

- Capture: `OUT=capture.csv INTERVAL=15 DURATION=<seconds> POWER_CMD="<site power in watts>" bash fleet/capture/kube_capture.sh` (read-only).
- Replay: `python fleet/capture_replay.py capture.csv --idle-w <W> --dyn-w <W> --site-limit-w <W> --out replay/` gives Omni-Compass's recommended node count, power cap and HPA target per decision.
- Governor in OBSERVE on production telemetry read directly from nodes (kubelet/cAdvisor metrics, power meters, queue depth).
- No write credentials are issued.
- Logged per interval: directive, native actions taken, and the observed outcome.
- Pass criteria, agreed before start: logged directives never violate I1 to I5; counterfactual analysis on at least N recorded incidents shows the directive would have reduced time-to-recovery or energy without a backlog increase beyond an agreed bound.

Phase 2: Guarded control, one loop at a time (4 to 8 weeks)

Order: power capping; node count (Cluster Autoscaler set to observe); replica count (HPA set to observe).

- Each loop is handed over separately, with the reset tested at handover and at exit.
- Pass criteria per loop, fixed in advance: SLO attainment not below the preceding shadow baseline at the agreed confidence level; zero shield invariant violations; energy per unit of completed work reported with confidence intervals.
- Exit: any criterion failed triggers the reset and returns the loop to its native controller.

Scoring your own pilot

Capture the baseline (a period before the controller, or a matched node pool left on your normal autoscaler) and the Omni-Compass period or pool with fleet/capture/kube_capture.sh, then: `python pilot/score.py --baseline baseline.csv --omni omni.csv [--idle-w W --dyn-w W]` It reports node-hours and energy per used CPU core-hour, utilisation, pending-pod minutes and HPA shortfall minutes, each with a bootstrap 95% interval over hourly blocks. Energy is measured if the captures include power_w. Run long enough for at least 24 blocks per side, and compare matched pools at the same time where possible, because traffic changes between periods.

Phase 3: Component retirement

A decision component is retired only after its loop has passed Phase 2 and a one-at-a-time removal shows no degradation (keep-or-remove rule, Manual Chapter 6). Execution and security components are retained.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Reporting

All pilot metrics, including failures, are reported in the same format as the benchmark results.

Omni-Compass shadow pilot kit

What a customer runs first. Omni-Compass watches the cluster read-only beside its own autoscalers. Every 15 seconds it decides what it would do, using the same closure law that was benchmarked. It never writes.

1. `kubectl config use-context <the cluster>`
2. `DURATION=86400 IDLE_W=<watts per idle node> DYN_W=<watts at full load> bash scripts/pilot_shadow.sh`
   - It proves with `kubectl auth can-i` that the identity can read and cannot write, and stops if any write permission exists.
   - It captures telemetry and logs every recommendation to `shadow_out/audit.jsonl`.
   - It writes `shadow_out/SHADOW_REPORT.md`: node-hours used against node-hours Omni-Compass would have used, and the write count, which must be 0.
3. Scoring against a matched baseline: `python pilot/score.py --baseline baseline.csv --omni omni.csv` (bootstrap intervals over hourly blocks).

Guarded control follows `docs/PILOT_PROTOCOL.md`: one loop at a time, the reset tested at each handover.

The kit is exercised end to end on kind by the `live-shadow` workflow.

CHAPTER 51

The GPU Bench

Before you wire anything: read `DISCLOSURES.md`. Omni-Compass acts only through the wires it is given; it cannot be slapped on. If your paired receipts differ from the published benchmarks in direction, the first presumption is wiring: check the installation with section 4.5 of the manual (*Wired right or wired wrong*).

This is the test that answers "does Omni-Compass save real energy?" with the GPU's own power meter. There is no model in it. Nobody has run it yet on real hardware for this repository; the first run is the first real-meter result.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What you need

- A Linux machine with one NVIDIA GPU (a rented cloud GPU works: A100, H100, L4, A10, RTX), the NVIDIA driver and `nvidia-smi`.
- Python 3 with PyTorch built for CUDA (`pip install torch numpy`).
- Root, because setting a GPU power limit (`nvidia-smi -pl`) needs it. Persistence mode on is recommended (`sudo nvidia-smi -pm 1`); the receipt records it either way.

Run it

```
git clone <this repository> && cd <it>
sudo bash scripts/gpu_paired.sh                       # 5 repetitions,
    ↪  10 minutes per arm: about 3 hours
sudo REPS=5 DURATION=300 bash scripts/gpu_paired.sh   # 5-minute arms:
    ↪  about 1.5 hours
```

Options (environment variables): `REPS`, `DURATION` (s per arm), `DRAIN` (s after arrivals stop), `COOLDOWN` (s idle before each arm), `GPU` (index), `SAMPLE_MS`, `INTERVAL` (s between Omni decisions), `SLO_MS` (response-time target; default ten bare service times), `WORKLOAD_ARGS` (e.g. `--n 8192 --target-ms 80`).

Two phases

- `PHASE=smoke` (the default): look for faults and for an effect worth a counted run. Any number of repetitions.
- `PHASE=confirm`: the preregistered test (`docs/GPU_PREREGISTRATION.md`), 10 repetitions. Omni's code must be committed; its files are hashed before the first arm and again after the last, and any change invalidates the run.

```
sudo PHASE=confirm bash scripts/gpu_paired.sh
```

The **primary outcome** is work per energy: requests served per kilojoule the GPU drew.

What it does

1. **Receipt.** GPU name, UUID, VBIOS, driver, kernel, host, persistence mode, power management, the enforced limit, default, minimum, maximum and current power limit, the workload's hash, the mechanism id, git commit (`receipt.json`). The current power limit is the **snapshot**; every arm must start and end at it. The bench refuses to start unless power management is Enabled (otherwise a written limit would not bind).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. **Calibrate once.** The workload times its request at the snapshot limit and picks the request size so one request takes about 50 ms (`calib.json`). Every arm uses the same calibration.
3. **Three arms per repetition, order rotated,** each after `COOLDOWN` s idle:
   - **native**: no Omni process.
   - **watch**: Omni runs, reads the GPU and decides, and is forbidden to write. This is the control: it shows what the machine does with Omni present and silent. If it writes even once, the run is invalid.
   - **omni**: Omni writes the GPU power limit.
4. **The same work in every arm.** `tools/gpu_workload.py` sends one seeded stream of requests (fp16 matrix products) at 30%, 60%, 80%, 30%, 60% and 30% of the GPU's full-power capacity. Every arm gets the same requests at the same moments.
5. **Measured by the device.** `nvidia-smi` samples power draw, temperature, utilisation, the power limit, the **enforced** power limit and the clock-limit reasons every 200 ms for the whole arm (the fields the driver reports, listed in `smi_fields.txt`); RAPL CPU package counters are read at both ends where the machine has them. This is receipt C, the outcome: Omni never supplies it.
6. **Reset.** After the omni arm Omni restores the snapshot limit and reads it back. The script checks the limit after every arm.
7. **The table** (`GPU_REPS.md`): each gauge for native, watch and omni, and three paired contrasts with 95% intervals — observation (watch − native), authority (omni − watch), total (omni − native). If an interval includes zero, it says **not proven**. The result label is chosen by rule (`docs/GPU_PREREGISTRATION.md`, amendment 1): SUPERIOR WITHIN GUARDRAILS, ENERGY IMPROVEMENT WITH SERVICE TRADEOFF, NONINFERIOR / INCONCLUSIVE, NOT ESTABLISHED, AWAY FROM ITS AIM, or INVALID. Also: actuator fidelity (receipt B), control effort and representation fidelity (receipt A). A meter that was not fitted prints UNAVAILABLE. The run folder holds every raw file and `SHA256SUMS.txt`.

What Omni does on the GPU (omni_controller/gpu_governor.py)

Every 2 s it reads the GPU and runs the Omni-Compass engine (the throughput law in `omnicompass/adapter.py`): load is GPU utilisation, power stress is draw over the snapshot limit, heat is temperature over 83 C, queue is response-time pressure. The engine's power cap becomes a power limit, inside hard rules:

- never below the GPU's current draw x 1.3, never below 0.70 of the snapshot (`--min-share`), never below the device minimum, never above the snapshot;
- a busy card (utilisation smoothed over decisions at or over 0.5, `--util-gate`) gets the snapshot limit back at once, and the cap returns only under 0.4;
- optional speed lock (`--baseline-file`, from `tools/gpu_baseline.py` on runs without Omni): the limit follows response time against that baseline, every gauge kept at least 1% faster (`docs/INTEGRATION_MANUAL.md`, level 5);

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

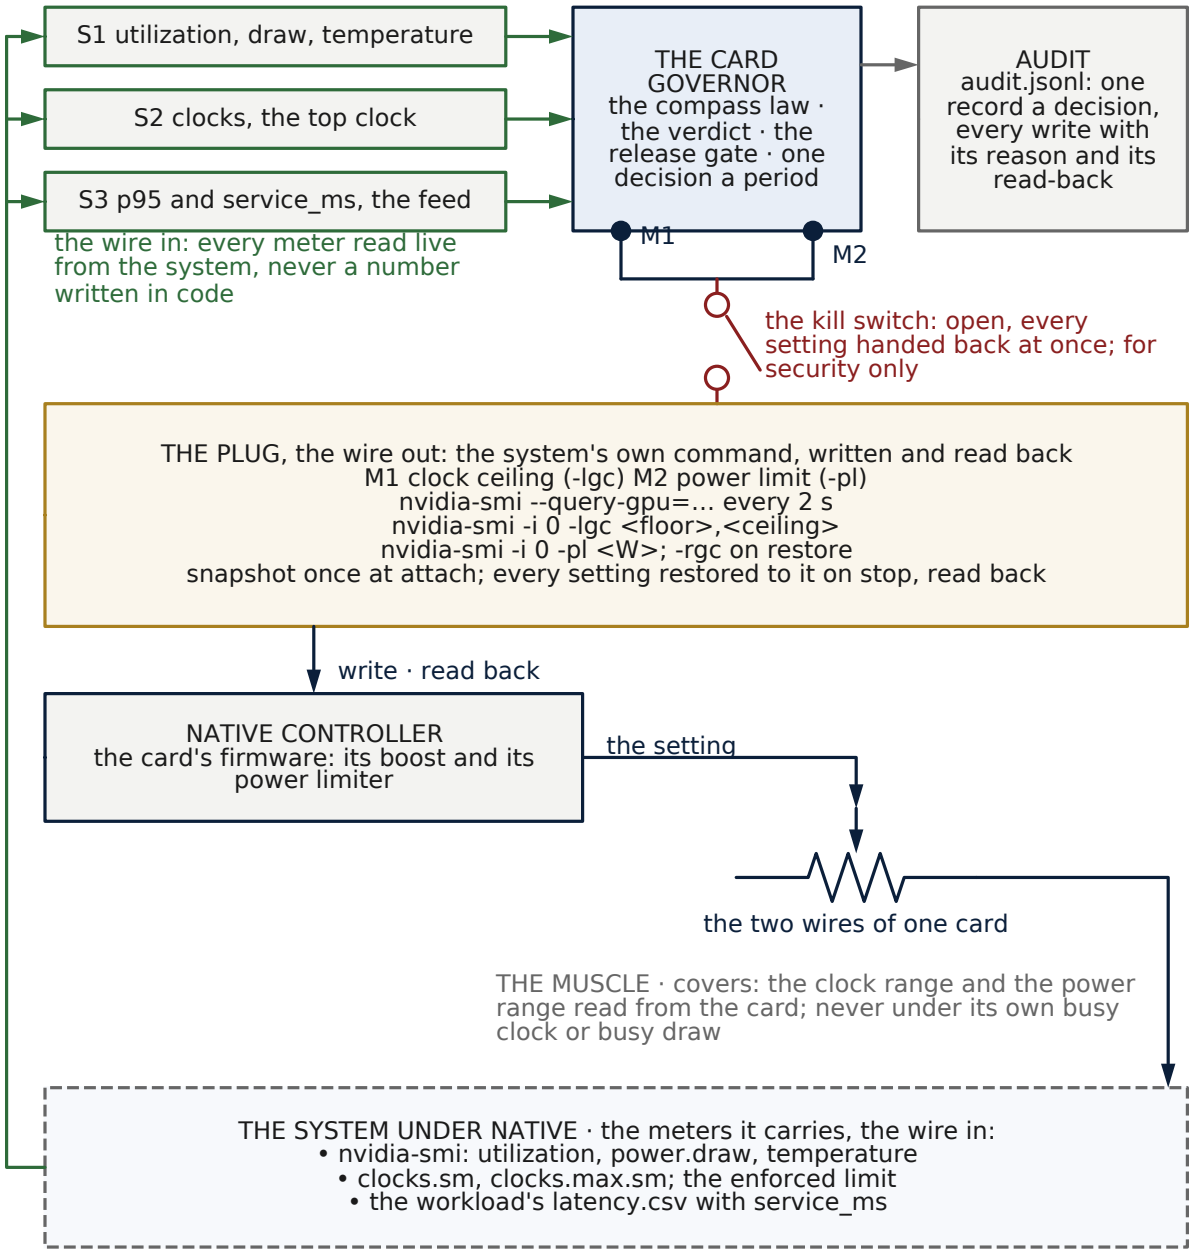


Figure 71. Wiring schematic: a graphics card, two wires. The schematic is read top to bottom as an electrical drawing: the governor (the control unit) with its sense terminals S1, S2, … on the left and its motor terminals M1, M2, … on its lower edge; the motor bus through the kill switch into the plug, the system's own command written and read back; the plug into the native controller; the native controller setting the muscle, drawn as a potentiometer with its cover; the system under native carrying the meters; and the meters back along one bus, the wire in, to the sense terminals.

The audit stands beside the governor. The senses are the card's utilization, draw and temperature, its clocks and top clock, and the workload's feed; the two motors are the clock ceiling (-lgc) and the power limit (-pl), both through nvidia-smi and both read back. Learns the card on its own first (15 busy readings); races while

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

work waits (≥ 95% utilization); at the max never below the top while the card serves; at the tune-down paces the slack in 15 MHz steps, each step through the paired trial.

- no new write until the last one reads back from the device; every write is read back at once and recorded (requested, return code, read back, enforced limit, delay); the engine senses the enforced limit, the one the card obeys; a write the device refuses ends the arm (exit 4) and makes the run invalid; no clock locks are ever written;
- if it cannot read the GPU or the response times, the snapshot limit at once;
- if response time breaks its target, the snapshot limit at once, and for three decisions after;
- kill file or SIGTERM: the snapshot limit, read back.
- **one writer:** if the limit ever reads a value Omni did not write, Omni stops writing, leaves that limit alone, and exits 5 (the run is invalid);
- **heat fails up:** while the card reports a thermal or hardware slowdown, no lower limit is written;
- every decision names every rule that held the engine back (`blocked_by`) and the one that decided (`decided_by`).

Any workload plugs in through `WORKLOAD_CMD` (for example a vLLM or MLPerf inference harness), if it writes `latency.csv`, `requests.csv` and `summary.json` in `tools/gpu_workload.py`'s format and `SLO_MS` is given.

The table also credits each write: joules and requests against native at the same moments of the same stream, grouped by the rule that decided it. CPU energy comes from RAPL by domain: package and DRAM apart, psys never added, wrap undone. The card's own energy counter (NVML) and its ECC and retired-page counters are read at both ends of each arm.

Gauges

Gauge	From	Its aim
work per energy (served requests per kJ), primary	requests served / GPU energy	higher
energy, GPU (J)	power.draw integrated over the arm's window	lower
energy per served request (J)	the same, over requests served	lower
power, GPU mean (W)	energy / window	lower
requests served, not served	the workload's own record	more served, fewer not
response time mean, 95th, 99th percentile (ms)	arrival to finish of each request	lower

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.


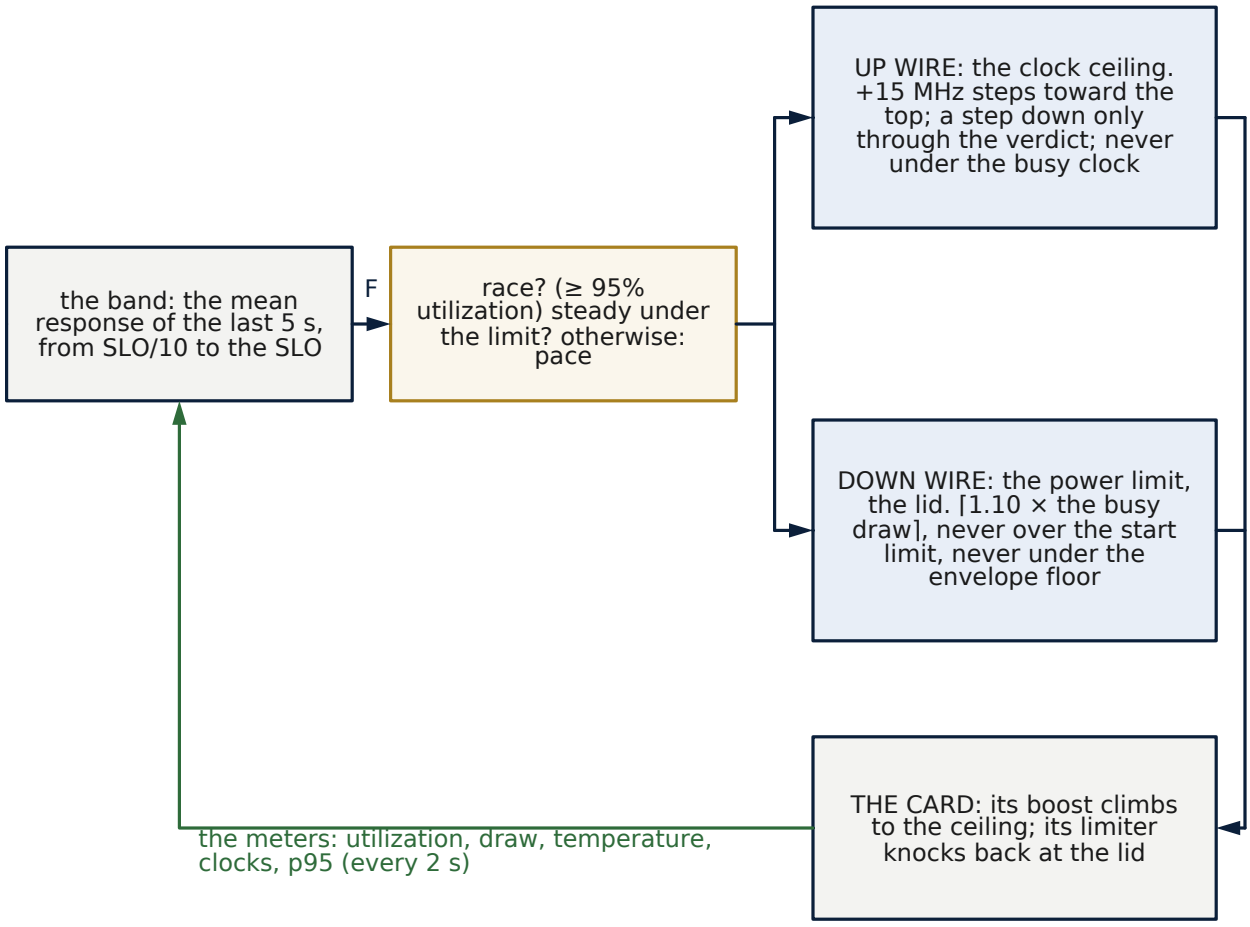


Figure 72. Block diagram: the two wires of a card as an antagonist pair. The band (the mean response of the last 5 s, from a tenth of the line to the line) yields the force F; the mode decides between racing (both wires to full while work waits, utilization ≥ 95%), steady under the limit (the card's own busy clock as the ceiling) and pacing.

The up wire is the clock ceiling, raised in 15 MHz steps toward the top and lowered only through the verdict; the down wire is the power limit, the lid at ⌈1.10 × the busy draw⌉, never over the start limit and never under the envelope floor. The card's own boost climbs to the ceiling and its own limiter knocks back at the lid; the meters close the loop every 2 s.

Gauge	From	Its aim
temperature, peak and mean (C)	temperature.gpu	lower
energy, CPU package (J)	RAPL counters, when present	lower

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

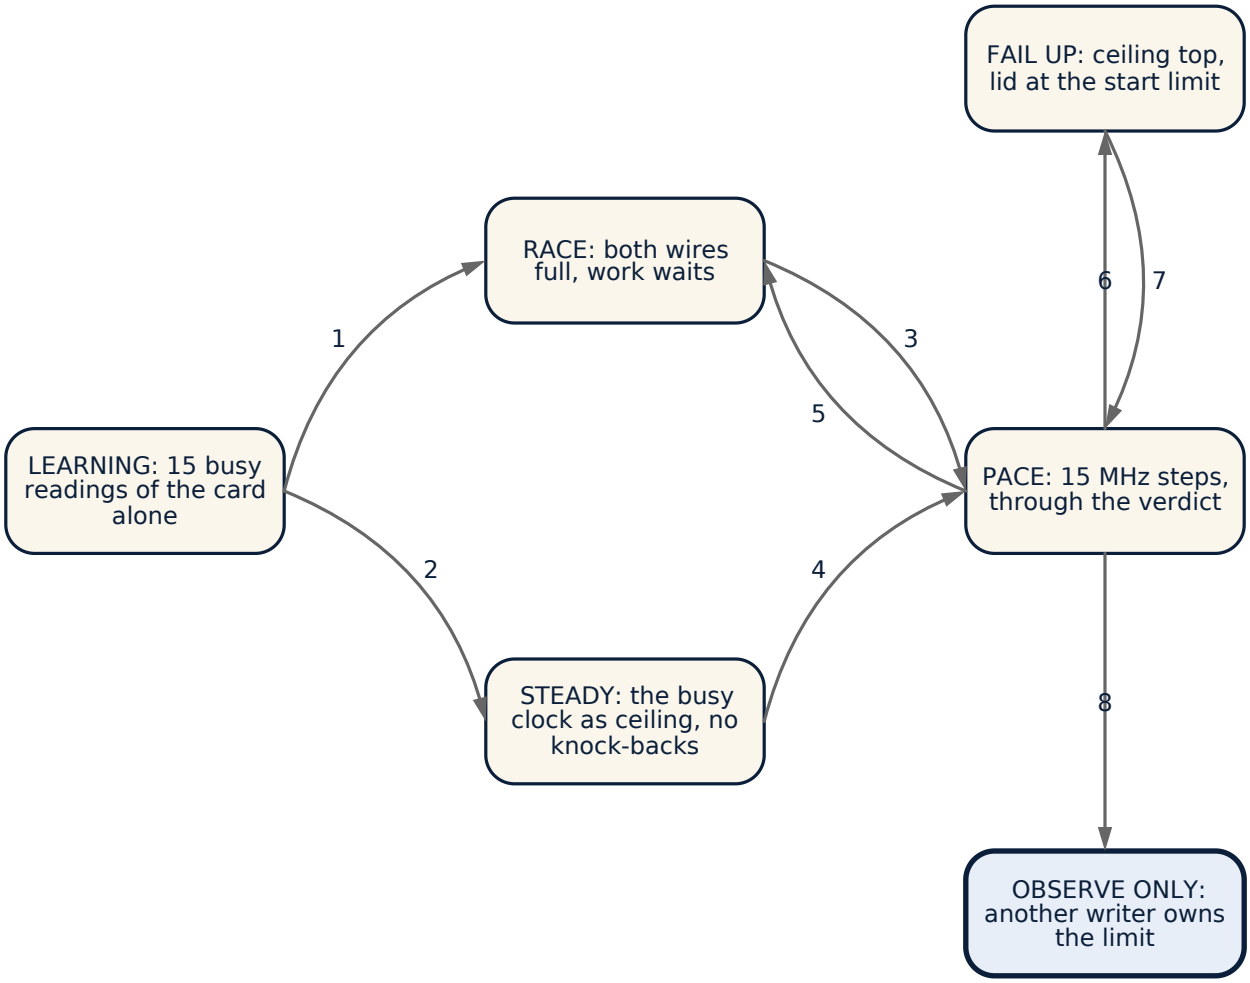

1 utilization ≥ 95% · 2 saturated, drawing ≥ 97% of the limit · 3 slack (the tune-down) · 4 (no condition) · 5 work waits again · 6 p95 at the line, a failure, a blind feed, a heat slowdown · 7 clear for --slo-clear · 8 a limit not written by the governor

Figure 73. State machine: the two-wire card governor. It learns the card on its own first (15 busy readings), then races while work waits, holds steady under the limit, or paces the slack in 15 MHz steps through the verdict; it fails up on a breach, a failed request, a blind feed or a heat slowdown, and it observes only, for the rest of the run, once a limit is found that it did not write.

Testing the bench without a GPU

`python tests/test_gpu_bench.py` runs the whole script against a stand-in `nvidia-smi` (`tests/fake_gpu/`), with the workload's `--sim` mode. The stand-in has no real power physics, so its numbers mean nothing; it proves the script, the controls and the validity checks work.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 52

The GPU Preregistration

Written before any hardware trial. The counted run (`PHASE=confirm`) hashes this file with the code in `FREEZE.json`; a change to either after the run starts invalidates it.

Question

On one NVIDIA GPU serving a fixed, seeded request stream, does Omni-Compass holding the GPU power limit change the successful work done per joule measured by the device, compared with the device left at its own limit?

Fixed here, before any smoke trial:

- the number of counted repetitions (10);
- the primary outcome;
- the guardrails;
- the analysis.

Nothing seen in smoke may change them.

Two phases

1. **Smoke** (`PHASE=smoke`, any number of repetitions). Its purpose is to find faults in the harness, and to see whether the effect is large enough to be worth a counted run. Smoke results are not published and are never reported as the result. After smoke, Omni's code may change.
2. **The counted run** (`PHASE=confirm`). Omni's code is committed and frozen before the first trial. The script refuses to run if any frozen file has uncommitted changes, and the table marks the run invalid if a frozen file changes during it. No inspection, tuning or rerun between counted trials. If the counted run fails, it is reported as failed; a new counted run needs a new commit and a new run, and both runs are reported.

Design

- **Arms:** native (no Omni), watch (Omni runs, may not write), omni (Omni writes the GPU power limit).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Repetitions:** 10 in the counted run, each with all three arms back to back, order rotated. Repetitions may run on separate machines of one GPU type (`REP_ONLY`, the GitHub workflow); the three arms of a repetition always share one machine, so every comparison is paired within a machine.
- **Per arm:** 60 s idle, then the pinned workload for 600 s plus 30 s drain.
- **Workload:** `tools/gpu_workload.py`, calibrated once at the start power limit before any arm. The seed is 20260928, and the load phases are 30, 60, 80, 30, 60 and 30% of full-power capacity.

Outcomes

- **Primary:** work per energy = requests served / GPU energy (kJ). GPU energy is `nvidia-smi` power.draw integrated over the arm's window.
- **Secondary:**
  - GPU energy;
  - energy per served request;
  - requests not served;
  - response time: mean, 95th and 99th percentile;
  - peak temperature;
  - CPU package energy (RAPL), where present;
  - where a smart plug is fitted (`WALL_METER`), whole-machine energy at the wall and work per wall kJ. The plug is read by the bench only, never by Omni. An arm whose plug readings have a gap over 5 s has no wall number.

Analysis

- **Primary comparison:** omni against native, paired by repetition. Report the mean difference with a two-sided t 95% interval.
- **Result:**
  - The result is *a proven GAIN* if the interval lies entirely above zero.
  - It is *a a proven LOSS* if the interval lies entirely below zero.
  - Otherwise it is *not proven*.
- **Guardrails, fixed now:** a primary GAIN counts only if Omni did not buy it with the work. Both guardrails must hold:
  - **Requests served:** the 95% interval of (omni − native) must not reach below −1% of native.
  - **95th-percentile response time:** the interval must not reach above +10% of native.

If a guardrail fails, the verdict is *more requests per kJ, fails the service guardrail*. That is a different product and is reported as such.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Watch against native:** reported as the cost of Omni being present. If watch differs from native on the primary outcome as much as omni does, the effect is not attributed to Omni's authority.

Amendment 1 (2026-09-28, before any hardware trial; no smoke or counted data exist)

Added before any data, to make the chain from engine to plant identifiable. The question, the arms, the primary outcome, the repetitions, and the two guardrails above are unchanged.

- **Three contrasts, all reported, each paired by repetition:** observation = watch − native; authority = omni − watch; total = omni − native (the primary comparison). A total effect is not attributed to Omni's authority where the observation contrast differs materially from zero.
- **Third guardrail, errors:** the 95% interval of (omni − native) requests *not* served must not reach above +1% of native requests served.
- **Result label, by rule, never by hand** (`tools/gpu_reps.py`, `label()`):
  - primary a proven GAIN, all three guardrails held: **SUPERIOR WITHIN GUARDRAILS**;
  - primary a proven GAIN, a guardrail failed: **ENERGY IMPROVEMENT WITH SERVICE TRADEOFF**;
  - primary not proven, all guardrails held: **NONINFERIOR / INCONCLUSIVE**;
  - primary not proven, a guardrail failed: **NOT ESTABLISHED**;
  - primary a proven LOSS: **AWAY FROM ITS AIM**;
  - any invalidity below: **INVALID**.
- **The card obeys enforced.power.limit.** The snapshot records power.limit, enforced.power.limit, default, min and max limits, persistence mode and power management. The bench refuses to start unless power management is Enabled. The bench samples enforced.power.limit where the driver reports it. The governor senses the enforced limit and reads back every write at once; it never writes clock locks.
- **Also invalid:** a native or watch arm whose enforced limit differs from the snapshot; a governor that exits nonzero (a refused start, or a write the device refused — that write ends the arm); smoke and counted repetitions mixed in one table.
- **Three receipts, kept apart.** A (governor, `audit.jsonl` decisions): telemetry consumed; the six-state reading (history-dependent, `state_observed`); the memoryless state the telemetry alone points to (`state_measured`); the U-channel command u evaluated on the evolved state (`u_push`); admissibility; requested and granted authority; shield bound; holds. B (actuator, `actuator` records): requested limit, return code, power.limit read back, enforced limit, delay to realization, override (enforced under requested), restoration. C (outcome, the bench alone): nvidia-smi power, joules, temperature, utilization, clock-limit reasons; the workload's requests, latency and failures. Omni never supplies its own outcome.
- **Secondary, descriptive (no verdict):**

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- actuator fidelity: r[act] = read back − requested (mean and max absolute), delay (median, max), enforced-under-requested count, total variation of the realized limit, reversals, refused writes;
- control effort: J_u = sum of abs(u[push]) × decision interval; mean and max abs(u[push]); saturations (abs(u[push]) = 25); shield interventions (a bound other than the engine decided); holds;
- representation fidelity: R[int] = sqrt(mean over consecutive decision pairs of sum_k w_k (h(z_(k+1)) − F_h(h(z_k), u_k))_k^2) over E, U, I[U], S, B, weights 1, with h the memoryless map and F_h the engine's own projection (`state_projected_next`); directional accuracy = share of pairs where sign(projected − current reading) equals sign(next measured − current measured), both movements at least 0.01, per state and by predicted size (0.01–0.03, 0.03–0.1, ≥ 0.1);
- energy of the rest of the machine = wall − GPU − CPU package, only when all three meters measured the arm. A missing meter prints UNAVAILABLE, never a modelled substitute.

- **Smoke never enters the counted run.** A smoke run that changes any code or parameter is followed by: repair, the tests, a new freeze, and a counted run collected from zero.

The run is invalid, and reported as invalid, if

- the watch arm executes any power-limit write;
- a native or watch arm sees a power limit other than the snapshot;
- any arm ends at a limit other than the snapshot (the reset failed);
- Omni's frozen files change during the run;
- the counted runs on uncommitted code.

Recorded for every Omni decision

Every decision is logged in `audit.jsonl`:

- the raw device telemetry: utilisation, draw, temperature, limit, SM clock, and clock-limit reasons where the driver reports them;
- the engine's six-state reading, the state it had projected for this moment, and the error against it;
- the projection for the next decision. This is the engine's own evolved state from the same step that sets the cap; no separate predictor was added for the experiment;
- whether change was admissible, the requested and granted authority, and which shield bound decided the limit;
- the limit written, and the requests served in the window.

Amendment 2 (2026-09-28, before any hardware trial; no smoke or counted data exist)

Unchanged:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- the question;
- the arms;
- the primary outcome;
- the repetitions;
- the guardrails of amendment 1.
- **Watch must match native.** If the observation contrast (watch − native) on the primary outcome is proven in either direction, the label is **NOT ATTRIBUTABLE: WATCH DIFFERS FROM NATIVE** and no omni result is published.
- **One writer.** If the power limit ever reads a value that is neither Omni's last write nor the limit before it, another writer is present:
  - the governor stops writing for the rest of the run;
  - it leaves that writer's limit alone;
  - it exits 5;
  - the run is invalid.
- **Heat fails up.** While the device reports a thermal or hardware slowdown (clock-limit reason bits 0x8, 0x20, 0x40, 0x80), no lower limit is written.
- **Credit per write (descriptive).** Each write owns the interval to the next. For that interval, the table records GPU joules and requests finished, Omni minus native, at the same moments of the same seeded stream. It records who decided the write: the engine, a floor, the busy gate, a reflex, heat, or the speed lock. The table says which rule produced the joules; a speed-lock result is not credited to the engine.
- **CPU side (secondary, never on the control path).** RAPL counters are read by domain name at both ends of each arm:
  - `package-N` is summed as CPU package; `dram` is summed separately;
  - `psys` is recorded and never added to either;
  - wrapping is undone with `max_energy_range_uj`;
  - a counter that went backwards without a known range, or is missing, prints UNAVAILABLE.
  - The governor never reads these counters.
- **Device energy counter (cross-check, secondary).** Where NVML reports it (Volta and newer), the card's total-energy counter is read at both ends of each arm, beside the integrated power.draw.
- **Card health (descriptive).** Uncorrected and corrected ECC error counts, and pages pending retirement, are read at both ends of each arm.
- **Workload plug.** Any workload may be served through `WORKLOAD_CMD` if it writes the pinned workload's files. It needs its own response-time target (`SLO_MS`). The command is recorded in the receipt. A counted run names its workload before the first trial.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 3 (2026-10-01, before any hardware trial; no smoke or counted data exist)

No GPU job has ever been given a machine (every gpu-bench run so far waited in the queue and was cancelled), so no trial data exist. Unchanged:

- the question;
- the arms;
- the primary outcome;
- the repetitions;
- the guardrails, labels and invalidity rules of amendments 1 and 2.
- **Declared envelope, before any trial.** The buyer's service envelope is written to a file before the first trial and recorded with the run (`envelope.json` in the run folder and in every repetition):
  - `power_min_w`, the lowest watts Omni may set. Default (`tools/declare_envelope.py`): max(device minimum, 70% of the power limit read at declaration), rounded up to whole watts;
  - `power_max_w`, the power limit read at declaration;
  - optionally `slo_ms`, the response-time target; without it the target comes from calibration (10 bare service times), as before.
  - The bench refuses an envelope whose floor lies outside [device minimum, starting limit].
  - **The counted run refuses to start without a declared envelope** (`scripts/gpu_paired.sh`, `ENVELOPE`).
- **Envelope floor.** The governor never sets the limit under `power_min_w` (`--floor-w`). When the floor is what lifted a write, the decision record names it (`decided_by`: envelope_floor), so no saving below the floor can be credited to the engine.
- **Outer controller holds.** When the card's own controller (board, BMC or system policy) already holds enforced.power.limit under the current limit, a lower write that would still sit above that enforced limit changes nothing on the card. It is not written; the decision record marks it (`outer_controller_holds`). Only a write that would actually bind, or a return upward, goes out. This is not another writer (amendment 2): the set limit is unchanged and the governor keeps running.
- **Narrow cards are reported as they are.** The device's own limit range is in the snapshot. On a card whose range is narrow (for example a 70 W card that accepts 60–70 W), the envelope is that narrow range; the result is reported for that card and range and not extrapolated to wider cards.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 4 (2026-10-02, after an invalid smoke; no counted data exist)

The first smoke on a rented A10 (results/gpu/smoke-20261002T032459Z, never counted) was invalid by rule: two copies of `scripts/gpu_rented_run.sh` had been started on the same machine, so both benches wrote the same card's power limit. The native and watch arms saw limits they never wrote (116, 137 and 150 W), each governor refused to start beside the other one (exit 5), and one reset restore was undone by the other copy. The card also began at 116 W, a limit an earlier start had left behind, not its 150 W default, so native itself ran capped (83% of samples). None of these numbers measures Omni. The engine, the governor, the outcomes and the analysis are unchanged. The run script now:

- **runs once per machine:** it takes a lock and refuses to start while another copy runs;
- **runs alone on the card:** it refuses to start while any other process is using the GPU;
- **starts from the card's default limit:** it sets power.default_limit before the envelope is declared, so the envelope, the snapshot and every arm start from the card's own default, not from a limit an earlier run left behind.

Amendment 5 (2026-10-02, before any valid hardware trial; the only smoke so far was invalid, amendment 4)

The Omni arm changes engine. The outcomes, the arms' order, the guardrails, the analysis and the validity rules are unchanged.

- **The Omni arm holds two wires** (`omni_controller/gpu_compass.py`, the compass law of `omnicompass/compass_law.py`): the clock ceiling (`nvidia-smi -lgc`, reset with `-rgc`; cover 35% of the top clock to the top), which sets how high the card's own boost may climb, and the power limit (`-pl`), the lid at what a fully busy card draws at that ceiling plus 10%, never under the declared envelope floor and never over the start limit. The service is read as one position between calm and the response-time line (the larger of p95 and utilization above half) and pulled to the middle; past 95% both wires go to full at once (fail up). The card's firmware keeps its own control; Omni sets only those two values. The earlier power-limit-only governor stays available (`OMNI_ENGINE=one_wire`) and is not the counted run's arm.
- **Why, before the run:** on a modelled card (`results/sim/gpu_two_wire/`, evidence class S, seeds never used while tuning) the one-wire governor gave +0.1% work per energy and the two-wire engine +9.0%. That is a model; this run is the card's own meter.
- **The watch arm** runs the same two-wire engine in watch mode: it computes and records both wires and writes neither.
- **The clock range is reset before and after every arm** (`-rgc`), as the power limit already was; the run script resets it once at the start.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **The wire check runs first** (`tools/gpu_wire_check.py`): the card's clock must follow a lowered ceiling down and come back up when reset, the power limit must read back what was set, the governor must hand both wires back when stopped and must leave a limit set by another writer alone (exit 5). If any step fails, nothing else runs and the check's report names the wire, the step and what the card said.
- **Wire check, corrected before any trial (2026-10-02):** on the A10 the first wire check failed at "3 up wire (follows up)" although the wire works: under the heavy check load the card's own 150 W limit already held it near 990 MHz, so a ceiling at 60% of the top clock (1017 MHz) left no room for the clock to come back up above it. The check now reads the card's busy clock on its own first and locks at 60% of that. The governor likewise starts its ceiling at the clock the busy card actually runs (a ceiling above it holds nothing), and its clock cover is 35% of the top clock to the top. No trial had run.

Amendment 6 (2026-10-02, after the first counted run and before any further trial)

What the first counted run showed (A10, commit `c908054`, `results/gpu/run-20261002T082232Z/`): work per energy +3.6% (+2.7% to +4.5%, proven), the same requests served, no request lost, but the 95th-percentile response time +58.5% (510 to 809 ms), so the response-time guardrail failed and the label by rule was ENERGY IMPROVEMENT WITH SERVICE TRADEOFF. It stands as the result of that run.

Why, from the card's own samples: while busy the card ran at 736 to 768 MHz under Omni against 861 to 889 MHz on its own, and spent about 30% more time busy for the same work; requests queued behind each slower one. Three faults in the governor, not in the engine: (1) the position counted utilization above half as service trouble, so every burst read as past the wall (fail up in 46% of decisions) and every quiet gap pulled the ceiling down, so each burst began on a lowered clock; (2) the lid followed a curve from the top clock and sat at the 105 W envelope floor in 49 of 165 compass decisions, under the 135 W the card itself draws while busy; (3) the ceiling's cover reached 35% of the top clock, far under the clock the card's own power limit holds it at while busy.

The Omni arm from now on (`omni_controller/gpu_compass.py`; the outcomes, arms, guardrails, analysis and validity rules are unchanged):

- the position is response time only (p95 over 5 s, not 30 s); being busy is not a breach;
- **race while work waits:** at 95% utilization or more the ceiling goes to the top and the lid to the start limit; the compass paces only the slack between bursts;
- **the card's own level, learned from its own meter** while the ceiling is at the top and the card is busy: its busy clock (median) and busy draw (90th percentile); until 15 such readings are in, neither wire moves;
- **speed floor:** the ceiling never goes under the card's own busy clock; **lid floor:** the lid never goes under the card's own busy draw plus 10%;
- fail up (past 95% of the line, or blind) is unchanged.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

On the modelled card, before any trial (`results/sim/gpu_two_wire/`, seeds 5000 to 5009): p95 122.1 ms native, 123.7 ms with the corrected compass; work per energy +8.2% (+6.3% to +10.1%); energy -7.5%; the median response 10.1 to 12.1 ms, slower in the quiet stretches the compass paces. That is a model; the next trial is the card's own meter.

Amendment 7 (2026-10-02, before any further trial)

The outcomes, arms, guardrails, analysis and validity rules are unchanged. The Omni arm of the counted runs the **service** profile.

- **Two profiles, one switch** (`--profile`, `omni_controller/gpu_compass.py`; the same in `realms/gpu_card.py`):
  - **service**, the default and the counted run's arm: down gain 0.0125, the compass's center at 0.4, the speed floor 3% above the card's own busy clock;
  - **batch**: down gain 0.015, center 0.5, the floor at the card's own busy clock, for work nobody waits on answer by answer. It may be run as a separate, declared counted run (`OMNI_ARGS="--profile batch"`) and is reported as its own result, never pooled with service.
- **How service was chosen, on the model, before the trial** (20 paired seeds, 5000-5009 and 5100-5109; ratios summarised as the geometric mean of the per-seed ratios): down gains 0.01, 0.0125, 0.015, 0.0175 and 0.02 alone, and 0.0125 to 0.0175 crossed with the compass's center (0.4, 0.5), the speed floor (1.00, 1.03 of the card's own busy clock) and the race threshold (0.90, 0.95). The rule: the most work per energy at which no seed's p95 is more than 10% slower than native. Service (0.0125, 0.4, 1.03) gave work per energy +5.3% (+4.2 to +6.5), energy -5.0%, p95 -4.1% (-9.7 to +1.7), worst seed +9%, 0 of 20 seeds more than 10% slower, p99 -1.8%; its neighbours gave the same within a point. 0.015 alone gave +6.2% but 3 of 20 seeds 10% to 48% slower at p95; 0.01 alone gave +3.8% with p95 -1.9%.
- **The ceiling moves in whole clock steps** (--min-change-mhz, 15 MHz), as the card's own clock does and as the model moves it: the force times the gain, as a share of the top clock, is rounded to whole steps, and a pull under half a step moves nothing and is not stored up.
- **The position reads the mean response time of the window** (as the model does), between the bare service time and the line; the 95th percentile at or past the line, or any failed request, is past the wall (fail up).
- **The model's report summarises ratios on the log scale** (`tools/run_gpu_card.py`): the arithmetic mean of per-seed percentages let one seed (+240%) stand for twenty.

Amendment 8 (2026-10-03, before any further trial)

The outcomes, arms, guardrails, analysis and validity rules are unchanged, except as stated here.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Omni-Compass moves the card only where it measures that the card is never behind for it** (`omnicompass/verdict.py`, in `omni_controller/gpu_compass.py` and `realms/gpu_card.py`). While the service is calm, the governor runs a paired trial:
  - first the ceiling at the top until 30 requests are measured;
  - then one 15 MHz step past the deepest step already allowed, until 30 more are measured.

Each request's cost is the card's own time on it: the workload's new `service_ms` column, start to done, with the wait in the queue left out. The step is allowed if its median cost is at most **2%** above the median at the top. Otherwise it is refused and not tried again for 900 decisions. The compass may move the ceiling only between the top and the deepest allowed step. Where no step passes, the ceiling stays at the top and the card runs as it does alone. Every trial and every judgement is in the audit (`verdict`, `verdict_state`, `verdict_deepest_step`).

- **One law, no profiles.** The service and batch profiles are removed. The law is: down gain 0.0125, the compass's center 0.4, the speed floor at the card's own busy clock, and the verdict's allowance of 2%. The batch profile paced past the 2% allowance, so it is gone.
- **Why 2%** (the card model, 20 paired seeds):
  - an allowance of 0 leaves the card native on every workload, because every clock step down adds some time to a request, and saves nothing;
  - 2% is the smallest allowance that saves energy, and it is below what a person or a service contract can notice.
- **A second workload, AI token generation** (`tools/gpu_workload.py --kind decode`): fp16 matrix-times-vector over 1 GiB of weights per pass, batch one, so each pass streams every weight from memory, as token generation does. It runs as a second counted run of the same design (10 repetitions × 3 arms × 600 s) after the compute-bound one (`scripts/gpu_rented_run.sh`; `SKIP_DECODE=1` skips it). It is labelled by the same rule and reported as its own result, never pooled.
- **Every comparison is a base alone against the same base with Omni on top.** The model's report (`tools/run_gpu_card.py`) runs two bases:
  - the card's own firmware, alone and with Omni on top;
  - an operator's fixed 105 W power cap, alone and with Omni on top.

The old one-wire governor is removed as an arm (it was Omni's own earlier version).

- **On the modelled card, before any trial** (`results/sim/gpu_two_wire/`, firmware alone against firmware with Omni on top; tuning seeds 5000-5009, fresh seeds 5100-5109):
  - compute-bound work: work per energy +0.70% (tuning) and +0.48% (fresh); median +1.56% and +1.47%; p95, p99 and time over the line unchanged within their intervals;
  - AI token generation: work per energy +3.36% and +3.86%; median +0.55% and +0.70%; p95 +0.29% and +0.26%; time over the line 0.

That is a model; the next trial is the card's own meter.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 9 (2026-10-03, before any trial on this code)

Everything in amendment 8 stands. Four additions, each run by `scripts/gpu_rented_run.sh` after the two counted runs and each reported as its own result:

1. **Steady under the limit** (`omni_controller/gpu_compass.py`, the same in `realms/gpu_card.py`). While the card is saturated against its own power limit (work waiting, the draw at 97% of the limit or more), the firmware boosts a step, hits the limit and is knocked back. The ceiling is then held at the card's own busy clock under that limit, so the same watts serve the work without the knock-backs. It is never held under that clock, the lid stays at the start limit, and a blind feed still fails up. In the card model, fully loaded under a fixed cap, this gives about +0.6% requests served from the same watts, with p95 about 2% faster.
2. **An operator's power cap underneath.** The card's limit is set to the envelope's lowest watts (70% of its default) before the run, and the paired bench runs native (the cap alone), watch and Omni-Compass on top of the cap (the lid never above the cap). It runs twice, 5 repetitions × 3 arms × 300 s each time:
   - at the usual load;
   - fully loaded (arrivals at 130% of the card's capacity under the cap), so the result is requests served from the same watts.

The card is returned to its default limit afterwards.

3. **The GPU fault drill** (`scripts/gpu_fault_drill.sh`). With the request stream running:
   - the governor is killed outright, and the watchdog must hand the card back;
   - the master switch is pulled, and the governor must hand back, exit and refuse to restart while OFF;
   - the response feed is paused, and the governor must fail up.

Every check must pass, and the card must end at its start limit.

4. **Real AI serving** (`scripts/gpu_vllm.sh`, `tools/llm_workload.py`). An open language model (Qwen/Qwen2.5-0.5B-Instruct) is served by vLLM, installed in its own environment. It is asked the same seeded stream of prompts in every arm, each for exactly 128 new tokens; 5 repetitions × 3 arms × 300 s. Tokens per second and tokens per kilojoule follow from requests served. If vLLM cannot be installed or started on the machine, the stage says so and nothing measured before it changes.

Amendment 10 (2026-10-03, before any trial on several cards)

Everything in amendments 8 and 9 stands. **Several cards in one server** (`scripts/gpu_8card.sh`): every card runs `scripts/gpu_rented_run.sh` at the same time, each on its own card with its own wire check, envelope, smoke, the two counted runs and the power cap underneath, on the same committed code. Card i starts its arm rotation i steps later (`ROT_OFFSET`), so no arm always meets the same neighbours. Each repetition stays paired within its own card (its three arms on one card); the pooled table per workload holds every card's repetitions (card c, repetition r is pooled as repetition 100(c+1)+r) and is labelled by the same

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

rule. Each card's own table is reported beside it; a card whose table is invalid is reported, never dropped. The fault drill runs once, on the first card, after every card has finished. Last, **one model across every card** (`scripts/gpu_vllm.sh` with GPU = every card): vLLM tensor parallel, Qwen/Qwen2.5-7B-Instruct, one governor per card on its own card's two wires, all reading the same response times; the energy is every card's summed; 5 repetitions × 3 arms × 300 s, labelled by the same rule. Each card's energy is read from that card alone (the bench's sampling filtered to the card in each repetition's own receipt).

The short design (`FAST=1`, written before any trial on several cards): each card runs one smoke round and 3 repetitions of the compute counted run (24 paired repetitions on 8 cards, pooled and labelled by the same rule, each card's own table reported beside it), then one model across every card with 3 repetitions. AI token generation and the power cap underneath are measured on the one-card machine (amendment 9) and are not repeated here.

The whole stacks with a real card inside, on several cards (written before any trial): `tools/run_hil.py` as on the one-card machine (amendment 9, the six organisms at 1x, 10x, 100x and 1,000x, repetitions 3, 3, 2, 1 by size, the adaptive step), each organism on its own card at the same time (organism i on card i; with fewer cards than organisms, the next organism waits for a card). Each organism's receipt is its own; nothing is pooled across organisms.

The pooled design (`POOLED=1`, written before any trial on several cards): every stage of the whole design, with the repetitions pooled across the cards. Each card runs one smoke round; 3 repetitions of the compute counted run and 3 of the AI token generation counted run (24 paired repetitions per test on 8 cards, pooled and labelled by the same rule, each card's own table beside it); 2 repetitions of each power cap load (16 per load); the six organisms with the card inside, one repetition per size, each organism on its own card; then one model across every card, 3 repetitions; the fault drill once. Arm durations are those of the whole design.

The time budget (`MAX_HOURS`, written before any trial on several cards): a run on several cards ends by its budget whatever happens. At the budget the master switch is pulled (every governor hands its card back), every stage still measuring stops and is reported as incomplete (an arm cut short is never counted: its repetition has no complete pair), the stages not started are skipped and named, and the finished ones are packed.

Amendment 11 (2026-10-04, before any trial on this code)

The six organisms with the card inside (`tools/run_hil.py`), first run 2026-10-02 at commit `c908054`, labelled the card's part SUPERIOR in five organisms while its 95th percentile rose from about 500 ms to 600-935 ms in every organism. The harness counted the card's work and energy and never its response time (its time over the line was fixed at zero). That run is history: its governor was replaced in amendments 6 and 7, and its labels do not meet the founder's rule.

From this amendment the card harness measures what it never counted:

- the card's time over the line (requests slower than the line, ten bare service times, percent of requests) and its 95th percentile, each paired against native;

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- each row keeps its preregistered label and names, beside it, every measure that came out behind native by any amount, so what Omni costs is read beside what it gains; every change is read in words (GAIN, EVEN or LOSS, and what it means); no new line is drawn. The 2% bound stays where the founder set it: inside the engine, as the trigger of the verdict (`omnicompass/verdict.py`: a knob moves only where a paired trial shows the muscle at most a 2% LOSS);
- the stacks' own label (`realms/harness.py label`) puts the band first: its guardrail is the mean time over the line at or under native's, where it was the upper end of the interval under +1 point;
- at one copy, each organism runs 5 paired repetitions (was 3), so an energy change of 1-3% on the card's own meter can be told from noise; 3, 2 and 1 at 10, 100 and 1,000 copies as before.

The single card and the eight cards run this code. A card run started before this amendment is reported in full from its own raw files (its response times included) before any figure is quoted.

Why the stacks were late more often in the first run (+0.25 points) and are not now (-0.03): two knobs moved in commit `2a9285d`. Omni could loosen the operator's HPA target to 0.95 (fewer pods, bursts wait); it is now held at the operator's. A machine went back with no headroom (the next burst waits for a boot); it now goes back only when the rest covers the recent peak at 0.6 of the release level. Each alone leaves the stacks late more often; together they are late less often. The headroom is the least that keeps every seed un-late (`results/realms/RELEASE_MARGIN_SWEEP.md`).

Every report reads each change in words (GAIN, EVEN or LOSS, and what it means), so a sign is never read alone.

Amendment 12 (2026-10-05, before any trial on this code)

The card model rerun on the current code (`tools/run_gpu_card.py`, 2026-10-05) showed amendment 9's steady hold making the card slower on its own firmware: compute work, p95 122 ms native against 149 ms with Omni on top, time over the line +0.39 points. A bisection over every commit since the last clean model run puts the change in commit `bd455f9` (amendment 9, item 1). Holding the ceiling at the card's median busy clock takes away the boost the firmware uses to serve a burst at its own factory limit. Under an operator's cap the same hold is what helps: the firmware sawtooths against the low cap, and the hold smooths it.

From this amendment the hold applies only under an operator's cap: the start limit under the card's factory limit, read from the card (`power.default_limit`). If the card will not say, it is treated as no cap, so no hold, and the firmware is left to serve the burst. On the card's own limit, saturated, Omni races, as it did before amendment 9. Test: `tests/test_gpu_compass.py` (no hold at the factory limit; the hold under a 150 W cap on a 214 W card).

The card model with this amendment, 20 seeds (tuning and fresh). Under the cap: p95 6.4% and 7.1% faster, p99 3.2% and 5.8% faster, time over the line 1.3 and 1.0 points lower. On the firmware: energy 0.5-3.7% lower, p95 even. The median is 0.6-1.5% slower, inside the verdict's allowance (`results/sim/gpu_two_wire/`). The real card is the test.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 13 (2026-10-13, before any trial on this code)

The founder's order of 12 October: 1, 10 and 100 only, to cut the time and the bill; no 1,000 copies and no 1,000 runs anywhere. The whole stacks with the card inside (`tools/run_hil.py`, step 8 of the one-card and eight-card runs) now run each organism at 1, 10 and 100 copies on one clock, with 5, 3 and 2 paired repetitions by size (amendment 11's numbers for those sizes); the 1,000-copy size is gone. On eight cards with the repetitions pooled (amendment 10), each card's organism runs once per size. Nothing else changes: the arms, the measures, the labels and the hand-back are as before. On one card the stage takes at least 16 hours (60 paired repetitions, each arm 240 steps of 2 s; a size whose step must be longer is measured on the machine and stated in the receipt), where it took about 25 with the 1,000 copies.

CHAPTER 53

The Realms Preregistration

Round 3 is the current one: its section at the end changes only how the realms are made up. Round 2's section replaced round 1's Omni layer. Round 1 below is kept as it was frozen. Each round was written and committed before its counted seeds were run. Evidence class **S**: every number the run produces comes from a declared model. Nothing here is a meter, and nothing here is evidence about a real machine.

Question

For each of the 656 muscles of the canonical tower, and for each realm and the whole tower run as one organism: does the frozen governor (`omnicompass.adapter.Governor`, the engine with u = 0, the stack law, the reset), holding that muscle's one knob on top of the plant's native controller, change work per energy against the native controller alone, without buying it with service?

What runs

- **The catalog** (`realms/catalog.csv`, built by `tools/realms_catalog.py`): the 656 rows of the XPASS package's canonical tower, unchanged, plus four columns given by fixed rules: realm, plant, parameter set, knob.
  - Compute / AI / Cloud: 250 muscles. Physics / Robotics / Autonomous: 88. Energy / Facility / Industrial: 121. Distribution / Specialized: 197.
- **Five plants** (`realms/plants.py`), each with its own native controller, all parameters in `realms/presets.py`:
  - compute_pool: request stream, servers with start-up delay, idle and dynamic power; native: the HPA rule (10% tolerance, scale-down stabilisation window), fixed admission limit, full clock;

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

  - thermal_zone: zone heat balance, staged cooling units, COP from supply and outdoor temperature; native: PI on a fixed setpoint, units staged to the load;
  - energy_storage: site load, solar, battery, grid connection with a contract limit; native: self-consumption above a fixed reserve;
  - motion_axis: point-to-point moves from a task queue, motor copper losses and heating, derating; native: PID with feedforward at full speed;
  - process_loop: first-order process with dead time, pump or heater power; native: PI on a fixed setpoint.
- **A muscle is one knob of one plant.** Omni holds only that knob: capacity (the adapter's capacity law for one plant), setpoint (inside a declared band: calm end at rho0, stress end at rho_min), power (the directive's power cap), or admission (native while change is permitted; while not, only what clears inside the service target, or the flexible share deferred or shed).
- **Each muscle's plant is sized** by a factor 0.6 to 1.4 drawn from its muscle id.

Arms

On the same seed, so with the same demand, weather and disturbances:

- **native**: the plant and its native controller;
- **watch**: the governor reads every period and writes nothing;
- **omni**: the governor holds the knob; at 90% of the run it is killed and the knob returns to the native controller;
- **fixed_calm** (setpoint muscles only, descriptive): the native controller with the setpoint fixed at the band's calm end. It shows how much of a setpoint result the band alone gives.

Organisms: every plant of a realm (or all 656) on one 15 s clock for one hour. Plants are coupled:

- the electrical power of compute, motion and process plants is heat in the realm's thermal zones;
- the organism's load swing is load on its storage sites;
- the zones' temperature is the ambient every other plant reports.

One governor reads the organism's aggregate, and its one directive sets every muscle's knob.

Seeds and repetitions

Counted seeds 1000 to 1009: ten paired seeds per muscle and per organism. Development used seeds 0 and 1 only. Nothing from development seeds is reported.

Outcomes

- **Primary**, per seed: (work_omni / work_native) / (energy_omni / energy_native) − 1. Work is in the plant's own units: requests, IT heat held in specification, site load served, moves completed, or product

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

delivered in specification. For an organism, work is the mean over its plants of work_omni / work_native, and energy is total joules.

- **Guardrails**, both must hold:
  - work: the 95% interval of work_omni / work_native − 1 must not reach below −1%;
  - violations: the 95% interval of the change in the share of periods in violation must not reach above +1 percentage point.

Violation, per plant:

- compute: response time over the service target, or a dropped request;
- thermal: zone over its limit;
- storage: grid import over the contract limit;
- motion: tracking error over its bound, winding over temperature, or the oldest task waiting past its deadline;
- process: the process variable outside its specification.

- **Label, by rule** (`realms/harness.py`, `label()`, the GPU bench's rule):
  - SUPERIOR WITHIN GUARDRAILS;
  - ENERGY IMPROVEMENT WITH SERVICE TRADEOFF;
  - NONINFERIOR / INCONCLUSIVE;
  - NOT ESTABLISHED;
  - LESS WORK PER ENERGY;
  - INVALID.

Invalid

A muscle or organism is labelled INVALID if, on any seed:

- the watch arm differs from native in any meter or writes anything;
- the omni arm writes after the kill;
- a knob is not back at its native value after the kill;
- any contrast is not finite.

Recorded

Per muscle and organism:

- every per-seed contrast;
- writes per run;
- the native violation share;

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- the fixed-setpoint comparison where it applies.

Per run: the commit, the seeds, and the fingerprints of the catalog, the engine, the governor and the whole frozen tree (`RUN.json`, `SHA256SUMS.txt`). The counted run refuses to run on uncommitted code.

Changes made on the development seeds, before this freeze

The development runs found bugs and sizing faults. Each was fixed before the counted seeds were run:

- **The admission knob was inverted**: it admitted only what cleared the service target while change was permitted. Fixed to the declared rule.
- **The compute admission limit compared the queue limit with the period's arrivals** instead of the backlog left after the period's service. Fixed for native and Omni alike.
- **The capacity law did not clip the queue and load readings to [0, 2]**, as the adapter's `observe_vector` does. Fixed.
- **Thermal and process utilisation was measured against the uncapped capacity** while the power cap was held, so the power law's trim ratcheted to its floor. Fixed: utilisation of the capacity actually available.
- **Compute plants reported a heat proxy of my own.** Replaced by the live controller's own thermal model (`omni_controller/muscles.py`).
- **Thermal zones kept fixed cooling units while their IT load was scaled.** The large halls were under-provisioned, so the native controller overheated. Cooling now scales with the hall.
- **The flight axis's motor thermal resistance was ten times too high**, so the native controller was always derated. Corrected. The UPS feed was sized under its own load; sized at 1.2 times.
- **The slow plants** (vehicle, spacecraft, flight) completed too few tasks in six minutes to measure. They now decide every 5, 10 and 2 seconds over the same 360 decisions.
- **Added the fixed_calm arm** for setpoint muscles, after development showed that the band's calm end alone accounts for much of the setpoint results.

None of these changes was chosen by its effect on Omni's result. The development runs showed losses as well as gains for Omni before and after them.

Not claimed

- **No row is evidence about a real machine.** A row says what the governor's law does to that model through that knob.
- **The plants, native controllers and bands were written by the same project as the governor.** That is a real conflict, so every one of them is in two files, to be read and contested.
- **A muscle's name chooses its knob and its plant's size; it does not get its own physics.** The 16 muscles of a family share the family's plant model at different sizes, through different knobs.
- **The plant code is Python only.** The governor's C++ twin is unchanged; a C++ twin of the plants is open.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Round 2 (2026-10-01, after round 1's results; before any round-2 counted seed)

Round 1 (seeds 1000-1009) labelled all five organisms LESS WORK PER ENERGY. Reading the result against the shipped controller (`omni_controller/controller.py`, `omni_controller/muscles.py`, `omnicompass/nervous_system.py`) showed that round 1's Omni layer was not the Omni that runs on Kubernetes. Round 1 is kept unchanged in `results/realms/round1/`, with a note saying why it is superseded. Round 2 changes only how Omni commands a knob, the native machine-pool scaler and the declared budgets. These changes were made after seeing round 1, so they are listed with the source line each one follows:

Round 1	Round 2, as the shipped controller does it
Capacity muscles replaced the HPA with the stack simulator's capacity law (release one unit after convergence, dwell and a 20% band)	Pods: the HPA target written as min(rho*, the operator's target), never tighter, held one autoscaler window; the HPA scales (`controller.py`, HPA target patch). Machine pools: the node release gate, one machine per decision (`nervous_system.node_release_gate`)
HPA-type setpoints moved inside a band whose calm end was tighter than the operator's target	The same min(rho*, operator) rule: more headroom is always allowed, less never (`controller.py`)
No contraction authority and no SLO reflex	Every contraction needs the organ's authority (calm >= threshold, senses live) and three clean decisions; while service is breached the knob returns to native (`nervous_system.authority`, `muscles.py` SLO reflex)
Continuous knobs jumped to the governed value	Down by at most the calm share of the surplus per decision (`nervous_system`: step = calm)
Request-served pools had their power capped	Never: throttling request work saves no energy and adds wait (`muscles.py`, `_power_cap`); GPU and CPU-frequency pools use their envelope, never under draw x 1.3
Thermal setpoint by headroom	The live cooling law: warm while cool, cold as heat rises, under the envelope 18 + 9 x calm mapped onto the band (`muscles.py`, `_cooling`)
Round 1	**Round 2, as the shipped controller does it**
Admission paused every admission muscle, request traffic included, and resumed only when fully calm	Batch pacing of pausable work only: one muscle suspended per decision at power stress >= 0.95 or

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Round 1	Round 2, as the shipped controller does it
	heat >= 0.96 (or a nervous pause), one resumed per decision at power stress <= 0.8 and heat < 0.90 (`muscles.py`, `_batch_pace` defaults); request traffic never paused
queue_ratio was the backlog in service-target units	pending starts per serving unit, or latency pressure (p95 / target − 1, or the failed share), capped at 2 (`controller.py`)
The governor's current cap followed the applied cap	1.0, as the live controller sets it
Site power budget 1.25 x a formula nominal that sat under the organism's real native draw (compute ran at 1.2 x it), so the governor read the site as always at its limit	1.25 x each plant's mean native draw on the calibration seed 999 (never a result seed); compute pools alone likewise
Organism heat = the hottest of up to 656 plants	The mean, as every other organism channel; local heat stays with each plant's own reflex
Native machine pools used the HPA rule	The Cluster Autoscaler's defaults: add while work waits, remove one machine after the rest has been under 50% for 10 minutes
Building cooling sized under its own peak (native overheated half the time)	Units of 35 kW: capacity 1.25 x the declared peak

Unchanged: the plants' physics, the catalog, every other parameter, the arms, the outcomes, the guardrails, the label rule and the invalidity rules.

- **Round 2 seeds:** 2000 to 2009. Development of round 2 used seeds 0 and 1 only, never reported.
- **Results:** `results/realms/` (round 1 in `results/realms/round1/`). Both rounds are cited together.

Round 3 (2026-10-02, after round 2's results; before any round-3 counted seed)

Only the make-up of the realm organisms changes. The plants, the Omni layer, the outcomes, the guardrails, the label rule and the invalidity rules are round 2's, unchanged.

- **Round 2 cut the 656 into four realms with no overlap.** No realm organism carried the infrastructure every real stack runs on unless that infrastructure was the realm's own. The data-centre realm had no cooling or power, and the robotics and plant realms had no Kubernetes, machines or GPUs.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Round 3 gives every realm the shared spine** (`tools/realms_catalog.py`, SPINE): Kubernetes Workload Scaling, Placement & Scheduling, Container Resources, Node Fleet, Cloud VM & Capacity, NVIDIA GPU Hardware, Host CPU & Memory, Network Routing, Storage, Observability, Reliability & Security, Cooling & Chillers, PDU / UPS & Electrical Distribution.
  - Each realm's organism is its own families plus the spine: Compute 345 muscles, Physics 262, Energy 282, Distribution 337.
  - The whole-tower organism still holds each of the 656 once.
- **Quantum Computing Control moves to the compute realm** (it behaves as a compute job queue).
- **Round 3 seeds:** 3000 to 3009. Round 2 is kept in `results/realms/round2/` with a note on why it is superseded.

Round 4: the stacked organism (2026-10-02, before any round-4 seed)

The four realm organisms of round 3, stacked on one 15 s clock (`realms/harness.py`, `run_stack`; `tools/run_stack.py`). Every muscle appears as often as it appears in the realms, duplicates included: 345 + 262 + 282 + 337 = 1,226. A duplicate is still a muscle that has to converge. Each realm keeps its own internal coupling. The plants, the Omni layer, the outcomes, the guardrails and the label rule are round 3's.

- **Arms:** native (no governor); separate (one governor per realm); one (one governor over the whole stack, reading the mean of all 1,226 muscles and the stack's total power against its total budget).
- **Check, required for validity:** the stacked native run equals each realm's own native run, plant by plant, on every seed. Stacking must change nothing natively.
- **Comparisons, each labelled by the rule:**
  - one governor against native;
  - separate governors against native;
  - one governor against separate governors (does one Omni over everything beat four).
- **Seeds:** 4000 to 4009. Development used seed 0 only, never reported.

Round 5: the whole stacks with the real card inside (written 2026-10-02, before any run)

One harness (`tools/run_hil.py`, started by `scripts/gpu_rented_run.sh` after a valid card smoke): each of the six organisms (the four realms, the four stacked with every duplicate kept (1,226), the whole tower of 656) runs on one clock as in round 3, with the machine's real GPU wired in as one more muscle of its NVIDIA GPU family (a spine family, so the card is in every organism). The card serves the pinned request stream; its own power.draw is heat in the organism's thermal zones and load on its storage sites.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Arms:** native (the stacks' own controllers, the card's own firmware) and omni (one engine on everything: the compass law on every simulated muscle, `realms/compass_arm.py`, and on the card's two wires, `omni_controller/gpu_compass.py`). At 90% of each arm every knob and both wires are handed back; a knob not handed back, a card limit not back at its start, or a card governor exiting non-zero makes the run invalid (exit 2).
- **Seeds and repetitions:** 3 paired repetitions, seeds 6000-6002; arm order alternates by repetition and organism.
- **Clock:** 240 steps of 2 s of wall clock per arm (the card in real time).
- **Outcomes:** work per energy, work, energy and violations, Omni against native, for three parts kept apart: the simulated stacks (evidence S), the card (its own meter, evidence P), and both added (the card as one more plant, its joules added to the stacks'). Labels by the round 3 rule.

Round 6: the compute pools inside the band (2026-10-03, before any round-6 seed)

Round 3's rule (band first) was not held on the organisms: the compass law spent 0.20 to 0.29 points more time over the service line than native in every completed cell of the grid (`results/scale/GRID.md`). The cause was measured on the whole tower (seeds 7000-7003), muscle by muscle:

- **compute pools giving a machine back** (42 muscles): +1.77 points of their own time over the line;
- **the HPA target set looser than the operator's** (249 muscles): +0.22 points;
- the process and thermal setpoints, which save the most energy, added none.

Two changes, both in `realms/compass_arm.py`, everything else as round 3:

1. **The HPA target is held at the operator's own.** Loosening it past native costs the service time. This is the same rule as the card's speed floor and the live controller's cover.
2. **A machine goes back only when the machines left cover the recent peak at 0.6 of the plant's own release level** (`RELEASE_MARGIN`). A machine boots in minutes, so a burst that arrives after a release is served late until the machine is back.

How 0.6 was chosen (10 paired seeds per organism; the rule is the most work per energy whose whole interval of time over the line is at or under native): 1.0, 0.8, 0.75, 0.7, 0.65 and 0.6 on the tower; 0.65 and 0.6 on the other five.

- 0.65 failed on Physics, the upper end of its interval +0.001;
- 0.6 held on all six.

Checked on 20 paired seeds (7000-7019), before this round's official seeds:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism	Work per energy	Time over the line	Work done
Compute	+0.095%	−0.017 pp	unchanged within its interval (−0.001% to +0.000%)
Physics	+0.086%	−0.011 pp	unchanged within its interval (−0.001% to +0.000%)
Energy	+0.201%	−0.031 pp	unchanged within its interval (−0.001% to +0.000%)
Distribution	+0.090%	−0.015 pp	unchanged within its interval (−0.001% to +0.000%)
The four stacked	+0.153%	−0.022 pp	unchanged within its interval (−0.001% to +0.000%)
The whole tower	+0.194%	−0.010 pp	unchanged within its interval (−0.001% to +0.000%)

Every knob was handed back. The grid runs at 100× and 1,000× now on GitHub were started on round 3's law. They are recorded as round 3's result, and the grid is rerun on round 6's law.

Round 5, amended (2026-10-03, before any round-5 run on the corrected law)

The whole stacks with the real card inside run at four sizes, as the six-organism grid does: each organism as 1, 10, 100 and 1,000 copies governed together on one clock, with the one real card inside as one more muscle of its NVIDIA GPU family, native against Omni on top. Repetitions by size: 3, 3, 2 and 1 (seeds from 6000).

The step is 2 s of wall clock wherever the simulation keeps up. A size whose step takes longer gets a longer step: 1.5 times the measured time per muscle on that machine, times its muscles. The card's request stream runs for the same 240 steps, so the card and the stacks stay on one clock. The step of every size is in the receipt. At 1,000 copies the card is one muscle among hundreds of thousands, so its watts are a small share of the organism's; that is the arithmetic of one card in a large stack, and the card's own meter is reported apart from the stacks. Everything else is as round 5. The two GPU counted runs now run before this stage, so the most important results are in hand first.

Round 6 receipts and the one rule (2026-10-03)

At 1x and 10x (1,000 paired runs each) every organism is labelled superior within guardrails, with band first held and every knob handed back (`results/scale/receipts/`, `results/scale/GRID.md`). At 1,000 runs the intervals are narrow enough to show one cost: work done is lower by 0.0001% to 0.001%, wholly below zero in several organisms. Its cause was measured on the Physics organism, muscle by muscle.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

It is the thermal zones: a room held warmer keeps a little less margin, so a sudden heat spike puts it over its limit for a few extra seconds inside a step that already counts as over the line.

Limiting how far a room may drift (half, a quarter, none of the way toward its warm end; 40 paired seeds) does not remove it until the setpoint is held native, and then the Physics organism uses more energy than native. The cost is therefore disclosed and judged by the one rule now written for every muscle (`DISCLOSURES.md`, section 3): at most 2% in any measure, only where energy is saved. The largest work cost in the grid is 0.007% in a single run and 0.001% over 1,000 runs, far inside it.

The 1,000-copy size: memory and sharding (2026-10-03, before its re-run)

The first 1,000-copy run (six run 37090435347) stopped twice at the same point: every organism larger than physics and robotics ran out of memory about 3 minutes in (the four stacked at 1,000 copies is 1.2 million plants; at 33 KB a plant, and with the calibration organism built while the result organism was still held, it needed over 40 GB on a 16 GB runner). Three changes, none of which changes a number:

- the calibration run is made before the organism, so one organism is in memory at a time (`realms/harness.py`, `Body`);
- each plant is packed as it is made: its exogenous series as machine arrays, its random source dropped (every plant draws its series when it is made, never while it runs), plants with the same parameters sharing one table (`realms/plants.py`, `pack`, `_shared`);
- the six workflow sizes its shards by organism (`per_shard`, `workers` by organism), because one run of the four stacked at 1,000 copies takes 2 to 3 hours and a runner's job ends at 6.

Same outputs: four organisms, two seeds each, at 1x to 3x, byte-identical before and after. A plant now takes 6.7 KB; the four stacked at 1,000 copies needs about 9 GB. The re-run: 10 runs per organism at 1,000 copies (the 1-run and 10-run cells); 100 runs at 1,000 copies follows when the runners allow it (about 650 runner-hours).

The 100-run cells at 1,000 copies run on one rented machine (the one-machine grid script, removed on 13 October): every organism in turn, as many processes as the machine's cores and memory allow, the same seeds (7000 on), each finished organism saved at once, one receipt at the end (`SIX-1000x.md`), saved as `results/scale/v1/receipts/round6-1000x.md` in place of the 1-run and 10-run receipt it contains. From 12 October no 1,000-copy and no 1,000-run cell is started on any engine (the founder's order: 1, 10 and 100 only, the whole grid on GitHub's own machines, nothing rented for it); the rented-machine script is removed, and the cells already run at 1,000 copies stand as they were run.

Evaluation and simulation use only. Copyright (c) 2026 The Omni-Compass LLC. Commercial use, commercialization or monetization of any part of Omni-Compass requires a signed, paid Omni-Compass Enterprise License from The Omni-Compass LLC. All rights reserved. See `LICENSE` *and* `NOTICE` *at the root of this repository. All patents, copyrights and trademarks filed in the USA. www.omni-compass.com*

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment (2026-10-05): the compass law is the arm, written before its run

The tables of round 3 compared native against the allocation law ("omni"), the arm that came before the compass law. The engine is now one law on everything, the compass law on top of native, so the realms runner compares native against compass (`realms/harness.py` ARMS: native, watch, compass). The watch arm stays: Omni watching must write nothing and leave every muscle exactly as native. Seeds, plants, knobs, guardrails and the labelling rule are unchanged. The tables published until now describe the allocation law and stay as first measured in `docs/history/`.

Amendment (2026-10-05): four levers bounded by their physics, and the mirror label (written after the compass table was seen)

Disclosed: written after the first compass-law table (nine muscles LESS WORK PER ENERGY) was seen. Each change follows from the muscle's own model (`docs/MECHANISM_OF_ACTION.md` 9.6), applies to every muscle of its kind, and is tested:

1. Cooling power is native. A cap moves heat removal later, never away, and stages more units.
2. A battery's reserve is spent only at the connection's wall, and only when the battery can cover the excess. Below the operator's reserve every kWh costs (1 - eta)/sqrt(eta) to buy back.
3. A backup reserve (the UPS preset, `backup=True`) is never a lever.
4. A compute pool's power cap moves only where (9.8) says a lower cap saves energy. A quantum computer, a network switch and storage are left native (race to idle).

The labelling rule gains the mirror of ENERGY IMPROVEMENT WITH SERVICE TRADEOFF: less work per energy, no work lost (at most 1%), and the time over the line proven lower is SERVICE IMPROVEMENT WITH ENERGY TRADEOFF. Everything else is as before, and every other label keeps its definition.

Also in this amendment: an effort cap on a motion axis moves only where the copper loss it saves at full acceleration, (J a[max] / kt)^2 R, exceeds the standing draw a longer move pays, p[idle] + b v[max]^2 (a reaction wheel; not traction, a flight axis or a robot joint). The machine-release margin on node pools is 0.3, the largest at which no pool is later than native (`results/realms/RELEASE_MARGIN_SWEEP.md`, the per-muscle sweep).

Omni v2: the catalog grows to 945 muscles in 59 families (2026-10-06, before any v2 seed)

Written before any counted v2 run. **The law, the controllers, the plants, the Omni layer, the outcomes, the guardrails, the label rule and the invalidity rules are v1's, byte for byte.** Only the catalog and the presets it needs change, so by the change rule of `docs/OMNI_V1.md` this is a new version, Omni v2

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

(`OMNI_V2.json`, `docs/OMNI_V2.md`), and every modelled result is run again on it. No v1 result is read as a v2 result.

What is added, each row with its real system, its setting and its source, built by `tools/realms_catalog_v2.py` from three committed files by the v1 rules (realm, membership, plant, preset and knob: `tools/realms_catalog.py`, unchanged):

- **The 656 of v1, byte for byte** (`realms/catalog_v1.csv`): every v1 muscle keeps its id, realm, plant, preset and knob.
- **118 real controls the realm study had already found and the tower lacked** (`docs/realm_study/TRUE_MUSCLES.csv`, the rows marked "added (real, not in the 656)"; six of them were already in the tower under another name and are listed as skipped in `realms/catalog_provenance.json`). They join the family the study filed them under; 70 of them are spine muscles (Kubernetes, nodes, hosts, GPUs, storage, network, observability, power, cooling) and so sit in all four realms.
- **171 muscles in thirteen new families** (`realms/wave4_families.csv`), the domains the tower did not cover, one new preset each (`realms/presets.py`, round engineering figures for the class of machine, as every other preset):

Family	Realm	Plant / preset	Muscles	Examples of the real system
Healthcare Critical Environments	Energy / Facility / Industrial	thermal_zone / hospital	13	ASHRAE 170 rooms on a hospital BMS (Metasys, Desigo); isolation-room pressure; pharmacy cold rooms
Medical Imaging & Clinical Systems	Distribution / Specialized	compute_pool / clinical	12	DICOM archives and routers (Orthanc, dcm4chee), EHR tiers, HL7/FHIR engines, monitoring gateways
Agriculture & Irrigation	Energy / Facility / Industrial	process_loop / irrigation	14	pivot and pump controllers (Valley, Lindsay, Netafim), greenhouse climate computers (Priva), grain dryers
Oil & Gas Pipelines	Energy / Facility / Industrial	process_loop / pipeline	14	compressor and pump station SCADA (Emerson, AVEVA, Honeywell), API 1130 leak detection, DRA injection

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Family	Realm	Plant / preset	Muscles	Examples of the real system
Rail Traction & Train Control	Physics / Robotics / Autonomous	motion_axis / rail_traction	14	traction converters and ATO (Siemens Mobility, Alstom, Hitachi Rail), CBTC headway, ERTMS
Marine Propulsion & Vessel Automation	Physics / Robotics / Autonomous	motion_axis / marine_propulsion	12	propulsion and power management (Kongsberg, Wärtsilä, MAN), IMO shaft power limitation
Ports & Maritime Logistics	Distribution / Specialized	compute_pool / port	12	terminal operating systems (Navis N4), automated cranes and AGVs (Kalmar, Konecranes), shore power
Mining & Mineral Processing	Energy / Facility / Industrial	process_loop / mill	14	grinding and flotation control (Metso, FLSmidth, ABB), ventilation on demand (Howden), dewatering
District Heating & Cooling	Energy / Facility / Industrial	process_loop / district_heat	13	network and substation control (Danfoss Leanheat, Kamstrup), CHP dispatch, thermal storage
Power Generation & Turbine Control	Energy / Facility / Industrial	process_loop / turbine	14	governors and plant DCS (GE Mark VIe, Emerson Ovation, Woodward), AVRs, hydro gates, reactor rods
Renewable Generation & Inverter Control	Energy / Facility / Industrial	process_loop / inverter	13	IEEE 1547 inverter curves (SMA, Enphase), wake steering (NREL FLORIS), pitch and curtailment (Vestas)
Elevators & Vertical Transport	Physics / Robotics / Autonomous	motion_axis / elevator_hoist	12	drives and destination dispatch (Otis, KONE, Schindler), ISO 25745 standby modes
Pharmaceutical & Food Manufacturing	Energy / Facility / Industrial	process_loop / batch_reactor	14	ISA-88 batch control (DeltaV, SIMATIC Batch), bioreactors (Sartorius), pasteurizers, CIP, cleanrooms

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Four wave-4 names collided with the tower and carry a domain prefix (`terminal_tank_level_target`, `train_auxiliary_power_budget`, `plant_reactive_power_target`, `inverter_frequency_droop_setpoint`). Eleven names the knob rules would have placed wrongly are set by hand in `tools/realms_catalog.py` OVERRIDE and listed there.

The organisms of v2: Compute / AI / Cloud 430, Physics / Robotics / Autonomous 376, Energy / Facility / Industrial 470, Distribution / Specialized 440, the four stacked 1,716, the whole tower 945; the shared spine is 257 muscles. In code and workflows the two whole-tower organisms are now named `tower` and `stack` (nothing is named by a count); the v1 names `organism_656` and `stack_1226` are read as aliases, so every v1 run folder and record still reads.

Checked before this freeze, on seed 7, every one of the 289 added muscles: deterministic, the watch arm equal to native, every knob handed back after the kill, no number undefined, Omni's time over the line never above native's. Two presets were adjusted on that check and before any counted run: the inverter plant's disturbance amplitude (0.8 to 0.5, with its noise 0.05 to 0.02) because native itself was outside its band a quarter of the time, and the elevator hoist's position gains (kp 2,000 to 3,000, kd 400 to 500) with a smaller load disturbance (400 to 100 N m), because the first figures put native's tracking error at its limit under passenger load. Where native is still often outside its band in some heavy-load muscles (the compute pools at their busiest sizes), that is the plant at the size the muscle id draws, the same for both arms, and it is reported as it comes.

v2 runs: the realms table (every muscle alone and the five organisms, seeds 3000-3009, three GitHub runs A, B, C), the six-organism grid at 1, 10, 100 and 1,000 copies, the six organisms with the real cluster inside, and the big organisms on Azure, each on the v2 fingerprint; the live benchmarks that import none of the realm files (Kubernetes alone, Azure alone, CityLearn, the grid, the robots, the database) are run again on v2 as GitHub's queue allows, their v1 tables kept as v1 tables.

Omni v3: the slack gate on speed knobs (2026-10-06, after the v2 table, before any v3 seed)

Declared on the v2 result and before any v3 run. The v2 table (`results/realms/REALMS.md`, three runs reproduced) read Physics and the whole tower as "energy improvement with a service tradeoff" where v1 had every organism superior. The rows that carried it were the new speed muscles: three rail traction muscles where Omni's slowing added 1.6 to 2.7 points of lateness on a train already near its timetable's capacity, and two marine and two elevator muscles where the slower cycle finished fewer moves in the hour. By the honesty rule the first suspect was our own wiring, and it was: the realm harness had no do-no-harm gate on the speed knob of a motion axis, so the compass slowed an axis that had no slack to spend. The robot benchmark has such a gate (its paired physics trial, `docs/ROBOTICS_PREREGISTRATION.md`); the realms get one now.

The rule (`realms/compass_arm.py`, `speed_slack`). A motion axis is offered its speed knob only where its duty at full speed, task rate × (move time at full speed + dwell), is at most SLACK = 0.5, computed from the plant's own figures before any decision. The compass may ease an axis down to 0.4 of its speed,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

which stretches a move by up to 2.5 times; an axis busy more than half the time at full speed cannot absorb that when tasks arrive in bunches, and its knob stays native. Where the knob is offered, nothing else changes: the compass, its gains, the cover [0.4, 1.0] and the fail-up are v2's.

The marine preset. Four 600 rad speed changes an hour made a one-hour run too coarse to count (one unfinished move is a quarter of the hour's work); the v3 preset is twelve changes of 200 rad an hour, a move of 126 s plus 30 s of dwell, deadline 1,200 s. No other preset changes.

What the gate does on the shipped presets (the middle size; a muscle's own size, 0.6 to 1.4 on the task rate, moves its duty either side):

Preset	Move at full speed	Dwell	A task every	Duty	The speed knob
flight axis	4.8 s	2.0 s	20 s	0.34	offered
reaction wheel	30.0 s	5.0 s	100 s	0.35	offered
marine propulsion	126.5 s	30 s	300 s	0.52	left native
elevator hoist	12.8 s	8.0 s	40 s	0.52	left native
robot joint	0.7 s	0.2 s	1.7 s	0.54	left native at the middle size, offered on the lightly loaded joints
EV traction	35.6 s	10 s	60 s	0.76	left native
rail traction	220 s	20 s	300 s	0.80	left native

The threshold is a declared number set on the v2 finding, not a fitted one: it is written here before the v3 runs and applies to every axis alike. Where it leaves a knob native the row will read as native does, and that is the result. Everything else, the plants, the outcomes, the guardrails, the label rule and the invalidity rules, is v2's. v3 runs the realms table three times (A, B, C), then the grid, then the organisms with the real cluster inside; the v2 table stays a v2 result.

Amendment (2026-10-16): the spine, the seventh organism (written before its run)

The founder's order of 16 October: the **spine** is an organism in its own right. It is the set of catalog muscles whose realm list names all four realms, 267 of the 1,107 (`tools/run_realms_v5.py`, `spine_rows`), in thirteen families: Kubernetes workload scaling, container resources, placement and scheduling, node fleets, cloud capacity, host CPU and memory, GPU hardware, network, storage, observability, reliability and security, electrical distribution, cooling. Run alone it is a data center with nothing of any one trade in it, the base every stack runs on (`docs/THE_SPINE.md`).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- The spine runs as the seventh organism in every organism harness, under the same three loads (its own, the climb, work waiting in line), the same seeds (3000-3009 preregistered), the same two arms (native; Omni-Compass on top of native) and the same label rule as the other six; every table lists it first. In `tools/run_scale.py` and the grid conductor it is organism 7, so every grid run already started reads back under its own number; with the real cluster inside it is `tools/run_kil.py --organism spine`.
- The organisms are groupings of catalog rows made in the runners. No engine file changes: the fingerprint (`python3 tools/omni_version.py`) is the same before and after, and the six organisms' results on the engine that stands are unchanged by the seventh (the run is deterministic on its seeds; the rerun that adds the spine's rows reproduces theirs to the digit, checked by `realms-v5.yml`).
- Nothing is read across engines: the spine's rows carry the engine they ran on, like every other row.

CHAPTER 54

The Compass Law on Real Kubernetes: Preregistration

Written and committed before the run. The run's commit is the one that carries this file; nothing in the law, the harness or this rule changes after it starts.

What is run

Workflow `benchmark-reps` on `main`, 10 repetitions. Each repetition runs three arms back to back on the same runner, each on a fresh six-worker kind cluster, in an order rotated by repetition (`scripts/kind_paired.sh`):

Arm	What governs
native	Kubernetes alone (HPA at target 50, scheduler); Omni-Compass not started
omni	Omni-Compass on top with the engine's allocation law (`--law governor`, the law of sets 22 to 25)
compass	Omni-Compass on top with the compass law (`--law compass`, `omni_controller/controller.py`)

Load: fixed rate (`loadgen=open`), the same work in every arm. 900 measured seconds per arm. SLO 500 ms at the 95th percentile. Every Omni arm runs the six-state engine on every decision, the nervous system's authority and release gate, the shield, the compass, and ends with the reset, which must return the HPA target,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

its replica range, the pods' CPU limits and every worker to native, with no record left (`scripts/kind_bench.sh`).

The compass law in the live controller

The service position is the 95th-percentile response time over the SLO (0 calm, 1 the line); a blind probe or a pod waiting for a place reads as past the wall. The force is `A tanh((K_P (p - 0.5) + K_D v) / A)` with K[D] for critical damping times the realm push factor 3, the same law and gains as on every realm muscle (`realms/compass_arm.py`): up gain 0.10, down gain 0.02, release threshold -0.2. Two levers:

1. **HPA target**, cover from 60% of the operator's target to the operator's own: the up force lowers it (more pods), the down force returns it toward the operator's. It is never tighter than native.
2. **Node pool**: past the 0.95 wall one machine more at once; one machine back only while the force is below -0.2, the position is below the center, and the nervous system's release gate is open.

Outcomes and the rule

Primary: **worker nodes in service** (mean) and **95th-percentile response time**, each arm against native, paired over the 10 repetitions with a t-based 95% interval (`tools/live_reps.py`).

Band first: the compass arm is a win only if its p95 is not behind native's (the upper end of the 95% interval of the paired difference at or under 0) **and** failed requests are not higher. If that holds and machines in service fall with an interval wholly below 0, the label is **fewer machines within the band**. If machines fall but the band condition fails, the label is **tradeoff**. Otherwise **not established**.

Secondary, reported, not used for the label: p99, mean response time, HPA replicas, pods started, pod start wait, CPU including Omni-Compass's own, the declared energy models. The omni arm is reported against native and against the compass arm by the same rule. A run that fails its own checks (reset, controller stopped early, missing permission) is marked invalid and left out, never silently counted.

Evidence class **L**: real Kubernetes software on kind. Energy on kind is a declared model, not a meter.

Set 26 result

Compass arm against native: machines in service -17.2% (-26.4% to -7.9% of native), p95 -64.8%, failed requests 0 on both: **fewer machines within the band** (`results/live/LIVE_REPS_26.md`). The allocation law in the same set: machines -35.8%, p95 -55.4%.

Set 27 (written before the run)

The compass in the live controller now reads the service as the GPU compass does (`omni_controller/gpu_compass.py`, GPU amendments 6 and 7): the mean response time of the latency window between the bare service time (a tenth of the SLO) and the SLO, held at the compass's center

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

0.4 (the GPU service profile); p95 at or past the SLO, a blind probe or a pod waiting for a place is past the wall. Everything else, the arms (native, omni, compass), the load, the duration, the outcomes and the labelling rule above, is unchanged. The run's commit is the one that carries this section.

Set 27 result

Compass arm, aligned with the GPU governor, against native: machines in service -15.9% (-1.462 to -0.450 machines), p95 -65.5% (-311.8 to -156.1 ms), p99 -72.6%, failed requests 0 on both: **fewer machines within the band** (`results/live/LIVE_REPS_27.md`, run 37071353971, commit `d46c959`). The allocation law in the same set: machines -36.6%, p95 -53.1%.

The verdict in the live controller (2026-10-03, before any further set)

The compass law gives a machine back only where it measures that the service is never behind for it (`omnicompass/verdict.py`, stepwise, in `omni_controller/controller.py`). While the service is calm (inside the compass, no pod waiting, no breach), one more machine is given back on trial. The response times of 200 requests served without it are set against 200 served just before and against the cluster as it first ran on its own:

- at most 2% slower than both: the machine stays given back;
- slower than that: it is taken back and not tried again for 120 decisions.

Where no machine passes, the pool stays as the cluster runs it alone. The HPA target's cover is unchanged: from 60% of the operator's target up to the operator's own, never looser than native. Every trial is in the audit. The next set runs with this verdict; sets 26 and 27 ran before it and stay as they ran.

Set 28 and set 29 (2026-10-03, set 29 written before its run)

Set 28 (run 37087620193, commit `24666d7`) ran the compass law with the verdict. With Omni-Compass on top against native:

- machines in service −4.7%;
- p95 −65.3%, p99 −68.6%;
- pods waiting 0;
- failed requests 0.

Total CPU including Omni-Compass's own came out **+2.2%** (+0.003 to +0.042 cores), more than the 2% the one rule allows (`DISCLOSURES.md`, section 3). The cause is the controller's own cost: 0.063 cores, mostly a new kubectl process for every read, about 20 a minute. The compass law with the verdict freed only 0.040 cores of work. The allocation law in the same set: machines −29.6%, p95 −58.0%, total CPU including its own −1.2% (not significant). Set 28's receipt is `results/live/LIVE_REPS_28.md`, published with this section.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Set 29 runs the same arms, load, duration, outcomes and rule as set 28. One thing changes: the controller reads through one `kubectl proxy` started once, under the same least-privilege identity, so a read is a local HTTP request instead of a new kubectl process (`omni_controller/controller.py`, `Kube`; writes are unchanged; `tests/test_api_proxy.py`). The label also requires total CPU including Omni-Compass's own to be no more than 2% above native.

Set 29 result (run 37094338955, commit `a3721cc`): the compass law with the verdict, total CPU including its own **−4.7%** (−0.071 to −0.017 cores), passes; Omni-Compass's own CPU 0.011 cores (set 28: 0.063). Machines −5.1%, p95 −64.4%, p99 −71.1%, HPA replicas −7.6%, failed requests 0. No measure significantly behind native in either arm. Receipt: `results/live/LIVE_REPS_29.md`.

The cost to match (written before its run)

The question a buyer asks: what would native Kubernetes have to spend to answer as fast as it does with Omni-Compass on top? Each repetition runs, on the same runner and the same work, in rotated order:

- native (the operator's HPA target 50);
- native tuned harder by its operator, HPA target 40, 30 and 20 (more pods, faster answers), no Omni-Compass (`ARM=native40`, `native30`, `native20` in `scripts/kind_bench.sh`);
- native with Omni-Compass on top, the allocation law (`omni`);
- native with Omni-Compass on top, the compass law with the verdict (`compass`).

The report (`tools/live_reps.py`, "The cost to match") lists every arm's p95, p99, HPA replicas, CPU including Omni-Compass's own, and machines in service. For each Omni-Compass arm it names the cheapest native setting (by CPU) whose p95 is at or under Omni-Compass's, and that setting's extra replicas, CPU and machines over Omni-Compass. If no native setting tried reaches it, the report says so and gives the lowest native p95. 10 repetitions, 900 measured seconds per arm, fixed-rate load.

The fault test (written before its run)

Health, security and the babysitting a cluster needs, measured. Every arm (native; native with Omni-Compass on top, the allocation law; native with Omni-Compass on top, the compass law with the verdict) meets the same four faults at the same moments (`scripts/kind_faults.sh`, `FAULTS=1`):

1. at 15% of the run, a worker machine dies (its kind container is stopped) and comes back two minutes later;
2. at 35%, traffic triples for two minutes;
3. at 55%, a pod with no CPU limit burns CPU for two minutes;
4. at 75%, the response-time probe goes blind for one minute.

For each fault the report (`tools/live_reps.py`, "The fault test") gives the time to recover (from the fault's start until responses stay under the line for 30 s straight, at most 300 s) and the share of samples over the line or failed in the 300 s after it, paired against native over 10 repetitions. All the usual gauges are

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

reported as well, now including the share of response samples over the line (`pilot/bench_report.py`). The aim is lower in each.

The fault test, first run (run 37094604580, commit `a149d4e`; `results/live/FAULTS.md`). Omni-Compass on top recovered faster than native from every fault (allocation law: machine down −29%, runaway pod −35%, spike −7%; compass law: −14%, −17%, −6%), p95 −53% and −55%, p99 −27% (not significant) and −57%. One measure read LOSS: with the compass law, **HPA replicas +8.2%** (+0.41 to +0.99, significant), with CPU and machines unchanged and no energy saved, so outside the one rule (`DISCLOSURES.md`, section 3). The cause: past the wall the compass lowers the HPA target at once (more pods, the faster recovery), then handed the operator's target back step by step and held each step for the autoscaler's window, so the extra pods outlived the fault.

The change, written before the re-run (`omni_controller/controller.py`, the compass's push and pull on the HPA target; `tests/test_compass_controller.py`, "fault over"): once the responses are back inside the band (the compass's position under its center), the response line is clean and no pod is waiting, the operator's own target returns at once and is not held by the window. More pods only while the fault lasts. The re-run is the same fault test, arms, load, duration and rule (set 30 F); set 30 runs the same code without faults, to show nothing else moved.

Set 30 and set 30 F (runs 37105047258 and 37105046042, commit `acc1c4e`; `results/live/LIVE_REPS_30.md`, `results/live/FAULTS_30.md`). Set 30, no faults: no LOSS clear of the noise in either arm; the compass law's machines −9.9%, p95 −64.9%, time over the line −98.7%, HPA replicas −32.2%, total CPU −6.5%. Set 30 F: recovery faster than native from every fault in both arms; the compass law's HPA replicas **+5.6%** (first run +8.2%), still significant, with CPU and machines unchanged. The allocation law, which recovers as fast or faster, held no extra pods (+2.0%, not significant).

The second change, written before set 31 F (`omni_controller/controller.py`; `tests/test_compass_controller.py`, "blind"). Past the wall, the compass lowers the HPA target (more pods) only when the cause is load: the response line breached with every sense live and no pod waiting. Past the wall from a blind sense, or from pods waiting for a machine that is gone, more pods answer neither, so the target is the operator's own: fail up is native's own setting, as on the card, where fail up is the card's own clock and limit. The machine reflex (one machine more past the wall) is unchanged. Set 31 F is the same fault test, arms, load, duration and rule; set 31 the same without faults.

Set 31 and set 31 F (runs 37110007121 and 37110005322, commit `0a38e76`; `results/live/LIVE_REPS_31.md`, `results/live/FAULTS_31.md`). Set 31 F: the compass law's HPA replicas under faults **−1.1%** (not significant): the extra pods are gone. No LOSS clear of the noise in either arm; recovery faster than native from every fault (compass law, machine down −49%). Set 31: no LOSS clear of the noise; the compass law's machines −10.4%, p95 −66.0%, p99 −73.0%, time over the line −99.4%, HPA replicas −44.5%, pods started 0 against native's 4.3, total CPU −6.1%.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The bill on a real cloud (written before its run)

The question a buyer pays for: the same work, a smaller bill? On kind every machine stays powered, so a machine given back saves only a declared model's energy. On a real cloud the machine is deleted and stops being billed. The run (`.github/workflows/aks-metered.yml`, `scripts/aks_paired.sh`, `scripts/kind_bench.sh` with `PLATFORM=aks`):

- **The cluster.** Azure Kubernetes Service, a fresh cluster for every arm, built the same way:
  - a system pool of one machine, tainted so no workload lands on it (AKS's add-ons and the load generator: kind's control plane);
  - a work pool starting at 4 machines (Standard_D2s_v5) under **Azure's own cluster autoscaler** (min 1, max 4; scale down after 2 minutes unneeded), which deletes a machine once it is empty.
- **The arms**, rotated in each repetition:
  - native: Kubernetes with Azure's autoscaler alone;
  - native with Omni-Compass on top, the compass law with the verdict (`compass`);
  - native with Omni-Compass on top, the allocation law (`omni`).

With Omni-Compass on top, the machines it gives back are idled (new pods go elsewhere, their pods leave first), and Azure's autoscaler then deletes them. Omni-Compass never deletes a machine itself.

- **The same work** in every arm: the fixed-rate load of sets 22 onward, 900 measured seconds after 120 s of warm-up.
- **The bill.** Every 15 s, the number of work machines that exist (in service or idle, every one is billed), integrated over the measured window: billed machine-hours, priced at Azure's list price for the machine (USD 0.096 an hour for Standard_D2s_v5, Linux, pay as you go, set in the workflow's input). Omni-Compass never reads this count.
- **Outcomes.** Billed machine-hours and the bill (the aim is lower), and every gauge of sets 28 and 29 (response time, failures, pods waiting, CPU including Omni-Compass's own), paired against native with 95% intervals over 5 repetitions. Labelled by the one rule (`DISCLOSURES.md`, section 3): no LOSS of more than 2%, and only where the bill or energy is saved.
- **Housekeeping.** One repetition at a time; each cluster deleted when its arm ends, before the next is made; the resource group deleted at the end of every repetition whatever happens. It needs the repository secret `AZURE_CREDENTIALS`.

The capacity test (written before its run)

The question behind "more work for the same cost": on the same machines, how much more work does Kubernetes serve with Omni-Compass on top before its answers break the line? Each repetition runs native, native with Omni-Compass on top (the allocation law) and with the compass law and the verdict, in rotated order, on the same six workers, the open-loop load rising in eight equal steps of one load generator each (6

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

requests a second per generator, 1 to 8 generators, 200 s a step, 1,600 measured seconds; `load_steps` in `benchmark-reps`). A run's capacity is the highest step at which no more than 5% of the response samples (every 5 s, through the Service) are over the line (500 ms) or failed, every lower step holding too, the first 30 s of each step left to settle (`tools/live_reps.py`, `capacity`). Reported: each arm's mean capacity in requests a second, its change against native and the 95% interval of the paired difference over 10 repetitions; every usual gauge beside it. Labelled by the one rule: no LOSS of more than 2%.

The fairness test (written before its run)

The question a buyer with many tenants asks: when one application surges, does Omni-Compass on top protect its neighbour, or starve it? Each repetition runs native, native with Omni-Compass on top (the allocation law) and with the compass law and the verdict, in rotated order, on the same six workers, with two applications on them (`TWO_APP=1`, `deploy/kind/noisy.yaml`): php-apache under its usual fixed-rate load, and a noisy neighbour, the same image and the same HPA rule, whose own fixed-rate load surges in steps (0, 0, 6, 0, 6, 0 load generators of 6 requests a second, the same moments in every arm). Each application's response time is probed through its own Service. Omni-Compass governs both HPAs (`deploy/kind/rbac-omni-noisy.yaml`: the second HPA and nothing else more). Reported: every usual gauge for php-apache, and the neighbour's p95, p99, time over the line and failed requests, each paired against native over 10 repetitions with its 95% interval. The label is the one rule, applied to both applications: no LOSS of more than 2% for either.

The capacity and fairness results, and the amendment they call for (2026-10-03 evening, before either is run again)

Capacity (`results/live/CAPACITY.md`, run 37150909816): the compass law served 33.0 requests a second within the line against native's 24.6, **+34.1% (95% interval of the paired difference +6.2 to +10.6 requests a second)**, with response times about half of native's and fewer failures. One measure significantly LOSS: pods started 7.3 against 5.6 (+30.4%) while the mean HPA replicas were 26.9% lower: churn, not more pods. **Fairness** (`results/live/FAIRNESS.md`, run 37154210570): the neighbour unharmed under both laws; with the compass law php-apache's failed requests 3.89% to 4.90% (+0.12 to +1.90 points), pending pods and pod start wait higher, no machine saved. By the one rule neither result is labelled GAIN. Both causes are read from the controller's code; both corrections are stated here, as law, before the tests run again.

1. Only a sensed muscle moves (the fairness cause). Let the probe measure the response time of the services in a set S (`--sensed ns/deployment,...`; empty means every HPA, the single-service case). For each HPA h scaling a deployment d(h) with the operator's target $x^{(op)_h}$, the target written is

$x_h(t)$ = the compass's (or the allocation law's) target, if $d(h) \in S$; $x^{(op)_h}$, if $d(h) \notin S$

The probe's position p is a statement about S alone. A push on a muscle outside S answers no sensed error and adds pods that compete with S for the same machines (the run's pending pods and failures). It is the GPU law's own rule, applied to Kubernetes: where Omni-Compass cannot sense, it stands at native's own setting.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. Pods owed to a growing demand stay (the churn cause). Let u(t) be the CPU the workers use and W the HPA's scale-down window (W = 300 s unless the operator set one). The demand is *still growing* when

G(t) = [u(t) > (1 + ε) min[t − W ≤ s ≤ t] u(s)], ε = 0.05 .

After a breach the compass lowers the target to the bottom of its cover, x = x[lo] = 0.6 x^(op) (more pods, at once). Before this amendment, the first decision with the position back under the centre, p < c = 0.4, no breach and no pod waiting, returned x = x^(op) at once. Under a rising load the autoscaler then removed the extra pods one window later and started them again at the next step: the run's churn. The return is now

x ← x^(op) only if p < c, no breach, no pod waiting, ¬ G(t),

and while G(t) holds the target stays where the breach put it. A fault or a spike that has passed has a flat or falling u, so G is false and the operator's target returns at once, as the fault test requires (set 31 F: HPA replicas under faults −1.1%); only a demand still climbing keeps its pods. ε = 0.05 is set above the decision-to-decision noise of the node CPU reading. A rise too small to clear it leaves the rule as it was before this amendment (the target returns at once), so the correction can remove churn but cannot add any.

Nothing else changes: the compass's band, gains and centre, the verdict, the fail-up rules, the release gate and the node-pool law are as registered. Tests: `tests/test_compass_controller.py`, cases *demand* and *sensed*, beside the existing *fault over*, *blind* and reset cases.

The re-runs, on the commit that carries this amendment, unchanged in design: the capacity test (`load_steps` 1 to 8, 1,600 s), the fairness test (`two_app` 1, 900 s) and the fault test (`faults` 1, 900 s), 10 paired repetitions each, arms native / omni / compass. The second application is now probed and reported as before, and its HPA is held at the operator's target. Labelled by the one rule. Every number, whatever it says, is published beside the runs above.

The re-runs under the amendment: results (2026-10-04)

All three on commit `199f350`, 10 paired repetitions each, the design unchanged.

- **Fault test, set 32 F** (`results/live/FAULTS_32.md`, run 37162459956): **no LOSS clear of the noise under either law.** The compass law recovers from a lost machine 58% faster and starts 34% fewer pods; the amendment left the fault behaviour of set 31 F intact.
- **Fairness** (`results/live/FAIRNESS_2.md`, run 37162458834): **correction 1 holds.** With the compass law php-apache's failed requests are no longer lower (−14.0%, not significant; before +26.0%), pending pods −10.5% (before +65.2%); the neighbour unharmed under both laws. The compass law's response-time gains in this test are no longer significant. Still higher under both laws: the mean pod start wait (+1.1 s compass, +1.7 s allocation law).
- **Capacity** (`results/live/CAPACITY_2.md`, run 37162457542): the compass law served **24.6 against native's 16.2 requests a second, +51.9% (+6.2 to +10.6)**, the same paired difference as the first run on slower runners; response times −28% to −56%, failures −9.6%, HPA replicas −10.7%. **Correction 2 did not remove the extra pod starts** (5.1 against 3.8, +34.2%; before +30.4%): its premise, that the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

extra starts were pods removed and started again between steps, is not borne out. With the mean replicas lower, the reading the data support is pods started earlier on a rising load, the mechanism of the added capacity. Correction 2 stays (it removes no gain and added no measure power given); the pod-start rows stand as measured, and by the one rule neither the capacity nor the fairness arm is labelled GAIN while they do.

The pod record, and the second amendment (2026-10-04, before the next runs)

What the pod record shows (`tools/pod_report.py`, workflow `pod-report`, read from the stored artifacts of runs 37162457542 and 37162458834; nothing re-run). In the capacity test native started its pods once, early (33 of 38 in the first fifth of the window), and removed none. With Omni-Compass on top, two minutes into the window the controller raised the HPA target above the operator's (the conveyance: each pod given a larger CPU limit, the target raised by the same factor so each pod stays as busy, x = g x^(op); 114% with the compass law, 190% with the allocation law). The autoscaler then removed pods (14 with the compass law, 35 with the allocation law, over ten repetitions), and the next load steps started them again. **The extra starts are exactly those removals.** Correction 2 above read the wrong signal: the CPU used by the whole node, where one load step is lost in the node's own load.

3. A raise of the target waits for a steady demand. Let the demand on an HPA's service be read from the autoscaler's own status, D(t) = u̅(t) r(t): the pods' mean CPU utilisation of their request times the pods running, the CPU used in units of one pod's request. With W the HPA's scale-down window and ε = 0.05,

$$S(t) = [t - t_0 \geq 0.9\ W \wedge \max[[t-W, t]]\ D \leq (1+\varepsilon)\min[[t-W, t]]\ D]$$

(t_0 the oldest sample in the window). A new target above the one standing (fewer, larger pods) is written only when S(t) holds; the autoscaler itself removes pods only after its scale-down window, and Omni-Compass now asks the same of its own consolidation. A lower target (more pods) is never held, and the return of the operator's own target after a fault (rule 2) is unchanged. Correction 2's growth test G(t) now reads the same D(t) of the HPA concerned, not the node's CPU. Tests: `tests/test_compass_controller.py`, case *steady*.

The capacity, fairness and fault tests are run again on the commit that carries this amendment, unchanged in design, and published beside the runs above whatever they show. The bill run on Azure (`aks-metered`, run 37171672509) started on commit `199f350`, before this amendment, and is reported as of that commit.

The third amendment, and a change considered and declined (2026-10-04, before the next runs)

4. A lower target is never held. Until now every new HPA target, in either direction, was held for one autoscaler window W while the line was clean, so on a step up the compass's push (a lower target, more pods) could wait up to W and the pods arrive after the line is missed. The hold exists because a raise inside the

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

window removes pods the autoscaler then starts again; a lower target asks for pods and removes none. The hold now applies to raises only:

write $x_h(t) \Leftrightarrow x_h(t) < x_h\hat{}(\text{now})$ `v` no write in $[t-W, t)$ `v` the operator's own target returns,

with rule 3 still requiring a steady demand before any raise. Tests: `tests/test_convey.py` (a lower target written at once inside the window).

Declined: raising the replica cap above the operator's. `deploy/kind/demo.yaml` sets `maxReplicas: 10`, and at the top of the capacity test both arms meet it. Lifting it would let Omni-Compass run more pods than the operator authorised, which is more resources, not the same resources doing more, and it would break the shield's standing rule that Omni-Compass never moves past an operator's bound. Native would need the same cap for the comparison to stay fair. It stays at the operator's value in every arm; a higher cap is the operator's decision, tested as its own setting if ever asked for. Already in place and unchanged: a pod waiting for a place reads as past the wall and asks for one machine more at once.

A narrower form was proposed the same day (`docs/history/AMENDMENT_RISING_STEP_CAP.md`): while the demand rises and a pod of the sensed service is pending, raise `maxReplicas` by the pending count and lower the target to match. It is declined for a mechanical reason as well as the one above. The replica cap does not make pods pending: at the cap the autoscaler simply asks for no more pods, so the pending count there is zero and the write would never fire where it is aimed. A pod is pending only when the scheduler finds no machine with room for it, and more places under the cap give such a pod nowhere more to go; the answer to that is a machine, which the compass already asks for. The part of the proposal that holds, asking for pods at once on a step up instead of after a window, is rule 4 above.

On the CPU fill (used over allocatable about 0.10 in every arm): on kind every worker reports all of the host's cores as its own, so the allocatable counts the same cores once per worker and the fill reads far lower than the machine doing the work. Every receipt from the next runs on carries the host's own busy share and core count (`host_cpu.csv`, `tools/live_reps.py`), so the room left on the real machine is measured, not inferred.

The capacity, fairness and fault tests are run again on the commit that carries this amendment, beside the runs of commit `5d2e238` (rule 3 alone), so each rule's effect stays separable.

The second amendment's runs: results (2026-10-04)

`results/live/AMENDMENT_2_RUNS.md`, commit `5d2e238` (rule 3 alone), 10 paired repetitions each.

- **Capacity: no LOSS clear of the noise under either law.** Compass law 24.6 against native's 17.4 requests a second, +41.4% (+5.4 to +9.0); allocation law 25.2, +44.8% (+4.9 to +10.7). The compass law's pods started 5.7 against 4.1, interval −0.64 to +3.84: no longer significant. Rule 3 removed the significant pod-start excess and lifted the allocation law's capacity from +0.0% to +44.8%.
- **Faults: no LOSS clear of the noise under either law.**

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Fairness: the compass law, no LOSS clear of the noise for either application.** The allocation law: php-apache much lower, and the neighbour's failed requests **+0.74 points (+0.19 to +1.28), significant**. The allocation law conveys idle CPU to the service it senses; on machines shared with a surging neighbour that CPU is the neighbour's headroom. The allocation law is not labelled GAIN in this test.

Standing after rule 3: the compass law is clean in all three tests (no LOSS clear of the noise, capacity +41.4%). Rule 4 (a lower target never held) runs next on commit `583c97f`, beside these, to see whether it adds capacity without costing a row.

The fourth amendment: the replica cap as a lever the operator grants (2026-10-04, before its run)

The founder's instruction: no number in the harness is hard-wired; every one moves where the system lets it. The cap of 10 in `deploy/kind/demo.yaml` is the value of Kubernetes' own php-apache example, not a choice of any operator, and an earlier session read it as an operator's bound. It becomes a lever, under the operator's grant.

5. Replica room. With `--replica-ceiling` N[max] granted (0, the default, leaves the cap untouched), for a sensed HPA under the compass law, with r the pods running, c the cap, $\bar{u}$ the pods' mean utilisation and x the target, the autoscaler's own arithmetic asks for $n = \lceil r\,\bar{u}/x \rceil$ replicas, and

c ← min(N[max], n) if r ≥ c, n > c, p ≥ centre or the line is breached; c ← c^(op) if n ≤ c^(op), p < centre, no breach, S(t).

The cap is raised only while it binds and the line is threatened, to what the autoscaler asks and never past the grant, and returns to the operator's once the demand has held still for a window. The operator's range is recorded before the first change; the reset restores it. Tests: `tests/test_compass_controller.py`, case *room*.

Its run (a setting of its own, labelled as such): the capacity test unchanged, `replica_ceiling` 30, beside the runs without it. Native keeps its cap of 10, as an operator who has not raised it would; the extra pods the compass uses are counted in the HPA replicas row, so the receipt shows what the capacity cost in pods, not the gain alone.

The third and fourth amendments, and the bill on a real cloud: results (2026-10-04)

Rule 4 (`results/live/AMENDMENT_3_RUNS.md`, commit `583c97f`): **the compass law has no LOSS of more than 2% on any measure in any of the three tests.** Capacity +48.1% (+5.7 to +9.9), no LOSS; fairness, no LOSS for either application (energy per core-hour on the declared standby model +1.5%, inside the allowance); faults, no LOSS, lost-machine recovery −61%. The allocation law: capacity +55.6%, no LOSS; in fairness the neighbour no longer LOSS. The first runs with the real machine metered: a 4-core GitHub runner 48% to 70% busy, where kind's "used / allocatable" reads 0.07 to 0.10.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Rule 5, the replica lever (`results/live/REPLICA_ROOM.md`, commit `2101c3d`, ceiling 30): the compass law served 24.6 requests a second, the same as without the lever, with 78% more pods and 26 pod starts against native's 4.6, both significant. **The replica cap was not what limited the service; the machine doing the work was.** The lever stays, off by default, as the operator's to grant where machines have room; it is not part of Omni-Compass's default setting and this setting is not labelled GAIN.

The bill on a real cloud (`results/live/AKS_BILL.md`, run 37187059424, commit `5b2832f`, four paired repetitions): **no difference in the bill either way** (allocation law −0.6%, compass law +0.8%, intervals across zero) and no measure significantly power given. Azure's own autoscaler already ran the workload on about 1.86 of 4 workers, so this light workload leaves no machine to give back. The machine savings measured on kind, where native has no node autoscaler, do not carry to a cloud with one at this load; that is the reading of record. The preregistered size `Standard_D2s_v5` is not allowed in the subscription's region; `Standard_D2s_v4` (same 2 vCPU, 8 GiB and list price) was used. Three earlier attempts stopped at the load generator's placement before any measurement and are not results.

The burst bill test (written before its run, 2026-10-04)

The steady bill run left Azure's autoscaler nothing to do and Omni-Compass no machine to give back. The question a buyer asks is the bill under load that moves: on a real cloud, with Azure's own cluster autoscaler underneath, does native with Omni-Compass on top bill fewer machine-hours than native alone when demand rises and falls? Same design as "The bill on a real cloud" (fresh AKS cluster per arm, work pool 1 to 4 `Standard_D2s_v4` under Azure's autoscaler, the bill metered every 15 s, arms native / compass / omni rotated, five repetitions), with the open-loop load in bursts (`load_steps` 1 6 1 8 1 6, six steps over 1,800 measured seconds, the same steps in every arm). Reported: machine-hours and the bill at list price, paired against native with their 95% intervals, beside every service gauge. Labelled by the one rule: a lower bill counts only if nothing is a LOSS of more than 2%.

The six organisms with the real cluster inside (written before its run, 2026-10-04)

Every benchmark runs the same six organisms, native against native with Omni-Compass on top: the four realms, the whole tower of 656 muscles, and the four stacked with every duplicate kept (1,226). Six organisms, two arms, twelve columns. The model grid (`six`) and the card in the loop (`tools/run_hil.py`, single card and eight cards) already do. The Kubernetes runs now do too (`tools/run_kil.py`, workflow `six-kube` on kind, input `organism` on `aks-metered`).

Each organism runs on the measured window's clock, 240 steps, with the real cluster as one more muscle:

- efferent: the organism's offered compute work at step k, D(k) = sum over its compute pools of lam_i(k) / sum of lam0_i, the seeded trace, identical in both arms. The load generator runs r(k) = 1 + round((LOAD_MAX - 1) (D(k) - min D) / (max D - min D)) replicas, LOAD_MAX = 6 declared here, open-loop load.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- afferent: the cluster's watts (capture.csv, the declared power model, every 15 s, identical accounting in both arms) are added to the organism's source, zone and site power, as the card's watts are in the card harness.
- the clock (stated 2026-10-07, after the 1,000-copy runs): the organism must keep the window's clock. `tools/run_kil.py` records how long after the window its last step ended (`behind_s`); the report (`tools/six_kube_report.py`) shows it as "organism behind its window (s)", shown and not judged, and marks a repetition OFF THE CLOCK when either arm ended more than 5% of the window late, because its last steps then saw a cluster whose load schedule had already ended. The pairing stands (both arms slip alike), the mark stays on the cell. The remedy is a longer window for that size on that machine (240 steps, each at least the machine's time to step the organism once), never a change to the organism or the law: the four stacked at 1,000 copies (1.7 million muscles) step in about 31 s on an 8-vCPU machine, so their window is 10,800 s (45 s steps), against 2,880 s for the tower at 1,000 copies.

Arms: native (the stacks' own controllers, Kubernetes alone, Omni-Compass not started) and compass (the compass law on every simulated muscle, rule 4 on the cluster, handed back at 90% of the window; the run is invalid if any knob is not handed back). Five paired repetitions per organism, order rotated, each arm on a fresh six-worker kind cluster, 960 measured seconds. Seed 6000 for every organism and arm.

Reported in `SIX_KUBE.md` (`tools/six_kube_report.py`): twelve columns of means, then per organism every gauge paired against native with its 95% interval. Cluster rows are measured; organism rows are models (evidence S). Each organism is labelled by the one rule: no LOSS of more than 2% on any measure (CPU and host load shown, not judged), and a gain counts only where energy or the bill is lower with an interval wholly below zero.

Result: the six organisms with the real cluster inside (run 37217362568, commit `d81d5ee`)

Thirty jobs, six organisms times five paired repetitions, native against native with Omni-Compass on top (compass law), every arm valid, every simulated knob handed back. Full report `results/live/SIX_KUBE.md`; raw files `results/live/raw/run-37217362568/`.

On the real cluster, in every organism, native + Omni was late less often and answered faster:

Organism	Time over the line, native → Omni	p95, native → Omni (ms)	Failed requests, native → Omni
Compute / AI / Cloud	41.0% → 26.7% (lower, -35%)	3,967 → 2,653 (lower, -33%, inside the noise)	14.9% → 13.3%
Physics / Robotics / Autonomous	28.4% → 15.5% (lower, -45%)	2,440 → 1,767 (lower, -28%)	5.7% → 5.0%
Energy / Facility / Industrial	21.6% → 10.4% (lower, -52%)	1,951 → 1,482 (lower, -24%)	3.8% → 3.2%

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Organism	Time over the line, native → Omni	p95, native → Omni (ms)	Failed requests, native → Omni
Distribution / Specialized	40.7% → 21.1% (lower, -48%)	2,830 → 1,943 (lower, -31%)	11.1% → 9.3%
The whole tower (656)	25.8% → 14.7% (lower, -43%, inside the noise)	2,085 → 1,247 (lower, -40%, inside the noise)	12.8% → 9.1%
The four stacked (1,226)	55.6% → 43.0% (lower, -23%)	3,703 → 2,803 (lower, -24%)	31.7% → 27.6%

No measure read LOSS beyond the noise in any organism. Energy (declared model) and CPU moved by under 3%, lower with Omni in every organism. The modelled organisms around the cluster: work the same, energy 0.1-0.2% lower, time over the line 0.5-2% lower, in every organism (evidence S).

Read with it: at a peak of six open-loop load generators the 4-core runner is past what the six workers can serve in both arms (native late 22-56% of the time, 4-32% of requests failed; host 65-91% busy). The comparison is fair (same load, same seed, same runner per pair); the absolute levels are an overloaded cluster, and a lower `load_max` is the setting for a cluster inside its capacity.

More work, faster, on fewer machines, with less energy: all four in one run (written before its run, 2026-10-04)

The four gains so far come from different tests: more work on the same machines (the capacity test, +48.1%), the same work faster on fewer machines (sets 22-27), energy equal or lower in each. This test measures all four in one run.

Design: `benchmark-reps`, ten paired repetitions, arms native and compass (rule 4), order rotated, fresh six-worker kind cluster per arm, open-loop load rising and then falling, `load_steps` 1 2 3 4 5 6 7 8 7 6 5 4 3 2 1, 180 s a step (2,700 measured seconds). The rise is the capacity test (`tools/live_reps.py capacity`, read on the way up to the peak: the highest load step at which no more than 5% of response samples are over the 500 ms line or failed, every lower step too). The fall is where machines are no longer needed and can be handed back. Over the whole window: p95 response time, worker machines in service, energy (declared model; on kind it is not a meter), CPU with Omni's own.

Reported for each, native + Omni against native, paired, with the 95% interval and read in words (GAIN, EVEN or LOSS): work (capacity, requests a second inside the line), speed (p95), machines (worker machines in service, mean), energy.

The Omni index: one number for more for the same, or the same for less (written before its first use, 2026-10-04)

Each measure is turned into a ratio oriented so that above 1 is a GAIN for Omni-Compass:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- work: work with Omni / work native (capacity, requests served, work done)
- speed: p95 native / p95 with Omni (a lower response time is faster)
- machines: machines native / machines with Omni (in service, or billed machine-hours)
- energy: energy native / energy with Omni (or the bill)

The index of one test is the geometric mean of its oriented ratios, minus one, in percent: +30% reads "30% more for the same, or the same for 30% less", across work, speed, machines and energy together. A measure a test did not take is left out of that test, never filled in. A measure inside the noise is counted at its mean and flagged. A category (real Kubernetes on GitHub, Azure, the card, the eight cards, the modelled muscles) is the geometric mean of its tests; the headline is the geometric mean of the real categories, each weighted the same; the modelled muscles are shown beside it, never inside it. Computed by `tools/omni_index.py` from each test's own paired results; nothing is typed in.

The service reading, a second reading declared 2026-10-09 (the first unchanged). The founder asked what a cache is for. Redis is bought for speed and spends memory to deliver it; the index above counts that memory as a cost at the same weight as the speed it buys, so the Redis category reads −24.9% while its work inside the line and its hit rate read GAIN in all three of our runs in every run. The question is fair, and the answer is a second reading beside the first, never a change to the first: the same tests, the same three-run rule, scored on the service the stack is bought for, **work and speed only**, with the resources it spent or saved (machines, energy, memory, connections, consumers) shown beside it and not scored. It is computed for every test alike by the same tool (`service_pct`, `service_headline_pct`), never for one stack, and printed in the same tables as a second column; the resource reading above stays the headline this program preregistered. The two readings say different true things: where the governor buys service with a resource (Redis's memory ceiling, Kafka's consumers) the service reading is higher and the resource reading says what it cost; where it gives a resource back for the same service (the database pools and caches) the service reading is nothing and the resource reading carries the gain. On the day it was declared the service reading stood at +71.8% against the resource reading's +20.5% (Kubernetes +83.2%, Kafka +1,192.8%, Redis +8.8%, the three database stacks exactly nothing; on the sets of 10 October, the brain's verdict on every stack knob, the two readings stand at +10.7% and +4.8%); Kafka's hundredfold speed ratio is why the service headline is large, and the category table is where a reader sees it. A loss in all three of our runs in work or speed counts against Omni in both readings; neither hides one.

The wiring verdicts, declared 2026-10-09 (a reading of the tables, not a change to any rule). The founder's order of the same day: Omni need not be wired into every muscle; where it cannot beat native, the muscle stays native and Omni only reads it, one wire out and no wire in. `tools/wiring_verdicts.py` reads every three-run table, the simulator tables, the realms table and the organism tables by one rule into three words per knob and case: **write** (a judged gauge GAIN in all three of our runs, none LOSS or power given in all three of our runs), **watch** (nothing GAIN in all three of our runs, whether inside the noise, the runs disagreeing, or a loss with nothing against it) and **operator's choice** (gains and losses both the same in all three of our runs, shown with both readings of the index). Rows shown and not judged never count. Nothing is typed in, and `verify.py` fails if the page (`docs/WIRING_VERDICTS.md`) differs from what the tables

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

give. The verdicts change what an operator connects, never the engine (Omni v3) or any rule written here, and every test on this page is read as before.

Demand that wanders: up, spike, partway down, back up, down to idle (written before its run, 2026-10-04)

Real demand does not rise once and fall once. It climbs, spikes, eases part way, climbs again and finally settles to idle. This test drives that shape and asks whether machines follow it in order: the emptiest machine idles first on the way down (powered and Ready at its floor, never off), the warm machines wake first on the way up (no boot), one machine always in service for the first burst (`scripts/kind_nodepool.sh`).

Design as the all-four test (ten pairs, native and compass, open-loop load, fresh six-worker kind cluster per arm), with `load_steps` 1 2 3 2 3 4 5 6 5 3 5 6 5 4 3 2 3 2 1 1 (twenty steps of 135 s, 2,700 measured seconds), the same steps in every arm. Reported, native + Omni against native, paired with the 95% interval and read in words: time over the 500 ms line, failed requests, p95, worker machines in service (and its trace step by step), energy (declared model), CPU with Omni's own, pods started. No capacity is read (the load does not only rise).

Amendment to the wandering test, written before its run (2026-10-04)

The founder's two rules for real traffic, adopted before any result of the wandering test: traffic moves one step at a time, up or down, never skipping (it may go 1 2 1 2 1 2 if it never needs 3); and machines never go below two, so two are always in service, ready for a spike, with no ceiling but the machines the cluster has. The run started with the earlier steps (which jumped 5 to 3 and 3 to 5) was cancelled before it finished; none of it is reported.

From this amendment: the machine floor is two in every arm Omni-Compass governs (`MIN_NODES`, default 2: the controller's `--min-nodes`, the actuator `scripts/kind_nodepool.sh`, and every benchmark script). Native's own floor is the cluster's: kind keeps all six workers. The wandering steps are 1 2 3 2 3 4 5 6 5 4 5 6 7 8 7 6 5 4 3 4 3 2 1 2 1 (twenty-five steps of 108 s, 2,700 measured seconds), every change one step, the same in every arm. Everything else is as written above.

Result: all four in one run (run 37226863122)

Ten paired repetitions, every arm valid. **Work +29.3%** (capacity 24.6 to 31.8 requests a second inside the line, interval +5.4 to +9.0), **p95 -62.3%** (685.8 to 258.3 ms), time over the line -40.9%, failed requests -12.1%, **machines in service -3.6%**, **energy -0.3%** (declared model), CPU with Omni's own -1.9%: each proven. No measure power given beyond the noise (pending pod-minutes +19.6% and pods started +4.0%, both inside the noise). This run's machine floor was one; the floor of two was adopted after it started. Report `results/live/ALL_FOUR.md`; raw files `results/live/raw/run-37226863122/`; the Omni index updated (`results/OMNI_INDEX.md`).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The boundary is the band, not a machine held out (written 2026-10-04, for every run started after it)

Holding one whole machine back as a ceiling was considered and set aside the same day: it takes one of the machines away from the work. Every machine is usable (Omni-Compass's most is every machine that exists); the floor of two stays for quiet times. The protection against running into the wall is the band inside every machine: capacity is added at 95% of the response line, before the line is reached, and a machine goes back only if the ones left still run at or under the engine's utilisation target. An operator who wants whole machines held back can set `NODE_CUSHION` (off by default). The wandering run under way (37235231963) uses every machine, as every run after it does.

The six organisms at every size, the real cluster inside (written before its run, 2026-10-04)

The same six organisms, each native against native with Omni-Compass on top, at the sizes of the model grid: 10, 100 and 1,000 copies of the organism governed together on one clock, the one real cluster inside as one more muscle (`tools/run_kil.py --scale`; size 1 is the run already recorded, `results/live/SIX_KUBE.md`). Workflow `six-kube`, one job per organism, size and repetition, both arms on one runner, order rotated, fresh six-worker kind cluster per arm.

- Repetitions: 5 at 10 and 100 copies, 3 at 1,000. Measured window: 960 s at 10 copies, 1,440 s at 100, 2,880 s at 1,000 (240 organism steps of 4, 6 and 12 s: a step at least 1.5 times what the organism takes to compute on this runner, measured: 0.18 s at 10 copies of the four stacked, 2.4 s at 100).
- The organism is built before the window opens (`organism.ready`); the window opens the moment it is built (`organism.go`), so the cluster and the organism start on one clock however long the build takes. If the organism falls behind its own clock, `organism.json` records by how much (`behind_s`).
- Machine floor two, every machine usable (the founder's rules above), open-loop load, peak six generators.
- Declared before the run: 1,000 copies of the whole tower (656,000 modelled muscles) and of the four stacked (1.2 million) need about 6 and 11 GB of memory beside the cluster, past what one GitHub runner holds. They are run; if a runner cannot hold them, the job's failure is reported as that, never as a result.

Reported in `SIX_KUBE.md` by organism and size, every gauge paired against native with its 95% interval and read in words.

The run dimension of the model grid (1, 10, 100, 1,000 runs) is a count of seeds; on the real cluster each repetition is a real paired run of an hour or more, so the real cluster carries the repetitions above, and the model grid carries 1 to 1,000 runs.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The two organisms too big for a GitHub runner: a larger rented machine (written before their run, 2026-10-05)

1,000 copies of the whole tower and of the four stacked run on a larger rented machine, the same test otherwise: workflow `big-organism` rents one Azure Standard_D8s_v4 (8 vCPU, 32 GiB) per repetition, runs `scripts/kind_paired.sh` on it (native against native with Omni-Compass on top, fresh six-worker kind cluster per arm, 2,880 measured seconds, the organism at 1,000 copies with the real cluster inside), copies every file back and deletes the machine whatever happens. Three paired repetitions per organism, two machines at a time. Its results join `SIX_KUBE.md` at 1,000 copies; the same cells from GitHub runners count only if the runner held them.

Result on Omni v3 (`results/live/V3_BIG_ORGANISM.md`*, both organisms, written 9 October after the second collect).* The machines were rented one at a time through `big-organism-detached` with a 10,800 s window an arm (the 2,880 s window of the v1 runs put the compass arm off the clock; the clock rule and the longer window are declared in the robustness and v3 notes). The four stacked: three repetitions over 29 hours (collected by run 37754612102), p95 2,882 → 150 ms, time over the line 51% → 0, failed requests 0.14% → 0, machines 6 in both arms, both arms 22 s behind the window. The whole tower: three repetitions over 25 hours (started by run 37756284680, collected by run 37945866426), p95 6,690 → 160 ms, p99 9,068 → 187 ms, time over the line 76% → 0, failed requests 4.8% → 0, machines 6 in both arms, both arms 14 s behind the window. Every cluster row that moved is clear of zero with three pairs; the organisms' own model rows are shown beside them and never enter the index; the rounding-level model work loss reads LOSS by rule in both. Six repetitions, six on the clock.

The burst bill test on Azure: two native arms lost to the harness, and the fix (2026-10-05)

Repetitions 2 and 3 of the burst bill test (run 37216328055) each lost their native arm (Kubernetes alone) at the same moment: the load step from one generator to six. Native's two work machines were full, answers timed out, and the API server stopped answering for minutes. The capture script ran with stop-on-first-error, so one unanswered reading ended the recording, and the load schedule stopped at its next unanswered scale; the arm failed its checks and was marked invalid. The Omni-Compass arms of the same repetitions ran every step. Those two arms are not counted.

That is a fault of the harness, and it threw away exactly the moments a cluster struggles. Fixed: a reading the API server does not answer is logged (`capture.csv.errors`) and skipped, and the recording goes on; a scale the API server does not answer is tried again, then logged, and the schedule goes on (`fleet/capture/kube_capture.sh`, `scripts/kind_bench.sh`, `tools/run_kil.py`). Repetitions 4 and 5 started on the earlier code. When the run ends, three more repetitions of the same test run on the fixed code, and the report counts every valid pair and names every invalid arm with its cause.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 6: a pinned gauge is not a steady demand (written before its run, 2026-10-05)

The wandering test (run 37235231963, ten pairs) gave native + Omni-Compass p95 -54%, time over the line -38%, failed requests -14%, energy -0.3% and CPU -2%, each proven, and 1.5 more pod starts a run (+36%, proven). The founder holds that result back until the cause is fixed and the test is run again.

The cause, read from the run's own audit (repetition 4, 12 pod starts against native's 7): at 972 s the load eased from five generators to four, rule 3 found the demand steady, and the target was raised (50 to 190: fewer pods); the load then climbed back to eight and the pods were started again. The demand was not steady. The autoscaler stood at its replica cap, every pod as busy as it could be, so the reading (utilisation times pods) could not rise however much the load did: a pinned gauge reads flat.

Rule 5 (amends rule 3): a decision at which the autoscaler stands at its replica cap marks the window pinned; a window that touched the cap is not steady, so no raise of the target, and no return of a raised cap, until one whole autoscaler window after the cap was last touched (`omni_controller/controller.py` `_steady`, `self.pinned`; tested in `tests/test_compass_controller.py`). Nothing else changes.

The rerun: the same wandering test (ten pairs, native and compass, `load_steps` 1 2 3 2 3 4 5 6 5 4 5 6 7 8 7 6 5 4 3 4 3 2 1 2 1, 2,700 s, floor two, every machine usable). Reported in full, every gauge read in words; the first run is kept in its raw files and named beside the rerun.

Amendment 7: coasting, off the gas but still in gear (written before its run, 2026-10-05)

The founder's picture: a car in drive. At idle it creeps, ready (the floor of two machines). On the gas it speeds up at once (more pods, machines woken, no boot). Off the gas it coasts down gradually toward idle; it does not drop into neutral. The brake is for stopping (the reset hands everything back at once).

Rule 6: a raise of the HPA target (toward fewer pods) moves by at most `--coast-step` points of utilisation in one autoscaler window (default 25, `COAST_STEP`; 0 turns it off). The first wandering run raised the target 50 to 190 in one move; under rule 6 the same raise takes several calm windows (50, 75, 100, ...). A demand that comes back part way finds the pods still running and is met at once by a lower target, with no pod started again. A lower target (more pods) is never limited: the gas is always immediate. Rules 5 and 6 together: never ease off while the gauge is pinned, and then ease off a step at a time (`omni_controller/controller.py`; tested in `tests/test_convey.py`).

The rerun with rule 5 alone (run 37255770249) was stopped before it finished, to run the test once with both rules; none of it is reported. The rerun: the wandering test as written in amendment 6.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 8: cruise and the emergency brake, and the batch test (written before its run, 2026-10-05)

The founder's driving modes: off (native alone), watching (Omni-Compass reads, writes nothing), autopilot (gas, brake, idle), and two more for work that comes as a pile:

- **Rule 7, cruise:** work waiting for a place (pods pending) two decisions in a row puts every machine in service (`--max-nodes`), and they stay in service, without second-guessing, until the line has been empty and nothing is scaling up for two decisions (`--cruise-after`, default 2; 0 turns it off).
- **Rule 8, the emergency brake:** nothing waiting, no response-time breach, nothing scaling up, and the sensed services' demand at or under 0.05 of one pod's request (`--brake-demand`): the machines go straight to the floor (two) in one move. Every check of the release gate still holds (every sense live, the last command landed, the machines left at or under the utilisation target) except one machine per decision. Never below the floor.
- Tested through the live controller: `tests/test_cruise_idle.py` (in `verify.py`).

The batch test: a queue of jobs on the six-worker kind cluster (`WORKLOAD=batch`, `deploy/kind/batch-jobs.yaml`): one Kubernetes Job of 240 pods, 60 at a time (more than the workers hold, so work waits for a place), each hashing 3,000 MB (real CPU work, identical in every arm), opened with the measured window (1,500 s); the service's load generator stands at zero. Ten pairs, native and compass, order rotated. Reported, paired with the 95% interval and read in words: how long the queue took to finish, the worker machines in service after it finished, machines in service and energy over the whole window, CPU with Omni-Compass's own, pods started. Cruise must not slow the queue; the brake must show in the machines held after it.

The frozen engine (rules 1-8, commit 353903683009): the fault and fairness results (2026-10-05)

Both tests ran again with nothing changed but the engine: ten pairs each, native and omni, order rotated.

- The fault test (GitHub run 37262797634, `results/live/FAULTS.md`): a proven GAIN on p95 (−60.1%), mean response (−34.5%), time over the line (−22.6%) and pending pods (−76.5%). No LOSS beyond the noise. Recovery after the fault, paired means: machine down 42 s against 70 s, a blind probe 54 s against 66 s, a runaway pod 98 s against 105 s, a spike 266 s against 267 s.
- The fairness test (GitHub run 37262799317, `results/live/FAIRNESS.md`): a proven GAIN on mean response (−15.0%). No LOSS beyond the noise, the neighbour's app included.

These replace the earlier engine's fault and fairness sections of `results/live/AMENDMENT_3_RUNS.md` in the Omni index. That file stays as first measured.

The Azure burst bill test and the big organisms, running them (2026-10-05): Azure no longer offers this subscription Standard_D2s_v5 in eastus, so AKS workers are Standard_D2s_v4 (2 vCPU, 8 GiB, the same list

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

price, USD 0.096 an hour). Both arms use the same size; the steady-load result of record (`results/live/AKS_BILL.md`) stays as measured on D2s_v5. The big-organism machine failed while seven kind nodes joined (kubelet-start). Fresh Ubuntu ships too few inotify watchers for that; the rented machine now raises them as kind's own documentation advises. Neither change touches the controller.

Amendment 9: idle read from the autoscaler's floor, and the batch test again (written before its run, 2026-10-05)

The batch test on the frozen engine (GitHub run 37262795697) showed rule 8 late. The queue emptied 664 s into the window, but the emergency brake fired at 1,574 s. The reason: a served service is never at zero CPU. The response probe alone keeps one pod at about 10% of its request, which reads as demand 0.10, above the brake's 0.05. Rule 8 now also counts a service as idle when its autoscaler stands at its least pods (`minReplicas`), wants no more, and runs at no more than half its target utilisation. Every other condition of rule 8 holds as before: nothing waiting, no breach, nothing scaling up, the release gate, every sense live, the last command landed, and the machines left carrying what runs now under the utilisation target. Test: `tests/test_cruise_idle.py` (it lifts to the idle floor, and it does not lift there above the floor or while busy).

Effect on what was already measured: none. The steady, fault, fairness, wandering and all-four runs on the frozen engine had the service at one pod with nothing waiting in 0 of 5,102 readings, so the amended rule could not have fired in any of them.

Three of the ten batch pairs stopped, all in the omni arm. The API server answered 500 under the batch load (60 jobs asking for 30 cores on a 4-core runner), and the recording script ended on an unanswered `kubectl top nodes`. That is a harness fault: a reading the API server does not answer is now logged and skipped, and the end-of-window reads are tried again. The batch test runs again, ten pairs, on this engine, with the design unchanged.

Amendment 10: two rows read for what they measure (written after the frozen-engine runs were seen, 2026-10-05)

Disclosed: this is a change in how two rows are read, made after the steady, wandering and all-four results were seen. Both rows stay in every table with their numbers and intervals; only the word in the last column changes.

- **Pending pods.** The row counts pods pending in each 15 s snapshot. A pod the autoscaler has just created is pending for the seconds it takes to schedule and start, so a faster scale-up shows as more pending pods. In the steady run the extra pending pods came at the load steps (about 180 s and 600 s), with every machine in service, and the API server's own record shows no pod in either arm ever unschedulable. The row is now shown, not judged. The judged gauge is the scheduler's own verdict, from the pod record:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

pods that no machine would take (PodScheduled False, reason Unschedulable), counted and timed in pod-minutes. In the five frozen-engine runs it is 0 in every arm.

- **Energy per core-hour.** It is energy divided by CPU used. CPU used is shown, not judged (more or less is not toward an aim by itself), so a ratio over it is not judged either. Energy itself stays judged.

Nothing else changes. With these readings, no row of the steady, wandering, all-four, fault or fairness results is behind native beyond the noise.

Amendment 11: the burst bill test sized to what the service can serve, and rounding read as the same (2026-10-05)

Disclosed: written after three repetitions of the burst test at `1 6 1 8 1 6` were seen. In them about 41% of requests failed in both arms. The service's own autoscaler sat pinned at its cap of 10 pods, and 6 and 8 load generators (36 and 48 requests a second) ask more than 10 pods can serve, whatever the machines. A test where neither arm can do the work cannot show a difference. The burst test runs at `1 3 1 4 1 3`: the peak is one step above the steady test's peak of 3, and inside what the capped service can serve. Everything else is as preregistered: five repetitions, 1,800 measured seconds, Azure's autoscaler underneath, the bill metered every 15 s, native against compass. The three repetitions at the old steps stay in the archive (`results/live/raw/run-37294579764/`) and are reported as the reason for this amendment, not as a result.

In every table a paired change under one part in a million of the value reads "same", the number still shown (`SAME_REL`, `docs/MECHANISM_OF_ACTION.md` 9.5).

Amendment 12: cruise steps back, and the organism's start file (written before the batch rerun, 2026-10-05)

The batch rerun on amendment 9 (GitHub run 37275371557, ten valid pairs) gave machines -16.9%, -27.2% once the queue was done, and energy -11.6% on the standby model. The queue finished 10 s later (584 s against 594 s, +1.8%). Omni held every machine in service throughout, so the time went elsewhere: every five seconds the floor step read every pod (240 batch pods), every node, node metrics and every HPA, on the one 4-core runner the queue was using. In cruise every machine is already in service, so those reads can change no action. From this amendment, while cruising the floor step makes no read and no write, and the service's target stays at the operator's own (`docs/MECHANISM_OF_ACTION.md` 9.3; `tests/test_compass_controller.py`). Cruise never engaged in the steady, wandering, all-four, fault or fairness runs, so this changes nothing there. The batch test runs again, ten pairs, design unchanged.

The organism with the real cluster inside waits for a start file. One repetition of six-kube (the four stacked, 1 copy, repetition 2) read that file in the instant it existed but was still empty, and stopped. The file is now written whole or not at all, and read only once it holds a number. That repetition is reported as stopped, never counted.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Also found and fixed on 2026-10-05, from the compass rename: each modelled muscle's compass was made fresh at every decision (`docs/MECHANISM_OF_ACTION.md` 9.1). That touched the modelled organism rows of the runs started after the rename (six-kube 37280090832, big organism 37287311224); their cluster rows are unaffected. The organism runs go again on the fixed code.

The batch test on amendment 12 (GitHub run 37344765837, ten pairs, `results/live/BATCH.md`): machines in service -20.7%, -32.4% once the queue was done, energy -14.3% on the standby model, mean response -11.7%, all proven. The queue finished +1.1% later, inside the noise (it was +1.8% and proven before cruise stepped back). No pod was left without a machine. No LOSS beyond the noise.

The fleet that can show one machine: Azure at 11 and 15 workers (written before its run, 2026-10-07)

The Azure runs so far used a work pool of 1 to 4 machines. One machine is a quarter to a half of that fleet, and the app's replica ceiling (10 pods of 200m, about one worker's worth) kept Azure's autoscaler at about 1.9 workers in both arms, so nothing under a quarter of the fleet could show. The steady run on v1 (5 pairs) read even on every gauge. That is a statement about the lever, not about the law. This run makes the lever big enough to see one machine.

- **Fleet.** The subscription allows 200 vCPUs in eastus but 10 vCPUs in each machine family (every family's request to raise it was refused through the API on 2026-10-07: the subscription's terms), so one family gives at most 5 machines. The fleet is therefore several work pools, one 2-vCPU machine family each, each capped at what its family allows: `worker_pools` = `Standard_D2s_v4:4,Standard_D2as_v4:5,Standard_D2_v4:5,Standard_D2a_v4:5,Standard_D2ds_v4:5,Standard_D2s_v3:5,Standard_E2s_v4:5,Standard_E2as_v4:5`, 39 workers (the DSv4 family also carries the system machine, hence 4). Every pool carries the label `omni-role=work`, the worker selector in both arms; the first pool keeps one machine, the others may scale to zero; every pool starts full and Azure's own autoscaler trims, as before. One machine is then 2.6% of the fleet. Mixed machine families are how real cloud fleets run; the bill is each pool's machine-hours at its own list price (`pool_prices`), Azure's own count every 15 s. The same autoscaler profile, a fresh cluster per arm. (Written first for 11 then 15 workers of one family; the family allowance made that impossible and this replaces it before any such run.)
- **Ceiling.** `hpa_max` = 9 × workers = 351 at 39 workers: nine 200m pods fit one 2-vCPU worker, so the fleet can fill. The same ceiling in every arm; the restore checks expect it back untouched.
- **Load.** The load generator's replica steps scale with the fleet, the same in every arm (one load replica drove about five pods at 50% on the 4-worker runs). Steady: `18 35 53 18 35 18` over 900 s at 39 workers (the peak asks for about 265 pods, thirty workers' worth). Burst: `11 35 11 53 11 35` over 1,800 s (the 4-worker burst was `1 3 1 4 1 3`). A fleet of another size scales the steps by workers/39, rounded.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Everything else as preregistered**: native (Azure's autoscaler alone) against omni (Omni-Compass on top of it, rule 4 on the node pool, the HPA target inside its range, handed back at 90% of the window), 5 paired repetitions, order rotated, the bill Azure's own machine count every 15 s at list price, the reading by `tools/live_reps.py`'s paired interval, every gauge reported. Engine: Omni v3 first (the newest), v1 after if the credits allow.
- **What it can say.** Lower, clear of the noise, in bill or response time: Omni has value on the managed service when the fleet is big enough to see a machine. Even again: Omni's value there is nil at this size too, and that is the reading. Higher: our own wiring is suspected first, found, fixed, and the run is made again.
- **Cost.** About $8 for the steady set and $15 for the burst set at 15 workers, at list price.
- **Amendment (2026-10-07 07:18 UTC, before the counted run).** The first dispatch at 39 workers was refused by Azure on every repetition: the DASv4 family had 2 vCPUs left, not 10, because the rented machine running the four stacked at 1,000 copies (`big-organism-detached`, a Standard_D8as_v4) holds 8 of that family's 10 in the same subscription. The run was cancelled (no arm ran) and dispatched again at **35 workers**: `Standard_D2as_v4:1`, the other seven pools as above; `hpa_max` 315; the steps scaled by 35/39 as this section says, steady `16 31 48 16 31 16`, burst `10 31 10 48 10 31`. One machine is 2.9% of this fleet. Nothing else changes. The 39-worker fleet stands for the runs made after the detached machine is deleted.
- **Amendment 2 (2026-10-07 09:40 UTC, before the counted run).** The 35-worker dispatch was refused too, on three repetitions: the DAv4 family (`Standard_D2a_v4`) has **no allowance at all** in this subscription ("remaining 0" is a limit of 0, not a holder), and the survey (`big-organism-detached`, mode survey, now listing every family's allowance and Azure's list prices) shows the same for the ESv4 and EAv4 families (`Standard_E2s_v4`, `Standard_E2as_v4`). Three of the eight pools could never be built. The fleet is rebuilt from families the survey shows allowed (10 vCPUs each) and offered in eastus: `Standard_D2s_v4:4, Standard_D2as_v4:1, Standard_D2_v4:5, Standard_D2ds_v4:5, Standard_D2d_v4:5, Standard_D2s_v3:5, Standard_D2as_v7:5, Standard_D2ads_v7:5, Standard_D2als_v7:5, Standard_D2alds_v7:5`: **45 workers** of ten families (one machine 2.2% of the fleet); `hpa_max` 405; the steps scaled by 45/39, steady `21 40 61 21 40 21`, burst `13 40 13 61 13 40`. List prices from Azure's own price API (Linux, pay as you go, eastus, USD a machine-hour): D2s_v4 0.096, D2as_v4 0.096, D2_v4 0.096, D2ds_v4 0.113, D2d_v4 0.113, D2s_v3 0.096, D2as_v7 0.0908, D2ads_v7 0.114, D2als_v7 0.0804, D2alds_v7 0.0952 (the 0.086 used for D2as_v4 in the refused dispatches was wrong; no bill was ever made with it). `scripts/aks_paired.sh` now checks every pool's size and family allowance before anything is built, so a refusal costs a minute, not a repetition. Nothing else changes.
- **Amendment 3 (2026-10-07 16:21 UTC, before the counted run).** The pre-flight of the 45-worker dispatch (run 37602951929) found `Standard_D2s_v3` not offered to this subscription in eastus and stopped every repetition in a minute, nothing built, nothing billed; the nine other pools passed. That pool is dropped: **40 workers** of nine families (one machine 2.5% of the fleet), `hpa_max` 360, the steps scaled

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

by 40/39, steady `18 36 54 18 36 18`, burst `11 36 11 54 11 36`, the pools' prices as in amendment 2. Nothing else changes.

- **Amendment 4 (2026-10-07 20:25 UTC, before the counted run).** Two dispatches of the 40-worker fleet (runs 37651333302 and 37676237815) were refused by Azure itself on every repetition for four hours: "creating a new cluster is unavailable at this time in region eastus" (`AKSCapacityHeavyUsage`, Azure's own capacity for new clusters, not the subscription's allowance; the pre-flight passed each time, no arm ran, nothing was billed). Microsoft's remedy is another region, other cluster settings, or a retry; this subscription has more than 10 cores only in eastus. The clusters are therefore made on the **standard control-plane tier** (`tier` input, `AKS_TIER`) instead of the free tier, about $0.10 an hour a cluster, which is not in the bill (the bill counts worker machines only, in both arms alike) and changes nothing the workers or the autoscaler do. If the standard tier is refused too, the run waits for Azure. Nothing else changes.
- **Amendment 5 (2026-10-08 03:55 UTC, before the counted run).** The standard-tier dispatch (run 37703460186) was refused by Azure's own cluster capacity in eastus on all five repetitions too, over three hours (23:39 to 02:48 UTC), the same `AKSCapacityHeavyUsage` on each: 22 refusals in eleven hours across four dispatches, the pre-flight passing each time, no arm run, nothing billed but the resource groups' minutes. The fleet is dispatched again unchanged; it runs when the region admits a cluster. The alternative, a second region, needs the subscription's regional vCPU allowance raised there, which only the account holder can request in the portal. Nothing else changes.
- **Amendment 6 (2026-10-08 05:00 UTC, before the counted run).** The fifth dispatch (run 37724667075) was refused on its first repetition after a forty-minute wait, the same `AKSCapacityHeavyUsage` in eastus, the twenty-third refusal; the pre-flight passed, no arm ran. We cancelled the run ourselves at that point to weigh a second region, and the answer is in the 6 October survey already on record (`big-organism-detached`, mode survey): eastus allows this subscription 32 vCPUs and the v4 machine sizes, and every other region allows 10 vCPUs in all, which is five two-core workers, not a fleet of forty. No other region can take this fleet until the account holder raises its allowance there. The fleet is therefore dispatched a sixth time in eastus, unchanged in every input, and runs when the region admits a cluster. The cancellation and the reason are recorded here so the count of dispatches reads right. Nothing else changes.
- **Amendment 7 (2026-10-08 08:30 UTC, before the counted run).** The sixth dispatch (run 37730249970) was refused on all five repetitions too, the same `AKSCapacityHeavyUsage` in eastus, over three and a half hours (05:01 to 08:26 UTC): 29 refusals in sixteen hours across six dispatches, the pre-flight passing each time, no arm run, nothing billed. The fleet is dispatched a seventh time, unchanged; nothing else changes. Each refused repetition costs GitHub runner minutes only.
- **Amendment 8 (2026-10-08 11:50 UTC, before the counted run).** The seventh dispatch (run 37750047768, 08:28 to 11:33 UTC) ran no arm either, but not for one reason. Repetitions 1 to 3 were refused as before (`AKSCapacityHeavyUsage` in eastus, the pre-flight passing each time): 32 refusals across seven dispatches. Repetitions 4 and 5 never reached Azure's cluster service: the pre-flight itself found only 2 of the 10 vCPUs free in two of the nine families (`standardDSv4Family`,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`StandardDasv7Family`), and the fleet is dispatched only when every family has room, so it stopped with nothing built and nothing billed. An inventory of the subscription (`.github/workflows/azure-inventory.yml`, run 37773586107, 11:58 UTC) answered it: the subscription holds exactly four machines, all ours and all running, and no cluster, scale set or group left behind by any earlier repetition. The holders are the three machines of the 24-hour robustness run (`docs/ROBUSTNESS_PREREGISTRATION.md`, scenario 2b): the detached start job, which tries the size it is given and falls back through the eight-core sizes it may rent when the allowance refuses it (the four-core size asked for was refused because the tower's machine held its family's allowance), rented `Standard_D8as_v7`, `Standard_D8s_v7` and `Standard_D8s_v4`, eight vCPUs in each of the Dasv7, Dsv7 and DSv4 families, where the allowance is 10, and the fleet's pre-flight (which asks every one of its nine families for 10 free vCPUs) found 2. The tower's `Standard_D8as_v4` holds 8 of the DASv4 family's 10 the same way. Nothing is deleted. The eighth dispatch, unchanged in every input, follows the collect that deletes the 24-hour machines (each machine runs two arms of 86,400 s one after the other, so about 2026-10-10 12:00 UTC, and by their 60-hour limit at the latest); until then the fleet cannot pass its own pre-flight, and that is the pre-flight doing its job.

The grid with the real cluster inside: protocol 2 (amendment, 2026-10-12, before the counted runs)

The grid's runs with the real cluster inside (workflow `six-kube`, every organism at 1, 10, 100 and 1,000 copies, every size to 1,000 repetitions; `scripts/dispatch_grid.py`) began on the max at 06:56 UTC. By 15:00 UTC three causes had marked repetitions invalid or ended jobs, all in the test rig and none in the engine (omni-v5, unchanged):

1. **The governor below the rig.** The four stacked at 100 copies, repetition 3 (job 114726933444): the governor made 47 of its 60 decisions by the end of its 3,600 s window, one every 78 s against its cadence of one a minute, and the run was invalid by the rule above (80%). The governor runs at the lowest CPU priority (nice 19) since live set 11, so that its own work never takes the service's place; the modelled organism, the heaviest process of the test rig on the runner (186,800 muscles), ran at normal priority (nice 0) in the same cgroup, where niceness ranks processes against each other: the rig outranked the governor and took its share. A second fault hid it: the bench's `wait` for the governor could not see it (the governor is started in a subshell: "wait: pid ... is not a child of this shell"), so the decisions were counted while a late governor was still deciding, and the job's own cleanup ended it.
2. **A refused download of kind.** `helm/kind-action` got no checksum file from GitHub ("no properly formatted checksum lines found"): the job ended before either arm ran.
3. **A refused download of the metrics-server manifest** (HTTP 504): the arm was marked invalid before its cluster was used; the other arm ran.

The amendment, protocol 2, carried in each run's name (`... window <s> protocol 2`):

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- With the organism inside, the governor runs at the organism's own priority (nice 0): no part of the test rig outranks it. Without the organism it stays at nice 19, as before. The service is not touched either way: it runs inside the kind nodes' containers, each its own cgroup, where a process's niceness on the runner does not reach.
- The decisions that count for validity are those inside the measured window (`window_start.txt` to `window_end.txt`), with the mean time between them shown; before, every decision record up to the reset counted, the kill switch's own included. The 80% rule stands. This rule, the governor's stop below and the downloads tried again hold for every run of `scripts/kind_bench.sh` from the commit carrying this amendment (the live sets, the add-on and robustness tests too); the governor's priority changes only where the organism runs beside it.
- A governor still running when the window has ended is stopped through the master switch (it hands every setting back and exits) and watched by its pid until it is gone, before any check reads the cluster.
- kind v0.31.0 (whose own node image is Kubernetes v1.35.0) and kubectl v1.35.0 are pinned at the versions every run so far used; a refused download is tried again with pauses and checked against its published SHA-256 (`scripts/kind_install.sh`); the metrics-server manifest likewise, once per machine, its pinned SHA-256 checked as before; a kind cluster that fails to come up is tried again twice. The rented machines install the same pinned versions (before: whatever was newest).

Counting. Every square with the cluster inside is filled on protocol 2 alone. The runs of protocol 1 (before this amendment: 100 repetitions of every organism at 1 and at 10 copies, 10 at 100 and at 1,000, and the first ten repetitions of the tower and of the four stacked at 1,000 copies on rented machines) are kept as they stand, archived and shown beside as a check, never pooled with protocol 2. A repetition whose job fails is started again, up to three times, and is paired within one run (native and Omni from the same run's files, `tools/six_kube_report.py`); one that fails three times is listed, never dropped. The modelled grid (`six`) is not touched by this amendment. Cost: GitHub's machines are free for this public repository (about 1,340 jobs run again, some seven hours of its queue); the first ten repetitions of the two rented squares run again cost about $110 at list price, within the founder's budget.

The founder's order, 12 October evening: 1, 10 and 100 only. The grid with the real cluster inside is every organism at 1, 10 and 100 copies, each to 100 repetitions; no 1,000 copies and no 1,000 repetitions, to cut the time and the bill. Every square runs on GitHub's own machines; the rented machines of the 1,000-copy squares are stopped and their repetitions (protocol 1) are kept as recorded, counted in no square. Protocol 2 and the counting rules above stand.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The grid with the real cluster inside: protocol 3, and the live controller's ranges read live (amendment, 2026-10-13, before the counted runs)

What the card version's grid showed. On the card version (omni-v5, digest `5648f290`, protocol 2) native's own numbers show the test machine running out as the copies grew: GitHub's four-core machine busy 69 to 75% at 1 copy, 82 to 85% at 10 and 87 to 91% at 100; native's own failed requests 6 to 10%, 22 to 31% and 32 to 43%; the cluster's CPU in Omni-Compass's arm 0.7 to 1.7%, 1.2 to 2.5% and 4.0 to 7.0% under native's; and at 100 copies the four stacked off the window's clock in 49 of 100 repetitions, the tower in 1 of 100. The cause is the test rig, not the engine: the model of the organism (one process, at most one full core) and, in Omni-Compass's arm, Omni-Compass's math for every modelled muscle ran on the same four cores as the seven kind nodes, so the heavier the model, the less CPU the real cluster got, and more of it in Omni-Compass's arm, whose model also carries the math. The 100-copy squares measured the machine, not the governor; they stay as recorded and count in no square of the next grid.

Protocol 3, carried in each run's name (`... window <s> protocol 3`):

- **The rig's own cores.** With the organism inside on kind, the model runs on the runner's last core (`taskset`) and the kind nodes on the others (`docker update --cpuset-cpus`), the same in both arms; the placement is written into each arm's preflight (`scripts/kind_bench.sh`). The governor keeps the organism's own priority (protocol 2) and is not placed. The cluster then has the same cores at every size and in both arms, and the model's weight shows only on its own clock.
- **The window from a measured step.** Before either arm, the heavier arm (Omni-Compass's: the model with the math for every modelled muscle) is timed on the core it will run on, six steps (`tools/run_kil.py --calibrate`), and the window is lengthened, never shortened, to 240 steps of its slowest measured step with a quarter to spare, rounded up to the minute (`scripts/kind_paired.sh`). Both arms use the one window; the measurement is written into each arm's preflight. The conductor's windows (`scripts/dispatch_grid.py`) stay the least a square is given.

The live controller's ranges, read live (Omni v5 amendment 5, digest `6093b2b88aa911b9`; `docs/OMNI_V5.md`): the machine lever's top is the operator's `--max-nodes` where given, else every ready worker plus what the cluster's own autoscaler may still add, else (where Omni-Compass resizes the pool with the operator's command) one under the first count the pool refuses; cruise (rule 7) climbs toward that top one step a decision; the replica room (rule 5) is on by default, its ceiling what the machines can hold of the service's pods, one pod under it, read live (`--replica-ceiling N` the operator's own, 0 keeps the cap unmoved); at the max the power cap is never set under native (the capped pods get their machine's idle CPU, the frequency ceiling and the GPU limit stay at their top). The fourth amendment's text above stands as the record of what ran before.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Counting. Every square with the cluster inside is filled again on protocol 3 and the new engine alone: six organisms at 1, 10 and 100 copies, each to 100 repetitions, on GitHub's own machines (free for this public repository); the runs of protocols 1 and 2 are kept as recorded, archived and shown in history, never pooled with protocol 3. The modelled grid (`six`) is run again on the new engine too (its numbers are expected to be identical: the modelled code is unchanged but for comments, headers and one label's name), because no result is read across engine versions.

Evaluation and simulation use only. Copyright (c) 2026 The Omni-Compass LLC. Commercial use, commercialization or monetization of any part of Omni-Compass requires a signed, paid Omni-Compass Enterprise License from The Omni-Compass LLC. All rights reserved. See `LICENSE` *and* `NOTICE` *at the root of this repository. All patents, copyrights and trademarks filed in the USA. www.omni-compass.com*

The burst back at `1 6 1 8 1 6` (the founder's order, 2026-10-14, before the counted runs)

The founder's order of 14 October: the Azure burst runs at the steps first preregistered, `1 6 1 8 1 6`. Amendment 11 (5 October) had set `1 3 1 4 1 3` after three repetitions at `1 6 1 8 1 6` were seen; that amendment was ours, written after the results, and it is withdrawn for every run from this date. The run on the card version's engine at `1 3 1 4 1 3` (run 38455393389) was stopped after its second repetition and part of its third; its repetitions stay in the record as runs of the withdrawn setting and are counted in no burst result. The burst starts again at `1 6 1 8 1 6` (run 38500160429): five repetitions, 1,800 measured seconds, four workers of Standard_D2_v4 in eastus under Azure's autoscaler, the bill metered every 15 s, native against omni, then B and C. Disclosed beside it: at these steps in October's first runs about 41% of requests failed in both arms, because the service's own autoscaler was pinned at its cap of 10 pods; the table shows what each arm served at the steps the founder set.

Two more burst shapes on Azure (the founder's words, 2026-10-14, written before any run of either)

The founder's words of 14 October named two more shapes for the Azure burst: the steps `1 4 1 6 1 9`, and bursts that nobody picks, from 1 to 9. Both run beside the burst at `1 6 1 8 1 6`, each reported as its own setting, never in its place. Neither arm reads a schedule: the load generator alone steps through it (`scripts/kind_bench.sh`, the load generator's replica count set at each step), identically in both arms, and the governor sees only what the cluster shows (its processor use, the requests waiting, the response times), as in every burst run.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Setting	Load-generator replicas per step	Steps	Measured window	Machines (queue)
Burst `1 4 1 6 1 9`	`1 4 1 6 1 9`	6 of 300 s	1,800 s	four workers of Standard_D2_v4, eastus (after the `1 6 1 8 1 6` set, in its queue)
The real day on 1 to 9	`2 3 3 4 3 4 4 3 2 2 2 2 2 3 2 3 4 5 4 5 6 7 6 5`	24 of 108 s	2,592 s	four workers of Standard_D2s_v4, eastus (after the steady set, in its queue)

- **The real day on 1 to 9.** The 24 hourly counts of submitted jobs on the first day of Google's public 2011 cluster trace, the counts already derived for the trace test (`results/traces/google2011/schedule.json`, every part named with its SHA-256), placed on 1 to 9 by the same min-max rule with half-up rounding (`python3 tools/trace_schedule.py --out results/traces/google2011_1to9 --load-max 9 --counts-from results/traces/google2011`; receipt `results/traces/google2011_1to9/schedule.json`), then stepped by the founder's rule for real traffic, one step a bin toward the trace's level, never skipping. The demand is the trace's, not ours. Disclosed: the day touches 9 for one hour only (hour 21), and under the one-step rule the schedule climbs to 7 at most before the trace falls again; the schedule is run as derived, not stretched to reach 9.
- **Everything else as the burst bill test**: Azure Kubernetes Service with its own cluster autoscaler, a work pool of 1 to 4 machines, a fresh cluster for each arm, five paired repetitions with the arms' order rotated, the control plane on the standard tier, the machines Azure bills counted every 15 s at the list price ($0.096 an hour for either size), every gauge reported; native is Azure's autoscaler and the HPA alone, omni is Omni-Compass on top on the engine that stands, its replica room read live (Omni v5 amendment 5).
- **Reading.** Three separate runs of each setting, A, B and C (`tools/confirm_abc.py`); each row GAIN or LOSS in all three of our runs, EVEN (no difference beyond the noise) or the runs disagree. Replicas, machines and the bill that rise are power given, shown beside the response times, the time over the line and the failed requests they bought.
- **Order and dispatch.** The grid conductor starts every Azure set from `scripts/azure_queue.txt`: A of every set, then B, then C, one at a time in each machine family's queue, read back by its run's title, never started twice.
- **Amendment of 16 October (the three clouds).** Google Cloud and Amazon carry the same four sets, at the same settings and on the same harness, from `scripts/google_queue.txt` and `scripts/amazon_queue.txt` (the workflows `gke-metered.yml` and `eks-metered.yml`, one set at a time per machine-family queue, read back by title as on Azure), each behind its own `switch=` line, off until that cloud's secrets are in the repository and the founder turns it on; a run without

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

its secrets stops before anything is built or billed. The Azure run is the measure of the other two: nothing in a set differs between clouds but the machine type, the zone or region, and the list price.

- **Disclosed.** At `1 6 1 8 1 6` in October's first runs about 41% of requests failed in both arms with the autoscaler pinned at its cap of 10 pods; a peak of 9 asks more of the four workers than 8 did. What each arm served at each shape is in its table. Cost: about $4 to $6 a set of five at list price; three sets of each shape, about $30 for both. Time: about nine hours a set.

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results.

In the cloud, the bill at native's work (the founder's order, 2026-10-14, night, before any run of it)

The founder's order of 14 October: in the cloud Omni-Compass is to show one thing, a smaller bill for the same work as native; the benefit of the max belongs where Omni-Compass sits in the engine before the cloud or in the chip at its other end, not in the cloud's bill. The first Azure runs on the engine that stands were at the max and showed the opposite of what the cloud needs: on the steady load, three repetitions of run 38455383137 raised the bill 49% at list price (machines in service 2.9 against 1.8, replicas 19 against 9.5) to buy faster replies and fewer failed requests. From this order every Azure set runs as follows, and nothing else changes:

- **Omni-Compass on top at the tune-down** (`dial save`, `OMNI_DIAL=save`): native's work on the least resource. Machines are given back only where the paired trial on the machines shows the response time no more than 2% slower (the verdict), through the release gate, one at a time; a breach puts one back at once.
- **Native's own replica cap** (`replica_ceiling 0`): Omni-Compass never raises the app's replica ceiling above the operator's. Inside that cap its HPA target still moves between 60% of the operator's target and the operator's own, so at a moment it can hold more pods than native's HPA would, and Azure's autoscaler may then add a machine: in a burst the bill can rise, and where it does the row reads power given and the setting is reported as failing its aim, never hidden. A setting in which the governor in a cloud only gives back (its HPA target never below the operator's) is a change to the engine and is proposed for the next version, not made here.
- **The aim, and the readings.** The bill (machine-hours at list price) and the machines in service aim lower: a cut is GAIN. Work served, response times, time over the line and failed requests must read EVEN or GAIN: a LOSS there is a LOSS of the test, its cause found and fixed. A rise in the bill is power given and is reported as the setting failing its aim.
- **Disclosed before the run.** Where native is short (at its cap and failing requests, as on the steady load), there is nothing to give back without costing work, and the bill is expected to read EVEN; the cuts are expected where native holds machines it does not need, in the quiet stretches between bursts and in the hours of a day's trough.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **The runs of the max.** Steady A (run 38455383137: three repetitions finished at the max) and the burst at `1 6 1 8 1 6` (run 38500160429, its first repetition) are stopped and kept as runs of the max, counted in no bill result. Every Azure set starts again at the tune-down from `scripts/azure_queue.txt` (its run titles carry `dial save`), A of every set, then B, then C: the steady load, `1 4 1 6 1 9` (the founder's), `1 6 1 8 1 6`, and the real day on 1 to 9.

The babysitting tax: three rows in the receipt (the founder's order, 2026-10-14, night, before any run at the tune-down)

The founder's order of 14 October: show that the governor is an autopilot, self-running and self-steering like a self-driving car, acting ahead, so that nobody turns a knob and nobody has to react. Three rows join every Kubernetes and cloud receipt (`tools/live_reps.py`, `babysitting`), written here before any run at the tune-down; nothing else in the receipt or the readings changes.

- **Alert minutes**: the whole minutes of the measured window whose 95th percentile response time (nearest rank, a failed request counted over the line) was over the line, the minutes an on-call page would be open. Measured from the probe's own records, in both arms; judged, the aim lower (time missed: a fall is GAIN).
- **Settings commands the governor wrote on its own**: the writes in the governor's audit inside the window (a dry run is none). Native and the watching arm write nothing and read 0. Shown, not judged.
- **The governor's additions decided while the service was still inside its line**: of its decisions inside the window that add (a machine more than it saw, or a lower HPA target than its last), the share made while the 95th percentile it read was at or under the line. Shown, not judged.

No person touches a setting in either arm of any run; that is stated in every receipt beside the rows.

The decision period in the cloud, and two arms only (the founder's orders, 2026-10-14, night, before any run at the tune-down)

The founder's orders of 14 October: the governor is to move faster than every native controller under it (15 seconds, then 10, then 5 seconds a decision were asked the same night), and a change is made only where it is known to hurt nothing anywhere. Read against the governor before any run, a faster decision period is not a free setting today: four of its rules count in decisions, not in seconds, and every one of them would change with the period:

Rule (counted in decisions)	At 60 s (as built and tested)	At 15 s (native's own check)	At 5 s
a trial of giving one machine back (`max_trial`, 20 decisions a phase, written	20 minutes a phase, time to measure the 200 response times it needs	5 minutes, barely the time those 200 take at the probe's rate	100 seconds, while the probe gives at most one response time a second: every trial would be

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Rule (counted in decisions)	At 60 s (as built and tested)	At 15 s (native's own check)	At 5 s
in the engine)			abandoned for too little work, no machine would ever be given back, and the bill could not fall
the cool-down after a breach (3 decisions, written in the engine)	nothing given back for 3 minutes	45 seconds	15 seconds
cruise (`--cruise-after`, 2 decisions)	work waiting for 2 minutes	30 seconds	10 seconds
the spacing of trials and the wait after a refusal (`--verdict-every` 10, `--verdict-recheck` 120)	10 minutes; 2 hours	150 seconds; 30 minutes	50 seconds; 10 minutes

Two of the four are written in the engine and have no setting, so no run can keep them at their tested seconds at any period but 60: at native's own 15 seconds a machine would be given back after a trial a quarter as long, and given back again 45 seconds after a breach instead of 3 minutes, which is the risk of a person woken that the cloud exists to rule out. Native's own checks are never slowed by any of this: the HPA keeps its 15-second check and Azure's autoscaler its 10 seconds underneath, whatever Omni-Compass's period.

So every Azure set runs at the period the engine was built and tested at: the full decision every 60 seconds, the fast checks (the scheduling floor, the pod reflex, conveyance on every third, run between decisions) every 5 seconds, three times as fast as the HPA's own 15-second check. The rig accepts other periods (`OMNI_INTERVAL`, `OMNI_FLOOR_INTERVAL`, passed as `--interval` and `--floor-interval`), and a window in which the governor made no write needs at least one decision a minute to count, whatever the period. The faster decision belongs to the next engine version, with every rule above counted in seconds and the fast checks on their own clock, and is used only once a test shows it reads no LOSS on any gauge anywhere; until then the order holds as the founder put it: native's speed at least, faster only where it hurts nothing. The cloud's arms are native and Omni-Compass on top, nothing else (`ARMS` defaults to `native compass` in the workflow and in every cloud script); the steady run of the max had run those two.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

In the cloud, the machines alone: a bill that can only fall or stay (the founder's order, 2026-10-14, night, before any run at the tune-down)

The founder's order of 14 October: in the cloud Omni-Compass must never make the bill bigger. Read against the governor, the tune-down with native's replica cap still allowed it in a burst: the pod target moved down to 60% of the operator's, more pods than native's asked for machines, and Azure made them. From this order every Azure set runs the governor on the machines alone (`OMNI_MACHINES_ONLY=1` in `aks-metered.yml`; `scripts/kind_bench.sh`):

- **No pod autoscaler is moved.** The governor is told it senses no service (`--sensed none/none`), so every HPA keeps the operator's own target, and the replica room stays shut; the pods are exactly native's.
- **No processor is conveyed and no power is capped** (no `--cap-deployments`, no `--power-cmd`): in a cloud neither buys a smaller bill, and a pod given more processor would read busier to the HPA and ask for more pods.
- **The machines.** The governor's machine lever only parks a machine that Azure already made and wakes it again (`scripts/kind_nodepool.sh` never asks for more machines than the cluster has, and never tells Azure to make one). A machine is parked only after its own trial shows the response time holds within 2% (the verdict, through the release gate, one at a time), and a breach wakes it at once; a parked machine with no work is deleted by Azure's own autoscaler. Azure's autoscaler alone makes machines, for native's own pods.

So the omni arm can hold no more pods and no more machines than native's autoscalers give it: the bill can only fall or stay. The bill and the machines aim lower (a cut is GAIN); work, response time, failures and alert minutes must read EVEN or GAIN. The receipt's commands row shows how often a machine was parked or woken.

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results.

Amendment (2026-10-16): the spine, the seventh organism with the cluster inside

The founder's order of 16 October: the spine (the 267 catalog muscles in all four realms, the base every stack runs on; `docs/THE_SPINE.md`) is an organism in its own right. With the real cluster inside it runs as `tools/run_kil.py --organism spine`, on the same protocol (3), the same window rule, the same two arms and the same gauges as the other six; the grid conductor starts its squares, reads them back and never starts one twice, as it does for every organism, and the workflows `six-kube`, `aks-metered`, `gke-metered`, `eks-metered` and `cloud-organism` accept `spine`. The results already written on six organisms stand as they were run; nothing is read across engines or across organism sets.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 55

The Evidence Ledger

Every material statement in the technical package gets exactly one primary evidence class. A statement never borrows a stronger class from the one printed beside it.

Class	Meaning	Layer
T	formally proved theorem, under stated assumptions	L1 mathematical mechanism
V	finite computational verification: exact over a declared finite set, never a theorem beyond it	L1
S	simulation / model result	L2 modelled systems
L	live observation of external software (a real Kubernetes API, a real process)	L3 external software
P	independent physical measurement (a meter Omni does not read or control)	L4 physical plant
O	open: not established	—

No layer stands in for another: a theorem is not a physical validation, a Monte Carlo result is not a theorem, and a model's energy is not a meter's.

Mechanism identity for every row: `results/MECHANISM_IDENTITY.json`. Canonical engine `symmetric_verified`, mechanism id `29d9808dfb8f…`; the printed configuration `printed_eight_line`, id `cd333dc166fb…`, is a named alternative (Option A of the directive: one canonical, one alternative embodiment; no equivalence is claimed).

Layer 1: the mechanism

Class	Statement	Where
T	Unsaturated, the U-channel error obeys $de/dt = -KP\,e$; $V = e^2/2$ has $dV/dt = -KP\,e^2 < 0$ for $e \neq 0$ (inside Omega_unsat only).	`docs/TRACKING_THEOREM.md` Thm 1

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class	Statement	Where
T	With the U drift bounded by F[bar] < u[max], V decreases wherever e ≠ 0, saturated or not; e never changes sign; saturated stretches end in bounded time (continuous time).	Thm 2
T	On the declared parameter box, F[bar] = 16.86 < 25, so Thm 2 holds over the whole box in continuous time.	Thm 2
T	The sampled controller (u held through each RK4 step) satisfies e_(k+1) = 0.88 e_k + d_k, hence abs(e_k) <= 0.88^k abs(e_0) + epsilon_h (1 − 0.88^k)/0.12.	Thm 3
V	epsilon_h = 0.00378 over every micro step of the 500 frozen fixtures (nearest target); ultimate bound 0.0315 < BASIN_TOL 0.10. Wrong target: 0.0243, bound 0.20 (wider than the basin).	`results/TRACKING_BOUNDS.json`
V	The discrete execution dithers inside that band: abs(e) grew on 27 061 of 100 000 micro steps; e changed sign 747 times. The continuous monotone decay is not inherited.	same
V	Saturated micro steps: 0 of 100 000 (nearest target), 5 of 100 000 (wrong target).	same
T	The admissible box A (E interval, abs(U − sigma) <= abs(U0 − sigma), S between S0 and S[plus]) is forward invariant in continuous time.	Thm 4
V	Discrete invariance of A: 0 failures over 100 000 micro steps of the frozen fixtures, both targets.	`results/TRACKING_BOUNDS.json`
O	Discrete invariance and epsilon_h proved over the whole box (interval arithmetic).	—
O	Global stability of the forced six-state system.	`docs/FORMAL_STATUS.md`
V	500 / 500 frozen fixtures satisfy CONVEY-5 and CERT-10 (dwell predicates, not external certification).	`results/core_evidence.json`
V	Frozen 500-fixture comparison: symmetric_verified final error 7.48e-5, integrated abs(u) 0.878, peak 13.93; printed_eight_line 5.13e-6, 11.79, 18.87. Both executable; not interchangeable.	`results/MECHANISM_IDENTITY.json`
V	Python and C++ produce identical results (engine, governor, shield, HPA law, conveyance, GPU rules); twins sealed.	`verify.py`, `results/SEAL.json`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Layer 2: models and simulations

Class	Statement	Where
S	Synthetic stack: energy for Omni over the Kubernetes reference 168.9 → 121.7 kWh per run (documented-behaviour reference, not upstream controllers).	`docs/CLAIMS_REGISTER.md` C8
S	Fleet harness, recorded PlanetLab shapes: −40.6% energy vs HPA+CA, −21.7% vs Karpenter-lite (omni_fleet).	C17
S	Single GPU physics model: the engine alone would save 10.6–13.6% work per kJ on card A but breaks the p95 guardrail by 15–28%; with the frozen guards, about +1 to +5% inside it.	`results/gpu/sim/FINDINGS.md`
S	Node exchange (CPU and GPU on one budget): +1.4 to +5.7% work against the separate budgets, never over budget.	`results/hardware/NODE_EXCHANGE_*.json`
S	Six organisms (345, 262, 282, 337, the four stacked 1,226, the whole tower 656), the compass law on every muscle against each organism's own controllers, 1,000 paired runs at 1× and 10× size: work per energy +0.20% to +0.30%, energy −0.21% to −0.32%; every knob handed back.	`results/scale/GRID.md`
S	GPU card model, the card's firmware alone against the firmware with Omni on top (amendment 8: the verdict, 2% allowance), geometric means over 10 seeds and 10 fresh seeds: AI token generation, energy −3.25% / −3.72%, median +0.55% / +0.70%, p95 +0.29% / +0.26%; compute-bound, energy −0.70% / −0.48%, median +1.56% / +1.47%. A fixed 105 W power cap alone against the cap with Omni on top: energy −2.09% / −2.37% (AI token generation).	`results/sim/gpu_two_wire/RESULT.md`
Class	**Statement**	**Where**
S	Realm harness round 3 (every realm carries the shared spine), preregistered, seeds 3000-3009: the whole 656-muscle tower native against one governor on top, work per energy +0.1% (+0.1 to +0.1), violations +0.5 pp,	`results/realms/REALMS.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class	Statement	Where
	SUPERIOR WITHIN GUARDRAILS. Realms: Energy +0.2% with +1.9 pp violations (tradeoff); Compute 0.0% with +2.1 pp (not established); Distribution −0.1% (lower); Physics −0.7% (lower). Rounds 1 and 2 kept, superseded.	
S	Stacked organism (round 4, seeds 4000-4009): the four realm organisms on one clock, 1,226 muscles with every duplicate; stacked native equals the four realms alone on every seed. One governor over the stack: energy −0.14%, work per energy +0.02%, violations +1.4 pp, ENERGY IMPROVEMENT WITH SERVICE TRADEOFF; four separate governors about the same (+0.04%); one governor against four separate: −0.02% (lower, by a hair).	`results/realms/stack/STACK.md`

Layer 3: live external software

Class	Statement	Where
P	First real-GPU counted run, NVIDIA A10 (Lambda), 10 paired repetitions, the card's own meter: work per energy +3.6% (+2.7 to +4.5, proven), GPU energy −3.5%, same requests, none lost; wire check 7 of 7, every write read back, every arm restored.	`results/gpu/run-20261002T082232Z/GPU_REPS.md`
L	Set 25 (commit `6fa7a97`), real Kubernetes, 10 paired repetitions: machines in service −32.3%, p95 −57.3%, 0 failed requests, total CPU including Omni's own −0.6% (not proven).	`results/live/LIVE_REPS_25.md`
L	Set 26 (commit `e7f920d`), real Kubernetes, 10 paired repetitions, three arms: the allocation law machines −35.8%, p95 −55.4%; **the compass law in the live controller machines −17.2%, p95 −64.8%**, 0 failed requests, label by the preregistered rule *fewer machines within the band*.	`results/live/LIVE_REPS_26.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class	Statement	Where
L	Set 27 (commit `d46c959`), real Kubernetes, 10 paired repetitions, three arms: the allocation law machines −36.6%, p95 −53.1%; **the compass law aligned with the GPU governor machines −15.9%, p95 −65.5%, p99 −72.6%**, 0 failed requests, label by the preregistered rule *fewer machines within the band*.	`results/live/LIVE_REPS_27.md`
L	Set 24 (2026-10-02, commit `c908054`), real Kubernetes (kind), 10 paired repetitions: machines in service −31.6% (proven), p95 response time −60.1% (proven), p99 −64.1% (proven), HPA replicas −38.6% (proven), 0 failed requests on both; total CPU including Omni's own −1.8% (not proven); energy with every machine powered −0.3% (declared model).	`results/live/LIVE_REPS_24.md`
L	Set 23 (set 22 repeated on the current code, 2026-10-02), real Kubernetes (kind), 10 paired repetitions, equal work: p95 response time −62% (proven), replicas −37% (proven), pods started −64% (proven), 0 failed requests; total CPU with Omni's own −1.0% and modelled energy −0.2% (no difference).	`results/live/LIVE_REPS_23.md`
L	Set 22, real Kubernetes (kind), 10 paired repetitions, equal work (fixed-rate load): p95 response time −61% (proven), replicas −23% (proven), pending pod-minutes −91% (proven), 0 failed requests.	`results/live/LIVE_REPS_22.md`
L	Set 21, real Kubernetes (kind), 10 paired repetitions: p95 response time −37% (proven), replicas −12% (proven), 0 failed requests.	`results/live/LIVE_REPS_21.md`
L	Omni patched a real Kubernetes API in place (no restart); the reset restored every setting in every run; watch mode wrote nothing.	same, `results/live/`
S	Set 21 energy is a declared model, not a meter: +1.8% higher with parked machines at idle power.	same (energy table)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Layer 4: independent physical measurement

Class	Statement	Where
O	Omni changes successful work per measured joule on a GPU. The bench is built with three receipts (governor, actuator, outcome), the three contrasts (observation, authority, total), and result labels by rule; it has **not** been run on a card.	`scripts/gpu_paired.sh`, `docs/GPU_PREREGISTRATION.md`
O	Production data-centre energy effect.	—
O	Whether the power limit is the right actuator for LLM serving. Published measurements (arXiv 2605.11999, H200) find memory-bound decode draws 137–300 W of 700 W, so no power cap binds; clock scaling is what saves energy there (arXiv 2501.08219, GreenLLM 2508.16449). The pinned bench workload is compute-bound, where the cap does bind: a result on it does not transfer to LLM decode.	external literature
O	Wall-plug (whole-machine) energy effect; CPU package and DRAM (RAPL) effect.	—
—	What the GPU bench will attribute: per write, joules and requests against native, and which rule decided it (engine, floor, gate, reflex, heat, speed lock).	`tools/gpu_reps.py`

Negative evidence, kept

Nothing here is deleted when a later result looks different.

Class	Statement	Where
P	Same run: p95 response time **+58.5% higher** (510 to 809 ms), mean +48%; label by rule ENERGY IMPROVEMENT WITH SERVICE TRADEOFF. Cause: governor wiring (busy bursts served below the card's own clock); corrected in amendments 6-7, not yet re-run on a card.	`results/gpu/run-20261002T082232Z/GPU_REPS.md`, `docs/GPU_PREREGISTRATION.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class	Statement	Where
S	Two-wire GPU card, the profiles of amendment 7 (removed in amendment 8): service +5.3% work per energy with the median +14.8% slower; batch p95 +7.0% (−4.8 to +20.3). The governor before amendment 6 gave p95 +32.9% and +37.1%.	`docs/GPU_PREREGISTRATION.md`, history in git
S	Six organisms, same runs: time over the service line **+0.19 to +0.27 pp higher in every cell**; band first is not held anywhere.	`results/scale/GRID.md`
S	Round 6 law (HPA target held at the operator's own, machine release margin 0.6), 20 paired seeds per organism, before the grid rerun: work per energy +0.086% to +0.201%, time over the line −0.010 to −0.031 pp (ahead of native in all six), work unchanged within its interval, every knob handed back.	`docs/REALMS_PREREGISTRATION.md` (round 6)
L	Set 21: modelled energy 1.8% **power given** with every machine powered (the only honest energy row on kind).	`results/live/LIVE_REPS_21.md`
S	Realm harness round 1 (superseded, kept): all five organisms **LOSS** (whole tower −0.1%). Its Omni layer did not follow the shipped controller (no contraction authority or SLO reflex, the stack law in place of the HPA, request traffic paused, a site budget under native draw).	`results/realms/round1/`
S	Realm harness round 2: the Physics / Robotics / Autonomous organism **LOSS** (−1.9%, violations +2.9 pp); the Compute organism's +2.5% costs +2.9 pp of service violations; 68 single muscles LOSS or power given, mostly batch pacing and cooling setpoints under the live cooling law.	`results/realms/REALMS.md`
L	Set 22, equal work: no CPU saving once Omni's own CPU is counted (service −7.6%, controller +0.070 cores, together −0.9%, not proven); modelled energy unchanged (−0.1%).	`results/live/LIVE_REPS_22.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class	Statement	Where
L	Set 20: the "same work" reading was wrong; requests were +35%.	`results/live/LIVE_REPS_20.md` addendum
L	Sets 1–2: machine savings **withdrawn** — a broken probe had blinded the latency sense.	`results/live/LIVE_REPS_PROBE_DEFECT.md`
L	Set 3 with a working probe: Omni kept all 6 machines; no significant difference except more waiting pods.	`docs/HISTORY.md`
L	Set 21: pending pod-minutes +238% (not proven); pod starts +37% (not proven).	`results/live/LIVE_REPS_21.md`
S	GPU and batch: energy 1–2% **power given**, power and heat margins 1–4% short of tight packers (AKS/Karpenter, CAST AI, Spot).	`docs/HISTORY.md`
S	Machine round trips 1.1 → 1.7 per run (**LOSS**) in 6 of 8 seed-target combinations.	C12
S	Power-protect mode: backlog violations 2.5% → 6.7% (**LOSS**).	C12p
S	Park strategy on PlanetLab shapes: energy +1.3% vs HPA+CA, +33.6% vs Karpenter-lite (**power given**).	C17
S	Typical response time about 20% slower than every platform in the web and four-cluster simulations.	`docs/HISTORY.md`
S	GPU model: the engine without its guards breaks the p95 guardrail.	`results/gpu/sim/FINDINGS.md`
S	The compass-stroke GPU variant was tried and not adopted.	same
S	Right-sizing against VPA: p95 +15%, memory (OOM) kills +531%.	`docs/history/BENCHMARK_REPORT.md`
Class	Statement	Where
—	Reported in the external master-build report (not reproducible from this repository): on fresh scenarios Karpenter+VPA sometimes used less	external

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class	Statement	Where
	modelled energy than Omni, while Omni had lower churn and fewer request-induced evictions. Kept here so it is not lost; to be re-run here before it is cited.	

CHAPTER 56

The Claims Register

Every claim, its evidence status and the command that reproduces it. Simulation results use the synthetic stack model in omnicompass/stack_sim.py; they are not production measurements.

ID	Claim	Status	Reproduce			
C1	The six-state mechanism is implemented identically in the reference engine, Python and C++.	Proven (exact parity tests)	`python verify.py`			
C2	The C++ governor reproduces the Python governor on recorded stack telemetry.	Proven (0 mismatches)	`python tests/test_cpp_governor_parity.py <oc_governor>`			
ID	Claim	Status	Reproduce			
C2s	The C++ shield reproduces the Python shield (enforced actions,	Proven (0 mismatches; negative control)	`python verify.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	intervention counts and violations) on action sets recorded from every arm type; a C++ shield with invariant I1 weakened is rejected by the parity test.					
C2h	An independent C++ implementation of the HPA replica law (ratio rule, 10% tolerance, scale-up limit, 300 s scale-down window) reproduces the fleet harness HPA on every recorded step (hundreds of thousands of steps across Kubernetes and governor arms); a C++ HPA with 5% tolerance is rejected.	Proven (0 mismatches; negative control)	`python verify.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
C3	The S channel cannot cross S- (forward invariance).	Proven (Proposition 1)	`Manual Chapter 3`			
C4	The governor completed 100,000,000 consecutive decisions (951 years at 5-minute intervals) with 0 failures and constant memory; failure-rate upper bound 3.0e-08 at 95% confidence.	Measured (soak test); reproduced by the full verifier	`python verify.py`			
C4b	Throughput-mode soak: 100,000,000 decisions, 0 failures; resident memory at 25/50/75/100% of each run is constant ([3852, 3852, 3852, 3852] kB power-protect, [3916, 3916, 3916, 3916] kB throughput).	Measured (soak test)	`python verify.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
C8p	Primary endpoint (energy, throughput vs reference target 0.7): seed 346410161: -47.20 kWh, p = 1.0e-04; seed 360555127: -47.69 kWh, p = 1.0e-04. Secondary metrics Holm-adjusted over 24 tests: 21 toward their aims, 2 LOSS or power given, 1 not significant.	Measured in simulation	`python benchmarks/multiplicity.py`			
C5	One governor decision costs 2.6 microseconds on one CPU core of the test machine (machine-dependent).	Measured	`cpp: oc_soak`			
ID	**Claim**	**Status**	**Reproduce**			
C6	Observe mode leaves the stack bit-identical: over	Measured in simulation	`results/heldout_seed_*`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	Kubernetes, identical to Kubernetes alone (500/500 and 500/500); over the native model, identical to native (500/500 and 500/500).					
C7	Invariant violations per run (all arms scored identically): Kubernetes reference 9.56 / 9.44; power-protect 0.00 / 0.00; throughput 2.72 / 2.69, of which all are I4 (projected power), which throughput mode does not enforce; excluding I4: reference 6.91 / 6.80, throughput 0.00 / 0.00.	Measured in simulation	`results/heldout_seed_*`			
ID	**Claim**	**Status**	**Reproduce**			
C8	Energy for Omni-Compass	Measured in simulation	`results/heldout_seed`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	over Kubernetes (throughput mode, same power rules as the reference) versus the Kubernetes reference model (HPA target 0.7): 168.9 to 121.7 (lower) / 169.2 to 121.5 (lower) kWh per run; across HPA targets 0.5 to 0.8: GAIN in 8, LOSS in 0, not significantly different in 0 of 8 seed-target combinations.	(synthetic stack, documented-behaviour reference model)	_*			
ID	**Claim**	**Status**	**Reproduce**			
C9	Time healthy for Omni-Compass over Kubernetes (throughput mode) versus the reference model (target 0.7): 79.3% to 91.2% (higher) / 78.5% to	Measured in simulation	`results/heldout_seed_*`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	91.4% (higher); across targets: GAIN in 8, LOSS in 0, not significantly different in 0 of 8 seed-target combinations.					
C10	Recovery time for Omni-Compass over Kubernetes (throughput mode) versus the reference model (target 0.7): 57.2 to 17.8 (lower) / 58.4 to 15.2 (lower) minutes; across targets: GAIN in 8, LOSS in 0, not significantly different in 0 of 8 seed-target combinations.	Measured in simulation	`results/heldout_seed_*`			
ID	**Claim**	**Status**	**Reproduce**			
C11	Backlog violations for Omni-Compass over Kubernetes	Measured in simulation	`results/heldout_seed_*`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	(throughput mode) versus the reference model (target 0.7): 2.5% to 1.6% (lower) / 2.6% to 1.5% (lower); across targets: GAIN in 8, LOSS in 0, not significantly different in 0 of 8 seed-target combinations.					
ID	**Claim**	**Status**	**Reproduce**			
C12	Machine round trips (started and later stopped), throughput mode versus the reference (target 0.7): 1.1 to 1.7 (higher) / 1.1 to 1.8 (higher) per run; across targets: GAIN in 2, LOSS in 6, not significantly different in 0 of 8 seed-target combinations.	Measured in simulation	`results/heldout_seed_*`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	The reference removes a machine only after 10 minutes below 50% utilization and keeps post-event machines running; the governor releases them, which is the main source of its energy saving.					
ID	**Claim**	**Status**	**Reproduce**			
C12w	Scale direction reversals (back-and-forth wear), throughput mode versus the reference (target 0.7): 2.19 to 1.93 (lower) / 2.22 to 1.92 (lower) per run; across targets: GAIN in 4, LOSS in 4, not significantly different in 0 of 8 seed-target combinations.	Measured in simulation	`results/heldout_seed_*`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	Power-protect: 2.19 to 3.06 (higher) / 2.22 to 3.08 (higher).					
C12e	Engine mechanism in the flagship (throughput): removing the equation (2) release gate changes reversals from 1.93 / 1.92 to 3.19 / 3.18 and energy from 121.7 / 121.5 to 120.2 / 119.9 kWh; removing engine evolution changes energy to 125.4 / 125.1 kWh and reversals to 0.00 / 0.00.	Measured in simulation	`results/heldout_seed_*`			
ID	**Claim**	**Status**	**Reproduce**			
C12p	Power-protect mode (enforces the site power limit, which the reference does not): energy 168.9 to 132.2	Measured in simulation	`results/heldout_seed_*`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	(lower) / 169.2 to 132.3 (lower) kWh; power-limit violations 12.8% to 3.5% (lower) / 13.8% to 3.7% (lower); backlog violations 2.5% to 6.7% (higher) / 2.6% to 7.0% (higher).					
C12a	Human pages: the governor issues no page actions. Zero pages is a design property, not a measured performance result.	Design	`omnicompass/adapter.py`			
ID	**Claim**	**Status**	**Reproduce**			
C12b	The reference model is not the upstream Kubernetes controllers: Cluster Autoscaler scheduling simulation, Karpenter, VPA,	Stated limitation	`benchmarks/stack_benchmark.py (K8sReference)`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	scheduling constraints and disruption budgets are not represented.					
C15	15-second control plane, Omni-Compass as node-pool and power authority in place of the Cluster Autoscaler (HPA retained), energy vs HPA+CA / vs HPA+Karpenter-lite: energy-first: web -34.5% / -16.9%, reversals 4.3; multi -34.3% / -16.6%, reversals 18.1; batch -17.2% / -9.7%, reversals 13.6; gpu -4.9% / -2.7%, reversals 5.1; gpu_always_on -4.7% / -3.2%, reversals 0.0	balanced: web -33.2% / -15.3%, reversals 4.0; multi -33.0% / -15.0%, reversals 15.5; batch -12.4% / -4.5%, reversals 5.7; gpu -5.0% / -2.8%, reversals 4.2; gpu_always_on -4.7% / -3.2%, reversals 0.0	wear-first: web -29.7% / -10.9%, reversals 3.6; multi -29.6% / -10.6%, reversals 14.5; batch -12.3% / -4.3%, reversals 4.9; gpu -4.5% / -2.3%, reversals 3.0; gpu_always_on -4.2% / -2.8%, reversals 0.0	park: web -15.9% / +6.7%, reversals 0.0; multi -15.6% / +7.0%, reversals 0.0; batch -15.3% / -7.7%, reversals 0.0; gpu -4.9% / -2.7%, reversals 0.0; gpu_always_on -4.7% / -3.2%, reversals 0.0. Baseline reversals (CA / Karpenter): web 1.1 / 6.8; multi 5.5 / 25.4; batch 1.4 / 24.9; gpu 2.8 / 11.2; gpu_always_on 0.0 / 0.0. In gpu_always_on no arm powers a node off.	Measured in simulation (fleet harness, synthetic workloads, documented-behaviour execution layer)	`python -m fleet.benchmark --seeds 30 --seed-base 700000 --out out/`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
C17	Recorded PlanetLab utilization shapes with a declared scale mapping (9 traces, 30 scenarios), governor as node-pool authority in place of the Cluster Autoscaler: omni_fleet: energy -40.6% vs HPA+CA (lower), -21.7% vs Karpenter-lite (lower); omni_fleet_balanced: energy -37.5% vs HPA+CA (lower), -17.5% vs Karpenter-lite (lower); omni_fleet_wear: energy -31.0% vs HPA+CA (lower), -8.9% vs Karpenter-lite (lower); omni_fleet_park: energy +1.3% vs HPA+CA	Measured in simulation driven by recorded traces (frozen laws, no retuning)	`python -m fleet.planetlab --dir fleet/traces/planetlab --scenarios 30 --seed-base 800000 --out out/`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	(higher), +33.6% vs Karpenter-lite (higher). Time healthy and work completed are significantly lower by 0.08 points and 0.01%; observe mode identical in 30/30.					
C16	Live-cluster capture, capture replay and the PlanetLab vessel are tested on generated inputs in the real formats. No real capture or recorded trace has been run in the package.	Tested path; no real-data result	`python tests/test_fleet_realdata_paths.py`			
ID	**Claim**	**Status**	**Reproduce**			
C19	The live controller (omni_controller/) implements observe, target and nodepool modes with	Tested path; no live result	`python tests/test_omni_controller.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	dry-run, audit log and a reset that restores HPA targets from annotations; tested against a fake kubectl only, never against a real cluster.					
C18	Savings projection: the energy-first reduction relative to HPA + Karpenter-lite, applied to declared fleet profiles (results/SAVINGS.csv), computed identically in Python and C++. A projection from simulation, not measured savings.	Projection	`python benchmarks/savings.py`			
ID	**Claim**	**Status**	**Reproduce**			
C21	End-to-end self-pilot (shipped controller, simulated	Measured in simulation	`python pilot/selfpilot.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	cluster, real capture and scoring), default headroom 50%: energy per core-hour -7.7%, node-hours per core-hour -13.8%, pending-pod time not significantly different from HPA + Cluster Autoscaler; HPA shortfall minutes higher. Lower headroom saves more energy with more pending-pod time (manual Section 8.12a).					
ID	**Claim**	**Status**	**Reproduce**			
C20	pilot/score.py scores a user's own captures (node-hours and energy per used core-hour, utilisation, pending-pod	Tested tool; no pilot result	`python tests/test_pilot_score.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ID	Claim	Status	Reproduce			
	and HPA-shortfall minutes, bootstrap intervals); tested to detect a real gain, report no difference for identical clusters and detect a service regression.					
C13	Decision components (autoscalers, power agents, paging, Terraform as controller) consume about 0.02% of fleet CPU; idle capacity is 92% of fleet CPU at 8% utilization.	Modeled from published figures and stated assumptions	`python benchmarks/fleet_overhead.py`			
C14	Behaviour on production systems.	Not established; requires the pilot protocol	`docs/PILOT_PROTOCOL.md`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 57

Comparison with Existing Controllers

People who run these systems often see "autoscaling" everywhere and assume it all does the same thing. It does not. This page sets out, from public descriptions, what each system controls, and where Omni-Compass sits among them. The five systems named most often, nine open-source pieces read from their own repositories (license, kind, where each can run, its register row) and the formal distinction between one governor and a collection of tools: `docs/THE_SEAT.md`.

How to read it. Borg and Twine are private to Google and Meta; Turbonomic is closed commercial software. None of them can be run here, so they are compared by what their makers have published (papers, documentation, product pages), never by a run. A mark of "—" means the capability is not in the system's public description, not that it is impossible for it. The only fair measured comparison is on the customer's own system: their stack as it runs today against the same stack with Omni-Compass on top, in paired runs (`docs/INTEGRATION_MANUAL.md`, section 6).

1. What each system controls

System (public description)	Pods / replicas	Machines	GPU power	CPU clock / power	Moves watts between CPU and GPU	Site power budget	One decision across all of these
Kubernetes HPA	✓	—	—	—	—	—	—
Kubernetes VPA	✓ (requests)	—	—	—	—	—	—
Cluster Autoscaler, Karpenter	—	✓	—	—	—	—	—
KEDA	✓ (to zero)	—	—	—	—	—	—

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

System (public description)	Pods / replicas	Machines	GPU power	CPU clock / power	Moves watts between CPU and GPU	Site power budget	One decision across all of these
Red Hat OpenShift / OKD	✓ (the Kubernetes autoscalers)	✓ (machine autoscaling)	—	—	—	—	—
IBM Turbonomic	✓ (sizing, scaling)	✓ (placement, sizing)	—	—	—	—	partial (resource actions across layers)
Google Borg	✓ (job scheduling)	✓ (cluster placement)	—	—	—	Google has published separate power-capping work	—
Meta Twine	✓	✓	—	—	—	Meta has published separate power management (Dynamo)	—
NVIDIA DCGM	—	—	✓ (limits, monitoring)	—	—	—	—
Linux schedutil, RAPL	—	—	—	✓	—	—	—
AMD SmartShift, NVIDIA Dynamic Boost (laptops)	—	—	✓	✓	✓ (inside one laptop)	—	inside one device
Intel GEOPM (HPC)	—	—	partial	✓	partial (per job)	✓ (per job / cluster)	partial

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

System (public description)	Pods / replicas	Machines	GPU power	CPU clock / power	Moves watts between CPU and GPU	Site power budget	One decision across all of these
Omni-Compass	✓ (on top of HPA; or deciding)	✓ (park and wake)	✓	✓	✓ (conveyance law; simulated)	✓ (simulated)	✓

2. How each one decides

	Typical rule	Omni-Compass
Pods	add replicas when average CPU passes a target	the same autoscaler keeps working; Omni-Compass sets its target from the whole system's state and raises floors ahead of bursts
Machines	add when pods cannot be placed, remove when underused	park and wake machines by one law, and only when every sense is live, pods are not rising and nothing waits
GPU	vendor default: full power, or a fixed cap set by hand	a cap from the engine, bounded by a floor and released at once when the card is busy or response time slips
CPU	the kernel's governor picks a clock from recent load	a ceiling from the same engine, inside the nervous system's envelope
Power	a fixed plan leaving room for every device at peak; a breaker or capper reacts when the site goes over	one conserved budget: watts move from organs holding surplus to organs in need, never created, never over the budget
Safety	per tool	one OFF switch returns every organ to its recorded setting; watch mode first; service first

3. What is different, in plain words

1. **One brain instead of many separate reflexes.** Today each tool watches its own gauge: the pod autoscaler watches CPU, the node autoscaler watches pending pods, the GPU runs at its default, the power plan is fixed on paper. Nobody decides for the whole. Omni-Compass reads the whole system into one state and tells each tool the envelope it may act in. The tools keep doing their own jobs.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. **Power as a budget that moves.** Today a building keeps room for every device to hit its peak at once, so much of its power sits reserved and unused. Omni-Compass treats the building's watts as one conserved total and moves them to where the work is: from CPUs and quiet GPUs to busy GPUs, never over the limit (`docs/CONVEYANCE_LAW.md`).
3. **A proof, not a tuned dial.** The budget law is proved to conserve the budget and to converge, and those properties are checked on every build (`tests/test_conveyance.py`).
4. **Service guarded on every power move.** Power is only taken back while response time is inside the target, and given back at once when it is not.
5. **Reversible in one move.** Every setting is recorded before it is changed and restored by one switch.

4. What the numbers show today, and what kind they are

Against	Result	Kind
Kubernetes as it runs by default (HPA + fixed nodes)	p95 response time −37% to −55%, replicas −12% to −25%, machines in service −17% to −21%	measured on real Kubernetes (kind), 10 paired runs each, `results/live/`
A GPU at its vendor default	+1.3% to +5.1% work per energy, p95 within +10%	modelled card (MLPerf-calibrated), `results/gpu/sim/after`
Today's power practice (every GPU at one fixed cap that leaves room for every CPU at peak)	+1.4% to +5.7% work served, backlog −16% to −28%, never over the site budget	modelled, `results/hardware/NODE_EXCHANGE_*.json`
A reactive site capper alone	60-196 minutes over the site budget without Omni-Compass; 0 with it	modelled

Turbonomic, Borg and Twine cannot be measured here. Against a customer who runs one of them, the comparison is made on the customer's own system, with the same paired method.

5. Sources

- Kubernetes HPA, VPA, Cluster Autoscaler, Karpenter, KEDA: the projects' own documentation.
- Red Hat OpenShift / OKD: Red Hat's documentation of its autoscaling and machine management.
- IBM Turbonomic: IBM's product documentation.
- Borg: Verma et al., "Large-scale cluster management at Google with Borg", EuroSys 2015; Google's public Borg traces.
- Twine: Tang et al., "Twine: A Unified Cluster Management System for Shared Infrastructure", OSDI 2020.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- Meta Dynamo: Wu et al., "Dynamo: Facebook's Data Center-Wide Power Management System", ISCA 2016.
- NVIDIA DCGM and Dynamic Boost; AMD SmartShift; Intel GEOPM: the vendors' documentation.

Where a row above is wrong or out of date, correct it from the maker's own publication.

CHAPTER 58

The State of Play

How to read this receipt. Every judged row reads one of three words, decided by what its gauge is for and never by the plus or minus sign of its number. **GAIN**: the gauge moved toward its declared aim against native (more work done, a shorter wait, fewer misses or failures, or a resource cut). **EVEN**: native and Omni-Compass could not be told apart (the 95% interval includes zero: no difference beyond the noise), or the knob is at its limit on native. **LOSS**: the gauge moved away from its aim (less work done, a longer wait, more misses or failures). A resource spent or held (energy, machines, memory, processor time, a bill) that fell is a cut, a GAIN; one that rose is **power given**, what Omni-Compass put in to buy the work and the speed shown beside it, always shown and never called a loss. So a minus can read GAIN (a response time cut) and a plus can read LOSS (failed requests up). A reading counts when it holds the same way in all three of our runs, A, B and C, with every interval clear of zero; **the runs disagree** names a test unstable there; **shown, not judged** is a gauge declared shown only. The output follows the input: every reading is the result of the tune, the wiring and the load it names, and where a reading elsewhere differs the first presumption is the wiring (`DISCLOSURES.md`, section 4). The full key, letter by letter: `docs/HOW_TO_READ_THE_RESULTS.md`. Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

Current facts only. Earlier states, failures and chronology are kept whole in `docs/HISTORY.md`. The release this page describes is identified by `RELEASE_MANIFEST.json` (commit, fingerprints of the engine, the C++ twins, the GPU protocol, the live evidence and the verification receipt), which `verify.py` checks against the files.

Rerun everything: `pip install -r requirements.txt && python verify.py` ends with `VERIFICATION: PASS`.

Where things stand, read from the result files. Written by `python3 tools/summary.py --fix` from the files it names; `verify.py` fails a push in which this block no longer matches them. Nothing in it is typed by hand. The live results run on the engines named in their own tables, and every one of them runs again on the newest engine.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **The engine on this checkout:** omni-v7, fingerprint d6d467b824c585f1 (46 files).
- The muscles and the seven organisms on engine omni-v7 at the max (evidence class S, our own models; run 2026-10-16 04:34 UTC, commit 1637d32cd26c, 1107 muscles; source: results/realms_v5/REALMS_V5.md):
  - every muscle alone, over its loads: EVEN 580, GAIN 527
  - the organisms under the normal load: the spine: GAIN (fewer misses), misses -0.145 pp, power given +0.011%; Compute / AI / Cloud: GAIN (fewer misses), misses -0.070 pp, power given +0.009%; Physics / Robotics / Autonomous: GAIN (fewer misses), misses -0.121 pp, power given +0.010%; Energy / Facility / Industrial: GAIN (fewer misses), misses -0.118 pp, power given +0.000%; Distribution / Specialized: GAIN (fewer misses), misses -0.067 pp, power given +0.002%; the four stacked: GAIN (fewer misses), misses -0.092 pp, power given +0.000%; the whole tower: GAIN (fewer misses), misses -0.051 pp, power given +0.000%
  - the organisms under the climb load: the spine: GAIN (more work + fewer misses), misses -0.632 pp, power given +0.039%; Compute / AI / Cloud: GAIN (more work + fewer misses), misses -0.390 pp, power given +0.046%; Physics / Robotics / Autonomous: GAIN (more work + fewer misses), misses -0.317 pp, power given +0.021%; Energy / Facility / Industrial: GAIN (fewer misses), misses -0.217 pp, power given +0.000%; Distribution / Specialized: GAIN (more work + fewer misses), misses -0.460 pp, power given +0.026%; the four stacked: GAIN (more work + fewer misses), misses -0.349 pp, power given +0.000%; the whole tower: GAIN (fewer misses), misses -0.094 pp, power given +0.000%
  - the organisms under the line load: the spine: GAIN (fewer misses), misses -0.371 pp, power given +0.038%; Compute / AI / Cloud: GAIN (fewer misses), misses -0.205 pp, power given +0.045%; Physics / Robotics / Autonomous: GAIN (fewer misses), misses -0.250 pp, power given +0.030%; Energy / Facility / Industrial: GAIN (fewer misses), misses -0.117 pp, power given +0.000%; Distribution / Specialized: GAIN (fewer misses), misses -0.142 pp, power given +0.006%; the four stacked: GAIN (fewer misses), misses -0.176 pp, power given +0.000%; the whole tower: GAIN (fewer misses), misses -0.051 pp, power given +0.000%
- The grid (source: results/grid_v5/GRID.md): Across the grid: modelled, 36 of 36 squares of 10 and 100 runs GAIN (fewer misses); the 18 single runs: 18 with fewer misses; work +0.000%; power given +0.000% to +0.065%; with the cluster inside, 54 squares: 18 single repetitions (no reading); of the 36 of 10 and 100 repetitions, by gauge: "organism time over the line (% of steps)" GAIN in 36, LOSS in 0, "time over the response line (% of samples)" GAIN in 36, LOSS in 0, "response time (ms), 95th percentile" GAIN in 26, LOSS in 2, "energy (Wh)" GAIN in 26, power given in 0, "energy, parked workers still on at idle power (Wh)" GAIN in 26, power given in 0, "organism energy (J)" GAIN in 0, power given in 22, "organism work per energy" GAIN in 0, LOSS in 22, "failed requests (%)" GAIN in 18, LOSS in 0, "response time (ms), 99th percentile" GAIN in 12, LOSS in 2, "HPA replicas, mean" GAIN in 4, power given in 5, "pods started" GAIN in 3, power given in 0; off the clock in 3; invalid in 0.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- The Omni index (evidence class L, real machines, every measure the same in all three of our runs; the three-run tables of omni-v3, each named in its table): +5.2% GAIN on the resource reading (work, speed, machines, energy), +12.5% GAIN on the service reading (work and speed alone). Source: results/OMNI_INDEX.md.
  - Real Kubernetes (GitHub): +31.8% GAIN
  - Real database cache (MongoDB under YCSB, GitHub): +1.7% GAIN
  - Real database (PostgreSQL behind PgBouncer, GitHub): +0.9% GAIN
  - Real messaging (Apache Kafka, GitHub): +0.1% GAIN
  - Real cache (Redis, GitHub): +0.0% EVEN
  - Real database buffer pool (MySQL under sysbench, GitHub): +0.0% EVEN

On the engine that stands (omni-v7): 4 of 26 benchmarks so far. Every other row is that engine's own result, named in its Engine column, and runs again on the engine that stands (`scripts/reruns.txt`); results are never read across engines.

Benchmark	Engine	Its one number	Its word	Class
Real Kubernetes, a service rightsized by Goldilocks and the VPA's recommender, Omni-Compass on top, ten pairs, three runs	omni-v7	+18.0%	GAIN, power given	L
Real Kubernetes, a service rightsized by CruiseKube applying its own recommendations, Omni-Compass on top, ten pairs, three runs	omni-v7	+0.0%	EVEN	L
Real Kubernetes, With its add-ons: KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top, ten pairs, three runs	omni-v7	+78.3%	GAIN, power given	L
Real Kubernetes, With its add-ons: KEDA on the CPU target and the live requests in flight, Omni-Compass on top, ten pairs, three runs	omni-v7	+44.8%	GAIN, power given	L
Every real test together: the Omni index	omni-v3	+5.2%	GAIN, power given	L
The six organisms with the real cluster inside, 10 and 100 copies	omni-v3	+5.3%	GAIN, power given	L, the cluster; S, the organism around it

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Benchmark	Engine	Its one number	Its word	Class
The big organisms with the real cluster inside, 1,000 copies on Azure	omni-v3	+155.0%	GAIN	L, the cluster; S, the organism around it
The 945 modelled muscles as one tower, every muscle written at once	omni-v3	+0.3%	GAIN	S
Robustness: the two-hour run	omni-v3	+0.0%	EVEN	L
Robustness: the governor killed outright mid-run	omni-v3	+8.6%	GAIN	L
Robot arms (MuJoCo), the three untouched robots	omni-v3	+3.8%	GAIN	S
Redis, the cache's memory ceiling	omni-v3	+0.0%	EVEN	L
Real Kubernetes, steady work	omni-v3	+30.5%	GAIN	L
Real Kubernetes, faults	omni-v3	+36.6%	GAIN	L
Real Kubernetes, demand that wanders	omni-v3	+37.0%	GAIN	L
Real Kubernetes, all four at once	omni-v3	+41.7%	GAIN	L
Real Kubernetes, a queue of jobs	omni-v3	+16.5%	GAIN	L
Real Kubernetes, a public day of demand (Google 2011)	omni-v3	+46.4%	GAIN	L
Real Kubernetes, a noisy neighbour	omni-v3	+0.0%	EVEN	L
Power grids (SimBench), both load models	omni-v3	+5.8%	GAIN, power given	S
PostgreSQL, the pooler's pool size	omni-v3	+0.9%	GAIN, power given	L
MySQL, the buffer pool's size	omni-v3	+0.0%	EVEN	L

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Benchmark	Engine	Its one number	Its word	Class
MongoDB, the storage engine's cache size	omni-v3	+1.7%	GAIN	L
Kafka, the consumer group's size	omni-v3	+0.1%	GAIN	L
Drone swarms, the three untouched cells	omni-v3	+5.9%	GAIN	S
Buildings and batteries (CityLearn), the districts with batteries	omni-v3	+0.8%	GAIN AND LOSS	S

Run and scored by The Omni-Compass LLC's own code. No outside party has reviewed or approved these results. Preregistered means the rules were written down in our own repository before the runs; nothing was filed with any outside body.

The afternoon of 10 October: Omni v4 ordered, the sweep closed, two faults found, the second set landed. The founder ordered the collective mechanism as the next engine (`docs/OMNI_V4_PLAN.md`: one body, one brain, one tick a second; a trial runs to its full measurement and is never ended by the calm it causes; the body's cost judged, nothing anywhere pushed to a LOSS to move one thing toward its own; one trial at a time inside a body; nothing permanent; the wall belonging to the body; every wire forced through it; the six organisms, the four realms, all realms stacked and the whole catalog, re-cut by a written rule). The final coverage sweep against the internet added register rows 74 to 78 and five catalog families for v4, and mapped the mega-caps' closed systems to the open analogs that carry the same muscles (`docs/COVERAGE_MAP.md`). Two faults GitHub's own runs showed and no local check had were fixed: the release manifest, not refreshed after the morning's last document edits, and the cpu-power workflow file, refused by GitHub since its first push for an unquoted colon; the verifier now parses every workflow file. The five live products' second set on the amended trial rule landed (21 runs) and is archived; its early reading, from the logs, is in `docs/RERUN_2026-10-10.md` and the manual's 16.6c: on Kafka the brain allowed the third consumer once and the whole gain returned at 2.5 consumers instead of 6 to 8, and refused on every other repetition; the trial's measurement, not the law, is the fault, and four trial rules for v4 follow from it. The legal wording on every page outside the frozen engine now reads "all rights reserved" and "all patents, copyrights and trademarks filed in the USA", followed by www.omni-compass.com and nothing after it. The repository now keeps itself current: after every finished live run the front-page workflow archives it and `tools/front_page.py` rebuilds every table whose three runs are in, the pages read from the tables, and the README's latest lines (`results/live/FRONT_PAGE_STATE.json` records what each table was built from).

Everything run again (10 October 2026, 01:24 to 01:31 UTC). At the founder's order that every result be as of today, every benchmark with a result was dispatched again on the current commit `3aac0ab7` (Omni v3, digest `b53d05449ee04c4b`, by `tools/omni_version.py --commit`), native and omni, the wiring

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

of each checked against its preregistration before the dispatch: 70 GitHub runs (the seven Kubernetes tests, the five live stacks on the brain's own verdict, the four simulators, the realms table and the kill and long robustness scenarios, three runs each; the organisms with the real cluster inside; the modelled grid at 1, 10, 100 and 1,000 copies) and the two big organisms at 1,000 copies on rented Azure machines, plus one replacement run for a Kafka job GitHub's runner cut off (the record says which and why). By 12:30 UTC 69 of the 71 had landed and every table on this page was remade from them; the tables they supersede are whole in `docs/history`. The one shard the runner's six-hour limit cut off (the tower at 1,000 copies in the modelled grid) runs again, and that row reads the earlier run until it lands. The record, run by run with inputs, times and ids, is `docs/RERUN_2026-10-10.md`. Not restarted, and why: the three 24-hour robustness machines (started 8 October on the same harness, byte for byte, ending about 10:15 UTC today) and the Azure fleet that can show one machine, which waits on the family allowance those machines hold.

In one paragraph (2026-10-16, the engine that stands is omni-v7)

The engine that stands is omni-v7 (`OMNI_V7.json`, digest `d6d467b824c585f1`, 46 files; `docs/OMNI_V7.md`), on main since 16 October by the founder's order: the v5 law at the max on the 1,107-muscle catalog with every muscle's own card, the shared-host capacity repair in the Kubernetes controller, conveyance bounded by each namespace's CPU quota (an unreadable quota is no budget known, Kubernetes admission is the authority), the verdict reading a trial in the reports' words, every rule in seconds, the cloud's rule as one flag. Its first trials as pushed on 15 October found a fault in its quota budget (an unreadable ResourceQuota read as a zero allowance, so conveyance never raised a limit), fixed on 16 October in the toy gate first and then in the engine; the corrected trials are its first runs (below). Every benchmark runs again on the engine that stands (`scripts/reruns.txt`, released a few a tick by the grid conductor, A of every benchmark, then B, then C; the grid and every Azure set restarted on it the same day); every row stands as its own engine's result (omni-v6 for the four Kubernetes add-on tables of 15 October, omni-v3 for the rest, named in its Engine column on `docs/BENEFIT_SHEET.md` and in the standing block above) until its three runs on v7 land. Results are never read across engines. The standing block at the top of this page is written from the result files by `tools/summary.py --fix` and checked on every push; the prose below says the same in words.

On omni-v7, the engine that stands, real Kubernetes (evidence class L), ten pairs × three runs each (`results/live/V7_*.md`, runs 38843260818 to 38843289946, every one omni-v7; no row reads LOSS on the three-run rule):

- **A service rightsized by Goldilocks and the VPA's recommender, Omni-Compass on top** (`V7_GOLDILOCKS.md`): response time **−45% to −47% mean, −60% to −62% at the 95th percentile, −67% to −69% at the 99th**, time over the response line −100%, GAIN in all three of our runs; machines (node-hours) and failed requests EVEN; replicas, pods started, pod start wait and alert minutes EVEN (each clear of the noise in one run only, and there on the GAIN side except replicas +3.4%, power given); parked-worker energy +1.6% to +2.3%, power given; 14 to 18 settings commands a run. One number: **+18% GAIN, power given**.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top** (`V7_KEDA_REQUESTS.md`): response time **−57% to −58% mean, −71% to −75% at the 95th percentile**, time over the line −94% to −95%, alert minutes **−93% to −96%**, HPA replicas **−15% to −19%**, pods started **−17% to −23%**, all GAIN in all three of our runs; machines and failed requests EVEN; parked-worker energy +2.2% to +2.3%, power given; 4 to 5 settings commands a run. One number: **+78% GAIN, power given**.
- **KEDA on the CPU target and the live requests in flight, Omni-Compass on top** (`V7_KEDA_CPU_REQUESTS.md`): response time **−36% to −38% mean, −52% to −54% at the 95th percentile, −57% to −59% at the 99th**, time over the line −98% to −100%, GAIN in all three of our runs; machines, failed requests, replicas and alert minutes EVEN; parked-worker energy +1.1% to +1.7%, power given; 17 to 20 settings commands a run. One number: **+45% GAIN, power given**.
- **A service rightsized by CruiseKube applying its own recommendations, Omni-Compass on top** (`V7_CRUISEKUBE.md`): every gauge EVEN; CruiseKube's own rightsizing leaves Omni-Compass nothing to move and it wrote no setting. Run A alone read the 99th percentile +3.1% and run B the node-hours +1.0%, each inside the noise in the other two runs. One number: **0%, EVEN**.
- **Fixed capacity, four CPU caps, Omni-Compass on top at native's cap** (`V7_CAPACITY.md`): completed work and work inside the response line EVEN at every cap (run A alone read +3.8% completed work at 1 core, inside the noise in B and C): the cap is a quota on the service's CPU and blocks the one lever Omni-Compass has there.

On omni-v6, the engine of 15 October, real Kubernetes (evidence class L), ten pairs × three runs each (`results/live/V6_*.md`; that engine's own record, run again on v7 above):

- **A service rightsized by Goldilocks and the VPA's recommender, Omni-Compass on top** (`V6_GOLDILOCKS.md`): response time **-45% to -47% mean, -58% to -61% at the 95th percentile, -65% to -69% at the 99th**, time over the response line -99% to -100%, GAIN in all three of our runs; machines, node-hours, failed requests and the alert minutes EVEN; the parked-worker energy +1.8% to +2.7%, power given; HPA replicas EVEN. One number: **+54% GAIN, power given**.
- **KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top** (`V6_KEDA_REQUESTS.md`): response time **-59% mean, -73% to -75% at the 95th percentile**, time over the line -97% to -99%, alert minutes -98% to -100%, HPA replicas **-11% to -18%**, all GAIN in all three of our runs; parked-worker energy +1.6% to +2.1%, power given. One number: **+105% GAIN, power given**.
- **KEDA on the CPU target and the live requests in flight, Omni-Compass on top** (`V6_KEDA_CPU_REQUESTS.md`): response time **-37% to -41% mean, -55% to -57% at the 95th percentile, -59% to -63% at the 99th**, GAIN in all three of our runs; machines, failed requests, alert minutes and replicas EVEN; parked-worker energy +1.2% to +1.6%, power given. One number: **+15% GAIN, power given**.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **A service rightsized by CruiseKube applying its own recommendations, Omni-Compass on top** (`V6_CRUISEKUBE.md`): every gauge EVEN, no difference beyond the noise: CruiseKube's own rightsizing leaves Omni-Compass nothing to move on this service. One number: **0%, EVEN**.

In every one of these the governor ran on autopilot: no person touched a setting in either arm; the settings commands it wrote on its own (15 to 17 a run on Goldilocks and on KEDA with the CPU target, 4 to 5 on KEDA's HTTP add-on) are in each run's audit with their reasons, and the alert minutes (a whole minute over the line, when an on-call page would be open) are judged in every table.

Still on omni-v3, each named as that engine's result and queued to run again on v6 (`docs/BENEFIT_SHEET.md`): the seven real-Kubernetes demands (steady +31%, faults +37%, wandering +37%, all four at once +42%, a queue of jobs +16%, the Google day of 2011 +46%, all GAIN; a noisy neighbour EVEN), the five live stacks (PostgreSQL +0.9% GAIN with power given, MongoDB +1.7% GAIN, Kafka +0.1% GAIN, MySQL EVEN, Redis EVEN), robustness (the governor killed mid-run +8.6% GAIN; the two-hour run EVEN), the six organisms with the real cluster inside at 10 and 100 copies (+5.3% GAIN, power given), the big organisms at 1,000 copies on Azure (+155% GAIN), the modelled tower of that engine's 945 muscles (+0.3% GAIN), the robot arms (+3.8% GAIN), the power grids (+5.8% GAIN, power given), the drone swarms (+5.9% GAIN) and the buildings with batteries (+0.8%, GAIN AND LOSS: the bill in the 2023 districts read power given), and the Omni index over the real tests (+5.2% GAIN, power given). None of these is shown in front of a v6 result, and none is read beside one.

The muscles and the seven organisms, modelled (evidence class S, our own models, never counted in the headline), on the engine that stands, omni-v7, at the max (run again on 16 October, commit `1637d32cd26c`, with the spine as the seventh organism; every reading reproduces the 13 October table to the digit): 1,107 muscles in 70 families (`realms/catalog_v5.csv`), every muscle its own card (`realms/muscle_cards_v5.csv`), every muscle alone over its loads EVEN 580 and GAIN 527, LOSS 0; every one of the seven organisms (the spine 267, the muscles every stack runs on; Compute / AI / Cloud 540, Physics / Robotics / Autonomous 404, Energy / Facility / Industrial 480, Distribution / Specialized 484, the four stacked 1,908, the whole tower 1,107) GAIN (fewer misses, and under the climb more work) under the normal, climb and line loads, not one plant with less work or more misses in any of them, the power given +0.00% to +0.05%; the spine alone cuts its misses 6.1% under its own load, 7.9% under the climb (with more work) and 8.8% with work waiting in line, power given +0.01% to +0.04% (`results/realms_v5/REALMS_V5.md`, `docs/THE_SPINE.md`); the grid, 36 of 36 squares of 10 and 100 runs GAIN with the six organisms run so far alone and, with the real cluster inside, the organism's time over the line GAIN in 36 of 36; the spine's squares are in the conductor's queue (`results/grid_v5/GRID.md`). Every muscle is written out, organism by organism, the spine first, in `docs/REALM_MUSCLES.md`, and explained, wired and carded in `docs/MUSCLE_CATALOG.md` (the manuals' muscle appendix, with every family's wiring on a real stack from `docs/wiring_recipes.csv`).

The cloud (Azure), the bill at native's work. The founder's order of 14 October: in a cloud Omni-Compass shows one thing, the same work as native for a smaller bill, at the tune-down on the machines alone. The sets

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ran at the tune-down on 14 October (steady, the bursts `1 4 1 6 1 9` and `1 6 1 8 1 6`, the real day on 1 to 9; `aks-metered`, every run's title carrying `dial save`), and a full-wiring burst (`aks-metered-full`, the pod autoscaler moved too) ran on 15 October; their receipts are archived by this push and their tables follow, each on the engine it ran on. The only Azure tables up so far are v1's 4-worker fleet (`results/live/V1_AKS_STEADY.md`, `V1_AKS_BURST.md`): every gauge EVEN, a fleet too small to show one machine. Google (GKE) and Amazon (EKS) are built (`gke-metered`, `eks-metered`; the Operator's Manual's appendices G and H, click by click) and run only when the founder opens the accounts and says so.

The card (evidence class P): every earlier card result is obsolete; the founder's runs on rented cards come after the CPU and cloud work, at one named commit. **Linux's own CPU governor and meter** (`cpu-power`): built and preregistered; it waits for a machine on the metal, because GitHub's machines are virtual and expose neither.

What is shown and what is not. Shown, on the engine that stands and on real Kubernetes: a faster tail and more work inside the response line on the same machines, on top of the operator's own rightsizers and autoscalers (Goldilocks, KEDA), three times each. Shown on the older engine and queued to run again: the same on seven demands, memory and connections given back on real databases and a broker at no measured cost, the governor's hand-back when killed. Not yet shown: an energy or cloud-bill saving on real machines (energy on kind is a declared model; the Azure tables at the tune-down are being made), and anything on a real card.

Open

1. **Every benchmark on omni-v7**: 4 of 26 benchmarks have their three-run table on it (Goldilocks, KEDA's two add-on tests, CruiseKube; the fixed-capacity test too, which carries no sheet row); the rest released A, then B, then C by the conductor from `scripts/reruns.txt`; each table replaces its older row on the sheet when its three runs land.
2. **The grid and Azure on omni-v7**: restarted on 16 October; the v6 shards still running and the queued Azure set finish and stand as that engine's record, nothing cancelled.
3. **Azure at the tune-down**: the receipts of 14 and 15 October into tables (archive requested), checked against the cloud toy's finding that the machines-only setting barely cuts the bill while pods wait for a place.
4. **Google and Amazon**: on the founder's word; the accounts and secrets are his to make (appendices G and H).
5. **The card**: the founder's runs on Lambda, one exact commit, after the CPU and cloud work.
6. **Linux**: a machine on the metal for `cpu-power`.
7. **More room**: of the 159 muscles that read SAME AS NATIVE on omni-v7's realms table, the room search of 16 October (`docs/OMNI_V7.md`) found none under the max's gauges within each muscle's own knob: 147 have no native misses to cut and fixed work; the 12 battery power knobs miss only while

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

the charge sits at the operator's reserve, which the power knob may not spend. Six process loops miss at most 0.56% of decisions: a card candidate for a later version. The 14 of 26 knob-cases on the real stacks that read watch stay the next engine's question, in the toy gate first.

8. **Omni-Compass 1.0**: when the founder declares the engine final, the engine that stands then is published as 1.0 and the older fingerprints go to `docs/history` as the road to it.

Where things are

Path	What it is
`docs/OMNI_COMPASS_MANUAL.md` (PDF: `docs/OMNI_COMPASS_MANUAL.pdf`)	the Operator's Manual: how to embed, wire, tune, run and check Omni-Compass; every muscle's wiring and card (Appendix E)
`docs/OMNI_COMPASS_OWNERS_MANUAL.md` (PDF: `docs/OMNI_COMPASS_OWNERS_MANUAL.pdf`)	the Owner's Manual: the theory, the mechanism, the engine's source, every result, every muscle (Appendix G)
`docs/BENEFIT_SHEET.md`	one number per benchmark, its word, its engine, every change in words
`docs/REGISTER.md`	every muscle family wired, every benchmark run, every benchmark still to run
`docs/WIRING_VERDICTS.md`	write, watch or the operator's choice, per knob, from every result
`docs/OMNI_V6.md`, `docs/OMNI_V5.md`, `docs/OMNI_V3.md`, `docs/OMNI_V2.md`, `docs/OMNI_V1.md`	what each engine is and every result read on it; v7's page is on its branch
`docs/history/STATE_OF_PLAY_2026-10-10.md`	this page as it stood on 10 October, on Omni v3, moved here whole

PART EIGHT

Value, License and History

What a receipt is worth, how the license is priced against it, how the code is sealed, and how Omni-Compass came to be.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 59

Where the Value Comes From

The problem we are attacking

Computing has run into a wall that is not made of silicon. Data centers cannot get the power they need, cannot get it fast enough, and are running out of room to put more machines. AI made it harder: every new model needs more chips, and every chip needs more electricity and more cooling. The answers on the table are expensive and slow: new chips that do more work per watt (a new generation, new hardware to buy), new power plants and power contracts (billions, and years), and point fixes at a single layer (an AI serving trick, a scheduler, a power cap on one chip).

We attack it from the other side. Every system already running wastes room it paid for:

- GPUs boost to the top of their clock range and are knocked back by their own power limiter many times a second;
- Kubernetes keeps replicas and machines sized for the worst minute of the day;
- cooling runs colder than the heat requires; batteries hold more reserve than the hour needs.

That room is paid for in energy, in machines and in floor space, and it produces nothing.

Why the room is there is worth a paragraph, because it decides what can be done about it. Each layer of a stack is sized by someone who cannot see the others. The autoscaler's author does not know what the power cap will do; the cooling engineer sizes for the hottest hour of the year; the database operator sets a buffer pool for the largest table and leaves it there; each of them, sensibly, leaves a margin against the layer next door, and the margins add up. None of these people is wrong. The waste is not a mistake anyone made; it is the price of layers that cannot talk to each other, and it is why a fix at one layer, however good, moves the margin rather than removing it. The benchmarks in this manual are each a measurement of one such margin on real software: the connections a pooler holds open that no client is using, the memory a cache keeps for data it will not be asked for, the machines a cluster keeps in service for a minute that has passed. Each is small on its own and each is paid for every hour of the year.

The attack, then, is not another autoscaler or another cache. It is a governor that reads every layer's own gauge, keeps each layer in the middle of its own band, and gives the margin back where the layer's own controller shows it is not needed, with the layer's own controller still underneath and the layer's own setting restored when the governor is gone. That is a different kind of thing from a point fix, and it is why it stacks on top of every point fix a data center has already made rather than competing with any of them.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What Omni-Compass is, in one paragraph

Omni-Compass is software that sits **on top of** the controllers a system already has (the GPU's firmware, the Kubernetes autoscaler, the building's thermostats) and governs every layer under one law: a bounded push and pull that keeps each service in the middle of its band instead of far below its limit. It never replaces the native controller, never asks for more than the native settings allow, hands every knob back the moment it is switched off or loses a sense, and refuses any step that measures a LOSS of more than 2% on anything. No new hardware. It stacks on top of every other fix a data center makes.

The benefit: more work from what is already paid for

The room that was spent on nothing becomes one of two things, and a company chooses which:

- **More work for the same cost:** the same machines and the same watts carry more work; or
- **The same work for less:** fewer machines in service, fewer watts, a smaller bill.

They are the same gain read from two sides (3.4). The health side comes with it: faster answers, faster recovery from failures, nothing waiting, every knob returned, no human babysitting the stack.

The results to date (Chapter 48) show both readings on real software, and show that which one a stack gets is decided by the stack, not by Omni-Compass. On the real Kubernetes cluster the gain was taken as **more work, faster**: the cluster carried more requests inside its response line on the same machines. On PostgreSQL behind its pooler, on MySQL's buffer pool and on MongoDB's storage-engine cache the gain was taken as **the same work for less**: the same transactions answered inside the same line with fewer connections open, a smaller pool or a smaller cache, each notch proved on the stack first and the resource handed back at the end of every run. On Apache Kafka the earlier set had taken the gain as more work, faster, at the cost of three to four times the consumers, and on Redis the compass had bought the hit rate with three to four times the memory; under the brain's own verdict on the knob (10 October) neither spend was judged on the first set, because the trial rule of the day ended a spend trial on the calm the spend itself produced, so both read exactly nothing until the amended set lands (section 16.4). The combined index (section 16.6) is +4.8% over the six real categories on the sets of 10 October, with no loss in all three of our runs in any category. An operator should expect the same honesty from their own paired run: the receipts will say which side of the gain their stack took, and whether the compass's own cost (its CPU, its reads) ate into it.

How to read the benefit: the arithmetic

Every comparison is paired: the same system, the same work, the same moments, native alone against native with Omni-Compass on top. Let

- W be the work served (requests answered, tokens generated), held equal in both arms;
- C be a resource it used: machine-hours, CPU core-hours, or joules.

Productivity is work per resource, $P = W / C$. With the work held equal, the gain from Omni-Compass on top is

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

G = P[omni] / P[native] − 1 = C[native] / C[omni] − 1.

A gain *G* means the same resources can carry *G* more work. Read from the other side, the same work needs only

C[omni] / C[native] = 1 / (1 + G)

of the resources, a saving of *S = G / (1 + G)*. So **a third more work (G = 33%) is a quarter off the bill (S = 25%)**; 20% more work is 16.7% off; 50% more work is a third off. Both columns are the same measurement.

Three rules for reading any receipt:

1. **The work must be equal.** Every receipt states that the load was fixed-rate (open loop): the same requests at the same moments in every arm. Without that, a lower resource count could just mean less work was done.
2. **Nothing may read LOSS.** Beside every gain the receipt prints response times, failures, waiting and the controller's own CPU, each with its 95% interval. Our one rule (`DISCLOSURES.md`, Chapter 59): no LOSS of more than 2% on any measure, and only where energy or the bill is saved. A GAIN paid for with a LOSS of service is not a GAIN.
3. **Know the class and the comparator.** A machine-hour gain on kind (where idle machines stay powered and native has no node autoscaler) is not yet a bill; a modelled energy line is not a meter. Section 14 lists the classes; Chapter 48 says, for every result, what it is measured against.

Three worked examples, from the tables. In the all-four Kubernetes test on v3, the same ten machines carried 35% to 49% more requests inside the response line: *G* is 0.35 to 0.49, so the same work would need 1/1.35 to 1/1.49 of the machines, a saving *S* of 26% to 33%, had the fleet been free to shrink; on kind it was not, which is why the table reports the work column and not a bill. In the database test, the pooler held 61% to 72% fewer connections open for the same work: the resource there is connections, *C[omni] / C[native]* is 0.28 to 0.39, and the gain read as "more work for the same connections" would be *G* = 1.6 to 2.6, which the table reports as the machines-equivalent column, "fewer connections by". In the Kafka test the work inside the line rose 16% to 21% while the consumers running rose by a factor of 2.6 to 4: there the gain in work was bought with resources, and the table reports both, the one as GAIN in all three of our runs and the other as power given in all three of our runs, because that is what happened.

Where the evidence stands today, read honestly

Every number below is from a three-run table, each row naming the engine it ran on, with its evidence class and the question a referee is entitled to ask about it. The engine that stands is **omni-v7** (`OMNI_V7.json`, digest `d6d467b824c585f1`, on main since 16 October by the founder's order); every row names the engine it ran on (the first four rows omni-v7, three runs each; the rest Omni v3's own results, as their tables name them) and runs again on the engine that stands (`scripts/reruns.txt`), its row replaced here when its three runs land. Results are never read across engines. The answers to the referee's questions are given, where they exist, in the row; where they do not yet exist, the row says what will supply them. The newest state,

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

written from the result files on every push, is the standing block of `docs/STATE_OF_PLAY.md` and the sheet `docs/BENEFIT_SHEET.md`.

What	Measured, same work, three runs	Class	What a referee will ask, and the answer
omni-v7. Kubernetes with a service rightsized by Goldilocks and the VPA's recommender, Omni-Compass on top	response time **−45% to −47% mean, −60% to −62% at the 95th percentile**, time over the line −100%, GAIN in all three of our runs; machines and failed requests EVEN; replicas, pods started, pod start wait and alert minutes EVEN; parked-worker energy +1.6% to +2.3%, power given	L	"What did Omni-Compass move, if the rightsizer had already set the requests?" The CPU limits it conveyed from the machines' idle processor to the serving pods, within each namespace's quota (14 to 18 settings commands a run, each in the audit), and the HPA target; the rightsizer's recommendation stayed the operator's and was never written
omni-v7. Kubernetes with KEDA's HTTP add-on on the live requests in flight, Omni-Compass on top	response time **−57% to −58% mean, −71% to −75% at the 95th percentile**, alert minutes −93% to −96%, HPA replicas **−15% to −19%**, pods started −17% to −23%, GAIN in all three of our runs; parked-worker energy +2.2% to +2.3%, power given	L	"Fewer replicas and faster?" Yes: the conveyed limits let each pod serve more, so KEDA's own count fell; the energy the busier host drew is power given, shown beside the work
omni-v7. Kubernetes with KEDA on the CPU target and the live requests in flight, Omni-Compass on top	response time **−36% to −38% mean, −52% to −54% at the 95th percentile**, GAIN in all three of our runs; machines, replicas, failed requests and alert minutes EVEN; parked-worker energy +1.1% to +1.7%, power given	L	"Why less than the HTTP add-on alone?" KEDA's CPU target already scales on the pods' own use, so part of the room was native's

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What	Measured, same work, three runs	Class	What a referee will ask, and the answer
omni-v7. Kubernetes with a service rightsized by CruiseKube applying its own recommendations, Omni-Compass on top	every gauge EVEN, no difference beyond the noise; no setting written	L	"Then what is Omni-Compass for here?" Nothing, on this service: CruiseKube's rightsizing left no room, and the governor wrote nothing; the table says so
Kubernetes: work inside the response line, all four in one run	**+35% to +49%** GAIN in all three of our runs	L	"Is the cluster real?" Kubernetes is real (API server, scheduler, HPA); the seven nodes are containers on one 4-core GitHub runner, so the host's own busy share is recorded beside every run and the machines column is machine-hours in service, not a bill. The bill is Azure's test (below)
Kubernetes: 95th-percentile response time, steady, wandering, all four, faults	**47% to 66% faster** GAIN in all three of our runs	L	"Did native have a fair chance?" Native is Kubernetes with its HPA at the operator's target of 50%; the cost-to-match runs on the earlier engine showed no native target tried (40, 30, 20) reached Omni's p95 (`docs/history/`). The runs are paired on one runner with the order rotated
What	**Measured, same work, three runs**	**Class**	**What a referee will ask, and the answer**
Kubernetes: machines in service	−1.5% to −2.9% at steady load, **−19% to −23%** on the batch queue, GAIN in all three of our runs; inside the noise on the other tests	L	"Why so little?" Because the verdict kept every machine whose removal made requests slower in the paired trial. Earlier engines without that check parked 29% to 36% of

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What	Measured, same work, three runs	Class	What a referee will ask, and the answer
			the machines and paid for it in response time; the frozen engine puts service first. kind has no node autoscaler, so parked machines stay powered: the saving is machine-hours, not watts
Kubernetes: energy	the standby model, −11% to −14% on the batch queue and −5% to −7% under the Google trace, inside the noise elsewhere	L, modelled	"Is it a meter?" No. The machines are containers; energy is a declared formula (a parked worker at 25 W standby), stated as a model on every line
Kubernetes: fairness beside a noisy neighbour	no difference beyond the noise on every row, the neighbour's included	L	"Does it hurt the other tenant?" Not measurably, in three runs of ten pairs
Kubernetes under a public day of demand (the Google cluster trace of 2011): the 95th percentile; machines in service	**64% to 67% faster**; machines **−7% to −9%**, GAIN in all three of our runs; failed requests −11% to −18%	L	"Whose demand shape?" Google's, from a published trace, turned into the schedule by a rule written before the runs and receipted with every part's SHA-256
Database behind its pooler: connections held open	**−6% to −11%** on the read-only workload, GAIN in all three of our runs (the set of 10 October, the brain's verdict on the pool); the slow write workload's add refused	L	"What did it cost?" Nothing the same in all three of our runs: work, latency and host CPU inside the noise on all three workloads; the earlier sets' larger savings, and their costs, are whole in the history
What	**Measured, same work, three runs**	**Class**	**What a referee will ask, and the answer**
Message broker: work inside the 500 ms line; the 95th percentile	on the set of 10 October exactly nothing: every spend trial was abandoned before it was judged and the group stayed at the	L	"Why nothing?" Our trial rule ended a spend trial on the calm the spend produced; amended as amendment 3, the next set

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What	Measured, same work, three runs	Class	What a referee will ask, and the answer
	operator's two consumers; the earlier set's +16% to +21% and 1.6 s → 9 to 14 ms, bought with 6 to 8 consumers, is whole in the history		running
Database's storage-engine cache (MongoDB under YCSB): the cache size held	**−3% to −13% on f**, GAIN in all three of our runs (the set of 10 October, the brain's verdict on the cache); b, c and burst inside the noise	L	"What did it cost?" Nothing the same in all three of our runs: work, p95, p99, mean latency and host CPU inside the noise on all four workloads, no failed operation
Database's buffer pool (MySQL under sysbench): the pool held	**−10% to −20% on read_write**, GAIN in all three of our runs, the pages holding data with it (the set of 10 October, the brain's verdict on the pool); burst, read_only and update_index inside the noise	L	"What did it cost?" Nothing the same in all three of our runs: work, p95, p99 and CPU inside the noise on every workload; the earlier set's memory bought for the written working set is gone
Cache: work inside the 2 ms line; the hit rate	on the set of 10 October exactly nothing: the allowance one notch each way, most trials abandoned before they were judged, every gauge inside the noise; the earlier set's +14% to +27%, bought with a 64 → 200 to 270 MB ceiling, is whole in the history	L	"Why nothing?" The same trial rule as the broker's; amendment 3, the next set running
What	**Measured, same work, three runs**	**Class**	**What a referee will ask, and the answer**
omni-v7. The modelled muscles and seven organisms, the spine the seventh (16 October): 1,107 muscles in 70 families, every muscle its own card, three loads	every muscle alone over its loads EVEN 580, GAIN 527, LOSS 0; every organism GAIN (fewer misses, and under the climb more work) under the normal, climb and line loads,	S	"Why is the energy not a saving?" Because the max buys work and speed and the energy it takes is power given, shown beside them, never counted as a loss or a gain; the models are

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What	Measured, same work, three runs	Class	What a referee will ask, and the answer
	not one plant behind native, power given +0.00% to +0.05%; the spine alone: misses −6.1% under its own load, −7.9% with more work under the climb, −8.8% with work waiting in line, power given +0.01% to +0.04%; the grid 36 of 36 squares of 10 and 100 runs GAIN on the six run so far, the spine's squares queued		ours (class S) and are never counted in the headline
Power grid, 11 SimBench grids in pandapower	energy drawn and net import lower in all 11; losses lower in 7, **power given in 4**; tap operations fewer in 10, 4 → 8 a year in one, higher	S	"Where does it lose?" In the rural and semi-urban grids with their own generation, where a lower voltage raises losses; the table shows it
Robot arms, MuJoCo Menagerie	peak torque −29% and −10%, tracking error −21% where Omni moved; the Panda's copper loss **+14% higher**; two arms left native	S	"What about the arms that gained nothing?" The paired physics trial left them native and the table says "nothing for Omni to move"
Buildings with batteries, CityLearn, 11 districts	electricity bought, daily peak and unevenness lower in all 11; the bill **power given in 7**; ramping higher in 7	S	"Is the bill a loss?" Yes, in the 2023 districts, and it is in the table as such
Drone swarms, gym-pybullet-drones, three 20-drone cells	energy a mission −7% to −20%, missions a charge +8% to +25%; no late mission, reserve breach, near miss or collision	S	"Is the energy a meter?" No, a declared model from the simulator's own motor constants; the tracking error rose from 0.07 to 0.13 m inside its 0.25 m band and is shown

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What	Measured, same work, three runs	Class	What a referee will ask, and the answer
The governor's own cost, 1 to 1,000 copies with the real cluster inside	**0.006 to 0.013 of one core** at every size, 0.1% to 0.3% of the host's cores	L	"Does the brain's cost grow with the body?" No: it governs the real cluster, and that cost does not grow with the organism around it; shown, not judged, each run under its own engine (`results/live/V3_OWN_COST.md`)
The governor killed outright mid-run, 10 pairs × 3 runs	every setting back at the operator's **7 to 11 s** after the kill in 30 of 30 repetitions (mean 9 s; allowance 60 s); a second governor to the end in every one; the 120 s after the kill inside the noise against native	L	"What if Omni-Compass dies?" The watchdog hands back from the lease the governor left, within seconds, and the service does not measurably notice; the whole window with a kill and a restart in it still read faster and with fewer failures than native (`results/live/V3_ROBUST_KILL.md`)
Azure's bill on a 4-worker fleet (v1)	no difference beyond the noise on any gauge	L, a real bill	"Then where is the saving?" A fleet of 4 cannot show one machine; the 40-worker fleet that can is preregistered and waits on Azure's own cluster capacity in its region
The real card (GPU)	**obsolete**: every earlier card result ran on a controller since replaced	P pending	"When?" The founder's runs on rented cards at one named commit, after the CPU and cloud work

The upside the real-software data points toward is a third to a half more work from what is already installed on the Kubernetes side, with faster answers, and a smaller, resource-priced gain on the stacks where the knob is a pool, a consumer group or a ceiling. It becomes a claim about the bill, not a direction, when two tests land: the bill on a real cloud with a fleet big enough to show one machine, and the real card's own meter. We publish each of them as it comes, whatever it says.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

One law, versioned; and what came before it

The engine in every result of this manual is **the compass law with the verdict** (Chapter 20 and 1.2), versioned and fingerprinted at every change: frozen as Omni v1 on 5 October 2026; grown to the 945-muscle catalog as v2; given the slack gate on speed knobs as v3; redesigned as **v5** (12 and 13 October) with the max as its default brain on the 1,107-muscle catalog, every muscle its own card, the living body and the lease's walk back (v4 was the written plan of that redesign, `docs/OMNI_V4_PLAN.md`, never fingerprinted); and given the shared-host capacity repair of the Kubernetes controller as **v6** (15 October); and given conveyance bounded by each namespace's quota, the verdict in the reports' words, every rule in seconds and the cloud's one flag as **v7**, the engine that stands since 16 October by the founder's order, tried in the toy gate and in live trials first (`docs/OMNI_V1.md`, `OMNI_V2.md`, `OMNI_V3.md`, `OMNI_V5.md`, `OMNI_V6.md`, `OMNI_V7.md`). Earlier engines, among them an allocation law that gave back about a third of the machines at the cost of response time and a compass law without the verdict, produced the numbered sets kept in `docs/history/`; their results are history, labelled as the engine that produced them, and are never read beside a later engine's. A buyer does not choose between modes: there is one law, and every table names the version of it that produced the table. When the founder declares the engine final, the engine that stands then is published as Omni-Compass 1.0, with the older fingerprints kept as the road to it, never as a second product.

"Versioned" has a precise meaning here. The engine is a fixed set of files (46 on v7), and `OMNI_V7.json` holds one SHA-256 for each of them and one digest over all of them; `OMNI_V6.json`, `OMNI_V5.json`, `OMNI_V3.json`, `OMNI_V2.json` and `OMNI_V1.json` do the same for the earlier sets. `python3 tools/omni_version.py` hashes the files in a checkout and prints which fingerprint they match (for this edition, `omni-v7 (digest d6d467b824c585f1, 46 files)`), or, when they match none, which files differ from the nearest; with `--commit <sha>` it asks the same of any pushed commit, which is how every three-run table checks that its runs A, B and C were on the same engine before it combines them, and refuses if they were not. The versions differ in exactly the ways their records name, and a reader can check that from the fingerprints rather than from this sentence.

The rule that any change makes the next version is also the rule that keeps the results honest. A gain or a guard changed after a result is in would make that result unrepeatable on the engine that now stands, so the change moves the version, every result is run again on the new version, and the old tables keep their version in their name and move to history. The founder's standing order is that the engine is never changed without being told first; since 15 October every change is also tried in our own toy models against the engine that stands before any real run (`tools/toy_gate.py`). This manual records no change made otherwise.

The output follows the input

Every number Omni-Compass produces is the result of three inputs, and a reader who changes any one of them has changed the result: **the tune** (the factory tune as shipped, or the dial turned down, or a card changed), **the wiring** (which muscles are wired in and which are watched, what each wire reads and writes, how fresh each feed is) and **the load** (the work offered, its shape and its line). The published receipts are the record of

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

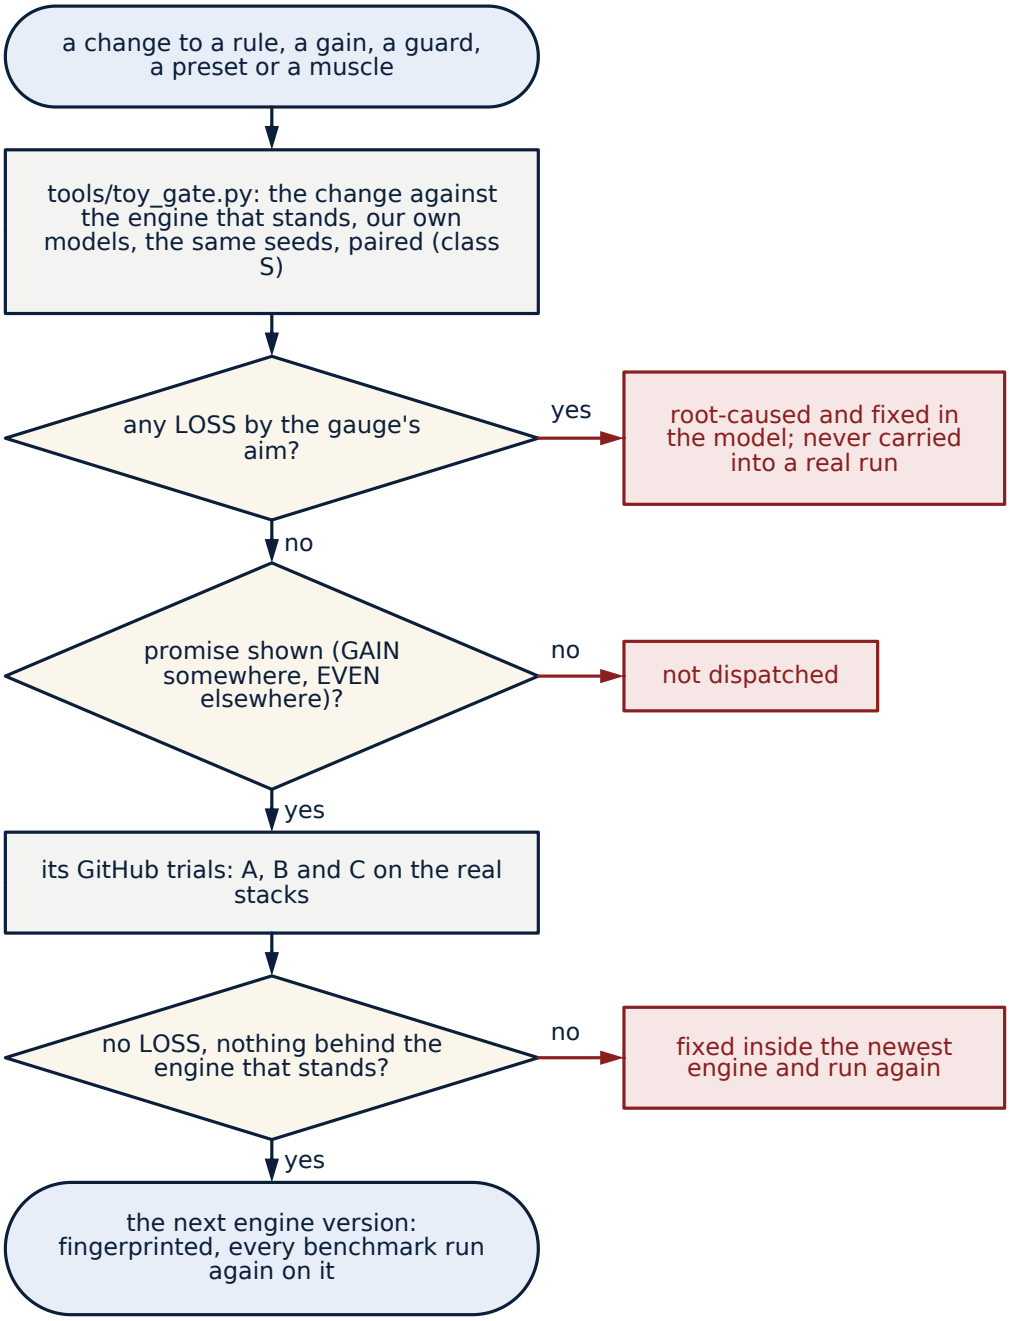


Figure 74. Flowchart: the toy gate before any engine change runs for real. A change to a rule, a gain, a guard, a preset or a muscle runs first in our own models against the engine that stands, on the same seeds, paired (class S); a LOSS is root-caused and fixed in the model and never carried into a real run; a change that shows promise goes to its GitHub trials, and only one that reads no LOSS and nothing behind the engine that stands becomes the next fingerprinted version, on which every benchmark runs again.

one setting of all three, and every receipt names it: the engine's fingerprint, the harness, the load and the window. The same engine wired onto another stack, or tuned to another purpose, gives another result, and that result is its own.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

A team that wants a different outcome sets the inputs for it and reads its own receipts against native: the most work at any spend (the max, the default); the same work as native for a smaller bill (the tune-down on the machines alone, the cloud's rule); a muscle held at a limit of the team's own choosing (its card, or its cover); a knob left native (watched, never written). Each of those is a legitimate setting of the inputs, and each has its own result. What no reader may do is read one tune's receipt as another's, or read a receipt without its inputs. The factory tune is the one setting whose receipts this book publishes (the Declaration of the factory tune, `DISCLOSURES.md`, Chapter 59); the dial and the cards are the inputs a licensee may change, and a changed tune's results are its own (section 3.6). Where a result read elsewhere differs from the published one, the first presumption is an input: the wiring, the settings or the reading (`DISCLOSURES.md`, Chapter 9).

CHAPTER 60

The Economics of a Receipt

Run the stack native and print the receipt. Run the same stack with Omni-Compass and print the receipt. The difference is the gain, read from either side: more work for the same energy, or the same work for less energy and fewer machines.

The license fee is set against the measured gain on the customer's own receipt. On a stack that costs one hundred, a measured gain of ten is worth ten; the fee is a share of that ten, and the customer keeps the rest. Percentages from different parts of a stack are not added into one bill: the invoice is one gain, measured once.

The value a customer sees comes in three forms, each on its own line of the receipt:

1. **Work per energy** - more finished work per kilowatt-hour.
2. **Capacity** - the same work on fewer machines in service; it becomes a cost reduction when the released machines are returned to the cloud or switched off by the platform around Omni-Compass.
3. **Service** - faster responses and fewer breaches at the same load.

The babysitting tax - the people and tools kept on the clock to set caps, answer pages and turn knobs back after a run or a crash - is the cost Omni-Compass removes by holding the knobs and returning them itself.

The receipt's arithmetic, and the one number. With the work held equal, a gain G in productivity is the same measurement as a saving S = G / (1 + G) in resources: a third more work is a quarter off the bill (manual, section 3.4). Across every real stack the one number is the Omni index (`results/OMNI_INDEX.md`): each test's work, speed, machines and energy as ratios, combined by geometric means so that a gain and an equal loss cancel exactly, each real category weighed the same, and only rows the same in all three of our runs counted. The index is honest in both directions by construction. As this edition is written it reads +30.2%: real Kubernetes +25.5%, the database +14.2%, messaging +166.9%, and the cache −24.9%, the last negative because the memory the governor holds for a wide working set is the resource it trades and reads power given

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

by rule, even as the cache's work and hit rate read GAIN. A buyer reads the category that matches their stack, and reads its losses in the same table as its gains.

What a receipt is not. A receipt is not a forecast. It is the measured difference between two arms on one system at one time, with its interval. The only number that applies to a customer's system is the one their own paired runs produce, and the method of those runs is the manual's section 13, the same method every table in this book was made with.

CHAPTER 61

Due Diligence

Answers reference the Claims Register (C-numbers) and the Technical Manual.

Engineering

Does the mathematics hold? Equations (1) to (8), Propositions 1 to 3 and their proofs are in Manual Chapters 2 and 3. The 500/500 CONVEY/CERT result is a property of the controller (Proposition 3), shown by counterfactuals: the controller aimed at the wrong basin also scores 500/500. **Is Python the same as C++?** Yes (C1, C2). The verifier also builds a deliberately mutated C++ governor and checks that the parity test rejects it. **Can every number be reproduced?** `python verify.py` rebuilds the C++, reruns parity, reruns the 100,000,000-decision soak and compares it with the recorded result, replays held-out scenarios and checks the pre-registered SHA-256 hashes (program fingerprints are additionally checked when the Python version matches the recorded one).

Operations

Against what we run today? Compared against a documented-behaviour reference model of Kubernetes autoscaling (HPA tolerance 0.1, 300 s scale-down stabilization, HPA targets 0.5 to 0.8; simplified Cluster Autoscaler with 10-minute unneeded time, 0.5 utilization threshold, 10-minute delay after scale-up): C8 to C12, including where Omni-Compass read LOSS. The reference model is not the upstream controllers (C12b); running the upstream controllers against the same scenarios is the next baseline step. **On real traffic?** Not yet. Results use a synthetic stack model. Replay of published production traces and the pilot protocol are the next evidence steps (C14). **What happens when it is wrong?** Observe mode changes nothing (C6). The reset returns control to the native managers at the next interval (omni_kill arm). The shield blocks actions that violate I1 to I5 (C7). **Will it wear hardware?** Machine start/stop cycles, power-cap travel and thermal travel are measured for every arm (C12, Manual Chapter 8).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Security

What authority does it hold? Capacity, replicas, power caps, rollback authorization and routing, only in AUTOPILOT, only through the shield. **Can it expand capacity during a security block?** No: invariant I1 is enforced before execution. **Does it replace encryption, identity or policy engines?** No. Those components are retained (fleet model, security role).

Finance

What does it save? Energy per run versus current autoscaling (C8). Fleet-scale figures are modeled (C13); the governance saving comes from reduced idle and padded capacity, not from removing the decision components' own consumption. **What does it cost to run?** C5.

Adoption

How is it introduced without risk? Observe, then shadow on production telemetry, then one control loop at a time under the reset (docs/PILOT_PROTOCOL.md).

Referees

Was it tuned on the test data? No. Law, shield and baselines were frozen and fingerprinted before the held-out seeds 346410161 and 360555127 (results/PREREGISTRATION.json). **Where does it fail?** Backlog violations against current autoscaling (C11); the engine-dynamics ablation (Manual Chapter 8); open obligations (Manual Chapter 10).

CHAPTER 62

License and Commercial Terms

The software and this manual are licensed under the Omni-Compass Evaluation License (`LICENSE`): evaluation and simulation use only. Everything else - commercial use, production use, operating any system beyond evaluation, redistribution, a hosted or managed service, incorporation into a product or service, or using the software or its results to build a competing product - requires a written Omni-Compass Enterprise License signed by The Omni-Compass LLC and paid for. All patents, copyrights and trademarks covering the Omni-Compass engine, its mathematics and its software have been filed in the United States by The Omni-Compass LLC. No patent or trademark license is granted for any other use. Contributions are accepted only on the terms in `.github/CONTRIBUTING.md`, which assign their rights to The Omni-Compass LLC.

The copyright in Omni-Compass belongs to The Omni-Compass LLC. The source is visible under the Evaluation License, which is not an open-source license; seeing the source grants no right beyond it. The

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

owner of a copyright may grant it under more than one license at once (the Evaluation License to everyone, a paid Enterprise License to a customer), may set the terms of each new version, and may assign the copyright; copies already received keep the terms they were received under. The license texts (`LICENSE`, `NOTICE`, `DISCLOSURES.md`) govern.

Every paper is bound into this book in full, as it stands in the repository, in the chapters that follow this one: the licensing questions and answers, the third-party notices, the standard terms of the Enterprise License (the grant, the term, the fees' basis, the warranties and their limits, the indemnities, the audit right, the source escrow and the governing law), the patents and trademarks statements and the security policy; the Evaluation License itself is the License appendix, and the disclosures, declarations and disclaimers stand in the front matter. Where a paper and this chapter differ, the paper governs. The engine's whole source, every Python file the fingerprint `OMNI_V7.json` names, is printed in the Source appendix: nothing in the mechanism is withheld from the owner.

CHAPTER 63

Licensing: Questions and Answers

Plain answers to the questions buyers, engineers and their lawyers ask. The binding terms are in `LICENSE`; where this page and `LICENSE` differ, `LICENSE` governs. Every declaration is in `DISCLOSURES.md`.

Is Omni-Compass open source? No. The source is published so that it can be evaluated, reproduced and audited. It is licensed under the Omni-Compass Evaluation License 1.0 (`LicenseRef-OmniCompass-Evaluation-1.0`), which permits evaluation and simulation only.

What may I do without a commercial license? Evaluation and simulation, free of charge (`LICENSE`, sections 1.4, 1.5 and 2): read the code; run `verify.py`, the simulations and the benchmarks; reproduce the published results and publish your own, every row included (section 4); run Omni-Compass in watch, dry-run or shadow mode, or in a test environment, on systems you own or control, where it writes to nothing that serves production traffic or real users and to no physical process outside a test bench. A limited patent license comes with it, for evaluation only (section 2.2).

What needs the Omni-Compass Enterprise License? Every commercialization or monetization of any kind; production use; operating any system beyond evaluation; offering it, or its function, as a hosted, managed or software-as-a-service offering; redistributing it; incorporating it, or any part or derivative of it, into a product, service, appliance or firmware; using it or its results to build or train a competing product (`LICENSE`, sections 3 and 5). The Enterprise License is a written agreement signed by The Omni-Compass LLC and paid for; its standard terms are summarized in `ENTERPRISE_LICENSE.md` (production, hosted service, OEM and embedded, managed service provider, research).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

May I run it as a service for others? Not without an Enterprise License with a hosted-service rider (`LICENSE`, section 3(c); `ENTERPRISE_LICENSE.md`, section 1).

May I connect it to a grid, a plant, a vehicle or a medical device? Not under the evaluation license: such systems may be studied only in simulation. A live connection to any physical system needs an Enterprise License and a written safety case accepted by the system's owner (`LICENSE`, section 10).

How is the Enterprise License priced? Against the measured gain on the customer's own paired receipts (native against Omni-Compass on the same system, the same load and the same clock). Terms are set in each signed agreement; no price stated anywhere in this repository is an offer.

Are patents involved? All patents, copyrights and trademarks covering the Omni-Compass engine, its mathematics and its software have been filed in the United States by The Omni-Compass LLC (`PATENTS.md`). The evaluation license grants no patent license beyond evaluation.

May I use the name or the compass rose? Only to refer to Omni-Compass accurately (`TRADEMARKS.md`).

May I contribute? Contributions require the contributor license agreement (`.github/CLA.md`): every contribution is assigned to The Omni-Compass LLC, with a patent license from the contributor.

Does Omni-Compass send data anywhere? No. The software contains no telemetry and makes no network connection of its own except to the systems an operator points it at (a Kubernetes API, `nvidia-smi`, a meter command).

What do scanners report? The license is declared in machine-readable form for Black Duck, FOSSA, Snyk and REUSE (`pyproject.toml`, `REUSE.toml`, `.fossa.yml`, `.snyk`, `sbom/`); third-party components are listed in `THIRD_PARTY_NOTICES.md`.

Can the terms change? Yes. The Omni-Compass LLC reserves the right to change the software, its documentation, its results and these terms at any time, without notice; a changed version applies to copies obtained and uses made after it is published (`LICENSE`, section 9). A signed Enterprise License governs its own term.

Which law governs? The laws of the State of Delaware and the federal laws of the United States, with exclusive venue in the Delaware state courts and the United States District Court for the District of Delaware (`LICENSE`, section 19). The Omni-Compass LLC is based in Florida.

Who do I contact? The Omni-Compass LLC, main office infrastructure, toll-free direct 1-888-339-9551, system route asset 1-888-DEX-YLL-1, landline 321-746-4411 registered in Florida, www.omni-compass.com.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CHAPTER 64

Third-Party Notices

Omni-Compass uses the following third-party components. Each remains under its own license; nothing in the Omni-Compass Evaluation License changes those terms. Installed versions are those resolved from `requirements.txt`.

Component	Use	License
NumPy	numerical arrays	BSD-3-Clause
Matplotlib	charts in the reports	Matplotlib License (PSF-based, BSD-compatible)
ReportLab (open-source edition)	the printable book and reports	BSD-3-Clause
Numba	compiled inner loops of the motion-axis plant	BSD-2-Clause
PyTorch (on GPU machines only, not installed by `requirements.txt`)	the GPU workload of the benchmark	BSD-3-Clause
`tests/third_party/hpa_independent.py`	an independently written HPA reference used unmodified in tests	its own terms, stated in the file
Liberation Serif and Liberation Sans fonts (embedded in the PDF book)	typesetting	SIL Open Font License 1.1
DejaVu Sans and DejaVu Sans Mono fonts (embedded in the PDF book)	typesetting	Bitstream Vera / DejaVu license (free)
PlanetLab / CoMon VM CPU traces, March 2011 (`fleet/traces/`, `k8s_controlplane/traces/`; source in their `PROVENANCE.json`)	held-out demand for the modelled fleet	their own terms (public research data); no Omni-Compass copyright is claimed in them

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Component	Use	License
Google cluster-usage traces 2011 (`clusterdata-2011-2`), from which `results/traces/google2011/` is derived (`docs/TRACES_PREREGISTRATION.md`)	the public demand trace on the real cluster	Google's published terms for the traces; no Omni-Compass copyright is claimed in the trace itself

Kubernetes, kind, `kubectl`, the NVIDIA driver and `nvidia-smi` are not distributed with Omni-Compass; it calls them where an operator has installed them. Their names are the property of their owners (`DISCLOSURES.md`, section 1).

CHAPTER 65

The Enterprise License: Standard Terms

This page summarizes the standard terms of the Omni-Compass Enterprise License, the paid license that every production use, commercial use, hosted service, distribution, OEM or embedded use, and every other commercialization or monetization of Omni-Compass requires (`LICENSE`, section 5). It is a summary for evaluation and planning. It is not an offer, and it binds no one: only an Enterprise License signed by The Omni-Compass LLC and the licensee, with its order form, grants any right, and that signed agreement controls over this page in every respect.

1. What can be licensed

License	What it allows
Production	The licensee runs Omni-Compass on top of its own systems (clusters, fleets, cards, sites, plants), on premises or in its own cloud accounts, within the scope in the order form
Hosted service	The licensee offers Omni-Compass's function to its own customers as a hosted, managed or software-as-a-service offering, under a hosted-service rider (per customer, per managed unit or revenue share)
OEM and embedded	The licensee ships Omni-Compass inside its own product, appliance, firmware or platform, under an OEM rider (per unit or per installed base)
Managed service provider	The licensee operates Omni-Compass for named third parties under a managed-service rider

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

License	What it allows
Research	A university or public laboratory uses Omni-Compass beyond evaluation for non-commercial research and publication, under a research rider

Scope is set in each order form: the licensed systems and their size (machines, cores, cards, sites, muscles or managed units), the fields of use, the territory, the named sites or accounts, and the engine versions covered.

2. Fees

Fees are set in each order form: a subscription, a usage-based fee, a share of the measured value captured, or a combination, with any minimum commitment. Where fees track value, the value is measured on the licensee's own paired receipts (native against Omni-Compass on the same system, the same load and the same clock), by the method the order form names. Payment terms, taxes and late charges are as the order form states. No price, rate or benchmark in this repository is an offer.

3. What the licensee receives

1. The licensed engine at a named, sealed version (its fingerprint, `tools/omni_version.py`), and each later version the subscription covers.
2. The wiring kits and the plug for the licensed systems, the manual and the book, and the receipts tooling.
3. Support and maintenance at the tier in the order form: response targets, named contacts, and corrections of defects that reproduce on the licensed version.
4. Installation through the manual's levels: read-only first, the wire check, a watch arm equal to native, then writing levels one at a time, each with its receipt.

4. Warranties

1. **Conformance.** For the warranty period in the order form, the licensed version performs materially as its documentation describes. The remedy is correction or, failing that, a refund of the fees paid for the nonconforming version for the affected period.
2. **The safeguards.** The kill switch hands every setting back to the value read before Omni-Compass's first write; the shield keeps every write inside the cover the operator granted; Omni-Compass never fights another writer.
3. **No other warranty.** No outcome, saving or result on the licensee's systems is warranted. Published results are evidence about the systems they ran on (`DISCLOSURES.md`, section 2).

5. Intellectual property

1. The Omni-Compass LLC keeps all right, title and interest in Omni-Compass, the Mechanism and the marks. The licensee receives the rights its order form lists, for its term, and no others.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. **Patent license.** The Enterprise License includes a license under The Omni-Compass LLC's patent rights in the filed applications, and in any patent issuing from them, for the licensed scope.
3. **Infringement indemnity.** The Omni-Compass LLC defends the licensee against a third-party claim that the licensed version, used as licensed, infringes that party's intellectual property, and pays the damages finally awarded or the settlement it agrees, subject to prompt notice, control of the defense and the usual exclusions (modifications, combinations, unlicensed use, versions superseded by an offered fix). Remedies may include a license, a modification or a refund.
4. **Confidential filings.** The patent application number and other confidential information are disclosed to a licensee under the agreement's confidentiality terms.

6. Limits of liability

Each party's liability is limited to the fees paid or payable in the twelve months before the claim, and neither party is liable for indirect, incidental, special, consequential or punitive damages, except for the exclusions the signed agreement states (for example, breach of confidentiality, the infringement indemnity, and the licensee's breach of the license scope).

7. Confidentiality, data and security

1. **Confidentiality.** Mutual, for the term and a period after it, covering non-public information either party gives the other.
2. **Data.** Omni-Compass contains no telemetry. The licensee's data, readings, settings and receipts stay on the licensee's systems and remain the licensee's. Where the licensee chooses to share data for support, a data-processing agreement applies.
3. **Security.** A software bill of materials ships with every version (`sbom/`); vulnerabilities are handled under `SECURITY.md`; the licensee may run the verifier (`python3 verify.py`) and the seal checks on every delivered version.

8. Safety and operation

1. The licensee remains the operator of its systems. The machines' own controls and protections stay in place; Omni-Compass sets only values they already accept.
2. Any connection to a physical system (grid, plant, vehicle, robot, medical device, facility) requires a written safety case accepted by the system's owner and every review its regulator requires; safety-critical systems are licensed only on those terms.
3. The kill switch stays operable at all times.

9. Compliance, audit and insurance

1. Each party complies with export-control, sanctions and anti-corruption law.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

2. The licensee reports usage against the licensed scope as the order form provides, and The Omni-Compass LLC may verify it on reasonable notice, no more than once a year.
3. Insurance, where the order form requires it, is carried by each party at the limits stated there.

10. Term, renewal and transition

1. Term and renewal are as the order form states.
2. On termination or expiry, the licensee stops use, every setting Omni-Compass changed is handed back to native (the hand-back is built into the engine), and every copy is returned or destroyed; transition assistance is available at the rates in the order form.
3. Source-code escrow for the licensed version is available under a three-party escrow agreement.

11. Governing law and precedence

The signed agreement states its governing law and venue; the standard is the law of the State of Delaware, with venue in the Delaware state courts and the United States District Court for the District of Delaware. Its order of precedence is: the order form, then any rider, then the Enterprise License terms, then the documentation. This page and the evaluation license (`LICENSE`) are superseded by the signed agreement for the licensee and its scope.

12. How to obtain one

The Omni-Compass LLC, main office infrastructure, toll-free direct 1-888-339-9551, system route asset 1-888-DEX-YLL-1, landline 321-746-4411 registered in Florida, www.omni-compass.com. A license starts with an evaluation on the licensee's own systems (`LICENSE`, section 1.4): watch mode, the wire check, and paired receipts on its own load.

CHAPTER 66

Patents and Trademarks

Patents

All patents, copyrights and trademarks covering the Omni-Compass engine, its mathematics and its software have been filed in the United States by The Omni-Compass LLC.

The filings cover, among other things, the Omni-Compass engine (the six-state closed law and its bounded control command held through the integration step), the compass law (the service position pulled to the middle

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

of its band by a bounded push and pull, with fail-up at the wall), the antagonist up/down wiring of each muscle, the plug contract (one restore point, read-back, the one-writer rule), the two-wire governance of a processor (clock ceiling and power limit), the two-way nervous system that grants and withdraws authority per organ, and one governor over many machines and realms on one clock.

What has been filed

Application	a nonprovisional utility patent application under 35 U.S.C. 111(a), filed with the United States Patent and Trademark Office
Title of the invention	**The Omni-Compass**
Inventor	Alan John Dubra, Kissimmee, Florida, United States
Drawing sheets	15
Application data sheet signed	20 September 2026 (form PTO/AIA/14, 37 CFR 1.76)
Publication	normal eighteen-month publication requested
Application number	withheld here on purpose; the filing is verifiable with the USPTO and is shown to a licensee under a signed Omni-Compass Enterprise License

The application data sheet names no assignee; the application stands in the inventor's name. Any assignment to The Omni-Compass LLC is recorded with the USPTO separately (37 CFR part 3).

No patent license is granted by publishing this repository, by the evaluation license, or by any act of The Omni-Compass LLC other than a signed, paid Omni-Compass Enterprise License. Use outside the evaluation license is infringement. Everyone who downloads, forks, scans or runs this software is on notice of these filings.

Trademarks

All patents, copyrights and trademarks covering the Omni-Compass engine, its mathematics and its software have been filed in the United States by The Omni-Compass LLC.

The marks

"Omni-Compass", "OmniCompass", the Omni-Compass compass rose with its ring of Greek letters, and the related names, logos and trade dress (the "Marks") are trademarks of The Omni-Compass LLC; trademark applications have been filed in the United States. Neither the evaluation license (`LICENSE`) nor publication of this repository grants any license to the Marks. A license to use them is granted only in a signed Omni-Compass Enterprise License, and only as it states.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What is allowed without a license

- Referring to Omni-Compass by name, accurately and in plain text, to say what it is, that you evaluated it, or that a result was produced with it, with the engine version and commit (`LICENSE`, section 4).
- Linking to the repository or to www.omni-compass.com.

What is not allowed

- Using any Mark, or anything confusingly similar, in the name of a product, service, company, domain, account, package, repository, fork or derivative.
- Using the logo or the compass rose, or altering any Mark.
- Suggesting endorsement, sponsorship, certification, partnership or affiliation by The Omni-Compass LLC.
- Using a Mark in advertising, comparative claims or sales material without a signed license.

Other companies' marks

Kubernetes is a trademark of The Linux Foundation; NVIDIA is a trademark of NVIDIA Corporation; KEDA and Karpenter are projects of their maintainers; other names belong to their owners. Their mention describes compatibility or a system Omni-Compass was tested with; it states no affiliation, endorsement or certification (`DISCLOSURES.md`, section 1).

Reporting misuse

The Omni-Compass LLC, main office infrastructure, toll-free direct 1-888-339-9551, system route asset 1-888-DEX-YLL-1, landline 321-746-4411 registered in Florida, www.omni-compass.com.

CHAPTER 67

Security Policy

Reporting a vulnerability

Report a suspected vulnerability privately to The Omni-Compass LLC by telephone at its main office infrastructure (toll-free direct 1-888-339-9551; system route asset 1-888-DEX-YLL-1, landline 321-746-4411 registered in Florida) or through www.omni-compass.com, never in a public issue, pull request or discussion. Include the version and commit, what you saw, how to reproduce it, and its likely impact. We acknowledge reports, keep the reporter informed, and coordinate disclosure: a fix or a mitigation is published before the details are, and the reporter is credited if they wish. Please give us a reasonable time to fix before any

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

disclosure, do not access data that is not yours, and do not disrupt any system; good-faith research that follows this policy will not be pursued by us.

What is in scope

The engine, the controllers, the plugs and wiring, the harnesses, the workflows and the verifier in this repository. Third-party software Omni-Compass runs on or connects to (Kubernetes, KEDA, Karpenter, NVIDIA drivers, databases) is reported to its own maintainers.

How Omni-Compass is built to fail safe

- The governor issues control actions only through the shield (`omnicompass/shield.py`, `cpp/src/shield.cpp`), inside the cover the operator granted, and never fights another writer.
- It snapshots every setting once, before its first write, and the kill switch (`python3 tools/omni_switch.py off`) hands every setting back; a dead-man lease hands them back if the governor stops.
- It runs under least privilege: on Kubernetes, a service account with `kubectl auth can-i` receipts for what it can and cannot do (`deploy/kind/rbac-omni.yaml`).
- It contains no telemetry and makes no network connection of its own except to the systems an operator points it at.
- Every release carries a software bill of materials (`sbom/`) and a seal of the engine and its twins (`results/SEAL.json`, `python3 verify.py`).
- The capture script (`fleet/capture/kube_capture.sh`) is read-only; no component writes to a live cluster unless the operator starts it in a writing mode.

CHAPTER 68

Repository Standards

The files the leading repositories carry, the open ones such as Kubernetes and the source-available, commercially licensed ones such as HashiCorp Terraform, Elastic, MongoDB, Redis, CockroachDB and Sentry, and where Omni-Compass carries each. Omni-Compass is published for evaluation and simulation; everything else is licensed (`LICENSE`, `LICENSING_FAQ.md`).

What a leading repository carries	Omni-Compass
License, machine-readable and in full	`LICENSE`, `LICENSES/LicenseRef-OmniCompass-Evaluation-1.0.txt`, SPDX headers, `REUSE.toml`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What a leading repository carries	Omni-Compass
Licensing questions in plain words	`LICENSING_FAQ.md`
Notices and third-party components	`NOTICE`, `THIRD_PARTY_NOTICES.md`
Disclosures and disclaimers in one place	`DISCLOSURES.md`
Patents and trademarks	`PATENTS.md`, `TRADEMARKS.md`
Contributor license agreement	`.github/CLA.md`
Contributing, code of conduct, governance, ownership	`.github/CONTRIBUTING.md`, `.github/CODE_OF_CONDUCT.md`, `.github/GOVERNANCE.md`, `.github/OWNERS`, `.github/CODEOWNERS`
Security policy and contacts	`SECURITY.md`, `.github/SECURITY_CONTACTS`
Support	`.github/SUPPORT.md`
Changes and roadmap	`CHANGELOG.md`, `ROADMAP.md`
Citation and software metadata for archives and crawlers	`CITATION.cff`, `codemeta.json`, `pyproject.toml` (keywords, URLs)
Software bill of materials (SPDX and CycloneDX)	`sbom/omni-compass.spdx.json`, `sbom/omni-compass.cdx.json`
License scanners (Black Duck, FOSSA, Snyk, ScanCode, REUSE)	`pyproject.toml`, `.fossa.yml`, `.snyk`, `REUSE.toml`, SPDX headers
Issue and pull-request templates, including a licensing template	`.github/ISSUE_TEMPLATE/`, `.github/PULL_REQUEST_TEMPLATE.md`
Dependency updates	`.github/dependabot.yml`
Continuous verification	`.github/workflows/verify.yml`, `python3 verify.py`
Reproducibility: fingerprinted release, sealed twins, checksummed results	`RELEASE_MANIFEST.json`, `results/SEAL.json`, `SHA256SUMS.txt` in every result folder
Rules written before every benchmark run	`docs/GPU_PREREGISTRATION.md`, `docs/REALMS_PREREGISTRATION.md`, `docs/K8S_COMPASS_PREREGISTRATION.md`
A manual and a printable book	`docs/OMNI_COMPASS_MANUAL.md`, `docs/OMNI_COMPASS_MANUAL.pdf`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What a leading repository carries	Omni-Compass
Every result in one place, with charts	`docs/DOSSIER.md`
A one-file archive of the repository	GitHub's Download ZIP, at any commit (the copyright deposit is `release/copyright/`)

Files present at the commit this page describes; `python3 verify.py` checks the ones the results depend on.

CHAPTER 69

Python, C++ and the Seal

The laws are twinned: each has a Python version and a C++20 version that give the same answers, proven by a parity test on every build (`cmake -S cpp -B cpp/build && cmake --build cpp/build`).

Law	Python	C++	Proven by
core engine	`omnicompass/core.py`	`cpp/src/core.cpp`	500 frozen fixtures
governor	`omnicompass/adapter.py`	`cpp/src/governor.cpp`	`tests/test_cpp_governor_parity.py`
safety shield	`omnicompass/shield.py`	`cpp/src/shield.cpp`	`tests/test_cpp_shield_parity.py`
HPA replica law	`fleet/harness.py`	`cpp/src/hpa.cpp`	`tests/test_cpp_hpa_parity.py`
closure law	`omnicompass/closure.py`	`cpp/src/closure.cpp`	`tests/test_cpp_closure_parity.py`
conveyance law	`omnicompass/conveyance.py`	`cpp/src/conveyance.cpp`	`tests/test_cpp_conveyance_parity.py`
nervous system	`omnicompass/nervous_system.py`	`cpp/src/nervous_system.cpp`	`tests/test_cpp_twins_parity.py`
compass and ledger	`omnicompass/compass.py`, `storage.py`	`cpp/src/compass.cpp`	`tests/test_cpp_twins_parity.py`
GPU governor rules	`omni_controller/gpu_governor.py`	`cpp/src/gpu_rules.cpp`	`tests/test_cpp_twins_parity.py`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The seal (`results/SEAL.json`) holds the SHA-256 fingerprint of every twinned file, written only after every parity test passes. `verify.py` fails, naming the file, if any sealed file changes afterwards. The compass law (`omnicompass/compass_law.py`) and the two-wire GPU governor are in Python today; their C++ twins are next.

Why two languages. A law that exists in one implementation can hide a bug that is also its behaviour: the tests pass because the tests were written against the same code. Two implementations written separately, in languages with different numerics and different defaults, that agree to fifteen decimal places on five hundred trajectories and on every fixture of the governor, the shield, the HPA law, the closure, the conveyance and the nervous system, are evidence that the text of the law is what both compute. The C++ twin is also the one a buyer would embed where Python does not run (a controller, a firmware, a PLC), and the soak (`results/SOAK.json`, one hundred million decisions, no failure) is run on it. The seal makes the twins' agreement a property of the repository rather than a claim: change a sealed byte and `verify.py` fails, naming the file.

The three fingerprints. The seal fingerprints the twinned laws; `OMNI_V1.json` to `OMNI_V7.json` fingerprint the engine as a whole (law, controllers, muscles, runners: 38 to 46 files); `RELEASE_MANIFEST.json` fingerprints the release (the commit, the engine, the twins, the GPU protocol, the live evidence and the verification receipt) and is rewritten by `tools/release_manifest.py` before every push, under the Python GitHub runs. A reader holding any one of the three can tell whether the files in front of them are the files the results were made on.

CHAPTER 70

The Founder's Working Notes

Where a sentence is a design aim rather than what the code does today, or a figure that is not yet measured, the check column says so. Nothing in this chapter adds a result: every number that is a result names the file it comes from.

What Omni is

OmniCompass is the governor. It is the process running on the processor, and the chip executes it. The card, the replica count, the rack cap, the joint and the feeder are the levers: the muscles. Omni reads the meters, steps a bounded loop, and writes only the lever it is allowed to write. When it stops, it puts that lever back.

It is not the chip, not the card and not Kubernetes. It is the brain on the host, writing through a bolt.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Governor is the machine word. A governor on a steam engine did not build the engine and did not turn the shaft. It watched the speed and moved the throttle so the speed stayed in a band. The plant does the work: the chip, the card, the pods, the job. Omni reads a meter, writes one lever, and puts that lever back.

The loop

The chapter says	The code today	Check
Omni reads the plant's meters and maps them to the state E, U, S	`omnicompass/adapter.py`, `observe_vector` and `assimilate`	matches
It computes the drift with the command at zero, then raw = −drift + K[P]·(σ − U), clipped to the authority before the step	`omnicompass/core.py`, `control_command`: `u = clip(−f_U(x,t) + KP·(σ − U), ±U_AUTHORITY)`	matches
It holds that same u through every RK4 stage and does not rewrite U afterwards	`core.py`, `macro_step`: one `u` per micro step, passed unchanged into all four RK4 stages; U is never overwritten	matches (proved: `docs/TRACKING_THEOREM.md`)
It writes the clipped command u to the lever	**Not today.** The frozen live governor runs the engine with u = 0 (`macro_step(..., target=None)`) and uses u only as its convergence signal (`push = u / U_AUTHORITY`). The lever is set by the allocation law and the nervous system's authority (`omnicompass/nervous_system.py`).	**design aim**, see "What to strengthen"
On exit it restores the lever	kill switch: `omni_controller/controller.py` restore; the GPU bench restores and reads back the start limit; the realm harness checks every knob is handed back	matches

So the step the chapter describes is the engine's own step, and it is proved. Writing u itself onto a lever, through an output map with a gain in watts (or replicas) per unit of u, is a further mechanism. It is not what produced the results below.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wiring

A wrist wire moves the wrist. It does not move a finger that has its own tendon unless that tendon is also wired.

The card's clock wire goes to the NVIDIA driver. The replica wire goes to the Kubernetes API. The scheduler's wire goes to the kubelet. Those wires already exist and do not pass through Omni. Omni is an added process, and a tendon is connected to it only if the output map writes that lever and the input map reads it back.

A power-limit write can make the driver drop clocks. That is a side effect on one finger, not the replica nerve, which keeps running on its own path unless a second line is connected. The cluster starts its own wires: the API server accepts a replica write, the scheduler places the pod, the kubelet starts it, the driver moves the clocks, and HPA, if installed, is its own process. Omni joins those nerves. It is a client of the plant, not its origin.

Four realms, five organisms

1. Compute / AI / Cloud: GPU server, Kubernetes, the card, the job.
2. Physics / Robotics / Autonomous: joint, servo, PLC, car, line.
3. Energy / Facility / Industrial: rack, cooling, PDU, battery.
4. Distribution / Specialized: network, feeder, logistics.
5. The whole organism: all 656 canonical muscles, each once, one clock.

A muscle may sit in more than one realm. Every realm stands on the same spine (Kubernetes, machines, GPUs and CPUs, network, storage, observability, security, cooling, electrical distribution), and then has its own domain muscles. The fifth run holds each of the 656 once.

Each organism is shown native, then with Omni, on the same membership, the same seed and the same clock: two receipts. The core does not change when the lever changes.

Check	
Built	`realms/` (round 3): spine of 190 muscles in all four realms; organisms of 345, 262, 282, 337 and 656 (`docs/REALM_MUSCLES.md`)
Result	Whole organism +0.1% work per energy, SUPERIOR WITHIN GUARDRAILS; the realms pay in service when they share the spine (`results/realms/REALMS.md`)
Limit	These are modelled plants (evidence S / rung E2). A catalog row is not a tendon. GitHub can host the compute organism for real (kind, and the GPU on a rented card); facility, machine and grid need their own hosts
Open	The 656 is a working catalog, not a census: `docs/realm_study/` checks it against the real systems' documentation and industry practice (waves 1 and 2 done; wave 3 maps every row)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Evidence rungs

Rung (chapter)	Class (repository, `docs/EVIDENCE_LEDGER.md`)	Meaning
E0	design	the written spec
E1	T / V	deterministic tests and proofs: Python against the C++ twin, the tracking theorem
E2	S	simulation on a made plant (the realms, the fleet and GPU models)
E3	L	real software: Kubernetes on kind, no card (sets 22 and 23)
E4	P	a physical meter: the card's own power reading (the GPU bench; first run on an NVIDIA A10, 2026-10-02, `results/gpu/run-20261002T082232Z/GPU_REPS.md`; the corrected governor not yet run on a card)

A result does not climb a rung by itself. The four realms are plants; E1 to E4 are how hard the proof is on whichever plant is run.

What blocked the card

The hash did not stop the card. A Python–C++ mismatch can fail a test after a machine has started the job; it cannot stop GitHub from handing out a machine, because the runner is chosen before the code runs. The verify job started and failed (fixed since: it is green), and separately the GPU job never got a machine.

The organisation's and enterprise's settings show no GPU runner and no option to create one (checked 2026-10-02), so no budget could start it. The run therefore moves to a rented card (`scripts/gpu_rented_run.sh`, one command).

The bake-off that exists

Set 23 (`results/live/LIVE_REPS_23.md`, run 36940088922): real Kubernetes, ten pairs, fifteen minutes an arm, the same open-loop work, native against Omni, six kind workers, order rotated.

Gauge	Native	Omni	Change
Response, 95th percentile (ms)	327.3	123.8	−62.2%
Response, 99th percentile (ms)	503.4	169.3	−66.4%
Response, mean (ms)	146.6	80.1	−45.4%

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Gauge	Native	Omni	Change
Failed requests	0	0	0
HPA replicas, mean	8.51	5.40	−36.6%
Workers in service	6	4.28	−28.7%
Pods started	4.7	1.7	−63.8%
Pod start wait (s)	18.6	3.8	−79.6%
CPU, service plus Omni (cores)	0.903	0.894	−1.0% (no difference)
Energy, workers still on (Wh, declared model)	159.0	158.7	−0.2% (no difference)

The same requests were sent and none failed. They were answered faster, on fewer copies, at the same bill. Kind leaves every worker powered, so the watt line stays flat. Parking a worker and waking it again was tried; the churn ate the saving (`docs/CLAIMS_REGISTER.md`, C17), so that path is closed on this plant.

Arithmetic, not a result: if a run finishes 5% more work, nineteen runs do what twenty used to (20 / 1.05 = 19.05).

The chip

The card is the meter that can move the electric bill, and the meter that can move output.

Energy on the chip is the integral of power.draw. The same pile can be spent two ways:

- **Output:** more finished work on the same bill. The cap stays near where the native arm left it, the draw stays in the same band, and heat gets no new reason to rise.
- **The bill:** a lower enforced limit, the job still finishes, and joules fall.

A company short of cards spends it on output. A company paying for GPU hours with spare capacity spends it on the bill. A company against a building power cap splits it. The bench's primary outcome, work per joule, counts both, and its table prints requests and joules separately, so the receipt shows which way the pile went (`tools/gpu_reps.py`).

For the pile to be real:

- the cap has to bind;
- the write has to be enforced by the driver, and the enforced limit read back;
- the job has to finish;
- the limit has to be restored on exit, so the next native arm is not still capped.

All four are in the bench and its preregistration (`docs/GPU_PREREGISTRATION.md`, amendments 1–3).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The babysitting tax

The electric bill is the small pile. The babysitting tax is the people and tools kept on the clock to watch the levers, reset a cap, and stop the muscles fighting. A card's real cost is usually the card and the hours it sat idle or late, not the electrons.

What fills the seat today is a person: someone sets the cap, someone gets the page when it is left down, someone turns it back after the run or the crash. The product takes that knob and that page.

What we found nobody selling

We found no published product that does all of the following across compute, machines, facility and grid as one governor:

- reads all of their meters into one state;
- holds one clipped command through the step;
- puts each lever back when the run stops, and prints both receipts.

Borg, Twine and OpenShift govern compute. AWS is a cloud. Turbonomic covers the IT stack. Tesla runs the car, the battery and the factory as separate software. Each covers more than one thing as a company, not four realms as one governor.

Omni on such a stack does not replace it: Borg remains the muscle. This is a market observation from public material, not a claim tested here.

The bill

Run the stack native and print the receipt. Run the same stack with Omni and print the receipt. The difference is the pile, and the fee is 20 percent of it.

On a stack that costs $100, a 10 percent win is $10. The fee is $2, and the customer keeps $8. In general, the fee is 0.2 × (measured win) × (spend). A gain and a cut are the same difference, read from opposite sides. Do not add CPU, GPU and babysitting percentages into one bill: the invoice is one pile.

Check: the 10 percent is an example, not a measured win. What is measured so far:

- on Kubernetes, response time −62% at the same energy (set 23);
- in simulation, +0.1% work per energy for the whole organism (realm round 3);
- on a card, nothing yet: the GPU bench is the first real-meter number.

Revenue figures should be computed from the measured win on each customer's own receipt. The per-company table in the working draft (2% of each company's published infrastructure spend) assumed a 10% win everywhere, and several of its spend figures do not match the companies' published capital expenditure. It is left out of the repository until both are sourced.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What to strengthen

1. **Wire the output map.** u becomes one lever, read back and restored, with the start value, the written value and the value after a kill printed on the receipt. The GPU bench already records the start limit, every write and its read-back, and the restored limit. A u-to-lever output map (a gain in watts or replicas per unit of u) is a new mechanism. It would be preregistered and tested as its own arm, first in the realms, then on a card, never mixed into the frozen confirmation run.
2. **Keep the step as it is:** clip before the stage, hold u through RK4, do not rewrite U (proved: `docs/TRACKING_THEOREM.md`).
3. **Run native against Omni on the same membership for each realm.** Compute is the one GitHub can host for real; the other three are modelled until their hosts exist.
4. **Aim the chip at about 5% more finished work on the same bill**, cap unchanged and temperature never behind, or at fewer joules for the same work. The buyer chooses, and the receipt prints which.

CHAPTER 71

The Road to the Engine That Stands: Omni v5 and v6

Omni v5 — the engine fingerprint

omni-v5 is a distinct engine, its own tree, no longer read as v3. It is fingerprinted file by file in `OMNI_V5.json` (`tools/omni_version.py`); `python3 tools/omni_version.py` prints `omni-v5` on this checkout. v1, v2 and v3 stay frozen, each kept for its own results; no result is ever read across versions.

The default brain: the max (12 October)

The founder's order of 12 October: "We're going to show a benchmark that shows it to the max. And we're going to show one native... anybody can tune it from the max down." v5's default (`V5CFG`) is therefore **the max**: every muscle pushed toward its own limit for the most work, faster, never past its limit and never below native. The energy that takes is reported as **LOSS**, beside the work and the speed it bought; the max never shaves (nothing is taken from one muscle to give to another). The dial turns it down: **the tune-down** (`V5SAVE`, the save setting described below) is native's work on the least energy, kept and tested on every muscle.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **A pool** gets the machines its forecast needs before the rush lands: the recent peak arrivals widened by the largest rise the pool has shown within one machine start, at 95% utilisation, plus any **work waiting in line** cleared within one machine start, through a floor under its own autoscaler, never fewer than its **twin** runs (the brain's model of native: the same pool under its own autoscaler alone, on the same arrivals). The machines it added and no longer needs go back at once (a ceiling at the larger of its need and its twin's count; the autoscaler's own scale-down would hold them for its window). Its power cap and admission stay native: full clock, every request admitted.
- **A room** is cooled ahead of the heat as it nears its limit or its cooling nears flat out, never warmer than native.
- **A battery site** clips its line from its charge, native plus: the operator's own reserve while nothing would cross, and below it, down to its band's floor, exactly the draw that would cross; a UPS lends only the charge above its outage floor.
- **A motion axis alone**, while tasks are waiting, runs at **its own peak speed** (`s_peak`, `realms/presets.py`: the head the machine itself has above the everyday profile native runs: a joint's drive and a multirotor's airframe 1.25, a road vehicle's drive 1.25, a ship's engine to its maximum continuous rating 1.15), never past it, back to the everyday setting at once when its motor passes 80% of its heat rise or its tracking error passes half its line. A reaction wheel's saturation, a train's line speed and an elevator's overspeed governor are their limits: those stay native. Inside a body an axis keeps its everyday speed (see the bone). Torque (effort) limits stay native: in these models a higher one changes nothing.
- **A process loop** native already runs flat out (the full actuator): wired, watched, native.
- **At its limit on native.** Every power limit at full, every admission gate open, a loop's actuator at its full range: native already runs these at the top of their range, the max writes nothing, and the tables say so in those words (`native_at_limit`).
- **The bone.** Inside an organism the body's lines (each site's grid line, each room's cooling and its degrees to its limit) are loaded by the whole body, so the max grants machines and cooling only out of the room the most loaded line has left, one decision ahead (its latest reading plus the larger of 3.09 of its own wobbles and the largest single climb it has shown, counted on the line without the max's own machines: its own steps are not the line's wobble). A machine is started only if the lines can still carry it when it is ready (the climb grown by the square root of its start time: one started and then cancelled only burns its start). A site with flexible load waiting gives its catch-up the room first. With no room, what the max added goes back, as much as the shortfall needs, the pools with the most extra first and the machines started last first, never below a pool's twin. An axis inside a body keeps its everyday speed: at the peak hour the organisms run, the bone almost never has room for its worst case, and in the development runs its peak gave the body nothing while its changed rhythm crossed neighbours at their own limits.
- **One pedal.** Push for more, lift off for less; lifting hands the setting back toward native. At idle the pool lifts all the way to its breathing floor (two machines) and wakes straight to the work. **The lease**: at 80% of every modelled run the brain is cut and the plug walks every setting back to native over 24 decisions (no

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

jump the body must absorb at once); a floor that only held a pool at its twin's count adds nothing to walk back and is let go at once (a walking floor would hold machines native had already released). The security kill switch is instant.

- **Wear** is metered beside the work, never judged: a pool's machine-hours, a room's cooling unit-hours, a battery's kWh cycled, an axis's motor heat (degree-hours above ambient), a loop's actuator duty-hours.
- **Three loads**, fixed before the preregistered run (seeds 3000-3009): each organism's own load, **the climb** (the load stepping 1 2 3 2 3 4 ..., up to twice its own), and **the line** (`LINE` in `realms/harness.py`: work already waiting when the run starts, a quarter of the work the run itself brings; a pool's jobs, an axis's tasks, a site's held-over flexible load; a room's heat and a loop's demand cannot wait and have none). Every muscle alone runs its own load and the line; the organisms run all three. Speed is judged where there is a line: the arm that clears it sooner is faster.
- **The live controllers** carry the same dial (`--dial max`, the default): the Kubernetes controller holds the service well inside its line (the compass at 0.3) and never gives back a machine the cluster had on its own; the GPU compass keeps the card's clock ceiling at the top while it serves (the card already runs flat out on its own power limit).

The organisms run the hour around each battery site's daily peak, where the UPS lines carry most of their rating: there the bone is tight and the max gives only what the lines can carry. Every muscle alone has no body around it, so the max gives it everything its own limits allow. `results/realms_v5/REALMS_V5.md` shows both, and the climb (the load stepping 1 2 3 2 3 4 ..., up to twice the organism's own) where native breaks first.

What v5 is

v5 is **a combination of everything**: it takes v3's proven engine (its live controllers, its realms and organisms, its runners) and adds the **v5 compass law** (`realms/compass_arm_v5.py`) and its arm in the harness (`realms/harness.py`). The goal is to be equal to or ahead of native and every prior version on every measure, and never behind on any — *do no harm*.

The v5 muscle catalog (`realms/catalog_v5.csv`) is **1,107 muscles in 70 families** — v3's 945, then a first wave of six new families of real control points: **Linux Kernel & OS Control** (cgroups, the CFS scheduler, DVFS/cpufreq, transparent hugepages, the I/O scheduler, NUMA balancing, dirty-ratio writeback, swappiness, TCP buffers, …), **Serverless & Functions (FaaS)**, **Virtualization & Hypervisor**, **Content Delivery & Edge Cache**, **Gut** (data-plane intake and waste), and **Skin** (perimeter and admission); then a second wave (12 October) of 95 muscles: five new families, **Financial Markets & Trading Systems** (matching engines, order gateways, pre-trade risk, market-data fan-out), **Media Streaming & CDN** (transcoders, packagers, origin shields, player buffers), **Game Servers & Real-Time Interactive** (Agones fleets, tick rates, matchmaking, relays), **Blockchain & Ledger Nodes** (a node's cache, mempool, peers and validation threads; never a consensus rule) and **CI/CD & Build Farms** (runner scale sets, build concurrency, caches, test shards), plus additions to seven families already there: security engines (an intrusion-detection system's capture threads and ring buffer, a web firewall's inspection workers, a SIEM's ingest), MQTT

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

brokers, DNS and mail caches, ROS 2 executors, humanoids and manipulators, warehouse robot fleets, PX4 and ArduPilot drones and swarm spacing, and edge sites. The GPU family is named for the hardware, not one vendor (**GPU Hardware**), and the eight audited families carry numbers (64 to 71) like every other family. Each is a distinct real-world knob, modelled on the matching plant template, exactly as v3's 945 already share five templates. A third wave (12 October, night) adds the founder's nine open-source pieces as ten muscles, each in the spine family its knob belongs to (`docs/THE_SEAT.md`): Kepler's energy reading driving a pool's target (Kubernetes Workload Scaling), Climatik's inference power cap, Adaptive GPU Power Capping and NVIDIA's platform power budget (GPU Hardware), EAR's CPU frequency policy and global energy budget and the Kubernetes Power Manager's core profiles (Host CPU & Memory), CruiseKube's and Goldilocks's request rightsizing (Container Resources) and PEAKS's power-aware placement (Kubernetes Placement & Scheduling). The organisms on v5: Compute / AI / Cloud 540, Physics / Robotics / Autonomous 404, Energy / Facility / Industrial 480, Distribution / Specialized 484, the four stacked 1,908, the whole tower 1,107; the spine all four realms share is 267. (v3's own catalog `realms/catalog.csv` stays 945, frozen for v3's results.)

Two math-only guardrails, and otherwise free arms:

- **The edge** — a per-knob cushion that widens at once when service climbs and narrows slowly when it falls (`cushion = climb × reaction + z × wobble`), so nothing riding its own limit falls off.
- **The centre / the hole** — nothing is eased into a pit it cannot climb out of. A cooled zone is eased only by the degrees its cooling can still recover (the Lindley reach), and not at all while its cooling headroom is falling toward empty faster than the cooling can answer. A process loop's setpoint never sits closer to its band's edge than the loop's own largest swing toward that edge (the loop reach, read from the historian's low and high over each decision, carried ahead for a slow loop). A serving pool is never capped below the largest jump in demand it has shown (the drop floor) nor so far that a burst would push its responses over the line where native's would not (the latency floor). And nothing permanent: a machine handed back to a cloud is the cluster autoscaler's own decision, because the autoscaler shrinks from wherever it is left, so an early hand-back would leave the pool a machine short of native for good; and a motion axis is slowed only while the wake forecast over a whole deadline (the most that can arrive in one deadline at the recent peak rate) still finishes inside that deadline at the slowed speed, so a delay is always recovered before a later rush could make it permanent. When work comes, every muscle wakes straight to the level the work needs (the founder's rule: from idle straight to 99, never past 100).

Every other knob is free to move both ways inside its physical cover, generating units included (a unit's steam, speed or gate loop eased inside its band serves the same load with less effort), and **a knob stays native only where its own physics says moving it cannot help without harm**: an interactive pool's power cap (its response line is shorter than one decision, so a cap's one decision of slower service cannot be seen and undone inside the line; the metered GPU, class P, is where that cap is proven), a battery's peak-shave (round-trip energy bought for service), and a cloud pool's machine hand-back. A batch queue's, a training job's or a terminal's power cap is free under the drop and latency floors.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment, 12 October. The first v5 table (commit `c0e80a852`, the whole tower +0.0%) ran an engine that held every generating unit's loop, every power cap and every inverter native by blanket gates. The gate on generating units alone threw away almost all of what v5 saves: on the tower, 1.09% with it off against 0.04% with it on, on development seeds. v5 was re-declared with the gates replaced by the physics floors above, developed on seeds 7100-7209 only, and the preregistered seeds 3000-3009 were run again unchanged.

Amendment 2, 12 October. The catalog's second wave (95 muscles, five new families and additions to seven) took it to 1,097 muscles in 70 families; the engine's law is unchanged, its fingerprint re-declared because the catalog is part of it. Developed on seeds 7100-7109 only (0 of 1,097 LOSS or power given, all six organisms superior); the preregistered seeds 3000-3009 were run again unchanged on commit `04d9eb3b3`, with the same savings on the whole tower, the four stacked and Energy / Facility (3.0 times v3's).

Amendment 3, 12 October (night): the living body. The founder's order of 12 October: "whatever one muscle is having a problem, the other muscles kick in ... the brain and nervous system to activate its immune system ... nothing can be locked." The engine now carries, as properties of the code (`docs/FORMAL_V5.md`, section 4): a native twin of every room (the brain's sense of the temperature native would leave it at, exact by construction), the room's own knob curing it where it can and the body's heat debt handing back the max's machines where it cannot (V8, V11), every battery's charge counted as room only while it lasts and its discharge timed for its line (V6, V12), no machine taken from a queue that needs it (V7), a pull-down handed back gradually and granted only where it can be held (V9, V10), and every forecast starting at the plant's first reading (V13: a lock that kept every battery's timed discharge shut for the whole run, and a room twin that started wrong, both removed). The catalog's third wave took it to 1,107 muscles. Developed on seeds 7100-7199 only: under the climb, plants with less work or more misses inside the four realms fell from 19 to 0 in 400 organism runs while the misses fell about twice as far as before; on seeds 7100-7109 every muscle alone and the six organisms on all three loads showed 0 muscles and 0 plants with less work or more misses. Fingerprint re-declared (digest `9be48445438943c2`); the preregistered seeds 3000-3009 were run again unchanged.

Amendment 4, 13 October: every muscle its own card. The founder's question of 12 October, night: does every muscle have its own tuning, maxed to its own benefit, instead of one global setting for a thousand muscles? The brain stays one; its settings are now each muscle's own (`docs/FORMAL_V5.md`, section 5). A muscle's card (`realms/muscle_cards_v5.csv`) holds what the max uses for it: a machine pool's edge utilisation and window, a battery's line margin and, wired by its power, its hold window and hold margin. The cards were found by an automatic search over every muscle whose settings can change what the max does (`tools/tune_cards.py`), on development seeds only, today's global setting always one of the choices, and kept only where the card beat the global setting beyond the noise on seeds 7100-7109 and again on seeds 7200-7209 and never behind native on any of their seeds under any load (never over its line more often, never less work, never its line cleared later): 364 muscles (333 machine pools, 31 batteries); every other muscle runs the global setting. Inside a body, a battery wired by its power keeps the body's margins on its line (V14: its card was chosen alone; the line carries the whole body's swing). In development, 360 organism runs on the two sets: 0 plants with less work or more misses, the misses removed 1.7 times the global setting's. Fingerprint

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

re-declared (digest `5648f2902f1fae68`, 44 files, the cards among them); the preregistered seeds were run again unchanged. Every card is printed in plain words in the muscle catalog (`docs/MUSCLE_CATALOG.md`).

Amendment 5, 13 October (evening): every muscle from 1 up to one click under its own capacity, read live. The founder's order of 13 October: "you can write it in code ... to show one, two, whatever a muscle's capacity is able to handle, guardrailed and skimmed on its border, one click down probably, so it never goes beyond. And, of course, can all scale right back down. It can never go be less than one." No top or floor in the live controllers is a number written down for a muscle any more; each muscle reads its own from the system it runs on:

- **Machines** (the Kubernetes controller): the top is the operator's own `--max-nodes` where given; else every ready worker plus what the cluster's own autoscaler may still add (its published status); where Omni-Compass resizes the pool with the operator's own command and no autoscaler reports, there is no top but the one the pool shows: one under the first count it refuses, read from the command's own refusal. Before: a fixed 1,000. The floor stays the founder's two machines, and cruise climbs toward the top one step a decision.
- **Replicas** (the replica room): at the autoscaler's cap with the compass pressing, the cap rises to the replicas the autoscaler's own arithmetic asks for, never past what the machines can hold of the service's pods, one pod under it, read live (the allocatable CPU of every ready worker and of the machines the system can still add, less what every other pod asks for); where every node is a container on one machine (kind), each reports the whole machine's CPU as its own, so that machine's CPU counts once (on 4 October the room raised to 30 on kind served no more requests and ran 78% more pods, `results/live/REPLICA_ROOM.md`: the cap was never kind's limit, the machine was); `--replica-ceiling N` is the operator's own; 0 keeps the cap unmoved. Before: off unless the operator gave a number.
- **The power cap at the max is never set under native**: each machine's idle CPU goes to the capped service's pods (one click under the machine: its last 5% is never handed out, and no pod gets less than its operator gave it), and the frequency ceiling and the GPU limit stay at their top. Before: the governor's trim to demand could set the pods' CPU limit and the frequency ceiling as low as 69.5% even at the max (never on the sets with a response-time probe, where the muscle already conveyed). The tune-down trims as before, with no fixed floor: the pod's own request and its use plus headroom (before: a fixed 65%), and the card's own minimum power limit, read live.
- **GPU**: the clock ceiling's floor is the card's own lowest supported clock (before: 35% of the top); one degree under the card's own slowdown temperature reads as full heat where the card reports it (before: a fixed 83 C for every card).
- **Batch**: held work is admitted while load and power stress are under the compass's wall less one cushion (0.95 - 0.05 = 0.90, the nervous system's own admit gate; before: load 0.80).
- **The nervous system's site power envelope** is the living band of the device's own range, [0.05, 0.95] (before: [0.65, 0.95]); the C++ twin the same, re-proven equal value for value and re-sealed.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Words**: the engine's own files say which way a number went (the founder's order of 13 October); the older result label "WORSE" is "AWAY FROM ITS AIM", the GPU benchmark's own.

The modelled organisms are unchanged: their code differs only in comments, file headers and that one label's name, so the 1,107 muscles, the cards and the max give the same numbers on the same seeds. The test rig with the real cluster inside changes beside the engine (protocol 3, `docs/K8S_COMPASS_PREREGISTRATION.md`): the model of the organism on the runner's last core and the kind nodes on the others, and the window set from the heavier arm's measured step. Fingerprint re-declared (digest `6093b2b88aa911b9`, 44 files); the mechanism identity's actuator part re-recorded (the core, the law, the observation map, the governor, the time step and the shield unchanged); every result runs again on it.

The no-harm proof (modelled, class S)

On a fixed seed, for **every** muscle in the catalog, the v5 default does no less work than native, is over its line no more often, and hands every knob back to native on the kill (the dead-man lease); the energy it takes is power given, shown beside the work and the speed it bought. On the preregistered seeds 3000-3009 (commit `eea291501848`, digest `5648f2902f1fae68`, every muscle its own card): **0 of 1,107 muscles LOSS or power given or mixed** (527 toward their aims, 421 at their limit on native, 159 the same), every organism ahead of native under all three loads, and **not one plant with less work or more misses inside any organism under any load**; the misses fall 1.9% to 7.5% under each organism's own load, 1.4% to 7.2% under the climb and 1.1% to 8.3% with work waiting in line, against 1.6% to 6.4%, 0.9% to 3.5% and 1.0% to 7.2% with one global setting (digest `9be48445438943c2`), with less power given and less wear. This is checked in `tests/test_compass_arm_v5.py` and run in full by `tools/run_realms_v5.py` (`results/realms_v5/`). Models are class S: a model's energy is not a meter's, and a plant written by the same people who wrote the law is not an independent test.

In development

While v5 is in active development its fingerprint is **re-declared on each engine change** (`python3 tools/omni_version.py --write v5`), and **no v5 result is published** until the v5 freeze. At the freeze, every benchmark is rerun on v5, A/B/C, the founder hears each result before it goes up, and the fingerprint is final.

Omni v6: capacity repair and complete non-GPU rerun campaign

Omni v6 stood on main from 15 to 16 October; since 16 October the engine that stands is Omni v7 (`docs/OMNI_V7.md`, the founder's order). This page and v6's four three-run tables (`results/live/V6_*.md`) stay as that engine's record, read beside no other engine's.

The engine combines the unchanged v5 muscle law and 1,107-muscle catalog with the v6 shared-host Kubernetes capacity repair. The controller samples Linux host CPU occupancy, counts kind's shared host once, refuses extra replica capacity when that host is busy or unmeasured, and rechecks a previously enlarged

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

replica ceiling. This is a versioned evaluation engine; it does not establish that every workload gains. Every result retains its own engine fingerprint and evidence class.

The source of the capacity repair is branch `codex/v6-kind-headroom-repair`, commit `3bda41a00fab81052551be99e618a523b5c61347`. The damaged Markdown manuals on that branch are not imported. The existing intact manuals remain the starting point. The zero-valued machines-only flag repair is retained: `1` selects machines-only; `0`, empty and unset retain full wiring.

Campaign

`scripts/benchmark_campaign.json` records this request. A successful `verify` run for the release commit marked `[all-nongpu]` starts the grid automatically; an unsuccessful release verification launches no campaign. `scripts/reruns.txt` lists every single-benchmark variant; the grid conductor releases A, B and C gradually alongside every organism at 1, 10, 100 and 1,000 copies and nested 1, 10, 100 and 1,000 runs on free GitHub runners. The v6 dispatch manifest lives under `results/grid_v6`; v5 receipts remain historical. Each job prints its engine fingerprint and source commit. A queued, failed or unavailable test is not a completed measurement.

The queue covers Kubernetes baseline/full/levers/observe, fairness, faults, batch and trace loads, KEDA, CruiseKube, Goldilocks, fixed capacity, scale control-plane checks, both muscle catalogs, all seven organisms (the spine the seventh since 16 October, `docs/THE_SPINE.md`) and their live-cluster grid, Redis, Kafka, PostgreSQL, MySQL, MongoDB, MuJoCo, pandapower, CityLearn, drone swarms, robustness, Linux CPU-governor checks, the Azure full-control burst and the larger Azure organism machine. Linux cpufreq/RAPL execution requires a host that exposes the interfaces; a hosted VM capability refusal remains visible as unavailable hardware.

The Azure burst is `1 4 1 6 1 9`, three paired repetitions, 600 measured seconds per arm, 100 seconds per load stage. Full wiring enables HPA control, pod CPU limits and the existing power model. It does not create host RAPL, clock control or physical power meters on managed Azure VMs.

Free GitHub Kubernetes, Linux, swarm and organism/model workloads may use 1,000 copies and 1,000 runs. Paid cloud and GPU organism scales remain 1, 10 and 100, with at most 100 repetitions. The conductor lists cells that exceed free runner memory/time as pending runner capacity; it never rents a cloud machine for them. The 1,000-copy planning estimates are extrapolations, not completed measurements.

Prepared, not launched

Google/GKE and Amazon/EKS retain their deployment scripts and use the new shared engine on a future manual launch. Their workflows, cloud-organism, gpu-bench and lambda-gpu are excluded from this campaign. No GPU machine is rented by it. `scripts/gpu_campaign_profiles.json` defines one physical card and eight physical cards, with all seven organisms at scales 1, 10 and 100 and 100 paired repetitions per scale. Reports show nested 1/10/100 run prefixes. These are model copies around real hardware; only these three organism scales are permitted.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The profiles are operational through the existing `HIL_SCALES` and `HIL_REPS_BY_SCALE` environment variables. Existing wall-clock budgets still apply: a stage that cannot finish within its budget must be reported incomplete.

© 2026 The Omni-Compass LLC. All rights reserved. **Evaluation and simulation use only.** Any commercial use, commercialization, monetization, production use, redistribution or hosted service of any part of Omni-Compass requires a signed, paid Omni-Compass Enterprise License from The Omni-Compass LLC. Every copy, export, report and printout carries this notice with `LICENSE`, `NOTICE` and `DISCLOSURES.md`. All patents, copyrights and trademarks filed in the USA. www.omni-compass.com

CHAPTER 72

History

Earlier states of play, kept whole. Nothing here is current status; the current state is `docs/STATE_OF_PLAY.md`.

State of play as written on 27 September 2026 (with the update of 28 September)

Superseded for live results. The live evidence below predates sets 19 and 20. The current live table is `results/live/LIVE_PAIRED.md`; energy on kind is a declared model, not a meter. The first metered test is `scripts/gpu_paired.sh` (`docs/GPU_BENCH.md`).

Update, 28 September 2026. Added since this page was written, each with its evidence: - **Live, set 21** (conveyance only when response time needs it): p95 -37%, machines in service -21%, CPU used +26% (unchanged from set 20; its source is still open). `results/live/LIVE_REPS_21.md`. - **GPU governor bounded** (0.70 share floor, busy gate, 2 s decisions): on the MLPerf-calibrated modelled card, +5.1% and +1.3% work per kJ with p95 within +10% (the old governor failed that guardrail at +31% and +66%). Model only. `results/gpu/sim/`. - **Speed lock** (opt-in): speed won elsewhere spent on GPU watts, every gauge kept at least 1% faster than without Omni. Model only. `results/gpu/sim/pipeline/`. - **CPU and GPU on one conserved power budget** (conveyance law over CPU and GPU organs): +1.4% to +5.7% work served against today's fixed caps, never over the site budget. Model only. `docs/CONVEYANCE_LAW.md`, `results/hardware/NODE_EXCHANGE_*.json`. - **The manual in the box:** `docs/INTEGRATION_MANUAL.md`; every gauge: `docs/METRICS_CATALOG.md`; against what runs today: `docs/COMPARISON.md`.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

This is the whole repository at the commit named in `STATE_OF_PLAY_COMMIT.txt`. Everything below can be rerun from it.

Run it live on real Kubernetes yourself: on any machine with Docker, kind, kubectl and Python, run `bash RUN_LIVE.sh 3`. It builds a fresh 7-node cluster per arm, runs native, Omni on top and Omni alone, and writes `live_runs/LIVE_REPS.md`. GitHub Actions runs the same comparison with a pushed commit whose message contains `[reps]`.

Rerun the whole thing: `pip install -r requirements.txt && python verify.py`. It must end `VERIFICATION: PASS`, and it does at this commit.

Best measured results, and where each one comes from

Claim	Evidence	Where
B (Omni on top of each platform): 0 losing cells on held-out scenarios; strictly GAIN on 27 of 28 platform-workload pairs	simulation, pre-registered	`tuning/B_FIX.json`, `tuning/B_TONE_HELDOUT.json`
Four-cluster sites: B 0 losses on all 7 platforms; C 0 losses vs GKE, AKS/Karpenter, CAST AI, Spot	simulation, held-out	`tuning/SITE_LEAGUE.json`
C (Omni alone), one global setting, 400 never-used scenarios: 153 toward their aims / 174 equal / 37 LOSS or power given of 364 cells (Holm-corrected)	simulation, held-out	`tuning/CONFIRMATORY.json`
C with nervous-system coordination, 400 fresh scenarios: 151 / 173 / 40	simulation, held-out	`tuning/CONFIRMATORY_COORD.json`
Controllers fighting each other: lowest of all 8 systems on web (0.07 per day) and four-cluster sites (0.56 per day)	simulation, held-out	same file
Real demand, 1,052 recorded PlanetLab machines: 0 losing cells of 91	simulation on real traces	`tuning/PLANETLAB_LEAGUE.json`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Claim	Evidence	Where
Faults (machines dying, spikes, crash loops, noisy neighbours): fewest pages to a human, fastest recovery	simulation, 500 runs per workload	`results/protocol/`
GPU power law (engine cap over the MLPerf-measured performance law), against native at equal work: energy -27% to -33%, time over the heat limit -73% to -78%	simulation, held-out	`results/hardware/SUMMARY_HELDOUT.json`
Site power exchange (conveyance law, manuscript Ch. 29-31): 4 GPU groups under one site budget: 0 minutes over the site limit at 70/60/50% budgets (native 10.5/45.6/106); least energy at every budget; 31-115 fewer backlog minutes than the static split	simulation, held-out; law proved (conservation, Lyapunov, exponential convergence)	`docs/CONVEYANCE_LAW.md`, `results/hardware/SITE_EXCHANGE_HELDOUT_*.json`
Live levers under the nervous system: 19 of 19 checks on real Kubernetes; reset restores everything	live, kind	`results/live/LIVE_LEVERS_2_NERVOUS.txt`
Shadow pilot kit: a read-only identity made 0 writes across 40 decisions	live, kind	`results/live/LIVE_SHADOW_1.txt`
Safety shield: 2,000,000 adversarial cases, 0 violations (the test found 2 real bugs, both fixed); C++ twin matches	test	`tests/test_shield_properties.py`
C++ engine: 100,000,000 decisions, no failures, about 2.3 µs per decision	test	`results/SOAK.json`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

What still loses, measured

- **C, typical response time, web and four-cluster:** about 20% slower than every platform. Omni fills pods to 80%, where the others stop at 70%, and trades response time for energy.
- **C, machine starts and stops:** loses to plain Kubernetes and OpenShift, which hold machines steady and pay for it in machine-hours.
- **C, GPU and batch:** energy 1-2% lower and power and heat margins 1-4% lower than the tight packers (AKS/Karpenter, CAST AI, Spot).
- **Live, set 3, with a working probe:**
  - Omni kept all 6 machines. Latency near the 500 ms SLO blocks machine release.
  - There is no significant difference from native on anything else, except that C has more waiting pods.
  - The earlier live machine savings (sets 1-2) are withdrawn, because the broken probe had blinded the latency sense (`results/live/LIVE_REPS_PROBE_DEFECT.md`).
  - Set 4's decision trail showed why. Latency spikes from pod saturation at load steps kept the service from being clean, and the engine's calm stayed under the machine threshold (0.65 against 0.7). Both are addressed by the attribution gate and the two-way wiring above; the live test is pending (`results/live/LIVE_REPS_4_DIAGNOSIS.md`).
- **A bound, not a loss:** no controller, even one with perfect foresight, can match both the tightest packer's machine-hours and the calmest autoscaler's churn at once (`tuning/bound.py`).

Two-way nervous system (new, live test pending)

Manuscript Appendix J names delay and dropout handling and feedback interpretation as the nervous system's job. The live controller now wires both directions (`docs/TWO_WAY_NERVOUS_SYSTEM.md`).

- **Blind senses are detected against the wall clock.** A hung probe was the root cause of the live set 1-2 error.
  - A blind sense feeds the engine's `stale` channel.
  - It blocks every give-back.
- **Commands are read back.** Drift feeds the engine's `drift_ratio`. No new machine release goes out before the last one has landed.
- **The machine organ has its own engine view and a release gate.** Pods move first, and the headroom proof uses the engine's rho.

Tests: 75,000 blind states, 200,000 gate states, 300,000 nervous-system states.

Live sets 5 and 6 could not run. From 03:51 UTC GitHub refused every job, including `verify`: runner ID 0, no steps, failed within about 2 seconds. That is GitHub declining to start runners, which on a private repository is most often exhausted Actions minutes or a spending limit. It is not a code failure. `python verify.py` passes locally at this commit.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Map

Path	What it is
`omnicompass/core.py`, `cpp/`	six-state engine; C++ twin
`omnicompass/closure.py`	closure law: forward projection, boundary correction, turning point, muscle tone
`omnicompass/nervous_system.py`	one engine state grants each organ its authority and envelope
`omnicompass/shield.py`	safety shield, downstream of everything
`omni_controller/`	live Kubernetes controller and levers
`fleet/`, `hardware/`	simulation plants
`tuning/`	benchmarks, pre-registrations, results
`results/live/`	every live run, including the failed and withdrawn ones
`docs/history/OMNICOMPASS_BUYER_EDITION.md`	the buyer-facing report

The state of play as it stood on 2026-10-10 (Omni v3), moved whole on 2026-10-16

Kept as its own page, `docs/history/STATE_OF_PLAY_2026-10-10.md`: the 10 October narrative, every number Omni v3's, named as such.

The state of play as it stood on 2026-10-06 (moved here whole on 2026-10-07)

In one paragraph (2026-10-06, Omni v1)

Omni v1, the same in all three of our runs. On real Kubernetes, every test ran three times as separate GitHub runs on the frozen engine, ten pairs each (`docs/OMNI_V1.md`, the six `results/live/V1_*.md` tables). Work inside the response line **+42% to +48%** in all three runs of the all-four test (18.6 → 27.6 requests a second in run A), GAIN in all three of our runs; the 95th percentile **−57% to −69%** in every run of the steady, wandering, all-four and fault tests, GAIN in all three of our runs; failed requests −12% to −13% where load swings, GAIN in all three of our runs; machines −1.5% to −3.4% at steady load and −15% to −24% on the batch queue, GAIN in all three of our runs, no difference beyond the noise elsewhere; energy a declared model (kind never powers a machine down); beside a noisy neighbour, no difference beyond the noise on every row. **The Omni index on v1: +26.2%** on real Kubernetes (`results/OMNI_INDEX.md`; only rows the same in all three of our runs count, a row inside the noise

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

counts as zero; Azure and the card join when their v1 runs land). The paragraph below is the earlier engine's reading, kept as the record it was.

Omni-Compass sits on top of Kubernetes and hardware and gets more out of what is already there. On real Kubernetes, the engine before v1 (the live controller at rules 1-8, commit `353903683009`), ten pairs per test, native against compass with the same work sent to both: **41.7% more work handled inside the response line on the same machines** (capacity, all four in one run), responses **59-64% faster** at the 95th percentile (steady, wandering, all four, faults), 12% fewer failed requests where load swings, energy equal or lower, and not one pod left without a machine. Machines: up to 2% fewer. Omni gives a machine back only when a paired trial shows the service no slower without it, and on these clusters one machine fewer made requests 30-45% slower in most trials, so it kept them and spent them on speed and work (earlier engines without that check parked 29-36%: `docs/history/`). All of it together, real machines only: **the Omni index +12.9%** (`results/OMNI_INDEX.md`).

Omni v1 (`docs/OMNI_V1.md`): the engine is frozen and fingerprinted (`OMNI_V1.json`), and every test above runs three times on it, as separate GitHub runs (A the result, B and C the replications); each table reads GAIN in all three of our runs, LOSS in all three of our runs, no difference beyond the noise, or the runs disagree, and replaces the earlier engine's table as it lands. Running on v1 now: the Kubernetes suite three times, the batch test, the six organisms at 1, 10, 100 and 1,000 copies with the real cluster inside, the big organisms on rented Azure machines, the Azure steady and burst bill tests, CityLearn, and the power grid.

What is shown and what is not. Shown: more work inside the response line on the same machines (34-52% across the three capacity runs on earlier engines) and a faster tail, on real Kubernetes. Not yet shown: an energy or cloud-bill saving on real machines. On kind the machines are containers on one runner, so a machine out of service saves modelled watts, not a metered bill, and Azure's bill did not move on the earlier engine (`results/live/AKS_BILL.md`); the v1 Azure runs are the test of that. The current card governor has not run on a real GPU.

The card: the first real run (NVIDIA A10, 2026-10-02) used a card controller since replaced; it is not a result to stand on. In simulation the current controller (amendment 12) is clearly faster under an operator's power cap (p95 6-7% faster, time over the line 1 point lower) and saves 0.5-3.7% energy on the card's own firmware with p95 even (`results/sim/gpu_two_wire/`). The real card runs next: one card, the card inside the six organisms, then eight cards.

The 945 muscles (Omni v2; 656 in v1) are models of real control systems. With the real cluster or the real card inside, they show the mechanism (work the same, energy 0.1-0.2% lower, time over the line lower than native in every organism); they are never counted in the headline.

Test (real)	Work	Speed	Machines	Energy	Source
All four in one run: load up and down one step at a time,	**+29%**	p95 -62%	**-3.6%**	-0.3%	`results/live/ALL_FOUR.md`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Test (real)	Work	Speed	Machines	Energy	Source
10 pairs					
Capacity, load rising, 10 pairs	**+48%**	p95 -50%	-1%	-0.3%	`results/live/AMENDMENT_3_RUNS.md`
Sets 22-27, same work, 10 pairs each	same, none failed	p95 -55% to -65%	**-29% to -36%**	-0.1% to -0.5%	`results/live/LIVE_REPS_22.md` to `results/live/LIVE_REPS_27.md`
Six organisms, cluster inside, 5 pairs each	requests served +0.5% to +6%	p95 -24% to -40%	same to -2%	-0.1% to -0.6%	`results/live/SIX_KUBE.md`
Azure AKS, steady load, 5 pairs	same	p95 -20%	same	(billed) same	`results/live/AKS_BILL.md`

All four in one run is done: every one a proven GAIN in the same run (`results/live/ALL_FOUR.md`). Running now: demand that wanders (up, spike, down, back up, idle, 10 pairs), the Azure burst bill test, and the 1,000-copy grid of the six organisms on Lambda.

The engine now, and what runs on it (2026-10-05)

The live controller is frozen at rules 1-8 (`docs/K8S_COMPASS_PREREGISTRATION.md`, amendments 1-8): rules 5-8 were added today (a pinned gauge is not a steady demand; coasting; cruise; the emergency brake). Every result above was measured on an earlier version of the controller, and each names its commit. So that every number comes from one engine, the whole Kubernetes suite runs again on the frozen engine: all four in one run, demand that wanders, the steady same-work set, the fault and fairness tests, the batch test, and the six organisms at every size; the Azure burst bill test and the two big organisms on rented Azure machines too. The card harness changed only in how it judges (amendment 11 of the GPU preregistration), so the single card and the eight cards run once, on this engine, on Lambda.

Back on the frozen engine so far, ten pairs each:

- **Faults** (`results/live/FAULTS.md`): p95 −60%, mean response −35%, time over the line −23%, pending pods −77%. Recovery is faster after every fault: machine down 42 s against 70 s, a blind probe 54 s against 66 s, a runaway pod 98 s against 105 s, a spike the same.
- **Fairness** (`results/live/FAIRNESS.md`): a noisy neighbour on the same cluster. Mean response −15%, no LOSS, and the neighbour's own app never behind. The earlier engine scored −0.3% on the index here; this engine scores +5.6%.

Independent simulator: CityLearn round 1 split (the 2022 battery districts lower on bill -4% to -11%, electricity -9% to -17%, carbon -7% to -14%; the 2020-2021 water-tank districts higher on peaks and

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

ramping), the fix (only the electric batteries are steered), and round 2 on every untouched district (`docs/CITYLEARN_PREREGISTRATION.md`).

Measured on real systems: the newest set, Omni-Compass against Kubernetes as it runs today

Set 24 (2026-10-02, commit `c908054`) repeats it again: machines in service −31.6%, p95 −60.1%, p99 −64.1%, HPA replicas −38.6%, 0 failed requests, total CPU including Omni-Compass's own −1.8% (not significant) (`results/live/LIVE_REPS_24.md`). Set 23 before it: p95 −62%, replicas −37%, pod starts −64%, 0 failed requests, no energy or total-CPU difference (`results/live/LIVE_REPS_23.md`). The set-22 table below stands as first measured.

Set 22 (`results/live/LIVE_REPS_22.md`): 10 paired repetitions on real Kubernetes (kind), each pair on one machine, Kubernetes with its autoscaler alone against the same Kubernetes with Omni-Compass on top. The load is sent at a fixed rate, so both arms were given **the same work**.

Result	Kubernetes alone	With Omni-Compass	Change (95% interval)
Energy, parked machines still on at idle power (declared model, no meter)	160.3 Wh	160.1 Wh	**−0.1%, no difference**
Response time, 95th percentile	407.9 ms	158.8 ms	**−61%** (proven)
Response time, 99th percentile	639.4 ms	245.1 ms	−62% (proven)
Response time, mean	179.9 ms	98.4 ms	−45% (proven)
Failed requests	0	0	equal
Pods waiting to start, pod-minutes	0.265	0.025	−91% (proven)
Replicas, mean	8.93	6.91	−23% (proven)
Machines in service, mean (all stayed powered)	6	4.14	−31% (proven)
CPU used by the service	1.036 cores	0.957 cores	−7.6% (proven)
Omni's own CPU (its controller and every command it ran)	0	0.070 cores	+0.070 (proven)
CPU used, service and Omni together	1.036 cores	1.026 cores	**−0.9%, no difference**

- **Same work, much faster answers**, with no failed requests and far less waiting.
- **No energy saving is shown on kind.** Every machine stays powered; energy is a declared model, and counted at the idle power a parked machine really draws it is unchanged.
- **No CPU saving once Omni's own cost is counted.** The service used 7.6% less CPU; the controller spent almost all of it. Cutting the controller's cost is the next improvement.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- The reset restored every setting in every run.

Kubernetes sets 25 and 26 (2026-10-02, 10 paired repetitions each, equal work)

Run	Machines in service	p95	Failed	Total CPU incl. Omni's own	Receipt
Set 25, the engine's allocation law	**−32.3%**	**−57.3%**	0 / 0	−0.6% (not significant)	`results/live/LIVE_REPS_25.md`
Set 26, the engine's allocation law	**−35.8%**	**−55.4%**	0 / 0	−1.5% (not significant)	`results/live/LIVE_REPS_26.md`
Set 26, **the compass law in the live controller**	**−17.2%**	**−64.8%**	0 / 0	+1.0% (not significant)	same; label by the preregistered rule: **fewer machines within the band**
Set 27, the engine's allocation law	**−36.6%**	**−53.1%**	0 / 0	−0.0% (not significant)	`results/live/LIVE_REPS_27.md`
Set 27, **the compass law aligned with the GPU governor**	**−15.9%**	**−65.5%**	0 / 0	+0.2% (not significant)	same; label by the preregistered rule: **fewer machines within the band**

Set 27 (running): the compass in the live controller reads the service as the corrected GPU compass does (mean response time, center 0.4), against native and the allocation law (`docs/K8S_COMPASS_PREREGISTRATION.md`).

Measured on a real GPU: the card's own meter (evidence class P)

First counted run, NVIDIA A10 on Lambda, 2026-10-02 (`results/gpu/run-20261002T082232Z/GPU_REPS.md`, 10 paired repetitions × native / watch / Omni, 600 s each, frozen at commit `c908054`, checksums verified). Wire check 7 of 7; 2,144 writes, none refused, every one read back, every arm ended at the start limit; watch equal to native.

Gauge	Native	Omni	Change (95% interval)
Work per energy (requests per kJ)	50.79	52.62	**+3.6% (+2.7% to +4.5%), proven**
GPU energy	69,180 J	66,790 J	−3.5%, proven
Requests served / not served	3,514 / 0	3,514 / 0	equal
Response time, 95th percentile	510 ms	809 ms	**+58.5%, higher, proven**

Result, by rule: ENERGY IMPROVEMENT WITH SERVICE TRADEOFF (the p95 guardrail of +10% failed). The six organisms with the same card inside (`results/hil/run-20261002T082232Z/HIL.md`, 3 repetitions each): the card's work per energy

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

+1.6% to +2.8% in every organism, the same requests, its p95 500 to about 600-935 ms. The cause, from the card's own samples, was wiring in the governor (amendment 6 of `docs/GPU_PREREGISTRATION.md`): busy bursts served at 736-768 MHz against 861-889 MHz on its own. Corrected (amendments 6 and 7); the corrected governor has not yet run on a card.

Simulated (models: they show the mechanism, not a measurement)

Result	Where
GPU governor with share floor and busy gate (one wire, the power limit), MLPerf-calibrated card: +5.1% and +1.3% work per kJ, p95 within +10%	`results/gpu/sim/after`
Two-wire GPU card under the compass law, corrected governor (amendments 6-7), 10 seeds and 10 fresh seeds, geometric means: **service** profile work per energy **+6.9% / +3.8%**, energy −6.4% / −3.7%, p95 **−5.9% / −2.3%** (faster), time over the line −0.03 / −0.04 pp; **batch** profile +8.1% / +4.2%, p95 +7.0% / −2.3%; the one-wire governor +0.1%; both wires restored every seed	`results/sim/gpu_two_wire/RESULT.md`, `fresh/`
The six organisms (Compute 345, Physics 262, Energy 282, Distribution 337, the four stacked 1,226, the whole tower 656), native against the compass law on every muscle, 1,000 paired runs at 1× and at 10× size: work per energy +0.20% to +0.30%, energy −0.21% to −0.32%, work −0.01% to −0.02%, time over the service line **+0.19 to +0.27 pp in every cell (band first not held)**, every knob handed back. 100× and 1,000× are running	`results/scale/GRID.md`
Speed lock (speed won elsewhere spent on GPU watts)	`results/gpu/sim/pipeline/`
CPU and GPU on one conserved power budget: +1.4% to +5.7% work served against a fixed cap, never over the budget	`results/hardware/NODE_EXCHANGE_*.json`, `docs/CONVEYANCE_LAW.md`
GPU groups sharing a site budget: 0 minutes over the budget	`results/hardware/SITE_EXCHANGE_HELDOUT_*.json`
Platform leagues, faults, PlanetLab traces, stack benchmark	`tuning/`, `results/protocol/`, `results/` (see `docs/history/BENCHMARK_REPORT.md`)

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Result	Where
The 656-muscle tower as organisms, round 3 (preregistered, 10 seeds; every realm carries the shared spine; Omni as the shipped controller commands): the whole tower native against one governor on top, work per energy **+0.1%, SUPERIOR WITHIN GUARDRAILS**; inside the realms the spine costs service: Energy +0.2% with +1.9 pp violations (tradeoff), Compute 0.0% (+2.1 pp, not established), Distribution −0.1% and Physics −0.7% (**AWAY FROM ITS AIM**). Rounds 1 and 2 kept, superseded	`results/realms/REALMS.md`, `docs/REALM_MUSCLES.md`

Back Matter

BACK MATTER

Glossary

Term	Meaning
Antagonist pair	the up side and the down side of a muscle's control, each with its own gain
Authority	how far the nervous system lets an organ move this decision
Band	a reading's or a knob's safe range
Compass	the band seen as a position from 0 (calm) to 1 (the line), with its bottom in the middle
EVEN	Equalized, Verified baseline, Equilibrium, Neutral: native and Omni could not be told apart (the same, or no difference beyond the noise); the key, front matter
GAIN	Growth, Advantage, Improvement, Net-positive: a gauge moved the way its declared aim asks, against native; a resource cut is a GAIN; the key, front matter

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Term	Meaning
GAIN in all three of our runs	the same sign in all three runs (A, B, C), every 95% interval clear of zero, and that sign a GAIN for the gauge's aim
LOSS	Leakage, Off-track, Setback, Subpar: a gauge moved against its declared aim (less work, a longer wait, more misses); it should never appear, and where it does it is shown, its cause found and fixed; the key, front matter
Power given	a resource spent or held that rose: what Omni put in to buy the work and speed beside it; shown, never called a loss
Cover	a knob's hard range; every write is clipped to it
Cushion	the 5% at each edge of the compass, 10% in all
DEX-YLL-1	the company's number, 1-888-DEX-YLL-1, read in order as the engine runs: DEX, Data Exchange (the input, the two-way plug); YLL, Yield Limit Line (the boundary: every muscle up to its own yield limit, never past it); 1, one closed loop (the output; in code 1 is true, in science 1 is unity)
Fail up	the return to full capacity the moment service crosses the wall or a sense goes blind
Governor	the process that reads, decides and writes; Omni-Compass
Muscle	any machine, service or controller Omni-Compass reads and sets
Native	the system as it runs without Omni-Compass
No difference beyond the noise	an interval over zero in at least one run: native and omni could not be told apart; the result, stated as such
Off the clock	a repetition in which either arm ended more than 5% of its window late; marked, the pairing stands
Organism	a set of muscles run together on one clock
Omni index	the one combined number: the geometric mean of every real category's work, speed, machines and energy ratios, each read by the three-run rule
Omni v1, v2, v3	the frozen engines, fingerprinted file by file; a result belongs to the engine its commit carries
Plug	the two-way connection to one muscle: read, write, read back, restore
Pool (Azure)	one machine family under Azure's autoscaler with its own ceiling; several pools make the fleet

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Term	Meaning
Profile	a named set of the compass's settings for one kind of work: service (the default) or batch
Race	full speed at once while work waits, so a burst is never served slowly
Yield limit line	a muscle's own limit, read live: Omni-Compass takes it right up to the line and never past it, as an engineer loads a material up to its yield limit, the most it carries and still springs back unharmed
Speed floor	the clock a card reaches on its own while busy, learned from its own meter; the governor never sets the ceiling under it
Receipt	the paired record of native against Omni-Compass for one run
Snapshot	a knob's value read once before the first write; the restore point
The runs disagree	runs clear of the noise point different ways; the test is unstable on that measure and is looked into
Wire check	the test that proves every wire follows, reads back and returns before anything runs
Work per energy	work done divided by energy used; the primary outcome
Work inside the line	the requests, transactions or messages a second answered within the response line; the product number on every real stack
One pedal	push for more, lift off for less, idle (the pedal lifted all the way), reset (everything back to native): how the governor moves capacity under autopilot
Cruise	every machine in service while work waits for a place, held without second-guessing until the line has been empty for two decisions
Idle at once	the work done and demand at zero: the pedal lifted all the way in one move, every safety check still holding
Kill switch	security only: one switch in a human hand that turns every governor on the machine off at once; never the reset
Lease	the record every governor renews each decision; a lease older than its limit, or a dead process, makes the watchdog hand back for it
Watchdog	the service beside the governors that hands back for any governor that died or hung without doing it itself
Verdict	the paired trial on the muscle itself that allows a slow knob to move only where the cost is within 2%; "left native" where no step passes

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Term	Meaning
Slack gate	v3's rule: a motion axis busy more than half the time at full speed keeps its speed native
Tuning case	the one workload, cell or swarm the rules were fitted on; shown in every table and never counted
Untouched case	a workload, cell or swarm the rules were applied to unchanged; the judged rows
Knee	nine tenths of a system's measured capacity, where its queue begins to grow; the broker's native was set there by design
Amendment	a change to a preregistration after it was written, with its time and reason; one made after a result was seen says so
Dwell	the seconds after a knob moves during which the law will not move it back
Notch	the smallest step a knob moves in one decision (one consumer, 8 MB of cache, one tap)
Evidence class P, L, S	a physical meter; live software with no meter; a model of ours
Handed back	the knob read back at the operator's value at the end of an arm; every table says whether every arm was
Off the clock	see above; a repetition whose arm ended more than 5% of its window late
Own cost	the governor's CPU (its process and every command it ran) as a share of one core over the window, from its audit; a few thousandths of a core at every size
Smoke run	one repetition that exercises a harness end to end before any counted run; never counted, always recorded
L + S	an organism run with a real cluster inside: the cluster is L, the organism around it S
Working set	the records a workload actually touches over a window; a cache benchmark measures nothing unless the working set reaches the cache
Key space	the records a benchmark may ask for at one notch; in the MongoDB test the knob's load, stepped one notch at a time

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Term	Meaning
Uniform draw	every record in the key space equally likely, so the working set is the key space; YCSB's shipped zipfian draw concentrates on a few thousand hot records whatever the key space
Ordered keys	records named in load order, so a run that asks for record n finds record n; a run with hashed keys against an ordered load asks for records that do not exist
Full-cache gate	the MongoDB and Redis rule: slow reads grow the cache only while the cache is full (nine tenths used), because a miss in a cache with room to spare is not the cache's to mend
Buffer pool	InnoDB's cache of table and index pages, the one memory setting every MySQL operator sizes; resized online by the server in whole chunks
Chunk	the unit in which MySQL resizes its buffer pool (128 MB as shipped); the knob's notch on that stack
Page cache	the operating system's own cache of file contents; where the data fits in it, a storage-engine miss is a read from memory and a decompression, not a disk read, and the gain available to the cache knob is smaller

APPENDIX

Appendix A. Command Reference

Task	Command			
Verify everything	`python3 verify.py`			
Seven organisms, modelled	`python3 tools/run_scale.py --runs N --scale K --out <dir>`			
The full ladder	`bash scripts/scale_ladder.sh`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Task	Command			
Two-wire card, modelled	`python3 tools/run_gpu_card.py <dir> [fresh]`			
GPU wire check	`sudo python3 tools/gpu_wire_check.py --gpu 0`			
GPU, whole benchmark in one command	`sudo nohup bash scripts/gpu_rented_run.sh > run.log 2>&1 &`			
The seven organisms with the real card inside	`python3 tools/run_hil.py --out <dir>`			
GPU governor, two wires	`sudo python3 -m omni_controller.gpu_compass --mode watch	cap ...`			
Kubernetes, watch	`kubectl apply -f deploy/install/omni-compass.yaml`			
Kubernetes paired runs	`scripts/kind_paired.sh`, then `tools/live_reps.py`			
OFF (Kubernetes)	`touch /tmp/omni.kill`			
OFF (GPU)	`sudo touch /tmp/omni-gpu-kill`			
The whole harness OFF, ON, status, watchdog	`python3 tools/omni_switch.py off	on	statu s	watchdog`
Seal check	`python3 tools/seal.py --check`			
Which engine a checkout or a commit carries	`python3 tools/omni_version.py [--commit <sha>]`			
Task	**Command**			
The three-run table (Kubernetes, Azure)	`python3 tools/confirm_abc.py "<title>" raw/run-<A>`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Task	Command			
	`raw/run-<B> raw/run-<C> --out results/live/V3_<TEST>.md`			
The three-run table (database, messaging, cache, swarms, robots, grid, buildings)	`tools/pgbench_abc.py`, `tools/kafka_abc.py`, `tools/redis_abc.py`, `tools/swarm_abc.py`, `tools/mujoco_abc.py`, `tools/pandapower_abc.py`, `tools/citylearn_abc.py`, the same arguments			
The organisms with the cluster inside	`python3 tools/six_kube_report.py <raw dirs> --out results/live/V3_SIX_KUBE.md`			
The grid of copies and runs	`python3 tools/grid.py` (reads `results/scale/receipts/`)			
The Omni index	`python3 tools/omni_index.py`			
Which knobs earn a wire in (write, watch, operator's choice)	`python3 tools/wiring_verdicts.py` (`--check` compares the page with the tables; `verify.py` runs it)			
One number per benchmark, plus always toward the system's own aims	`python3 tools/benefit_sheet.py` (`--check` the same way; `verify.py` runs it)			
The database benchmark, one run	`python3 tools/run_pgbench.py --out <dir>` (workflow `pgbench`)			
Task	**Command**			
The message broker, one run	`python3 tools/run_kafka.py`			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Task	Command			
	`--setup`, then `--workloads light,heavy,burst --out <dir>` (workflow `kafka`)			
The cache, one run	`python3 tools/run_redis.py --setup`, then `--workloads small,large,burst --out <dir>` (workflow `redis`)			
The database's storage-engine cache under YCSB, one run	`python3 tools/run_ycsb.py --setup`, then `--workloads b,c,f,burst --out <dir>` (workflow `ycsb`)			
The database's buffer pool under sysbench, one run	`python3 tools/run_sysbench.py --setup`, then `--workloads read_only,read_write,update_index,burst --out <dir>` (workflow `sysbench`)			
The robustness test	workflow `robustness`: `scenario` kill or long, `reps`, `duration_s`; the own-cost table `python3 tools/own_cost.py <raw run dirs> --out results/live/V3_OWN_COST.md`			
The drone swarms, one cell	`python3 tools/run_swarm.py --cell short	mixed	long	all --out <dir> (workflow swarm`
The independent simulators	`python3 tools/run_citylearn.py`, `run_pandapower.py`, `run_mujoco.py` (workflows `citylearn`, `pandapower`, `mujoco`)			

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Task	Command			
Azure, the bill	workflow `aks-metered`: `reps`, `arms`, `duration_s`, `load_steps`, `worker_pools`, `pool_prices`, `hpa_max`			
The big organisms, detached	workflow `big-organism-detached`: `mode` start / collect / survey, `organisms`, `size`, `duration_s`, `commit`, `max_hours`			
Archive a finished run with the code	add its id to `.github/archive_request.txt` and push (workflow `archive-run`)			
Verify before a push, as GitHub runs it	`python3 tools/release_manifest.py` under Python 3.12: 0 FAIL			

APPENDIX

Appendix B. File Map

Path	Contents
`omnicompass/`	the engine, governor, nervous system, shield, compass, conveyance law, the compass
`omni_controller/`	the Kubernetes controller and muscles; the GPU governors (one and two wires)
`realms/`	the 1,107-muscle catalog of v5 (`catalog_v5.csv`; v3's 945 in `catalog.csv`, frozen), every muscle's own card (`muscle_cards_v5.csv`), the plant models, the realm harness, the compass on every muscle (the max, `compass_arm_v5.py`), the modelled card

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Path	Contents
`tools/`	benchmarks, receipts, the wire check, the scale ladder, the card search (`tune_cards.py`), manifests, seals
`scripts/`	one-command runs (GPU, Kubernetes, ladder)
`deploy/`	container image, install and permission files
`cpp/`	the C++20 twins
`results/`	every published result, with its raw files and checksums
`results/live/V1_*.md`, `V3_*.md` (+ `.json`)	the three-run tables, one per test, named by the engine they ran on
`results/live/raw/run-<id>/`	every archived run's files, one SHA-256 manifest per repetition
`results/grid_v5/GRID.md`, `results/realms_v5/REALMS_V5.md`, `results/OMNI_INDEX.md`	the grid of copies and runs, the modelled muscles and organisms, the one combined number (the older engines' tables stay under their own names)
`OMNI_V7.json` (the engine that stands), `OMNI_V6.json`, `OMNI_V5.json`, `OMNI_V3.json`, `OMNI_V2.json`, `OMNI_V1.json`	the engines' fingerprints
`docs/`	this manual, the preregistrations, the evidence ledger, the theorem, the realm study
`docs/OMNI_V7.md`, `OMNI_V6.md`, `OMNI_V5.md`, `OMNI_V3.md`, `OMNI_V2.md`, `OMNI_V1.md`	what each engine is and every result read on it
`docs/REGISTER.md`, `docs/PROOF_PROGRAM.md`	every muscle, every benchmark run and every benchmark still to run; the program to full size
`.github/workflows/`	every benchmark as GitHub runs it: `benchmark-reps`, `six`, `six-kube`, `big-organism`, `big-organism-detached`, `aks-metered`, `pgbench`, `kafka`, `redis`, `ycsb`, `sysbench`, `robustness`, `swarm`, `citylearn`, `pandapower`, `mujoco`, `archive-run`, `verify`

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Path	Contents
`tests/`, `verify.py`	every unit and property test, the shield's adversarial cases, the Python-against-C++ agreement; `verify.py` runs them all and must end with its pass line
`tools/omni_version.py`, `tools/release_manifest.py`, `tools/layout_check.py`	which engine a checkout or commit carries; the release manifest and verification as GitHub runs it; the check that every path the documents name exists
`tools/confirm_abc.py` and its siblings (`pgbench_abc.py`, `kafka_abc.py`, `redis_abc.py`, `ycsb_abc.py`, `sysbench_abc.py`, `swarm_abc.py`, `mujoco_abc.py`, `pandapower_abc.py`, `citylearn_abc.py`)	the three-run tables, one tool per kind of raw record, each checking the engine of every run it reads
`tools/omni_index.py`, `tools/dossier.py`, `tools/own_cost.py`	the one number from the tables; the dossier from the tables; the governor's own cost from the archived audits
`tools/wiring_verdicts.py`, `docs/WIRING_VERDICTS.md`, `results/WIRING_VERDICTS.csv`	the verdict per knob from every table: write, watch or the operator's choice, every loss with its cause; one row per knob and per muscle
`tools/knob_verdict.py`	the brain's own verdict on a live knob, around the engine's `omnicompass/verdict.py`: watch first, one notch a trial, the allowance, the two objectives; used by the five live harnesses
`tools/benefit_sheet.py`, `docs/BENEFIT_SHEET.md`, `results/BENEFIT_SHEET.json`	one number per benchmark from the tables, plus always toward the system's own aims, with yes, no, none or trade beside it
`tools/legal.py`	the legal notice every generated report carries at its head and foot
`docs/book/`	the builder of this manual's PDF (`build_book.py`) and the theory chapters bound into it
`release/`	the copyright deposit and the release notes, printed at named commits
`CHANGELOG.md`, `docs/STATE_OF_PLAY.md`	what changed, by date; where everything stands today

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Path	Contents
`docs/*_PREREGISTRATION.md`	the rules of every benchmark, written before it ran, with every amendment and its time
`docs/DOSSIER.md`, `docs/dossier/`	every result in one place, with its charts, built by `tools/dossier.py` from the tables
`docs/HISTORY.md`, `docs/history/`	earlier states of play, earlier engines' sets and the pre-v1 index, kept whole
`LICENSE`, `NOTICE`, `LICENSES/`	the license and notices

APPENDIX

Appendix C. The Equations in Full

```
(1) dE/dt     = −α[E] E + β[int] + β[ext] + v[eff]
(2) dU/dt     = μ U (1 − U²) − (dE/dt)/E[max] − λ[U] U + u,
                |u| ≤ U_AUTHORITY = 25
(3) dI[U]/dt  = (1 − U) − σ₁ E − δ S − λ[I] I[U]
(4) v[eff]    = cos(ω[B] t / 2) · c · tanh(λ₀ + λ₁ (U − 0.5) + λ₂ S)
(5) Φ(S)      = αₛ S² / 2 + βₛ S³ / 4 − δ S

(6) dS/dt     = −dΦ/dS = δ − αₛ S − (3/4) βₛ S²
(7) dB/dt     = Ḃ ;  dḂ/dt = γ[c] δ S − (ω[B] / Q[B]) Ḃ − ω[B]² B
(8) R[B]      = finite-difference audit of (7) at every step;
                never fed back into the state

Control (one micro step, zero-order hold across all four RK4 stages):

    u = clip(−f[U](x, t) + K[P] (σ − U), −U_AUTHORITY, +U_AUTHORITY)
    K[P] = 12,  σ ∈ {−1, +1}

The compass (every muscle):
    p = position of the service reading in its band
        (0 calm, 1 the line)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    F = A tanh((K[P] (p − center) + K[D] v) / A)
    K[D] ≥ critical damping
    p ≥ 0.95  ⇒  full up force; down side held
    knob ← clip(knob + g[side] F span, cover)

The GPU governor (two wires, omni_controller/gpu_compass.py;

one law, amendments 8 to 10):
    p = (mean response of the last 5 s − S) / (SLO − S),  S = SLO / 10
    p95 ≥ SLO, a failure, blind  ⇒  fail up
    fail up / race (utilization ≥ 0.95)
        ⇒  ceiling = top clock, lid = start limit
           (the card's own settings)

    steady under the limit (saturated, drawing ≥ 0.97 of the limit)
        ⇒  ceiling = the card's own busy clock, lid = start limit
           (the same watts, no knock-backs)
    otherwise:
        step = round(g[side] F f[top] / 15 MHz) · 15 MHz
        ceiling ← clip(ceiling + step, c[floor], f[top])

        c[floor] = max(f[busy,own] × floor, f[top] − k* 15 MHz)
                   (never under the card's own busy clock, never past
                    the verdict's deepest step k*)
        lid = clip(ceil(1.10 P[busy,own]), envelope floor,
                   start limit)
    g[up] 0.10, g[down] 0.0125, center 0.4, floor 1.00

The verdict (omnicompass/verdict.py; every slow knob, the GPU ceiling
and the Kubernetes machine count):
    reference r = the median cost per request at the deepest allowed
                  step, measured fresh, n ≥ 30 requests
    trial t     = the median cost at one step past it,

                  n ≥ 30 requests, under the same traffic
    allow the step  iff  t ≤ r (1 + a)  and  t ≤ c[native] (1 + a),
                         a = 0.02
    a refused step is not tried again for R decisions (GPU R = 900;
    Kubernetes 120); the knob never goes past the deepest allowed
    step, so steps cannot add up beyond the allowance
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
Kubernetes, the compass on the HPA target
(omni_controller/controller.py; sets 30 and 31):
    target x ∈ [0.6 x[op], x[op]] (times the conveyed gain);
    the up force lowers x (more pods)
    p ≥ 0.95 from load (line breached, every sense live, nothing

    pending)  ⇒  x = 0.6 x[op] at once
    p ≥ 0.95 from a blind sense or pods waiting for a lost machine
        ⇒  x = x[op] (native's own)
    fault over (p < center, line clean, nothing pending)
        ⇒  x = x[op] at once, never held
    machines: one more at once past the wall; one back only when the

    verdict and the release gate agree
    g[up] 0.10, g[down] 0.02, release force < −0.2

The productivity arithmetic (every receipt; manual section 3.4):
    work W equal in both arms;  G = C[native] / C[omni] − 1;
    the same work needs 1/(1 + G) of the resources;

    saving S = G / (1 + G):  G = 1/3  ⇔  S = 1/4
```

The symbols, and their names in the code. The equations are written in the symbols above; the source (`omnicompass/core.py`, `omnicompass/adapter.py`, printed in Appendix H) spells each one out, and an engineer reading the two side by side needs the correspondence once. The values are those the live controllers run (`STACK_PARAMS` in `omnicompass/adapter.py`); the pressures and the drive are computed from the nine observations every decision and have no fixed value.

Symbol	In the code	What it is	Value in the live controllers
α[E]	`alpha_E`	the deviation's drain rate	3.487
β[int], β[ext]	`beta_int`, `beta_ext`	the internal and the external pressure on the deviation	computed each decision
v[eff], c	`v_eff`, `c`	the bounded drive and its bound	c = 1.0
λ_0, λ_1, λ_2	`lambda_0`, `lambda_1`, `lambda_2`	the drive's offset and its weights on the alignment and the stress	−0.40, 1.55, 1.15
μ	`mu`	the depth of the alignment's double well	3.782
E[max]	`E_max`	the deviation scale in the alignment's equation	2.0

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Symbol	In the code	What it is	Value in the live controllers
λ[U]	`lambda_U`	the alignment's own damping	0.0
σ_1	`sigma_1`	the deviation's weight in the memory	0.38
δ	`delta`	the stress's drive (the engine's own default is 0.5)	0.705
λ[I]	`lambda_I`	the memory's leak	0.719
α_s, β_s	`alpha_s`, `beta_s`	the coefficients of the cubic potential Φ(S)	0.12, 0.10
γ[c]	`gamma_c`	the stress's drive on the bath	1.0
ω[B], Q[B]	`omega_B`, `Q_B`	the bath's natural frequency and quality	1.0, 2.5
Ḃ	`B_dot`	the bath's rate, the engine's only second-order element	state
R[B]	`R_B`	the finite-difference audit of the bath, never fed back	recorded
K[P]	`KP`	the control law's gain	12
u, U_AUTHORITY	`u`, `U_AUTHORITY`	the command and its authority	±25
σ	the target pole	+1 (healthy) or −1 (failed), the nearer basin by default	±1
f[U]	computed inside `control_command`	the drift of U with the command at zero	computed each micro step

Parameter ranges, defaults and the proof of convergence: `omnicompass/core.py`, `docs/TRACKING_THEOREM.md`, `docs/CANONICAL_ENGINE.md`.

APPENDIX

Appendix D. Metrics

Every gauge, where it comes from, and whether it is measured or modelled: `docs/METRICS_CATALOG.md`. The gauges that appear in the three-run tables of this manual, with their source and their direction, are these:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Gauge	Source	Measured or modelled	Direction
work inside the response line (requests, transactions or messages a second answered within the line)	the probe's own records, pgbench's log, the consumers' records, the application's records	measured	the aim is higher; the product number
response time, mean, median, 95th and 99th percentile	the same	measured	the aim is lower
time over the response line (share of samples)	the same, against the preregistered line	measured	the aim is lower
failed requests, lost messages	the same	measured	any increase is marked
alert minutes: whole minutes whose 95th percentile, failed requests counted over, was over the line	the probe's own records, minute by minute	measured	the aim is lower: the minutes an on-call page would be open
settings commands the governor wrote on its own	the governor's audit	measured	shown, not judged (no person touched either arm)
the governor's additions decided while the service was still inside its line (% of its additions)	the governor's audit	measured	shown, not judged
worker machines in service, mean; node-hours	the cluster's own node records every 15 s	measured (machine-hours on kind; Azure's own count on AKS)	the aim is lower
compute bill at list price	Azure's own machine count × list price per family	measured (a real bill)	the aim is lower
energy (Wh), the standby model	a declared formula over the machines in service (kind)	**modelled**, said so on every line	the aim is lower

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Gauge	Source	Measured or modelled	Direction
host CPU busy; host CPU-seconds; CPU-seconds per 1,000 units inside the line	`/proc/stat` of the real machine under the test	measured	the aim is lower
Omni's own CPU (cores), mean	the governor's audit (its process and every command it ran)	measured	shown, not judged in the Kubernetes tables; a loss in all three of our runs where it is one
connections held open, consumers running, memory ceiling held	the pooler's, the group's, the cache's own reports	measured	the aim is lower (the resource held)
cache hit rate; consumer lag	Redis's INFO; the consumers' records	measured	the aim is higher; the aim is lower
HPA replicas, pods started, pod start wait	the API server's own records	measured	shown, not judged except pod start wait
organism work, energy, time over its line	the organism's plant models	**modelled**	by direction; S class
energy a mission, missions a charge (drones)	the simulator's motor constants through a declared model	**modelled**	lower; higher
cache size held, mean; bytes in the cache, mean; pages read into the cache (MongoDB)	the server's own `serverStatus` (WiredTiger cache)	measured	the aim is lower (the resource held); shown, not judged (pages read)
seconds from the kill to every setting back at the operator's (robustness)	the harness polling the cluster once a second from the kill	measured	the aim is lower; past 60 s marked; never, INVALID
the governor's resident memory, last ten minutes over the first ten (robustness, long run)	the process table, sampled every 15 s by the harness	measured	a growth over a quarter is marked
decisions made of expected; failed decisions (robustness, long run)	the governor's audit	measured	under 95% INVALID; any failed decision shown with its reason

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Gauge	Source	Measured or modelled	Direction
mission time, position error, collisions (drones)	the simulator's own state at every step	measured in the simulator (S class)	lower; under the safe error; any collision voids the cell
handed back (every arm)	the knob read back at the end of the arm	measured	yes in every arm, or the run is invalid
off the clock	the organism's own clock against its window	measured	shown; marks the cell

Three rules for reading any gauge in this appendix. A measured gauge is one the system under test, or the host's own kernel, reported about itself; a modelled gauge is one computed from a declared formula over measured inputs, and every table says which it is on the line itself, never only here. A resource gauge (machines, connections, consumers, memory, cache) is always judged as aiming lower, even where the governor's purpose was to add the resource to buy service, so that a gain bought with a resource is paid for in the same table and in the index. And a gauge marked "shown, not judged" never enters a reading or the index; it is there so that a reader can see what the governor did (how often it moved, how many pages it read, how many pods it started), not to be counted for or against it.

APPENDIX

Appendix E. Troubleshooting

Symptom	Cause	Fix
Wire check `FAIL 3 up wire (lock)`	the driver or VM refuses clock locking	use bare metal or full passthrough; or run the one-wire governor
Wire check `FAIL 3 up wire (follows down)`	the card ignores the ceiling	update the driver; check for another management agent holding clocks
Wire check `FAIL 4 down wire`	the power limit is refused or capped by the board	check `nvidia-smi -q -d POWER`; run as root
`another copy of this test is already running`	a second copy was started	wait for the first or reboot; start once
`something else is using the GPU`	another process holds the card	stop it; the benchmark must run alone

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Symptom	Cause	Fix
Governor exit 5	another writer changed a knob	find the other controller; Omni-Compass left its value alone
Governor exit 3	a restore did not read back	restore by hand (`nvidia-smi -rgc`, `-pl <start>`); investigate before rerunning
`decision failed (n in a row)`	the cluster API is unreachable	turn it OFF; native runs on
Energy saved but p95 slower than native	the card served bursts below its own clock, or the lid sat under its own draw	read section 8.5; in the audit compare `telemetry.clock_mhz` while busy with `native_busy_clock_mhz`, and `want_w` with `native_busy_draw_w`
Fail-up in most decisions	`--slo-ms` set too low for the workload, or a stale feed read as blind	set `--slo-ms` from the workload's own target; check the feed's age
No saving at all, service unchanged	the card is saturated almost all the time (it races), or the service sits above the compass's center	expected on a card with no slack; the saving comes from the quiet stretches
Kubernetes: no machine ever given back	the release gate refuses (its reason is in the audit), or the service is above the compass's center	read `node_gate.reason` in the audit; check `--slo-ms` and the latency feed
Kubernetes: a repetition marked OFF THE CLOCK	the machine could not step the organism inside its window	a longer window for that size on that machine; never a faster reading of the same run
Broker: consumers climb to the cover and stay	messages wait at every step (the producer is past the group's capacity)	the benchmark's capacity step sets the peak at nine tenths of the operator's group; check the measured capacity in the run's log
Cache: the ceiling grows while little memory is used	cold misses read as pressure	the full-cache gate is the rule (used ≥ 90% of the ceiling); check `used_mb` beside `maxmemory_mb` in the run's log

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Symptom	Cause	Fix
Cache: the ceiling never grows	the working set fits the operator's ceiling	expected: a cache that fits has nothing for the ceiling to mend, and the row reads inside the noise
Storage-engine cache: the cache never fills, whatever the key space, and omni reads as a free memory saving	the benchmark's requests concentrate on a few hot records (YCSB's shipped zipfian draw), or the run asks for records the load did not write (hashed keys over an ordered load), so the reads are served from the index	a result that flatters the governor is the first thing to suspect: check "in cache" against the cache size in the per-notch lines; draw requests uniformly over the key space and name the same key order in load and run; a knob with nothing to do is not a saving
Storage-engine cache: the compass only ever reads calm	the line is set far above the stack's own latencies (a 2 ms line over 0.15 to 0.45 ms reads)	set the line on the tuning workload's own figures so that a hit is calm and a full-cache miss is slow, and write the figures in the preregistration before any counted run
Swarm: a cell reads "void"	two drones came within two collision radii in either arm	a task or simulator setting (keep-out, altitude stagger, depot spacing); fixed before any counted run and said in the preregistration
Three-run table heads itself with a warning	a run's commit is not the engine it claims, or the three are not separate runs	run `tools/omni_version.py --commit <sha>` on each; make the table only from runs on one frozen engine
Archive bot skips a run	the run was not finished when the bot passed	leave the id in `.github/archive_request.txt`; the next pass copies it

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

APPENDIX

Appendix F. Evidence Map

`docs/EVIDENCE_LEDGER.md` (every claim and its class), `docs/CLAIMS_REGISTER.md` (what is claimed and what is not), `docs/GPU_PREREGISTRATION.md`, `docs/REALMS_PREREGISTRATION.md`, `docs/K8S_COMPASS_PREREGISTRATION.md`, `docs/POSTGRES_PREREGISTRATION.md`, `docs/KAFKA_PREREGISTRATION.md`, `docs/REDIS_PREREGISTRATION.md`, `docs/SWARM_PREREGISTRATION.md`, `docs/CITYLEARN_PREREGISTRATION.md`, `docs/PANDAPOWER_PREREGISTRATION.md`, `docs/ROBOTICS_PREREGISTRATION.md`, `docs/ROBUSTNESS_PREREGISTRATION.md`, `docs/YCSB_PREREGISTRATION.md` and `docs/MYSQL_PREREGISTRATION.md` (the rules written before each run), `docs/OMNI_V1.md` to `OMNI_V3.md` (every result by engine), `docs/REGISTER.md` (every benchmark and its file), `docs/PROOF_PROGRAM.md` (the program to full size with its costs), `docs/DOSSIER.md` (every result in one place), `results/OMNI_INDEX.md` (the one number), `docs/WIRING_VERDICTS.md` (which knobs earn a wire in, and every loss with its cause), `docs/STATE_OF_PLAY.md` (where everything stands), `docs/HANDOFF.md` (every command in one page).

The map, claim by claim. Each claim this manual makes is listed here with the class of evidence behind it and the document that carries it, so that a reader can go from any sentence of the executive summary to the file that would have to be wrong for the sentence to be wrong.

Claim	Class	Where the evidence is	What would falsify it
The engine's six states stay inside their walls and settle	T / V (proof and test)	`docs/FORMAL_STATUS.md`, `docs/TRACKING_THEOREM.md`, `tests/`, `results/SOAK.json`	a trajectory leaving its wall, or the C++ twin disagreeing with the Python
No write ever leaves a knob's cover; a blind sense holds; fail-up is immediate	T / V	`tests/test_shield_properties.py` (two million cases), the plug tests per stack	one case of a write past the cover or a give-back while blind
Claim	**Class**	**Where the evidence is**	**What would falsify it**
On a real cluster the governor does more work inside the	L	the six Kubernetes tables in `results/live/`, A/B/C	a row LOSS in all three of our runs on work or speed, or

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Claim	Class	Where the evidence is	What would falsify it
line, faster, on no more machines, at no more energy		each, `docs/K8S_COMPASS_PREREGISTRATION.md`	power given on machines or energy with nothing bought in any of the six, which would stand in the table
Killed outright, the governor's settings are back at the operator's within seconds	L	`results/live/V3_ROBUST_KILL.md`, `docs/ROBUSTNESS_PREREGISTRATION.md`	a repetition handed back after 60 s, or not at all
Over two hours the governor neither leaks, slows nor drifts, and hands everything back at the end	L	`results/live/V3_ROBUST_LONG.md`, `docs/ROBUSTNESS_PREREGISTRATION.md`	memory growing past a quarter, the decision time growing past a half, fewer than 95% of expected decisions, or a setting not handed back
Governing costs a few thousandths of a core at every size	L	`results/live/V3_OWN_COST.md`	an own-cost figure growing with the organism
The pooler, the buffer pool and the storage-engine cache each give memory back on an untouched workload with no LOSS; the broker and the cache read nothing on the first set under the brain's verdict	L	`V3_PGBENCH.md`, `V3_KAFKA.md`, `V3_REDIS.md`, each preregistration	a product row LOSS in all three of our runs on an untouched workload; the memory row of the cache is such a loss and stands
The one number is +4.8% across the real categories on the sets of 10 October, losses included	L, by rule	`results/OMNI_INDEX.md`, `tools/omni_index.py`	a category omitted, a loss not entered, a tuning row counted
A day of demand measured by someone else reads the same way as our own schedules	L	`results/live/V3_TRACE_GOOGLE2011.md`, `results/traces/google2011/schedule.json`, `docs/TRACES_PREREGISTRATION.md`	a schedule derived after the runs; a rule fitted to the governor; a trace part whose SHA-256 does not match

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Claim	Class	Where the evidence is	What would falsify it
The modelled realms, grids, arms, buildings and swarms gain under their own native controllers	S	`results/realms/`, `V3_PANDAPOWER.md`, `V3_MUJOCO.md`, `V3_CITYLEARN.md`, `V3_SWARM.md`	a run of the same simulator at the same version and seed giving other digits
A physical meter shows less energy for the same work	P	**no current result**; `docs/GPU_PREREGISTRATION.md` names the run	the rerun on the current card controller reading no difference, or LOSS
Omni-Compass never changes the engine between a rule and its result	by construction	`OMNI_V3.json`, `tools/omni_version.py --commit <sha>` on every table's commits	a table whose runs' commits carry different fingerprints

What a referee asks of each document. Of a preregistration: is it dated before the first counted run, does it name the tuning case and the untouched cases, is every amendment dated and does any amendment made after a result was seen say so? Of a three-run table: are the three run ids separate runs, does the head name the engine at each commit, is every gauge of the preregistration present including the ones that went against the governor, and is the reading one of the three the rule allows? Of the index: is every real category in it, is every tuning row out of it, and does a loss in all three of our runs enter as a loss? Of the raw folder: does the SHA-256 manifest in it match the files, does the governor's audit show every decision with its reading and its write, and does the hand-back record read the operator's value? Every one of those questions has a yes in this program or a disclosure naming the exception; the disclosures are in section 16.7.

How to audit one result from this manual to its raw files. Take any row of Chapter 48. Its source column names a three-run table in `results/live/`; the table's head names the three GitHub run ids, the commit each ran on and the engine `tools/omni_version.py` reads at that commit. Each run id names a folder `results/live/raw/run-<id>/` holding every repetition's files (the capture, the response times, the governor's audit and log, the per-request records, one SHA-256 manifest per repetition). The table tool named in the table's text (`tools/confirm_abc.py` or its siblings) rebuilds the table from those folders; `tools/omni_index.py` rebuilds the index from the tables; `tools/dossier.py` rebuilds the dossier. The preregistration named in the table's text holds the rules, written before the first counted run, with every amendment dated. Nothing in that chain is by hand.

What one repetition leaves behind. Take the first repetition of the first kill-scenario run, archived at `results/live/raw/run-37716845219/paired-1/`. It holds two folders, one per arm, and the omni arm's folder holds twenty-nine files, every one of which a reader can open: `preflight.txt` (the UTC time, the arm, the git commit the arm ran at, the versions of Docker, kind, kubectl, the API server and Python, the metrics-server version with its SHA-256, the worker count and the probe's address); `rbac_omni.txt` (twenty lines of `kubectl auth can-i`, each verb the governor needs reading yes and each it must not

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

have reading no); `window_start.txt` and `window_end.txt` (the window's clock); `load_schedule.log` (every load step and when it was applied); `latency.csv` (the probe's response times, one row a second); `capture.csv` (the cluster's state every fifteen seconds: replicas, workers, pods pending, the HPA's target); `host_cpu.csv` (the runner's own `/proc/stat`); `pod_watch.json` and `pods_end.json`, `nodes_end.txt`, `hpa_end.json` (the API server's own records at the end); `audit.jsonl` (one line per decision: the compass's position, heading and letter, the engine's state, every write with its value sent and its value read back); `controller.log` and `controller2.log` (the first governor's log, and the second one's after the kill); `audit_kill.jsonl` (the watchdog's restore writes, each with its command and its reason, such as "reset: remove record"); `watchdog.log` (one record: which governor, its process id, whether it was hung or dead, every command run and each exit code); `robust.log` (the kill at the 360th second with the settings as they stood, "target=50 range=1,10 limits=1850m 3700m workers=5/6", and the hand-back "every setting at the operator's after 8 s, target=50 limits=500m workers=6/6 left=none"); `rss.csv` (the governor's resident memory every fifteen seconds); `omni_writes.txt` (how many writes the governor made in the window: 42); `kill_switch.txt` (the reset check: target restored, workers in service, no record left); `omni2.pid` (the second governor's process id) and `kill` (the marker the harness wrote at the kill); `robust.out` (the same robustness log as the job printed it); `end_reads.err`, `pod_watch.err` and `capture.csv.errors` (empty, as they should be); `metrics-server-components.yaml` (the pinned manifest as applied); and `SHA256SUMS.txt`, one line per file. A reader who doubts a number in the kill table can find the second it was taken.

APPENDIX

Appendix G. The Muscles: What Each Is For, and How It Is Wired

A **muscle** is one setting on one machine that already has its own control: a replica target, a node pool's size, a GPU's clock ceiling, a chiller's setpoint, a battery's reserve, a joint's effort. Omni-Compass does not replace that control. It reads the machine's meters and, at its default, the max, moves the setting the machine already accepts toward the machine's own limit for the most work, never past it and never below native, through a plug that reads the setting once before the first write, reads back every write, steps aside if another controller moves it, and walks it back to native at the end. A knob native already runs at the top of its range is at its limit on native and is left there.

This chapter lists all 1107 muscles of the v5 catalog (`realms/catalog_v5.csv`); each run records its engine separately. For each one it says what kind of machine it is, which of the four kinds of knob it is, what Omni-Compass reads and does with it, how such a muscle is reached in a real stack, and which organisms it belongs to. The plants behind the benchmark numbers are models of these machines (evidence class **S**); a

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

muscle in this list is wired on a real system only through the levels and the checks of the manual (chapters 4 and 6). See `DISCLOSURES.md`.

How to read an entry

The four kinds of knob.

- **capacity**: how much of the machine is in service (replicas, instances, units, speed). At the max Omni-Compass pushes it to the machine's own limit for the most work, never past it and never below native.
- **admission**: what is let in (queues, rate limits, admission control). Native already lets everything in: the knob is at its limit on native, and Omni-Compass reads it and leaves it native.
- **power**: the power share or limit the machine may draw. Native already runs it at full: at its limit on native, read and left native.
- **setpoint**: the target the machine's own loop holds (a temperature, a reserve, a process value). At the max a room is cooled ahead of the heat and a battery's charge is held for its line, inside the safe band, never behind native on its line.

The five kinds of plant. Every muscle is modelled on one of five plants, each with its own service reading and lever:

Plant	What it is	What Omni-Compass reads	What Omni-Compass moves
`compute_pool`	a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs	how far its queue and its load sit toward the service line (queue or lateness, and load above half)	the capacity it may use: its replica or instance count (through its autoscaler's target or floor), its power share, or one unit given back through the release gate
`thermal_zone`	a data hall or building zone cooled by chillers, air handlers or fans	its temperature against its limit	its supply setpoint (colder is more cooling), its power share, or one cooling unit given back when the room has margin
`energy_storage`	a battery, UPS or microgrid store with a load and a grid connection	its draw on the grid connection and its reserve	its reserve setpoint (how much charge it holds back); its power limit is left native
`motion_axis`	a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor	its tracking error and its load	its speed and effort share, or its power share

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Plant	What it is	What Omni-Compass reads	What Omni-Compass moves
`process_loop`	a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint	how far the process sits from its band	its setpoint within its safe band, its actuator range, or its power share

Every muscle its own card. The brain is one, its settings each muscle's own. A muscle's card holds the settings the max uses for that muscle (a machine pool: how full it runs on its forecast before it calls for more, and how many decisions of history it reads; a battery: how many wobbles of margin it keeps under its line, and, wired by its power, how long it reads its line before it holds and how much of it it keeps clear). The cards were found by an automatic search over every muscle on the development seeds, today's global setting always one of the choices, and kept only where the card beat the global setting beyond the noise on two separate sets of seeds and on no seed under any load fell behind native: never over its line more often, never less work, never its line cleared later (`tools/tune_cards.py`, `realms/muscle_cards_v5.csv`, `results/cards_v5/`). Inside a body, a battery wired by its power keeps the body's own margins on its line. 364 muscles carry a card of their own; every other muscle runs the global setting (machines started at 95% full, the last 20 decisions read, 3.09 wobbles of margin on a battery's line, 5% of it kept clear). Each muscle's card is in the last column of its family's table.

The organisms. The 1107 muscles build seven organisms: the spine (267 muscles, every muscle that sits in all four realms: the base every stack runs on, as an operating system is the base of every program), each of the four realms (every muscle whose realm list includes it, the spine among them), the four stacked with every duplicate kept (1,908), and the whole tower with every muscle once (1107). Each is run native and with Omni-Compass on top of native (`docs/THE_SPINE.md`, `docs/REALMS.md`).

Organism	Muscles
The spine, the muscles every stack runs on	267
Compute / AI / Cloud	540
Physics / Robotics / Autonomous	404
Energy / Facility / Industrial	480
Distribution / Specialized	484
The four stacked, every duplicate kept	1,908
The whole tower, every muscle once	1107

How a muscle is reached in a real stack. The class of machine decides the wire:

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class of machine	What it is	The wire in a real stack
`batch`	batch and queued jobs	the job queue (Kubernetes Jobs, Slurm, Spark)
`batch_reactor`	a GMP batch reactor, fermenter or food process	the batch control system (ISA-88, OPC UA)
`building`	a building zone	the building management system
`chamber`	a controlled chamber (clean room, kiln, reactor)	the PLC or DCS
`clinical`	clinical systems: imaging archives, records, interface engines, monitoring gateways	the application's own scaling and admission settings (Kubernetes, the vendor console)
`commerce`	a customer-facing service with bursts	the Kubernetes API
`cpu_host`	a CPU host whose clock and power can be set	Linux cpufreq and RAPL
`data_hall`	a data hall cooling plant	the building management system (BACnet, Modbus) or its command line
`database`	a database cluster	the database operator (replicas, connection pools)
`district_heat`	a district heating or cooling network	the network control system and substation controllers (Modbus, M-Bus)
`elevator_hoist`	an elevator or escalator drive and its group control	the lift controller and destination dispatch (modelled only)
`ev_traction`	an electric vehicle traction motor	the vehicle's motor controller (CAN; modelled only)
`fabric`	a high-speed fabric (RDMA, DPU, SmartNIC)	the fabric manager's API
`facility`	a facility battery behind the meter	the energy management system
`feeder_voltage`	a distribution feeder's voltage	the distribution management system (IEC 61850, DNP3; modelled only)
`flight_axis`	a flight-control axis	the flight controller (modelled only)
`gpu`	GPU serving with a response-time target	nvidia-smi (clock ceiling and power limit) or the serving autoscaler

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class of machine	What it is	The wire in a real stack
`gpu_batch`	GPU training and batch work	nvidia-smi, the job scheduler's pause and resume
`hospital`	a hospital's critical rooms (operating rooms, isolation, pharmacy, imaging suites)	the hospital's building management system (BACnet)
`inverter`	a plant of grid-support inverters or wind turbines	the plant controller and inverter settings (SunSpec, IEC 61850, IEEE 1547)
`irrigation`	pumps, pressure and climate on a farm or in a greenhouse	the pump station controller, the pivot panel or the climate computer (Modbus, the vendor cloud)
`marine_propulsion`	a ship's propulsion shaft and power plant	the vessel automation and power management system (modelled only)
`microgrid`	a microgrid battery and loads	the inverter or energy management system (IEEE 2030.5, SunSpec, OpenADR)
`mill`	a grinding, flotation or materials-handling circuit	the plant DCS or PLC (OPC UA)
`network`	network routing and switching	the network controller (SDN, routing API)
`node`	a fleet of machines or VMs that boot in minutes	the node pool's size command (Karpenter, Cluster Autoscaler, MachineSet, cloud ASG)
`pipeline`	a pipeline segment with its compressors, pumps and valves	pipeline SCADA (DNP3, Modbus, OPC UA)
`port`	a container terminal's cranes and vehicles taking moves	the terminal operating system and fleet controllers
`process`	an industrial process loop	the PLC or DCS (OPC UA, EtherNet/IP, PROFINET)
`qpu`	a quantum or specialised accelerator queue	the accelerator's job queue
`rail_traction`	a train's traction and auxiliary systems	the train control and management system and ATO (modelled only)
`ran`	a radio access network cell or site	the RAN controller (O-RAN interfaces)
`reaction_wheel`	a spacecraft reaction wheel	the attitude controller (modelled only)
`robot_fleet`	a fleet of robots or vehicles taking tasks	the fleet manager's dispatch API

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Class of machine	What it is	The wire in a real stack
`robot_joint`	a robot joint servo	the robot controller (ROS 2, EtherCAT, the drive's fieldbus)
`server`	an application service on servers or pods	the Kubernetes API (HPA target and floor, pod resize)
`storage`	block, file or object storage	the storage system's QoS and tiering API
`turbine`	a generating unit's governor, boiler or excitation loop	the plant DCS and governor (OPC UA, IEC 61850; modelled only)
`ups`	an uninterruptible power supply	the UPS and PDU management interface (SNMP, Modbus)
`water`	a water or pumping process	the SCADA system (Modbus, DNP3)
`workflow`	a workflow or pipeline engine	the workflow engine's concurrency settings

Wires marked *modelled only* exist as plants in the benchmark and are not built for live use.

How to wire any muscle on your own stack (the plug, chapter 4). Every muscle below is wired the same way: Omni-Compass never replaces the native controller; it reads the controller's own meters (the wire out) and writes the one setting the controller already accepts (the wire in), through a plug that (1) reads the setting once before the first write and records it, (2) reads back every write and stops writing if another writer moved the setting, (3) renews a lease every decision so a dead governor's settings walk back to native by themselves, and (4) restores the recorded setting at the end. Each family's entry says which native controller owns its muscles, where the reading is tapped, where the setting is written, how it is restored, and whether that wire has run live in this repository or only on a model (`docs/wiring_recipes.csv`). The muscle's name is the setting's own name on that controller. Where the entry says *modelled only*, the plant exists in the benchmark and the wire is written against the controller's documented interface, not yet run on the machine.

The spine: 267 muscles in all four realms, an organism of its own

The machines every realm stands on: servers, machines, GPUs and CPUs, network, storage, observability, security, cooling and electrical distribution. The spine is the seventh organism (`spine`, the base every stack runs on, run native and with Omni-Compass on top like the other six; `docs/THE_SPINE.md`), and each spine muscle is also part of every realm's organism, counted once in the tower and four times in the stack.

Cloud VM & Capacity (21 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `node` (a fleet of machines or VMs that boot in minutes), reached through the node pool's size command (Karpenter, Cluster Autoscaler, MachineSet, cloud ASG). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wire it on your stack.

- **Native controller:** the cloud's autoscaling group or scale set: AWS Auto Scaling, Azure VMSS, GCP MIG.
- **Wire out (read):** group size, instance states, the target-tracking metric (the cloud's API and monitoring).
- **Wire in (write):** desired capacity, min and max, the target-tracking policy's target, through the cloud CLI or SDK.
- **Restore:** the group's desired, min, max and policy recorded once; restored from it.
- **Run live?** live on AKS through the node pool (family 5); the cloud SDK path itself is written, not yet run live.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
97	vm count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
98	vm size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 40 decisions
99	vm start stop	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
100	vm migrate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
101	instance family	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
102	asg min	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
103	asg max	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
104	spot mix	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
105	reservation mix	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 40 decisions
106	zone selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
107	region selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
108	architecture selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
109	accelerator selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
110	boot disk class	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
111	placement group	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
112	interruption response	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
1038	target tracking policy	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1039	scaling cooldown warmup	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1114	vm cpu cap by priority	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1120	predictive scaling	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1121	instance refresh	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

Container Resources (25 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the pod's own resource requests and limits (the Deployment template) and, where it runs, the VPA, Goldilocks or CruiseKube recommender.
- **Wire out (read):** each pod's CPU use (kubectl top), its request and limit, the node's allocatable CPU (Kubernetes API).
- **Wire in (write):** the running pod's CPU limit in place through pods/resize (no restart); the template is never changed, so no rollout.
- **Restore:** the operator's limit recorded in an annotation before the first write; every pod returned to it.
- **Run live?** live: omni_controller/muscles.py convey() (conveyance); KEDA and Goldilocks tables.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
33	cpu request	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			needs at once		
34	cpu limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
35	memory request	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
36	memory limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
37	ephemeral storage	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
38	hugepages	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
39	io weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
40	pids limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
41	memory high	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
42	memory reclaim	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
43	swap limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
44	cgroup io max	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
45	cpu weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
46	cpu quota	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
47	cpuset	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
48	runtime class	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1017	in place resize	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1019	namespace quota	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1020	default limits	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1022	memory hard limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1023	memory protection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1024	io latency target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1025	freeze	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
2176	cruisekube request rightsizing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2177	goldilocks vpa request recommendation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 10 decisions

Host CPU & Memory (26 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `cpu_host` (a CPU host whose clock and power can be set), reached through Linux cpufreq and RAPL. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the Linux kernel's own governors: cpufreq (schedutil or the processor driver), RAPL, cpuidle, the memory manager.
- **Wire out (read):** /sys/devices/system/cpu/cpufreq (frequencies and governor), /sys/class/powercap intel-rapl energy counters, /proc/stat busy share, /proc/pressure.
- **Wire in (write):** scaling_max_freq per policy and the RAPL package power limit through sysfs (root); on Kubernetes through the Kubernetes Power Manager's PowerProfile or EAR's policy.
- **Restore:** the governor's files snapshotted once and restored byte for byte (tools/run_cpu_power.py --restore).
- **Run live?** written and tested on the modelled machine (tools/run_cpu_power.py, cpu-power.yml); GitHub's machines are virtual and cannot write the governor: the live run needs a real Linux machine.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
113	cpufreq min	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
114	cpufreq max	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
115	rapl package power	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
116	uncore frequency	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
117	energy perf preference	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
118	cpu idle policy	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
119	memory bandwidth	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
120	numa balance	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
121	irq affinity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
122	llc allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
123	memory pressure gate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
124	page reclaim rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
125	transparent hugepages	capacity	starts the machines the forecast needs before the rush lands and clears	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		
126	core online offline	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
127	thermal throttle policy	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
128	host power profile	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
1040	frequency governor	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
1041	turbo boost	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1042	dram power limit	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1043	swappiness reclaim	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1112	core packing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1115	per pod cpu frequency range and c state access	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
1116	uncore frequency per node	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
2174	ear cpu frequency policy	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
2175	ear global energy budget	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
2178	k8s power manager core profile	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Kubernetes Placement & Scheduling (21 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** kube-scheduler and its profiles, the descheduler, PriorityClasses, scheduling gates.
- **Wire out (read):** pods pending and their reasons, node fill, topology spread (Kubernetes API).
- **Wire in (write):** a pod's or deployment's placement fields (nodeSelector, affinity, topologySpreadConstraints, priorityClassName, schedulingGates) by kubectl patch, or the scheduler's profile.
- **Restore:** the fields as they stood before the first write, restored field by field.
- **Run live?** modelled; the API path is the same kubectl patch the live controller uses for the HPA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
49	node selector	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 85% full; reads the last 10 decisions
50	node affinity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
51	pod anti affinity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
52	topology spread	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
53	numa placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
54	gpu topology	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
55	storage locality	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
56	network locality	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
57	taint toleration	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
58	priority class	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
59	preemption policy	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
60	device claim	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
61	failure domain spread	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
62	scheduler backoff	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
63	gang admission	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
64	deschedule	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1026	scheduler scoring strategy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1027	scheduler plugin weights	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 40 decisions
1028	scheduling gates	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1029	cpu manager	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
2179	peaks power aware placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Kubernetes Workload Scaling (32 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the HorizontalPodAutoscaler, KEDA ScaledObject or VPA that owns the workload's scale.
- **Wire out (read):** the HPA's current and desired replicas, the Deployment's ready replicas (Kubernetes API, metrics-server), the service's response time from the probe.
- **Wire in (write):** the HPA's target (spec.metrics averageUtilization) and floor (minReplicas) by kubectl patch; KEDA through its ScaledObject, so the add-on keeps its own loop.
- **Restore:** the operator's target and range recorded in an annotation before the first write, restored from it, annotation removed.
- **Run live?** live: scripts/kind_bench.sh and omni_controller (HPA target, KEDA, Goldilocks, CruiseKube), three-run tables in results/live.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
17	replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
18	hpa cpu target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
19	hpa memory target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
20	hpa custom target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
21	vpa apply	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
22	scale to zero	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 80% full; reads the last 40 decisions
23	keda threshold	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
24	rollout rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
25	max surge	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
26	max unavailable	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
27	deployment pause resume	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
28	rollout abort	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
29	pod eviction	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
30	pdb policy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
31	scheduler queue priority	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
32	api priority fairness	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1001	hpa min replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1002	hpa max replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1003	hpa scale down stabilisation window	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1004	hpa scale up stabilisation window	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1005	hpa scaling rate policies	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1006	hpa policy selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1007	hpa tolerance	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1008	hpa sync period	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1009	vpa minmax allowed resources	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1010	keda polling interval	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1011	rollout progress deadline	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1012	rollout readiness delay	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
1014	unhealthy pod eviction policy	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1015	graceful termination	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1016	probes	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
2172	kepler energy target autoscaling	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

GPU Hardware (22 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `gpu` (GPU serving with a response-time target), reached through nvidia-smi (clock ceiling and power limit) or the serving autoscaler. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the card's own firmware limits through NVML and nvidia-smi (power limit, application clocks, MIG, compute mode).
- **Wire out (read):** nvidia-smi --query-gpu (clocks, power draw, temperature, utilisation, memory), the serving response time from the probe.
- **Wire in (write):** nvidia-smi -pl (power limit), -lgc/-rgc (clock ceiling and reset), -ac (application clocks), -mig and -c (modes), per card.
- **Restore:** every limit read once at start (the snapshot line in the GPU audit) and restored by the same commands at the end or on the lease.
- **Run live?** live: omni_controller/gpu_governor.py and scripts/gpu_paired.sh on a rented A10 (results/gpu); the new card runs wait on Lambda by the founder's order.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
129	gpu allocate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
130	gpu power limit	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
131	gpu sm clock	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
132	gpu memory clock	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
133	gpu persistence mode	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
134	gpu compute mode	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
135	mig mode	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
136	mig geometry	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 85% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
137	gpu timeslice	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 40 decisions
138	gpu mps	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
139	gpu quarantine	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
140	gpu reset	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
141	gpu thermal limit	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
142	gpu ecc response	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
143	gpu job power budget	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1044	application clocks	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
1045	gpu temperature target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1117	sync boost	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions
1118	target clocks	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2173	climatik inference power cap	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
2180	adaptive gpu power cap	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
2181	nvidia platform power budget	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

Node Fleet & Karpenter-Class Control (24 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `node` (a fleet of machines or VMs that boot in minutes), reached through the node pool's size command (Karpenter, Cluster Autoscaler, MachineSet, cloud ASG). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the cluster's own node autoscaler: Karpenter (NodePool), the Cluster Autoscaler, a MachineSet, a cloud node pool.
- **Wire out (read):** ready and schedulable workers, pending pods, allocatable and used CPU (Kubernetes API), the autoscaler's status ConfigMap.
- **Wire in (write):** the pool's size through the operator's own command (--node-scale-cmd: az aks nodepool scale, gcloud container clusters resize, eksctl scale nodegroup, kubectl scale machineset, a Karpenter NodePool limit); a machine parked by taint and drain, never deleted by Omni-Compass.
- **Restore:** the pool's starting count recorded once; every parked machine untainted and the pool restored to it at the end or on the lease.
- **Run live?** live: omni_controller nodepool mode on kind and on AKS (results/live/V1_AKS_*, the capacity and steady tables).

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
65	node desired	capacity	starts the machines the forecast needs before the rush lands and clears work	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		
66	node pool min	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 10 decisions
67	node pool max	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 40 decisions
68	node provision	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 60 decisions
69	node cordon	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
70	node drain	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
71	node consolidate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
72	node replace	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
73	node shutdown	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 40 decisions
74	node power on	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
75	nodepool weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
76	disruption budget	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
77	consolidation policy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 20 decisions
78	consolidate after	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 90% full; reads the last 20 decisions
79	expire after	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
80	capacity class	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
1030	scale down utilisation threshold	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1031	scale down unneeded time	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
1032	scale down delay after add	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 20 decisions
1033	expander	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 80% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1034	node pool limits	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
1035	kubelet eviction thresholds	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1036	kubelet reserved resources	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions
1037	max pods per node	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 40 decisions

Network Routing & Switching (19 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `network` (network routing and switching), reached through the network controller (SDN, routing API). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Native controller:** the network controller: the load balancer's weights, the SDN controller, the NIC's ethtool and tc settings.
- **Wire out (read):** link utilisation, drops, queue latency (SNMP, the controller's API, ethtool -S).
- **Wire in (write):** LB and route weights through the controller's API; rate limits and queue disciplines through tc; NIC queues through ethtool.
- **Restore:** every weight and setting recorded; restored with the same commands.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
225	lb weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
226	route weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
227	rate limit	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
228	bandwidth limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
229	qos class	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
230	connection limit	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
231	failover route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
232	nic rate limit	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
233	nic queue count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
234	queue discipline	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
235	congestion control	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
236	egress budget	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
237	ingress budget	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
238	ecmp weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
239	path selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
240	network isolation	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1046	nic interrupt coalescing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1047	nic ring size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 80% full; reads the last 10 decisions
1048	port link power	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Observability & Telemetry (9 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the collector's own configuration: the OpenTelemetry Collector, Prometheus scrape and remote-write settings.
- **Wire out (read):** dropped samples, queue depth, memory, cardinality (the collector's self-metrics).
- **Wire in (write):** the collector's batch, queue and memory limits and scrape intervals through its config reload.
- **Restore:** the config recorded; reloaded from it.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
373	collector memory limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
374	export concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
376	cardinality budget	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
377	retention window	setpoint	starts the machines the forecast needs before the rush lands and clears work	the spine; all four realms; stack; tower	machines started at 85% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		
378	remote write queue	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
379	telemetry shed	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1053	metric scrape interval	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
1054	batching	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 80% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1119	per pod energy attribution	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 60 decisions

Reliability, Security & Recovery (12 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

- **Native controller:** the platform's own recovery and security controls: rollout and rollback, PodDisruptionBudgets, the security hold, a kill switch.
- **Wire out (read):** error rate, rollout status, the security hold (a ConfigMap key), the kill file.
- **Wire in (write):** rollout pause and undo by kubectl; the security hold read, never written; the kill switch (tools/omni_switch.py) is a human's.
- **Restore:** every write recorded and undone on the lease.
- **Run live?** live in part: the security hold and kill switch run in every Kubernetes benchmark (omnicompass/master.py).

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
385	restart	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			needs at once		
386	rollback	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
388	traffic divert recovery	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
389	degraded mode	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
390	actuator freeze	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
391	workload isolate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
393	credential rotation gate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
394	policy enforcement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
395	rate abuse gate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
396	fault domain isolate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
397	backup trigger	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 10 decisions
400	kill switch	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

Storage Block/File/Object (20 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `storage` (block, file or object storage), reached through the storage system's QoS and tiering API. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). It belongs to every organism.

Wire it on your stack.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Native controller:** the storage system's QoS and tiering: Ceph (ceph osd pool set, QoS), a cloud volume's IOPS class, S3 lifecycle.
- **Wire out (read):** IOPS, throughput, latency and queue depth from the storage system's metrics.
- **Wire in (write):** volume IOPS and throughput limits, replica counts and tiering through the storage API or CSI VolumeAttributesClass.
- **Restore:** the volume's class and limits recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
257	volume size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
258	iops limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
259	throughput limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
260	replica count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
261	storage tier	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
262	volume placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
263	snapshot trigger	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
264	rebalance	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 10 decisions
265	recovery rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
266	backfill rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
267	compaction pressure	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
268	cache allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 75% full; reads the last 10 decisions
269	object replication	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
270	erasure code profile	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
271	storage admission	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
272	degraded storage gate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1049	scrub schedule	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	machines started at 70% full; reads the last 20 decisions
1050	io scheduler	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global
1051	disk power spin down	power	at its limit on native (the full clock): read and left native	the spine; all four realms; stack; tower	global
1052	lifecycle tiering	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	the spine; all four realms; stack; tower	global

Cooling, Chillers & Thermodynamics (18 muscles)

Each is a data hall or building zone cooled by chillers, air handlers or fans; its class is `data_hall` (a data hall cooling plant), reached through the building management system (BACnet, Modbus) or its command line. Omni-Compass reads its temperature against its limit. It belongs to every organism.

Wire it on your stack.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Native controller:** the building management system and the chiller plant's own supervisory controller (BACnet, Modbus).
- **Wire out (read):** supply and return temperatures, chiller load, fan and pump speeds, rack inlet temperatures (BACnet reads).
- **Wire in (write):** supply-air and chilled-water setpoints, fan and pump speeds within their safe bands by BACnet write; the plant's own staging keeps control.
- **Restore:** every setpoint read once and restored.
- **Run live?** modelled (the data-hall plant); the BACnet path is written.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
545	supply air temperature	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	the spine; all four realms; stack; tower	global
546	return air target	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	the spine; all four realms; stack; tower	global
547	coolant supply temperature	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	the spine; all four realms; stack; tower	global
548	coolant flow	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global
549	pump speed	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global
550	fan speed	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global
551	chiller setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
552	compressor authority	power	at its limit on native (the site envelope at full): read and left native	the spine; all four realms; stack; tower	global
553	cooling tower fan	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global
554	cooling capacity	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global
555	rack thermal budget	power	at its limit on native (the site envelope at full): read and left native	the spine; all four realms; stack; tower	global
556	gpu thermal envelope	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	the spine; all four realms; stack; tower	global
557	cpu thermal envelope	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	the spine; all four realms; stack; tower	global
558	thermal workload migrate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
559	thermal load shed	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1055	server fan speed	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global
1056	economiser	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1122	chiller plant supervisory control rl with safety layer	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	the spine; all four realms; stack; tower	global

PDU, UPS & Electrical Distribution (18 muscles)

Each is a battery, UPS or microgrid store with a load and a grid connection; its class is `ups` (an uninterruptible power supply), reached through the UPS and PDU management interface (SNMP, Modbus). Omni-Compass reads its draw on the grid connection and its reserve. It belongs to every organism.

Wire it on your stack.

- **Native controller:** the UPS and PDU management interfaces (SNMP, Modbus) and the servers' BMC power caps (IPMI DCMI, Redfish).
- **Wire out (read):** load per branch, UPS mode and charge, power per server (SNMP, Redfish).
- **Wire in (write):** server and rack power caps through Redfish or DCMI; UPS charge rate and mode through SNMP; breakers never written.
- **Restore:** every cap and mode read once and restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
529	server power cap	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
530	rack power cap	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
531	pdu branch power limit	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
532	pdu outlet control	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0 wobbles of margin on its line

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
534	ups operating mode	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0 wobbles of margin on its line
535	ups charge rate	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
536	ups discharge rate	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
537	phase balance	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0 wobbles of margin on its line
538	load transfer	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
539	reactive power target	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0 wobbles of margin on its line
540	voltage target	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0.25 wobbles of margin on its line
541	generator dispatch	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0 wobbles of margin on its line

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
542	electrical isolation	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
543	breaker trip gate	admission	at its limit on native (nothing paced or turned away): read and left native	the spine; all four realms; stack; tower	global
1057	ups shutdown battery test	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	the spine; all four realms; stack; tower	0 wobbles of margin on its line
1110	hierarchical power budget row pdu switchboard controllers	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
1111	priority aware capping throttle low priority first	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global
1113	power oversubscription with prediction	power	at its limit on native (full battery power): read and left native	the spine; all four realms; stack; tower	global

Realm: Compute / AI / Cloud (273 muscles of its own, 540 in its organism with the spine)

AI Inference Serving (24 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `gpu` (GPU serving with a response-time target), reached through nvidia-smi (clock ceiling and power limit) or the serving autoscaler. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the serving engine's own autoscaler and batcher (vLLM, Triton, KServe, Ray Serve): replicas, batch size, concurrency, KV cache.
- **Wire out (read):** queue depth, tokens per second, p95 latency, KV-cache use from the server's /metrics.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire in (write):** the server's replica count or KServe/Knative autoscaling target, max_num_seqs and KV-cache budget through its API or its ConfigMap.
- **Restore:** the serving spec recorded once; restored to it.
- **Run live?** live in part: GPU serving under the card governor (results/gpu); the vLLM run is ready and waits on Lambda.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
161	model replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
162	model route weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
163	model load	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
164	model unload	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
165	model instance count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
166	continuous batching	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
167	max batch size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
168	batch queue delay	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
169	inference concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
170	inference max tokens	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 60 decisions
171	kv cache budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
172	prefix cache budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
173	speculative decode budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
174	model precision	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
175	inference priority	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
176	inference slo gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
1058	autoscaling target concurrency qps	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1059	scale to zero panic window	setpoint	starts the machines the forecast needs before the rush	Compute; stack;	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	tower	
1060	request priority levels	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
1061	kv cache swap space	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
1062	chunked prefill	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 20 decisions
1063	tensor parallel degree	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 40 decisions
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1064	disaggregated prefill decode	capacity	starts the machines the forecast needs before the rush	Compute; stack;	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	tower	
1065	lora adapter load	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

AI Training (18 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `gpu_batch` (GPU training and batch work), reached through nvidia-smi, the job scheduler's pause and resume. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the training job's launcher and scheduler (Kubeflow, Ray Train, Slurm, torchrun).
- **Wire out (read):** step time, GPU utilisation, checkpoint cadence, stragglers (the job's metrics).
- **Wire in (write):** the job's worker count (elastic training), batch sizes and checkpoint interval through the launcher's API or the job spec.
- **Restore:** the job spec recorded; the next run launched from it.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
177	training workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs;	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			hands back what it no longer needs at once		
178	global batch size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 10 decisions
179	microbatch size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 90% full; reads the last 10 decisions
180	gradient accumulation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
181	data parallelism	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 60 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
182	tensor parallelism	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 10 decisions
183	pipeline parallelism	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 10 decisions
184	expert parallelism	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 20 decisions
185	checkpoint interval	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 10 decisions
186	checkpoint trigger	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
187	training preempt	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
188	training gang size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 10 decisions
189	elastic worker count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 90% full; reads the last 10 decisions
190	straggler mitigation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 20 decisions
191	training precision	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
192	compute comm overlap	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1066	activation checkpointing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
1067	dataloader workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions

Cross-Cluster, Multi-Region & Edge (18 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `node` (a fleet of machines or VMs that boot in minutes), reached through the node pool's size command (Karpenter, Cluster Autoscaler, MachineSet, cloud ASG). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the global load balancer and the fleet manager (Karmada, Fleet, the cloud's global LB).
- **Wire out (read):** per-region latency, capacity and cost, pending work (the global LB's and clusters' metrics).
- **Wire in (write):** region and cluster weights and quotas through the global controller's API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
609	multi cluster dispatch	capacity	starts the machines the forecast needs before the rush lands	Compute; stack;	machines started at 70% full; reads the last 60 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	tower	
610	region dispatch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 40 decisions
611	zone dispatch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
612	edge dispatch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
613	cloud capacity class	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
614	workload migrate region	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
615	data residency gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
616	latency region gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
617	cost region gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
618	carbon region gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
619	global failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 40 decisions
620	federation quota	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
621	cross cluster replication	capacity	starts the machines the forecast needs before the rush lands	Compute; stack;	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	tower	
622	edge offload	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
623	global admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5128	edge site node pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
V5-5129	edge inference gpu clocks	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
V5-5130	edge sync interval	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global

DPU SmartNIC & Programmable IO (12 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `fabric` (a high-speed fabric (RDMA, DPU, SmartNIC)), reached through the fabric manager's API. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wire it on your stack.

- **Native controller:** the DPU's own management (NVIDIA DOCA, the SmartNIC's SDK) and SR-IOV.
- **Wire out (read):** per-function rates, flow-steering hits, DPU CPU and memory (the DPU's counters).
- **Wire in (write):** rate limits, QoS groups and VF counts through the DPU management API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0021	dpu pf tx rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0022	dpu vf tx rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0023	dpu sf tx rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0024	dpu bandwidth share	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0025	dpu qos group	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0026	sriov vf count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0027	smartnic flow steering	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 10 decisions
AUDIT-0028	smartnic offload enable	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0029	dpu cpu budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
AUDIT-0030	dpu memory budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0031	dpu service placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
AUDIT-0032	dpu failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

Distributed Cluster Managers (15 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `batch` (batch and queued jobs), reached through the job queue (Kubernetes Jobs, Slurm, Spark). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the cluster manager's scheduler: YARN, Mesos, Nomad, Ray.
- **Wire out (read):** queue lengths, resource reservations, preemptions (the manager's API).
- **Wire in (write):** quotas, reservations and preemption settings through the manager's API.
- **Restore:** recorded once, restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
209	task admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
210	task priority	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
211	resource reservation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 10 decisions
212	cluster quota	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
213	task preemption	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
214	binpack pressure	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 10 decisions
215	spread pressure	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
216	gang schedule	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 90% full; reads the last 60 decisions
217	worker allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
218	maintenance evacuation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 90% full; reads the last 10 decisions
219	oversubscription	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 10 decisions
220	resource reclaim	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
221	queue fairness	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
222	deadline pressure	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
223	scheduler retry	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

GPU Fabric & RDMA (18 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `fabric` (a high-speed fabric (RDMA, DPU, SmartNIC)), reached through the fabric manager's API. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the fabric manager and the collective library (NVIDIA Fabric Manager, NCCL settings, RDMA CM).
- **Wire out (read):** link and NVSwitch counters (nvidia-smi nvlink, DCGM), collective time per step from the training job.
- **Wire in (write):** NCCL environment and the job's rank placement at launch; RDMA QoS through the fabric manager's API.
- **Restore:** the launch settings recorded; the next job launched with the originals.
- **Run live?** modelled; written against NCCL and Fabric Manager documentation.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
145	nvlink placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			needs at once		
146	nvswitch route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
147	gpu fabric quarantine	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
148	rdma bandwidth	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 10 decisions
149	rdma route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
150	nic affinity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
151	collective concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
152	collective algorithm	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
153	collective chunk size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
154	rank placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
155	gpudirect policy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
156	congestion response	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
157	rail selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
158	fabric failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
159	communication priority	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
160	fabric isolation	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
1068	collective protocol	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1069	nic hca selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

HPC & Distributed Compute (19 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `batch` (batch and queued jobs), reached through the job queue (Kubernetes Jobs, Slurm, Spark). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the batch scheduler: Slurm (scontrol, sacctmgr), PBS, LSF.
- **Wire out (read):** queue depth, node states, job wait times, power per node (sacct, sinfo, the power plugin).
- **Wire in (write):** partition limits, job priority and fair-share factors, node power-saving settings through scontrol and the scheduler config.
- **Restore:** the scheduler's settings recorded; restored with the same commands.
- **Run live?** modelled; EAR (family 8) is the live energy path on HPC.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
193	job slots	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
194	mpi ranks	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 20 decisions
195	rank mapping	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
196	node allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
197	job walltime	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
198	job priority	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
199	job preemption	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
200	checkpoint restart	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 20 decisions
201	parallel io budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
202	collective budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
203	accelerator share	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 20 decisions
204	cpu gpu ratio	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
205	memory per rank	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
206	scratch budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
207	scheduler fair share	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
208	backfill policy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
1070	node power saving	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
1071	cpu frequency per job	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
1072	partition limits	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

Kubernetes Dynamic Device Allocation (8 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `gpu` (GPU serving with a response-time target), reached through nvidia-smi (clock ceiling and power limit) or the serving autoscaler. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Native controller:** Kubernetes DRA: DeviceClass, ResourceClaim, ResourceSlice.
- **Wire out (read):** claims pending, devices allocated and tainted (the Kubernetes API).
- **Wire in (write):** DeviceClass selectors and claim capacity by kubectl apply; devices tainted, never removed.
- **Restore:** the objects recorded; restored.
- **Run live?** modelled; the API path is kubectl.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0001	dra device class selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 40 decisions
AUDIT-0002	dra claim capacity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
AUDIT-0003	dra claim sharing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 20 decisions
AUDIT-0004	dra device taint	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0005	dra device eviction	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
AUDIT-0006	dra binding readiness	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 20 decisions
AUDIT-0007	dra binding failure response	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
AUDIT-0008	dra device configuration	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

OpenShift & Machine API (9 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `node` (a fleet of machines or VMs that boot in minutes), reached through the node pool's size command (Karpenter, Cluster Autoscaler, MachineSet, cloud ASG). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** OpenShift's Machine API operators: MachineHealthCheck, MachineConfigPool, the Cluster Version Operator.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire out (read):** machine phases, MCP status and pause, degraded counts (the OpenShift API).
- **Wire in (write):** MachineHealthCheck maxUnhealthy, MachineConfigPool paused and maxUnavailable by oc patch.
- **Restore:** the fields recorded before the first write, restored from the record.
- **Run live?** modelled; written against the documented OpenShift API, not yet run live.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
85	machine remediation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
88	machine health gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
89	mcp pause	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
90	mcp max unavailable	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
91	node config rollout	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
92	operator reconcile budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
93	cluster version pacing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
94	infra machine admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
95	machine failure domain	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

Quantum Computing Control Simulation (16 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `qpu` (a quantum or specialised accelerator queue), reached through the accelerator's job queue. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the quantum control stack's job queue and pulse schedules (Qiskit Runtime, the vendor's control software).
- **Wire out (read):** queue depth, calibration drift, error rates (the stack's metrics).
- **Wire in (write):** shot allocation, circuit admission and scheduling through the stack's API; pulse parameters never written live.
- **Restore:** recorded; restored.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
593	qubit mapping	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
594	circuit admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
595	shot allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
596	circuit scheduling	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
597	gate scheduling	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
598	pulse amplitude	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			within one machine start, never fewer than native runs; hands back what it no longer needs at once		
599	pulse duration	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
600	pulse phase	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
601	pulse frequency	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
602	coupling control	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
603	reset scheduling	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			within one machine start, never fewer than native runs; hands back what it no longer needs at once		
604	measurement scheduling	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
605	dynamical decoupling	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
606	noise aware routing	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
607	error mitigation budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
608	quantum queue priority	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Work Admission & Demand Shaping (19 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the service's own admission layer: its API gateway, queue or admission controller (Envoy, NGINX, Kong, a job queue's concurrency setting).
- **Wire out (read):** queue depth, requests in flight and the response-time line from the gateway's or queue's metrics (Prometheus, the admin API).
- **Wire in (write):** the gateway's or queue's concurrency and rate settings (the limit named by the muscle) through its admin API or its config object.
- **Restore:** snapshot of each limit once before the first write; every limit restored from it.
- **Run live?** at its limit on native: read and left native in every run (nothing is paced or turned away); the wire is read-only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1	api concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
2	queue concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
3	queue backpressure	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
4	job admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
5	batch admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
6	inference admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
7	load shed	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
8	priority gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
9	tenant admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
10	burst limit	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
11	deadline admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
12	work budget	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
13	request queue limit	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
14	retry admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
15	background work gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
16	maintenance work gate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
1074	request concurrency limit	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
1123	adaptive concurrency limit	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
1124	priority request queue under limit	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

Linux Kernel & OS Control (20 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `cpu_host` (a CPU host whose clock and power can be set), reached through Linux cpufreq and RAPL. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the Linux kernel's own tunables: cgroup v2 files, /proc/sys/vm and net, the cpufreq and cpuidle governors, the I/O scheduler.
- **Wire out (read):** /sys/fs/cgroup, /proc/pressure, /proc/vmstat, /sys/block queue stats, the frequency files.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire in (write):** cgroup cpu.weight, cpu.max and memory.high; sysctl vm and net keys; scaling_max_freq, through sysfs and sysctl (root).
- **Restore:** every file snapshotted once and restored byte for byte.
- **Run live?** the CPU frequency path is written (tools/run_cpu_power.py); the other knobs are registered and queued, they need a real Linux machine.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5001	cgroup cpu weight	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5002	cgroup cpu quota	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5003	cgroup memory high	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 10 decisions
V5-5004	cfs scheduler latency	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5005	cpufreq dvfs governor	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5006	transparent hugepages	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5007	io scheduler depth	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5008	numa auto balancing	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5009	dirty ratio writeback	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5010	vm swappiness	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5011	tcp buffer autotune	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 60 decisions
V5-5012	block nr requests	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5013	ksm memory dedup	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global
V5-5014	net rx coalesce	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5015	cpu cstate governor	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
V5-5016	zswap pool fraction	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5017	page cache reclaim	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5018	irqbalance affinity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 75% full; reads the last 60 decisions
V5-5019	net qdisc codel target	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5020	hugepage pool reserve	capacity	starts the machines the forecast needs before the rush lands	Compute; stack;	machines started at 75% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	tower	

Serverless & Functions (FaaS) (9 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the function platform's concurrency settings (Knative autoscaling annotations, AWS Lambda concurrency, OpenFaaS).
- **Wire out (read):** concurrency, cold starts, queue waits (the platform's metrics).
- **Wire in (write):** provisioned and reserved concurrency, scale-to-zero windows through the platform's API or annotations.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5021	fn concurrency limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5022	fn provisioned concurrency	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5023	fn scale to zero idle	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5024	fn memory size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5025	fn prewarm pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5026	fn reserved concurrency	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5027	fn burst admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5028	fn snapstart restore	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
V5-5029	fn timeout budget	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global

Virtualization & Hypervisor (9 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `cpu_host` (a CPU host whose clock and power can be set), reached through Linux cpufreq and RAPL. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the hypervisor's management API (libvirt, vSphere, Hyper-V).
- **Wire out (read):** vCPU steal, balloon state, migration load (the hypervisor's metrics).
- **Wire in (write):** vCPU allocation, ballooning and migration pacing through the management API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5030	vcpu allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5031	memory ballooning	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5032	vm overcommit density	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
V5-5033	live migration pacing	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5034	numa vcpu pinning	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5035	sriov vf allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5036	vgpu partition	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5037	vm memory dedup ksm	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global
V5-5038	hypervisor cpu pinning	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions

Gut: Data-plane Intake & Waste (8 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `process` (an industrial process loop), reached through the PLC or DCS (OPC UA, EtherNet/IP, PROFINET). Omni-Compass reads how far the process sits from its band. Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the data plane's own intake pacing and compaction settings (the ingress, the queue, the store's compactor).
- **Wire out (read):** intake rate, backpressure, compaction debt, dead-letter depth (the components' metrics).
- **Wire in (write):** pacing, drain rates and compaction budgets through each component's settings API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5045	ingress intake pacing	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global
V5-5046	dead letter retry cap	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5047	gc compaction pacing	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5048	ttl eviction waste	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5049	backpressure threshold	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5050	queue drain rate	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global
V5-5051	retry budget window	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5052	compaction debt drain	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global

Skin: Perimeter & Admission (5 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the perimeter's own controls: the WAF, the DDoS shield, the TLS terminator.
- **Wire out (read):** request admission, inspection sampling, session cache hit rate (the perimeter's metrics).
- **Wire in (write):** token-bucket rates, sampling and session cache size through the perimeter's API; blocking rules never loosened.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5053	rate limit token bucket	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5054	connection admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5055	waf inspection sampling	capacity	at its limit on native (the full actuator): read and left native	Compute; stack; tower	global
V5-5056	tls session cache	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5057	ddos shield admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

Media Streaming & CDN (14 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `process` (an industrial process loop), reached through the PLC or DCS (OPC UA, EtherNet/IP, PROFINET). Omni-Compass reads how far the process sits from its band. Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the streaming stack's transcoder pools, packager and CDN settings.
- **Wire out (read):** transcode queue, GPU clocks, buffer health, origin load (the stack's metrics).
- **Wire in (write):** worker pools, bitrate-ladder cap and cache TTLs through the stack's API; GPU clocks through nvidia-smi (family 9).
- **Restore:** recorded; restored.
- **Run live?** modelled; the GPU path is live (family 9).

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5072	abr bitrate ladder cap	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5073	player buffer target	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5074	transcoder worker pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5075	live transcode gpu clocks	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
V5-5076	vod transcode batch power	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
V5-5077	packager workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 60 decisions
V5-5078	origin shield cache size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5079	edge cache ttl	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5080	segment duration target	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5081	cdn request coalescing	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5082	drm license server pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 85% full; reads the last 40 decisions
V5-5083	thumbnail sprite batch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 80% full; reads the last 10 decisions
V5-5084	media ingest admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5085	encoder lookahead frames	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global

Game Servers & Real-Time Interactive (12 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** Agones Fleets and the matchmaker, the game node pool.
- **Wire out (read):** allocated and ready servers, matchmaking waits, tick rate (Agones and the matchmaker's metrics).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire in (write):** Fleet replicas and buffer sizes by kubectl patch; matchmaking admission through its API.
- **Restore:** the Fleet spec recorded; restored.
- **Run live?** modelled; the API path is kubectl patch.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5086	agones fleet buffer size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5087	agones fleet min replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 60 decisions
V5-5088	agones fleet max replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 40 decisions
V5-5089	game server tick rate	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5090	players per server cap	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5091	matchmaking admission rate	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5092	matchmaking wait window	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5093	relay server pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5094	voice chat mixer pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5095	game node pool autoscaler	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5096	replay render batch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5097	cloud gaming gpu clocks	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Blockchain & Ledger Nodes (10 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `storage` (block, file or object storage), reached through the storage system's QoS and tiering API. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the node's configuration (cache sizes, peer limits, mempool) and its host's power profile.
- **Wire out (read):** block relay latency, mempool size, peer counts, validation backlog (the node's RPC).
- **Wire in (write):** cache and pool sizes through the node's config and RPC; the host's power profile through family 8.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5098	node db cache size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5099	mempool max size	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5100	max peer connections	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5101	script validation threads	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5102	block relay admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5103	rpc work queue depth	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5104	utxo cache flush interval	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5105	indexer batch workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5106	archive node storage tier	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	global
V5-5107	validator host power profile	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

CI/CD & Build Farms (10 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `batch` (batch and queued jobs), reached through the job queue (Kubernetes Jobs, Slurm, Spark). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Compute / AI / Cloud.

Wire it on your stack.

- **Native controller:** the runner scale set (actions-runner-controller, GitLab runners) and the build cache.
- **Wire out (read):** jobs queued, runners busy, cache hit rate (the controller's metrics).
- **Wire in (write):** min and max runners, build concurrency and cache size by kubectl patch of the scale set.
- **Restore:** the scale set spec recorded; restored.
- **Run live?** modelled; the API path is kubectl patch.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5108	runner scale set min runners	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5109	runner scale set max runners	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 60 decisions
V5-5110	build concurrency limit	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5111	build cache size	capacity	starts the machines the forecast needs before the rush lands	Compute; stack;	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	tower	
V5-5112	test shard parallelism	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5113	job queue admission	admission	at its limit on native (nothing paced or turned away): read and left native	Compute; stack; tower	global
V5-5114	artifact retention ttl	setpoint	left native: native already holds it inside its band (nothing to win)	Compute; stack; tower	global
V5-5115	build node cpu frequency	power	at its limit on native (the full clock): read and left native	Compute; stack; tower	global
V5-5116	remote execution workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Compute; stack; tower	machines started at 70% full; reads the last 20 decisions
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5117	warm runner pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line	Compute; stack; tower	machines started at 75% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			within one machine start, never fewer than native runs; hands back what it no longer needs at once		

Realm: Physics / Robotics / Autonomous (137 muscles of its own, 404 in its organism with the spine)

Automotive EV & Mobile Powertrain (14 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `ev_traction` (an electric vehicle traction motor), reached through the vehicle's motor controller (CAN; modelled only). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the vehicle's motor and battery controllers (CAN, the OEM's diagnostic interface).
- **Wire out (read):** torque, speed, state of charge, temperatures (CAN signals).
- **Wire in (write):** torque, regeneration and charge limits within the OEM's envelope.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1083	state of charge limits	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
1084	smart charging schedule	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
AUDIT-0045	traction torque limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0046	regen braking level	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0047	battery charge limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0048	battery discharge limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0049	battery thermal target	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0050	motor thermal limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0051	vehicle speed envelope	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
AUDIT-0052	energy recovery target	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0053	auxiliary power budget	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0054	fast charge current	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0055	fast charge voltage	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
AUDIT-0056	vehicle safe state	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Aviation & Autonomous Flight (28 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `flight_axis` (a flight-control axis), reached through the flight controller (modelled only). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the flight controller's own parameters: PX4 (MPC_XY_VEL_MAX, MPC_Z_VEL_MAX_UP, MPC_ACC_HOR, MC_ROLLRATE_MAX) and ArduPilot (WPNAV_SPEED, ATC_ACCEL_R_MAX), the battery failsafe.
- **Wire out (read):** mission progress, battery state, tracking error and near-miss distance over MAVLink telemetry.
- **Wire in (write):** the speed, acceleration and rate parameters over MAVLink PARAM_SET within the autopilot's own limits; failsafes and geofence never loosened.
- **Restore:** every parameter read (PARAM_REQUEST_READ) once and written back at the end.
- **Run live?** modelled: the swarm cells (results/live/V3_SWARM.md); the MAVLink path is written, not yet flown.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
481	throttle envelope	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
482	attitude target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
483	attitude rate target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
484	velocity target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
485	altitude target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
486	waypoint authority	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
487	flight hold	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
488	return to home	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
489	land action	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
490	mission admission	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
491	geofence response	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
492	failsafe selection	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
493	battery reserve threshold	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
494	actuator saturation envelope	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
495	flight mode transition	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
496	flight termination safe state	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
1079	attitude rate gains	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
1080	horizontal speed limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
1081	vertical speed limits	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
1082	acceleration jerk limits	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
V5-5143	px4 mpc xy vel max	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5144	px4 mpc z vel max up	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5145	px4 mpc acc hor	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5146	px4 mc rollrate max	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5147	ardupilot wpnav speed	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5148	ardupilot atc accel r max	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
V5-5149	drone battery failsafe reserve	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Physics; stack; tower	1.5 wobbles of margin on its line
V5-5150	swarm formation spacing	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

Robotics Fleet & Warehouse Automation (17 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `robot_fleet` (a fleet of robots or vehicles taking tasks), reached through the fleet manager's dispatch API. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Native controller:** the fleet manager's dispatch and charging rules (Open-RMF, the vendor fleet manager).
- **Wire out (read):** tasks waiting, robots active and charging, battery states (the fleet API).
- **Wire in (write):** active robot count, charge thresholds and zone admission through the fleet API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
449	robot dispatch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
450	task assignment	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
451	traffic reservation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
452	robot route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
453	charging dispatch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
454	battery reserve	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
455	elevator request	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
456	door request	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
457	conveyor speed	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
458	agv speed	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
459	warehouse zone admission	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
460	robot quarantine	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
461	fleet failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
462	human safe stop	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global
463	fleet concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
V5-5151	amr fleet charge threshold	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Physics; stack; tower	1.5 wobbles of margin on its line

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5152	amr fleet active robots	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	global

Robotics Motion Control (26 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `robot_joint` (a robot joint servo), reached through the robot controller (ROS 2, EtherCAT, the drive's fieldbus). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the robot's own controller: ros2_control and MoveIt parameters, the drive's limits over EtherCAT or the vendor fieldbus.
- **Wire out (read):** joint tracking error, effort, temperature, cycle time (joint_states, the drive's registers).
- **Wire in (write):** velocity and acceleration scaling, trajectory tolerances and controller rates through ROS 2 parameters (ros2 param set) or the drive's limit registers; never past the manufacturer's limits.
- **Restore:** every parameter read once (ros2 param get) and restored (ros2 param set).
- **Run live?** modelled: MuJoCo (results/live/V3_MUJOCO.md); the ROS 2 path is written, not yet run on a physical arm.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
433	joint position	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
434	joint velocity	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
435	joint acceleration	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
436	joint effort	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
437	cartesian velocity	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
438	trajectory speed	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
439	trajectory acceleration	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
440	jerk limit	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
441	collision margin	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
442	force limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
443	gripper force	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
444	locomotion speed	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
445	steering angle	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
446	braking force	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
447	balance correction	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
1076	trajectory tolerances	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
1077	velocity acceleration scaling	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
1078	controller update rate	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5135	ros2 executor threads	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Physics; stack; tower	machines started at 70% full; reads the last 40 decisions
V5-5136	ros2 qos history depth	setpoint	left native: native already holds it inside its band (nothing to win)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5137	ros2 control loop rate	setpoint	left native: native already holds it inside its band (nothing to win)	Physics; stack; tower	global
V5-5138	humanoid balance margin	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5139	humanoid gait speed	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5140	humanoid joint torque limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
V5-5141	humanoid step height	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
V5-5142	manipulator payload speed scaling	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Spacecraft & Flight Software (14 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `reaction_wheel` (a spacecraft reaction wheel), reached through the attitude controller (modelled only). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the flight software's command and mode tables (cFS, F Prime).
- **Wire out (read):** attitude error, wheel speeds, power and thermal state from telemetry.
- **Wire in (write):** payload duty cycle, communication allocation and wheel allocation through commands; safe modes never commanded.
- **Restore:** the command table recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
497	space command admission	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
499	flight task schedule	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
500	space mode transition	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
501	payload duty cycle	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
502	communication allocation	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
503	space power budget	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
504	space thermal command	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
505	attitude command envelope	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
506	reaction wheel allocation	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
507	rcs authority	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
508	safe mode transition	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
509	watchdog recovery	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
510	instrument activation	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
511	fault isolation	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global

Rail Traction & Train Control (14 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `rail_traction` (a train's traction and auxiliary systems), reached through the train control and management system and ATO (modelled only). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the train control and management system and ATO.
- **Wire out (read):** speed, traction effort, timetable margin, auxiliary power (TCMS telemetry).
- **Wire in (write):** traction and coasting targets within the ATO's envelope.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2054	traction effort limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2055	regenerative braking share	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2056	coasting speed target	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
2057	dwell time schedule	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2058	hvac duty cycle	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2059	train auxiliary power budget	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2060	platform approach speed	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
2061	acceleration rate setpoint	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
2062	wheel slip protection mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2063	traction motor thermal derate	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2064	catenary voltage limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2065	timetable recovery margin	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2066	headway target	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
2067	door release hold	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Marine Propulsion & Vessel Automation (12 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `marine_propulsion` (a ship's propulsion shaft and power plant), reached through the vessel automation and power management system (modelled only). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the vessel's automation and power management system.
- **Wire out (read):** shaft speed and power, fuel rate, engine load (the automation system).
- **Wire in (write):** shaft speed and power limits, engine staging within the manufacturer's envelope.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2068	shaft speed target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
2069	propeller pitch limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2070	shaft power limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2071	bow thruster duty	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2072	ballast pump mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2073	engine load sharing setpoint	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
2074	slow steaming speed target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2075	auxiliary engine staging	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
2076	shore power mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2077	hotel load budget	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2078	trim target	capacity	its own peak speed while tasks wait, back to its everyday speed near its heat limit or when its tracking strains (alone; inside a body, its everyday speed)	Physics; stack; tower	global
2079	rudder rate limit	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global

Elevators & Vertical Transport (12 muscles)

Each is a motor-driven axis: a robot joint, a flight-control surface, a reaction wheel, a traction motor; its class is `elevator_hoist` (an elevator or escalator drive and its group control), reached through the lift controller and destination dispatch (modelled only). Omni-Compass reads its tracking error and its load. Its home realm is Physics / Robotics / Autonomous.

Wire it on your stack.

- **Native controller:** the lift controller and destination dispatch.
- **Wire out (read):** calls waiting, car positions, drive temperature (the controller).
- **Wire in (write):** speed and dispatch modes within the manufacturer's limits; safety modes never written.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2146	hoist speed target	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2147	acceleration limit	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
2148	regen drive mode	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2149	standby power mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2150	destination dispatch schedule	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2151	car parking mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2152	door dwell hold	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2153	escalator speed target	capacity	at its limit on native (its everyday speed is the machine's limit): read and left native	Physics; stack; tower	global
2154	group capacity mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2155	motor thermal derate	power	at its limit on native (full torque): read and left native	Physics; stack; tower	global
2156	brake test schedule	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global
2157	fire recall mode	admission	at its limit on native (nothing paced or turned away): read and left native	Physics; stack; tower	global

Realm: Energy / Facility / Industrial (213 muscles of its own, 480 in its organism with the spine)

Building & Critical Environment HVAC (15 muscles)

Each is a data hall or building zone cooled by chillers, air handlers or fans; its class is `building` (a building zone), reached through the building management system. Omni-Compass reads its temperature against its limit. Its home realm is Energy / Facility / Industrial.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wire it on your stack.

- **Native controller:** the building management system (BACnet) and the AHU and zone controllers.
- **Wire out (read):** zone temperatures, airflows, duct static pressure, occupancy (BACnet reads).
- **Wire in (write):** zone setpoints, fan speeds and damper positions within their bands by BACnet write; the BMS's own sequences keep control.
- **Restore:** every setpoint read once and restored.
- **Run live?** modelled: CityLearn districts (results/live/V3_CITYLEARN.md); the BACnet path is written.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1094	setpoint reset trim and respond	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
1095	duct static pressure setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
1096	optimal start stop	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
AUDIT-0081	zone temperature target	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
AUDIT-0082	zone airflow	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
AUDIT-0083	ahu fan speed	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
AUDIT-0084	damper position	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
AUDIT-0085	economizer position	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0086	boiler setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
AUDIT-0087	heat pump mode	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0088	humidity target	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
AUDIT-0089	occupancy ventilation	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0090	building demand limit	power	at its limit on native (the site envelope at full): read and left native	Energy; stack; tower	global
AUDIT-0091	thermal storage dispatch	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
AUDIT-0092	hvac emergency mode	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Energy Storage & Microgrid (19 muscles)

Each is a battery, UPS or microgrid store with a load and a grid connection; its class is `microgrid` (a microgrid battery and loads), reached through the inverter or energy management system (IEEE 2030.5, SunSpec, OpenADR). Omni-Compass reads its draw on the grid connection and its reserve. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the battery's or site's energy management system and inverter (SunSpec, IEEE 2030.5, OpenADR, Modbus).
- **Wire out (read):** state of charge, grid import and export, PV output, load (the EMS or inverter registers).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire in (write):** the reserve setpoint, charge and discharge limits, import limit and curtailment through SunSpec or Modbus registers.
- **Restore:** registers read once and restored.
- **Run live?** modelled: CityLearn (results/live/V3_CITYLEARN.md) for the districts; the register path is written.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
513	battery charge power	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 10 decisions before it holds; keeps 0% of its line clear
514	battery discharge power	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
515	battery soc reserve	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0.75 wobbles of margin on its line
516	grid import limit	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	global
517	grid export limit	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 5% of its line clear
518	pv curtailment	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
519	ev charge power	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
520	heat pump power	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
521	electrolyzer power	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 5 decisions before it holds; keeps 0% of its line clear
522	microgrid demand limit	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	global
523	peak shaving	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line
524	time of use schedule	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	1 wobbles of margin on its line
525	energy load shed	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
526	flex load admission	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
527	storage dispatch	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
528	microgrid emergency reserve	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	1 wobbles of margin on its line
1085	volt var	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line
1086	volt watt	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line
1087	constant power factor reactive power	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	global

Facility & Grid Optimization (15 muscles)

Each is a battery, UPS or microgrid store with a load and a grid connection; its class is `facility` (a facility battery behind the meter), reached through the energy management system. Omni-Compass reads its draw on the grid connection and its reserve. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the facility's energy management system and demand-response gateway (OpenADR).
- **Wire out (read):** site power, utility signals, PUE, carbon intensity (the EMS and the utility's feed).
- **Wire in (write):** the site power budget, demand limit and battery dispatch through the EMS.
- **Restore:** recorded; restored.
- **Run live?** modelled.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
561	facility power budget	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
562	utility demand limit	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
563	demand response	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
564	electricity price gate	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
565	carbon intensity gate	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
566	renewable dispatch	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line
567	generator start stop	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line
568	site battery dispatch	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
569	pue target	setpoint	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	1 wobbles of margin on its line
570	cooling power budget	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
571	it power budget	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	0 wobbles of margin on its line; reads its line 3 decisions before it holds; keeps 0% of its line clear
572	rack power allocation	power	at its limit on native (full battery power): read and left native	Energy; stack; tower	global
573	facility peak guard	capacity	holds the charge for the line and clips only the draw that would cross it; a UPS lends only the charge above its outage floor	Energy; stack; tower	0 wobbles of margin on its line
574	grid frequency response	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
575	facility islanding	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Grid Transmission & Distribution (12 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `feeder_voltage` (a distribution feeder's voltage), reached through the distribution management system (IEC 61850, DNP3; modelled only). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wire it on your stack.

- **Native controller:** the distribution management system and the devices' own controllers (IEC 61850, DNP3): regulators, capacitor banks, inverters.
- **Wire out (read):** feeder voltages, loads, tap positions, inverter output (the DMS).
- **Wire in (write):** regulator and transformer taps, capacitor switching and inverter reactive power within the planning envelope; protection never written.
- **Restore:** every setting read once and restored.
- **Run live?** modelled: SimBench grids (results/live/V3_PANDAPOWER.md).

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0033	capacitor bank switch	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0034	voltage regulator tap	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0035	transformer tap	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0036	inverter real power	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0037	inverter reactive power	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0038	feeder voltage target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0039	feeder load transfer	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0040	distribution storage dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0041	demand response dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0042	frequency droop setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0043	grid protection mode	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0044	grid restoration sequence	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Industrial PLC & Process Automation (18 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `process` (an industrial process loop), reached through the PLC or DCS (OPC UA, EtherNet/IP, PROFINET). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the PLC or DCS loop (OPC UA, EtherNet/IP, PROFINET): the setpoint and the mode of each loop.
- **Wire out (read):** the process value, setpoint, output and alarm state of each loop (OPC UA reads).
- **Wire in (write):** the loop's setpoint within its safe band and its actuator range by OPC UA write; safety interlocks are never written.
- **Restore:** every setpoint read once and restored; a value outside the band is refused by the plug.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
465	plc cycle authority	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
466	machine cell admission	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
467	valve position	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
468	pump flow	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
469	compressor speed	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
470	heater power	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
471	furnace setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
472	pressure setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
473	temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
474	mass flow setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
475	tank level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
476	conveyor rate	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
477	feed rate	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
478	purge vent action	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
1088	controller mode	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
1089	alarm limits	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1090	safety interlock trip	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
1091	opc ua writes	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global

Semiconductor Fab & Precision Manufacturing (13 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `chamber` (a controlled chamber (clean room, kiln, reactor)), reached through the PLC or DCS. Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the fab's MES and each tool's controller (SECS/GEM).
- **Wire out (read):** tool queues, chamber states, process values (MES and GEM).
- **Wire in (write):** lot dispatch and tool admission through the MES; chamber recipes and parameters never written outside the qualified window.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1092	run to run control	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
1093	idle sleep mode	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0057	tool job dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0058	wafer route	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0059	chamber recipe selection	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0060	chamber temperature	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0061	chamber pressure	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0062	gas flow	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0063	rf power	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0064	vacuum pump speed	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0065	robot transfer rate	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0066	lot priority	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0068	tool quarantine	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Water Wastewater & Pumping (12 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `water` (a water or pumping process), reached through the SCADA system (Modbus, DNP3). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wire it on your stack.

- **Native controller:** the utility's SCADA (Modbus, DNP3) and the pump station controllers.
- **Wire out (read):** levels, pressures, flows, aeration and dosing (SCADA reads).
- **Wire in (write):** pump speeds, level and pressure targets, aeration and dosing within their bands by SCADA write; emergency shutdowns never written.
- **Restore:** every setpoint read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0069	pump speed water	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0070	valve position water	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0071	reservoir level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0072	line pressure target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0073	flow target water	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
AUDIT-0074	aeration rate	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0075	chemical dose rate	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
AUDIT-0076	filtration backwash	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0077	lift station dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0078	leak isolation	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0079	water demand shed	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
AUDIT-0080	water emergency shutdown	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Healthcare Critical Environments (13 muscles)

Each is a data hall or building zone cooled by chillers, air handlers or fans; its class is `hospital` (a hospital's critical rooms (operating rooms, isolation, pharmacy, imaging suites)), reached through the hospital's building management system (BACnet). Omni-Compass reads its temperature against its limit. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the hospital's building management system (BACnet) with its clinical limits.
- **Wire out (read):** room pressures, air changes, temperatures and humidity (BACnet reads).
- **Wire in (write):** setpoints within the clinical envelope by BACnet write; pressure cascades and alarms never loosened.
- **Restore:** every setpoint read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2001	operating room air change setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2002	isolation room pressure target	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
2003	patient room temperature setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
2004	surgical suite humidity target	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
2005	ahu supply air temperature	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
2006	pharmacy cold room setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
2007	sterile storage humidity setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Energy; stack; tower	global
2008	imaging suite cooling capacity	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
2009	chiller plant staging	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
2010	exhaust fan capacity	capacity	left to its own staging (native already has the cooling it needs: nothing to win)	Energy; stack; tower	global
2011	ward night setback mode	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2012	medical gas plant demand limit	power	at its limit on native (the site envelope at full): read and left native	Energy; stack; tower	global
2013	emergency power load shed	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Agriculture & Irrigation (14 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `irrigation` (pumps, pressure and climate on a farm or in a greenhouse), reached through the pump station controller, the pivot panel or the climate computer (Modbus, the vendor cloud). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the pump station controller, pivot panel or climate computer (Modbus, the vendor cloud).
- **Wire out (read):** pressure, soil moisture, temperature, flow (the controller's registers).
- **Wire in (write):** pump speed and climate setpoints within their bands by Modbus write.
- **Restore:** registers read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2026	irrigation pump speed	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2027	mainline pressure setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2028	soil moisture target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2029	pivot speed setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2030	fertigation dose	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2031	greenhouse temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2032	greenhouse co2 target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2033	vent position setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2034	grain dryer temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2035	cold storage temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2036	barn ventilation rate	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2037	milking vacuum level setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2038	well drawdown level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2039	drip zone dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Oil & Gas Pipelines (14 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `pipeline` (a pipeline segment with its compressors, pumps and valves), reached through pipeline SCADA (DNP3, Modbus, OPC UA). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** pipeline SCADA (DNP3, Modbus, OPC UA).
- **Wire out (read):** pressures, flows, line pack, compressor states (SCADA reads).
- **Wire in (write):** pressure and flow setpoints and unit staging within the safe envelope; protection never written.
- **Restore:** every setpoint read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2040	compressor discharge pressure setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2041	pump station suction pressure target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2042	line pack target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2043	pipeline flow setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2044	compressor unit staging	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2045	vfd pump speed	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2046	terminal tank level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2047	leak detection shutdown	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2048	batch interface dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2049	heater outlet temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2050	drag reducing agent dose	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2051	valve position target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2052	cathodic protection voltage	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2053	pressure protection priority	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Mining & Mineral Processing (14 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `mill` (a grinding, flotation or materials-handling circuit), reached through the plant DCS or PLC (OPC UA). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the plant DCS or PLC (OPC UA).
- **Wire out (read):** mill load, speed, pressures, densities, power (OPC UA reads).
- **Wire in (write):** loop setpoints within their bands by OPC UA write; shutdowns never written.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Restore:** every setpoint read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2092	sag mill load setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2093	mill speed target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2094	crusher gap setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2095	flotation aeration rate	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2096	cyclone feed pressure target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2097	thickener underflow density target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2098	reagent dose	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2099	conveyor speed setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2100	dewatering pump level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2101	ventilation on demand airflow	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2102	stockpile level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2103	slurry pump speed	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2104	tailings discharge shutdown	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2105	ore blend dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

District Heating & Cooling (13 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `district_heat` (a district heating or cooling network), reached through the network control system and substation controllers (Modbus, M-Bus). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the network control system and substation controllers (Modbus, M-Bus).
- **Wire out (read):** supply and return temperatures, differential pressure, storage level (the controllers).
- **Wire in (write):** supply temperature and pressure setpoints, pump speed and staging within their bands.
- **Restore:** registers read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2106	supply temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2107	return temperature target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2108	differential pressure setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2109	network pump speed	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2110	heat pump staging	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2111	chp dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2112	thermal storage level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2113	peak boiler heater output	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2114	substation flow limit	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2115	peak demand shed	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2116	outdoor reset setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2117	cooling network supply temperature	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2118	cooling storage level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global

Power Generation & Turbine Control (14 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `turbine` (a generating unit's governor, boiler or excitation loop), reached through the plant DCS and governor (OPC UA, IEC 61850; modelled only). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the plant DCS and the unit's governor (OPC UA, IEC 61850).
- **Wire out (read):** unit load, frequency, pressures, temperatures (the DCS).
- **Wire in (write):** load setpoints and ramp limits within the dispatch envelope; protection and rod positions never written.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2119	turbine speed droop setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2120	unit load setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2121	boiler steam pressure setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2122	feedwater level target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2123	agc participation limit	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2124	excitation voltage setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2125	hydro gate position target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2126	combustion air ratio setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2127	cooling water flow setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2128	inlet guide vane position	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2129	reserve dispatch priority	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2130	turbine ramp rate limit	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2131	emissions shutdown	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2132	nuclear rod position target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global

Renewable Generation & Inverter Control (13 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `inverter` (a plant of grid-support inverters or wind turbines), reached through the plant controller and inverter settings (SunSpec, IEC 61850, IEEE 1547). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the plant controller and inverter settings (SunSpec, IEC 61850, IEEE 1547).
- **Wire out (read):** active and reactive power, voltage, curtailment state (SunSpec registers).
- **Wire in (write):** volt-var and volt-watt setpoints, curtailment and ramp limits by SunSpec write within the interconnection agreement.
- **Restore:** registers read once and restored.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Run live?** modelled: SimBench grids solved by pandapower (results/live/V3_PANDAPOWER.md); the register path is written.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2133	inverter volt var setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2134	inverter volt watt setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2135	active power curtailment	power	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2136	plant reactive power target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2137	wind turbine yaw offset	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2138	pitch angle limit	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2139	rotor speed setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2140	inverter frequency droop setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2141	ramp rate limit	capacity	at its limit on native (the full actuator): read and left native	Energy; stack; tower	global
2142	tracker stow mode	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2143	string mppt voltage setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2144	noise mode schedule	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2145	ice detection shutdown	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Pharmaceutical & Food Manufacturing (14 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `batch_reactor` (a GMP batch reactor, fermenter or food process), reached through the batch control system (ISA-88, OPC UA). Omni-Compass reads how far the process sits from its band. Its home realm is Energy / Facility / Industrial.

Wire it on your stack.

- **Native controller:** the batch control system (ISA-88, OPC UA) with the validated recipe limits.
- **Wire out (read):** process values and phase states (OPC UA reads).
- **Wire in (write):** setpoints within the validated recipe band only; a value outside it is refused by the plug.
- **Restore:** every setpoint read once and restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2158	reactor temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2159	agitator speed setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2160	fermenter dissolved oxygen target	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2161	ph setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2162	pasteurizer holding temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2163	freezer tunnel temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2164	cip cycle dispatch	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2165	cleanroom pressure cascade setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2166	lyophilizer shelf temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2167	chromatography flow setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2168	steam sterilizer cycle priority	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2169	oven zone temperature setpoint	setpoint	left native: native already holds it inside its band (nothing to win)	Energy; stack; tower	global
2170	refrigerant compressor authority	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global
2171	batch hold quarantine	admission	at its limit on native (nothing paced or turned away): read and left native	Energy; stack; tower	global

Realm: Distribution / Specialized (217 muscles of its own, 484 in its organism with the spine)

Cache & Memory Services (16 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the cache's own configuration: Redis CONFIG SET, Memcached runtime settings.
- **Wire out (read):** hit rate, evictions, used memory, p95 (INFO, the cache's stats).
- **Wire in (write):** maxmemory and eviction policy by CONFIG SET; replicas and shards through the operator.
- **Restore:** the setting read once (CONFIG GET) before the first write and restored (CONFIG SET).
- **Run live?** live: tools/run_redis.py, V3_REDIS.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
305	cache size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native	Distribution; stack; tower	machines started at 75% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			runs; hands back what it no longer needs at once		
306	cache ttl	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
307	cache eviction policy	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
308	cache replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
309	cache sharding	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
310	cache prefetch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
311	cache writeback rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
312	cache admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
313	hot key isolation	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
314	cache connection limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
315	cache memory limit	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
316	cache compression	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
317	cache warmup	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
318	cache failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions
319	cache flush rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
1106	memory size threads	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

Commerce & Payment Systems (15 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `commerce` (a customer-facing service with bursts), reached through the Kubernetes API. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Wire it on your stack.

- **Native controller:** the payment platform's gateway and its routing rules.
- **Wire out (read):** authorisation latency, decline and retry rates, queue depth (the platform's metrics).
- **Wire in (write):** concurrency, timeout and route weights through the platform's admin API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
401	payment admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
402	payment concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
403	payment retry	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
404	payment timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
405	fraud review gate	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
406	authorization route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
407	processor route weight	setpoint	starts the machines the forecast needs before the rush	Distribution; stack; tower	machines started at 70% full; reads the last 20

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		decisions
408	transaction queue limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
409	idempotency window	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
410	order reservation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
411	inventory hold	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
412	checkout load shed	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
#	**Muscle (the setting's own name)**	**Knob**	**What Omni-Compass does with it**	**Organisms**	**Its own card**
413	refund queue rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		
414	settlement batch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
415	payment failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions

Data Analytics & ETL (15 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `batch` (batch and queued jobs), reached through the job queue (Kubernetes Jobs, Slurm, Spark). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** Spark's dynamic allocation and the SQL engine's slots (spark.dynamicAllocation, Flink's parallelism, warehouse slots).
- **Wire out (read):** executor count, task backlog, shuffle spill, stage times (the engine's metrics).
- **Wire in (write):** dynamic allocation min and max, parallelism and slots through the engine's config at submit or its REST API.
- **Restore:** the submit settings recorded; the next job launched from them.
- **Run live?** modelled.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
338	executor size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
339	dynamic allocation min	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
340	dynamic allocation max	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
341	shuffle partitions	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
342	shuffle bandwidth	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
343	etl concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
344	stage parallelism	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
345	query slots	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 85% full; reads the last 10 decisions
346	spill threshold	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
347	cache fraction	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 80% full; reads the last 20 decisions
348	batch interval	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 80% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
349	stream backpressure	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
350	data locality wait	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 80% full; reads the last 20 decisions
351	speculation policy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 10 decisions
352	analytics admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

Database & Transactions (19 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `database` (a database cluster), reached through the database operator (replicas, connection pools). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the database's own pooler and server settings: PgBouncer's admin console, MySQL SET GLOBAL, MongoDB setParameter, the database operator.
- **Wire out (read):** pool waits and active connections (SHOW POOLS), buffer-pool size and hit rate, cache size and evictions, p95 per statement.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire in (write):** PgBouncer default_pool_size through its console; MySQL innodb_buffer_pool_size by SET GLOBAL; MongoDB wiredTigerEngineRuntimeConfig cache_size by setParameter; replicas through the operator.
- **Restore:** the setting read once before the first write and restored; a failed read-back stops the writer.
- **Run live?** live: tools/run_pgbench.py, run_sysbench.py, run_ycsb.py, three-run tables V3_PGBENCH, V3_SYSBENCH, V3_YCSB.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
273	db replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions
275	db memory	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
276	db cache	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 90% full; reads the last 40 decisions
277	query concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
278	read route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
279	shard placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 40 decisions
280	db failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
281	replication lag gate	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
282	db write throttle	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
283	db pool resize	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
284	transaction concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
285	lock timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
286	checkpoint rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
287	vacuum compaction rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
1099	parallel workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions
1100	background writer	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
1101	synchronous replication	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
1102	buffer pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 40 decisions
1103	io capacity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions

Messaging & Streaming (22 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the broker's own controls: Kafka's admin API and consumer group, RabbitMQ policies, MQTT broker settings.
- **Wire out (read):** consumer lag, messages per second, p95 end to end, broker CPU (the broker's metrics, the consumer group's offsets).
- **Wire in (write):** the consumer group's size (consumers running), quotas and partition counts through the admin API.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Restore:** the group's size recorded; restored at the end.
- **Run live?** live: tools/run_kafka.py, V3_KAFKA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
289	partition count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
290	partition placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
291	producer quota	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
292	consumer quota	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
293	broker io quota	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
294	message retention	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
295	queue depth limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
296	consumer concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
297	producer batch size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
298	fetch batch size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
299	rebalance rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
300	replication factor	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
301	retry backoff	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
302	dead letter divert	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
303	stream priority	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
304	broker failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
1104	prefetch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
1105	memory disk alarm	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5124	mqtt broker max connections	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5125	mqtt max inflight messages	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5126	mqtt session expiry	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5127	broker cluster nodes	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

Runtime & Application (21 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the application runtime's own settings: thread pools, JVM heap and GC, worker counts, connection pools.
- **Wire out (read):** queue waits, GC pauses, worker busy share, p95 from the application's metrics.
- **Wire in (write):** worker and pool sizes through the application's admin endpoint, environment or config reload; JVM flags at restart only.
- **Restore:** the settings recorded; restored (a restart-bound setting is left native).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
353	worker count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 10 decisions
354	thread pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
355	jvm heap	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
356	gc budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
357	connection pool runtime	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
358	application cache size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
359	runtime memory	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions
360	async concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
361	event loop workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 80% full; reads the last 20 decisions
362	process count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
363	request timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
364	background workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
365	runtime cpu budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
366	runtime io budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
367	runtime restart	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
1108	go runtime	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions
1109	keepalive connection reuse	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5131	dns resolver cache size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
V5-5132	dns negative cache ttl	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5133	mail queue concurrency	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5134	mail retry interval	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global

Search, Indexing & Vector DB (16 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the search engine's settings API: OpenSearch/Elasticsearch cluster and index settings, the vector database's config.
- **Wire out (read):** indexing and search latency, queue rejections, merge pressure (the engine's stats API).
- **Wire in (write):** index refresh interval, merge throttling, shard counts and search thread pools through the settings API.
- **Restore:** settings recorded; restored.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
321	index workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 75% full; reads the last 20 decisions
322	index refresh rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
323	segment merge rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
324	search concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
325	search timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
326	shard count	capacity	starts the machines the forecast needs before the rush lands and clears work waiting	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		
327	shard replication	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
328	shard rebalance	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
329	vector search k	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
330	vector batch size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
331	embedding workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
332	index memory budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
333	query route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 60 decisions
334	hot shard isolation	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
335	search admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
1107	circuit breakers	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

Service Mesh & API Reliability (16 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Native controller:** the mesh's own policies: Istio DestinationRule and VirtualService, Linkerd ServiceProfile, Envoy filters.
- **Wire out (read):** request rate, error rate, p95 and outlier ejections from the mesh's telemetry.
- **Wire in (write):** connection pool, outlier detection, retry budget and traffic weights by kubectl patch of the policy objects.
- **Restore:** the policy objects recorded; restored.
- **Run live?** modelled; the API path is kubectl patch.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
241	circuit breaker	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
242	retry budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
243	service timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
244	service concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
245	connection pool	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
246	traffic divert	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
247	traffic mirror	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
248	canary weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions
249	outlier ejection	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
250	health threshold	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
251	dns traffic weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
252	session affinity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
253	request hedging	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
254	fault injection gate	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
255	service failover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
1097	load balancing policy	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

Telecom RAN & Edge Radio (12 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `ran` (a radio access network cell or site), reached through the RAN controller (O-RAN interfaces). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the RAN's near-real-time RIC and O-RAN interfaces (E2, O1).
- **Wire out (read):** PRB use, connected UEs, cell load, handover rates (the RIC's KPIs).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

- **Wire in (write):** scheduler weights, slice budgets and traffic steering through the RIC's xApps; transmit power within the licence.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0009	ran connection admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
AUDIT-0010	ran ue handover	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0011	ran cell traffic steering	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0012	ran slice resource budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
AUDIT-0013	ran prb allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0014	ran scheduler weight	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
AUDIT-0015	ran tx power	power	at its limit on native (the full clock): read and left native	Distribution; stack; tower	global
AUDIT-0016	ran antenna tilt	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0017	ran carrier enable	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0018	ran cell sleep	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0019	ran du cu placement	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
AUDIT-0020	ran fronthaul budget	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Workflow, Logistics & Fulfillment (15 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `workflow` (a workflow or pipeline engine), reached through the workflow engine's concurrency settings. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the workflow engine (Temporal, Airflow, Camunda) and the fulfilment system's dispatch rules.
- **Wire out (read):** task queue depth, worker utilisation, SLA misses (the engine's metrics).
- **Wire in (write):** worker rates, concurrency and retry policies through the engine's API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
417	workflow admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
418	workflow worker rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
419	task queue rate	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
420	workflow retry	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
421	workflow backoff	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
422	workflow timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
423	inventory allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
424	fulfillment route	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
425	warehouse queue	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
426	carrier selection	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
427	dispatch priority	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
428	shipment batch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
429	route replan	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
430	sla escalation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
431	compensation action	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 40 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Medical Imaging & Clinical Systems (12 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `clinical` (clinical systems: imaging archives, records, interface engines, monitoring gateways), reached through the application's own scaling and admission settings (Kubernetes, the vendor console). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the clinical application's own scaling and admission settings (Kubernetes, the vendor console).
- **Wire out (read):** queue depths, interface backlog, reconstruction wait (the application's metrics).
- **Wire in (write):** replicas, concurrency and rate limits through the Kubernetes API or the vendor console.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2014	pacs archive tier target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
2015	dicom router concurrency	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2016	ehr application replicas	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2017	hl7 interface queue limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2018	fhir api rate limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2019	reconstruction gpu workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
2020	modality worklist timeout	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2021	patient monitoring gateway capacity	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2022	lab analyzer batch window	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2023	telehealth session admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2024	clinical backup window	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2025	imaging prefetch priority	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Ports & Maritime Logistics (12 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `port` (a container terminal's cranes and vehicles taking moves), reached through the terminal operating system and fleet controllers. Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the terminal operating system and the equipment fleet controllers.
- **Wire out (read):** moves waiting, cranes active, gate queue, equipment charge (the TOS).
- **Wire in (write):** crane and vehicle allocation, gate rate and charging windows through the TOS.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2080	quay crane allocation	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
2081	yard crane fleet size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
2082	berth window admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2083	truck gate rate limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
2084	horizontal transport fleet size	capacity	starts the machines the forecast needs before the rush lands and clears work	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
			waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once		
2085	reefer plug power budget	power	at its limit on native (the full clock): read and left native	Distribution; stack; tower	global
2086	shore power connection capacity	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
2087	rail mounted gantry dispatch	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
2088	container dwell priority	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2089	vessel arrival pacing	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
2090	stacking height target	setpoint	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
2091	equipment charging window	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Content Delivery & Edge Cache (6 muscles)

Each is a regulated process: a temperature, pressure, flow, level, voltage or composition held at a setpoint; its class is `process` (an industrial process loop), reached through the PLC or DCS (OPC UA, EtherNet/IP, PROFINET). Omni-Compass reads how far the process sits from its band. Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the CDN's configuration API and the edge cache's settings.
- **Wire out (read):** hit ratio, origin load, TTLs (the CDN's metrics).
- **Wire in (write):** cache TTLs, origin-shield concurrency and prefetch through the CDN API.
- **Restore:** recorded; restored.
- **Run live?** modelled.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5039	cdn cache ttl	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5040	edge cache size	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
V5-5041	origin shield concurrency	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
V5-5042	prefetch aggressiveness	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5043	tiered cache promotion	capacity	at its limit on native (the full actuator): read and left native	Distribution; stack; tower	global
V5-5044	edge pop admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Financial Markets & Trading Systems (14 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `server` (an application service on servers or pods), reached through the Kubernetes API (HPA target and floor, pod resize). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the trading platform's gateway, matching engine and risk settings, the colocation BMS.
- **Wire out (read):** order latency, session counts, risk-check backlog, market-data fanout (the platform's metrics).
- **Wire in (write):** thread and session pools, conflation intervals and batch sizes through the platform's configuration; risk checks never relaxed.
- **Restore:** recorded; restored.
- **Run live?** modelled only.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5058	matching engine threads	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5059	order gateway sessions	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5060	order admission rate limit	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5061	pre trade risk check workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
V5-5062	market data fanout threads	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 10 decisions
V5-5063	market data conflation interval	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5064	fix session heartbeat interval	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5065	kernel bypass poll cores	power	at its limit on native (the full clock): read and left native	Distribution; stack; tower	global
V5-5066	tick store write batch	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5067	post trade settlement workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 80% full; reads the last 20 decisions
V5-5068	end of day risk batch power	power	at its limit on native (the full clock): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5069	colocation rack cooling setpoint	setpoint	cools the room ahead of the heat as it nears its limit or its cooling nears flat out; never warmer than native	Distribution; stack; tower	global
V5-5070	backtest grid nodes	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5071	surveillance alert queue workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global

Reliability, Security & Recovery (6 muscles)

Each is a pool of servers, pods, GPUs, links or disks serving a stream of requests or jobs; its class is `network` (network routing and switching), reached through the network controller (SDN, routing API). Omni-Compass reads how far its queue and its load sit toward the service line (queue or lateness, and load above half). Its home realm is Distribution / Specialized.

Wire it on your stack.

- **Native controller:** the platform's own recovery and security controls: rollout and rollback, PodDisruptionBudgets, the security hold, a kill switch.
- **Wire out (read):** error rate, rollout status, the security hold (a ConfigMap key), the kill file.
- **Wire in (write):** rollout pause and undo by kubectl; the security hold read, never written; the kill switch (tools/omni_switch.py) is a human's.
- **Restore:** every write recorded and undone on the lease.
- **Run live?** live in part: the security hold and kill switch run in every Kubernetes benchmark (omnicompass/master.py).

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

#	Muscle (the setting's own name)	Knob	What Omni-Compass does with it	Organisms	Its own card
V5-5118	ids capture threads	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	global
V5-5119	ids ring buffer size	setpoint	left native: native already holds it inside its band (nothing to win)	Distribution; stack; tower	global
V5-5120	ids rule group admission	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global
V5-5121	waf inspection workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 70% full; reads the last 20 decisions
V5-5122	siem ingest pipeline workers	capacity	starts the machines the forecast needs before the rush lands and clears work waiting in line within one machine start, never fewer than native runs; hands back what it no longer needs at once	Distribution; stack; tower	machines started at 80% full; reads the last 10 decisions
V5-5123	endpoint scan scheduling	admission	at its limit on native (nothing paced or turned away): read and left native	Distribution; stack; tower	global

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

APPENDIX

Appendix H. Source of the Engine

The engine that stands, omni-v7, is the 46 files named in `OMNI_V7.json` (digest d6d467b824c585f1): 41 Python files and 5 tables. The Python files are printed here in full from the repository, in the fingerprint's order, so that the book and the code can be read side by side and nothing in the mechanism is withheld from the owner: the Kubernetes governor, its muscles, the replica room, the quota budget and the two card governors (`omni_controller/`); the engine core, the compass law, the compass, the verdict, the conveyance law, the plug adapter, the nervous system, the master switch and the rest of the library (`omnicompass/`); the modelled plants, the harness, the presets, the max's arm and the card's model (`realms/`); and the three runners the fingerprint covers (`tools/`). The tables are the muscle catalogs: `realms/catalog_v5.csv` (the 1,107 muscles, printed muscle by muscle in the Muscles appendix with every card of `realms/muscle_cards_v5.csv`) and the earlier catalogs kept for their results (`realms/catalog.csv`, `realms/catalog_v1.csv`, `realms/wave4_families.csv`). `python3 tools/omni_version.py` hashes every one of the 46 and prints omni-v7 when none has changed; `verify.py` fails if a byte of them differs from the fingerprint.

`omni_controller/__init__.py`

5 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
```

`omni_controller/capacity.py`

123 lines.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Capacity guards for shared-host Kubernetes clusters.

The kind runner is one physical host even when Kubernetes reports seve
    ↪ ral nodes.

Sample the host's aggregate CPU counters and limit additional replicas
    ↪  to measured
headroom; an unavailable reading fails closed at the current replica c
    ↪ ount.
"""
from __future__ import annotations

import os
from pathlib import Path

KIND_SCALE_OUT_BUSY_LIMIT = 0.75

def one_host(nodes) -> bool:
    """Nodes that are containers on one machine (kind: providerID kind
    ↪ ://...): each reports the whole host's CPU as its
    own, so the cluster's real CPU is one host's, not the sum (the rep
    ↪ lica room on kind, results/live/REPLICA_ROOM.md:

    the cap raised to 30 served no more requests and ran 78% more pods
    ↪ )."""
    return bool(nodes) and all(str((n.get("spec") or {}).get("provider
    ↪ ID", "")).startswith("kind://") for n in nodes)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class HostCpuSampler:
    """Measure aggregate host CPU busy share from Linux /proc/stat."""

    def __init__(self, stat_path: str | os.PathLike[str] | None = None
    ↪ ):
        self.stat_path = Path(stat_path or os.environ.get("OMNI_HOST_P
    ↪ ROC_STAT", "/proc/stat"))
        self._previous: tuple[int, int] | None = None
        self.busy_share: float | None = None

    def sample(self) -> float | None:
        """Update the busy share since the previous sample, or None wi
    ↪ thout two valid samples."""
        try:
            line = next(row for row in self.stat_path.read_text().spli
    ↪ tlines() if row.startswith("cpu "))
            fields = [int(value) for value in line.split()[1:]]
            if len(fields) < 4:
                self._previous = None
                self.busy_share = None
                return None
            total = sum(fields)
            idle = fields[3] + (fields[4] if len(fields) > 4 else 0)
            current = (total, idle)
        except (OSError, StopIteration, ValueError):
            self._previous = None
            self.busy_share = None
            return None

        previous = self._previous
        self._previous = current
        if previous is None:
            self.busy_share = None
            return None
        dt, di = current[0] - previous[0], current[1] - previous[1]
        if dt <= 0 or di < 0 or di > dt:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            self.busy_share = None
            return None
        self.busy_share = (dt - di) / dt
        return self.busy_share

def kind_replica_ceiling(
    allocatable_cpu_m: int,
    other_requested_cpu_m: int,
    pod_request_cpu_m: int,
    current_replicas: int,
    host_busy_share: float | None,

    reserve_share: float = 0.10,
    max_busy_share: float = KIND_SCALE_OUT_BUSY_LIMIT,
) -> int:
    """Return a total replica ceiling for kind's single shared host.

    Keep the existing Kubernetes-request ceiling as a hard upper bound

    ↪ . The
    host observation then limits *new* replicas to the CPU left below
    ↪ the
    configured reserve. If a host reading is unavailable, do not autho
    ↪ rize
    scale-out on an unmeasured shared machine.

    """
    alloc = max(0, int(allocatable_cpu_m))
    other = max(0, int(other_requested_cpu_m))
    request = int(pod_request_cpu_m)
    current = max(0, int(current_replicas))
    if request <= 0 or alloc <= 0:

        return current


    request_ceiling = max(1, (alloc - other) // request - 1)
    request_ceiling = max(current, request_ceiling)
    if host_busy_share is None:
        return current
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    if not 0.0 <= host_busy_share <= 1.0:
        return current
    # A request-based headroom calculation can still authorize more po
    ↪ ds on a
    # host whose measured CPU is already under sustained pressure. At
    ↪ that

    # point, fail closed: do not expand the HPA cap until the host is
    ↪ below the
    # threshold. The threshold is a conservative starting guard for ki
    ↪ nd and
    # must be validated against the paired live workload before releas
    ↪ e.

    if host_busy_share >= min(1.0, max(0.0, float(max_busy_share))):
        return current

    reserve = min(0.95, max(0.0, float(reserve_share)))
    headroom_m = max(0, int(alloc * max(0.0, round(1.0 - reserve - hos
    ↪ t_busy_share, 12))))

    measured_ceiling = current + headroom_m // request
    return max(current, min(request_ceiling, measured_ceiling))


def bounded_replica_cap(
    operator_max: int,

    current_max: int,
    current_replicas: int,
    live_ceiling: int | None,
) -> int:
    """Recheck an Omni-raised HPA cap without setting it below live re
    ↪ plicas.

    If the live ceiling cannot be read, restore the operator's origina
    ↪ l cap;
    Kubernetes must still be allowed to keep its currently running rep
    ↪ licas.
    """
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    original = max(1, int(operator_max))
    cap = max(original, int(current_max))
    running = max(0, int(current_replicas))
    measured = original if live_ceiling is None else max(0, int(live_c
    ↪ eiling))
    return max(original, running, min(cap, measured))
```

omni_controller/controller.py

1228 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Omni-Compass live controller for a real Kubernetes cluster.

Modes
  observe   read the cluster every interval, run the fleet-mode govern

    ↪ or in OBSERVE, log every decision; no writes (default)
  target    additionally patch each HPA's CPU averageUtilization to rh
    ↪ o* (bounded, rate-limited); the Cluster Autoscaler and
            all node management remain unchanged
  nodepool  additionally size one node pool to the governor's recommen
    ↪ dation through --node-scale-cmd, a command template

            such as "aws autoscaling set-desired-capacity --auto-scali
    ↪ ng-group-name POOL --desired-capacity {n}"; the
            Cluster Autoscaler must not manage that pool
Laws (--law)
  governor  (default) the engine's allocation law sets the HPA target
    ↪ (rho*) and the closure law or the governor sizes the pool
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
compass      the compass law (omnicompass/compass_law.py) holds the
  ↪ service in its band, read as the GPU compass reads it: the mean
         response time of the latency window between the bare servi
  ↪ ce time (a tenth of --slo-ms) and --slo-ms. At the
         max (--dial max, the default) the balance point stands at
  ↪ --compass-center (0.3: well inside the line, so every

         rush finds its pods already there) and no machine the clus
  ↪ ter had on its own is ever given back; at the
         tune-down (--dial save) it is held at the v5 edge (omnicom
  ↪ pass/edge.py: the balance point moves with the
         service's own risk, 1 - (climb x reaction + 3.09 x wobble)
  ↪ , never below 0.4 unless a breach while machines were

         given back has taught it otherwise) and the verdict below
  ↪ gives machines back; p95 at or past the SLO, a blind
         sense or pods waiting for a place read as past the wall. I
  ↪ ts push and pull move two levers: each HPA's CPU target inside i
  ↪ ts cover (from 60% of the
         operator's target up to the operator's own, never tighter

  ↪ than native, so it only ever adds pods and gives them
         back) and the node pool (one machine back only while the f
  ↪ orce is clearly down, the position below the center
         and the nervous system's release gate open; past the 0.95
  ↪ wall, one machine up at once). The verdict
         (omnicompass/verdict.py, stepwise) decides how many machin

  ↪ es may be given back at all: while the service is
         calm, one more machine is given back on trial and the resp
  ↪ onse time of the requests served without it is set
         against the requests served just before and against the cl
  ↪ uster as it ran on its own at the start; at most
         --allow slower and that machine stays given back, slower t

  ↪ han that and it is taken back and not tried again
         for --verdict-recheck decisions. Where no machine passes,
  ↪ the pool stays as the cluster runs it alone. The
         six-state engine still runs every decision: it grants the
  ↪ authority, feeds the release gate and the compass,
         and is audited
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
Safety
  every node action passes through the shield (bounds, step limit); th
    ↪ e recommendation never falls below what the CPU
  requests of running and pending pods, or current usage, need, and ca
    ↪ pacity required by that floor is added in one step
  (the step limit applies only to the governor's own adjustments); --d

    ↪ ry-run logs intended writes without executing them; creating the
    ↪  kill file (or
  setting OMNI_KILL=1) restores every HPA target this controller chang
    ↪ ed, runs --node-restore-cmd if given, and returns to
  observe; every decision and action
  is appended to the audit log.

Requires kubectl on PATH with access to the cluster (metrics-server fo
    ↪ r kubectl top).
"""
from __future__ import annotations

import argparse, csv, json, math, os, re, shlex, subprocess, sys, time

from pathlib import Path
from types import SimpleNamespace

ROOT = Path(__file__).resolve().parents[1]
sys.path.insert(0, str(ROOT))
from omnicompass import master

from omnicompass.adapter import Governor, mode_law, OBSERVE
from omnicompass.shield import enforce, ShieldLimits
from omni_controller.muscles import Muscles, add_args as add_muscle_ar
    ↪ gs
from omni_controller.capacity import HostCpuSampler, bounded_replica_c
    ↪ ap, kind_replica_ceiling, one_host

ANNOTATION = "omnicompass.io/original-target-utilization"
RELEASE_PERIOD_S = 60.0   # the pool gives back at most one machine a
    ↪ minute (v7: a rate in time, not in decisions)
COMPASS_UP, COMPASS_DOWN, COMPASS_RELEASE = 0.10, 0.02, -0.2   # the c
    ↪ ompass's gains, the same on every muscle (realms/compass_arm.py)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
DEMAND_RISE = 0.05     # the demand moves: more than 5% between its le
    ↪ ast and its most over one HPA window
RANGE_ANN = "omnicompass.io/original-replica-range"


def to_milli(v: str) -> float:

    v = str(v).strip()
    if v.endswith("m"):
        return float(v[:-1])
    if v.endswith("n"):
        return float(v[:-1]) / 1e6
    return float(v) * 1000.0

# the reads the controller makes, as API paths (group/version, plural,
    ↪  namespaced): through one `kubectl proxy` started
# once (the same identity as every kubectl call), a read costs a local
    ↪  HTTP request instead of a new kubectl process

REST = {"nodes": ("api/v1", "nodes", False), "node": ("api/v1", "nodes
    ↪ ", False),
        "pods": ("api/v1", "pods", True), "pod": ("api/v1", "pods", Tr
    ↪ ue),
        "configmap": ("api/v1", "configmaps", True), "configmaps": ("a
    ↪ pi/v1", "configmaps", True),

        "resourcequota": ("api/v1", "resourcequotas", True),
        "deployment": ("apis/apps/v1", "deployments", True), "deployme
    ↪ nts": ("apis/apps/v1", "deployments", True),
        "statefulset": ("apis/apps/v1", "statefulsets", True),
        "jobs": ("apis/batch/v1", "jobs", True), "job": ("apis/batch/v
    ↪ 1", "jobs", True),

        "hpa": ("apis/autoscaling/v2", "horizontalpodautoscalers", Tru
    ↪ e)}


def milli_cpu(q):
    """A metrics-API CPU quantity (n, u, m or cores) as kubectl top pr
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ints it: millicores."""
    q = str(q)
    if q.endswith("n"):
        return f"{int(int(q[:-1]) / 1e6)}m"
    if q.endswith("u"):
        return f"{int(int(q[:-1]) / 1e3)}m"
    if q.endswith("m"):
        return q
    return f"{int(float(q) * 1000)}m"


class Kube:
    def __init__(self, kubectl: str = "kubectl", dry_run: bool = False
    ↪ , audit=None, proxy: bool = False):
        self.kubectl, self.dry_run, self.audit = kubectl, dry_run, aud
    ↪ it
        self.base = None
        if proxy:
            self._start_proxy()

    def _start_proxy(self):
        import atexit
        p = subprocess.Popen([self.kubectl, "proxy", "--port=0"], stdo
    ↪ ut=subprocess.PIPE, stderr=subprocess.STDOUT, text=True)
        line = p.stdout.readline()                # "Starting to serv
    ↪ e on 127.0.0.1:PORT"
        if "serve on" not in line:
            p.kill()
            return                                # no proxy: every r
    ↪ ead stays a kubectl call, as before
        self.base = "http://" + line.strip().split()[-1]
        self.proxy_proc = p
        atexit.register(p.terminate)

    def _rest(self, args):
        """The read through the proxy, in kubectl's own output shape,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ or None when it is not one the proxy serves."""
        import urllib.parse, urllib.request, urllib.error
        a = list(args)
        if not a:
            return None
        verb, rest = a[0], a[1:]

        if verb not in ("get", "top") or not rest:
            return None
        kind, rest = rest[0], rest[1:]
        ns, name, sel, fsel, out, allns = None, None, None, None, None
    ↪ , False
        i = 0

        while i < len(rest):
            t = rest[i]
            if t == "-A":
                allns = True
            elif t == "-n":
                ns = rest[i + 1]; i += 1

            elif t == "-l":
                sel = rest[i + 1]; i += 1
            elif t.startswith("--field-selector="):
                fsel = t.split("=", 1)[1]
            elif t == "-o":
                out = rest[i + 1]; i += 1

            elif t == "--no-headers":
                pass
            elif t.startswith("-"):
                return None                          # a flag the proxy
    ↪ path does not translate: use kubectl
            elif name is None:

                name = t
            else:
                return None
            i += 1
        if verb == "top":
            if kind not in ("nodes", "pods") or name:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            return None
        path = "apis/metrics.k8s.io/v1beta1/" + ("nodes" if kind =
↪ = "nodes" else (f"namespaces/{ns}/pods" if ns else "pods"))
    else:
        if kind not in REST or out not in ("json", "name"):
            return None

        group, plural, namespaced = REST[kind]
        path = f"{group}/" + (f"namespaces/{ns or 'default'}/" if
↪ namespaced and not allns else "") + plural
        if name:
            path += "/" + name
    q = {k: v for k, v in (("labelSelector", sel), ("fieldSelector

↪ ", fsel)) if v}
    url = f"{self.base}/{path}" + ("?" + urllib.parse.urlencode(q)
↪  if q else "")
    try:
        with urllib.request.urlopen(url, timeout=30) as r:
            body = json.loads(r.read())

    except urllib.error.HTTPError as e:
        raise subprocess.CalledProcessError(1, [self.kubectl, *arg
↪ s], stderr=f"API {e.code} for {path}")
    if verb == "top":
        if kind == "nodes":
            return "".join(f"{it['metadata']['name']} {milli_cpu(i

↪ t['usage']['cpu'])} 0% 0Mi 0%\n" for it in body.get("items", [])
↪ )
        return "".join(f"{it['metadata']['name']} {milli_cpu(sum(i
↪ nt(milli_cpu(c['usage']['cpu'])[:-1]) for c in it['containers'])
↪  / 1000)} 0Mi\n"
                       for it in body.get("items", []))

    if out == "name":
        single = REST[kind][1][:-1]
        return "".join(f"{single}/{it['metadata']['name']}\n" for
↪ it in body.get("items", [body] if name else []))
    return body
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def get(self, *args):
        if self.base:
            r = self._rest(args)
            if r is not None:
                return r
        out = subprocess.run([self.kubectl, *args], capture_output=Tru
    ↪ e, text=True, check=True).stdout
        return json.loads(out) if "-o" in args and "json" in args else
    ↪  out

    def write(self, args, why):
        self.audit({"write": [self.kubectl, *args], "why": why, "dry_r
    ↪ un": self.dry_run})
        if not self.dry_run:
            subprocess.run([self.kubectl, *args], capture_output=True,
    ↪  text=True, check=True)

IDLE_TAINT = "omnicompass.io/idle"   # PreferNoSchedule: new pods go e
    ↪ lsewhere first, but land here at once if they must


def closed(n):
    """A machine I have closed to new work: marked idle (PreferNoSched
    ↪ ule) or cordoned."""
    spec = n.get("spec", {})
    return bool(spec.get("unschedulable")) or any(t.get("key") == IDLE
    ↪ _TAINT for t in spec.get("taints") or [])

def schedulable(n):
    """Open to new work: not closed by me, and not tainted NoSchedule
    ↪ (the control plane)."""
    spec = n.get("spec", {})
    return not closed(n) and not any(t.get("effect") == "NoSchedule" f
    ↪ or t in spec.get("taints") or [])

CP_ROLES = ("node-role.kubernetes.io/control-plane", "node-role.kubern
    ↪ etes.io/master")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def is_ready(n):
    return any(c["type"] == "Ready" and c["status"] == "True" for c in
    ↪  n["status"].get("conditions", []))


def worker(n):

    """A machine the services' pods may run on: not the control plane
    ↪ (its role label, or its role's NoSchedule taint)."""
    labels = (n.get("metadata", {}) or {}).get("labels", {}) or {}
    if any(r in labels for r in CP_ROLES):
        return False
    return not any(t.get("key") in CP_ROLES and t.get("effect") == "No

    ↪ Schedule" for t in (n.get("spec", {}) or {}).get("taints") or []
    ↪ )


UNBOUNDED = sys.maxsize   # no top but what the system itself refuses
    ↪ (the founder's rule of 13 October: from 1 up, unbounded)

def apply_give_back_only(a):
    """The cloud's rule in one word (v7, --give-back-only; the founder
    ↪ 's order of 14 October, night): the governor moves
    the machines alone. No autoscaler moved (no service sensed), no pr

    ↪ ocessor conveyed, no power or clock capped, no pod
    resized, started or held, no replica cap raised, the tune-down dia
    ↪ l; machines are given back only after their own
    trial and woken on a breach, so the pods are exactly native's and
    ↪ the bill can only fall or stay. It is enforced here,
    in the governor, whatever else the command line says."""

    if not getattr(a, "give_back_only", False):
        return
    a.sensed = "none/none"
    for k in ("cap_deployments", "rightsize_deployments", "coldstart_d
    ↪ eployments", "power_cmd", "rapl_cmd", "cpufreq_cmd",
              "gpu_power_cmd", "cooling_cmd", "contain_namespaces"):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if hasattr(a, k):
            setattr(a, k, "")
    for k in ("batch", "batch_pace", "strict_replicas", "pod_reflex_wr
    ↪ ites"):
        if hasattr(a, k):
            setattr(a, k, False)

    a.replica_ceiling = 0
    a.dial = "save"
    if getattr(a, "mode", "observe") == "target":
        a.mode = "nodepool"

def autoscaler_room(k):
    """The machines the cluster's own autoscaler may still add, read l
    ↪ ive from its status (kube-system/
    cluster-autoscaler-status: per node group, its maxSize less the ma
    ↪ chines registered); None where no autoscaler reports
    (kind, a fixed pool, a pool Omni resizes with the operator's own c

    ↪ ommand). The founder's rule of 13 October: a
    muscle's top is what the system itself can hold, read live."""
    try:
        text = str(((k.get("get", "configmap", "cluster-autoscaler-sta
    ↪ tus", "-n", "kube-system", "-o", "json") or {})
                    .get("data", {}) or {}).get("status", ""))

    except Exception:
        return None
    if not text.strip():
        return None
    room = 0
    for line in text.splitlines():

    ↪ # the plain format: one node group's health per line
        m = re.search(r"registered=(\d+).*?maxSize=(\d+)", line)
        if m:
            room += max(0, int(m.group(2)) - int(m.group(1)))
    if room == 0 and "maxSize:" in text:
    ↪ # the YAML format of newer autoscalers
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        for block in re.split(r"\n\s*-\s*name:", text)[1:]:
            mx = re.search(r"maxSize:\s*(\d+)", block)
            reg = re.search(r"registered:\s*\n\s*total:\s*(\d+)", bloc
    ↪ k)
            if mx and reg:
                room += max(0, int(mx.group(1)) - int(reg.group(1)))

    return room


def snapshot(k: Kube, active_only: bool = False):
    nodes = k.get("get", "nodes", "-o", "json")["items"]
    ready = [n for n in nodes if is_ready(n)]

    pool = sum(1 for n in ready if worker(n))
    ↪ # every ready worker, open or closed: the lever's pool
    pods = k.get("get", "pods", "-A", "-o", "json")["items"]
    if active_only:
        # in service: open to new work, or still carrying work (an idl
    ↪ ing worker keeps serving until its work is gone)

        carrying = {p["spec"].get("nodeName") for p in pods if p["stat
    ↪ us"].get("phase") in ("Running", "Pending")
                    and all(o.get("kind") != "DaemonSet" for o in p.ge
    ↪ t("metadata", {}).get("ownerReferences", []) or [])}
        ready = [n for n in ready if schedulable(n) or (closed(n) and
    ↪ n["metadata"]["name"] in carrying)]

    # open: the machines I keep open to new work. My machine orders ar
    ↪ e counted here; a machine I closed that still
    # carries work stays in service (in the energy count) until its wo
    ↪ rk leaves on its own
    open_n = sum(1 for n in ready if schedulable(n))
    names = {n["metadata"]["name"] for n in ready}

    alloc = sum(to_milli(n["status"]["allocatable"]["cpu"]) for n in r
    ↪ eady)
    req = sum(to_milli(c.get("resources", {}).get("requests", {}).get(
    ↪ "cpu", "0")) for p in pods
              if p["status"].get("phase") in ("Running", "Pending")
              and (not active_only or p["status"].get("phase") == "Pen
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ding" or p["spec"].get("nodeName") in names)
              for c in p["spec"]["containers"])
    pending = sum(1 for p in pods if p["status"].get("phase") == "Pend
    ↪ ing")
    top = k.get("top", "nodes", "--no-headers")
    used = sum(to_milli(line.split()[1]) for line in top.strip().split
    ↪ lines()
               if line.strip() and (not active_only or line.split()[0]
    ↪  in names))
    hpas = k.get("get", "hpa", "-A", "-o", "json")["items"]
    return {"nodes": len(ready), "open": open_n if active_only else le
    ↪ n(ready), "alloc_m": alloc, "req_m": req, "used_m": used, "pendi
    ↪ ng": pending, "hpas": hpas,
            "pool": pool}


def cpu_target(h):
    for i, m in enumerate(h["spec"].get("metrics", [])):
        if m.get("type") == "Resource" and m["resource"]["name"] == "c
    ↪ pu" and "averageUtilization" in m["resource"]["target"]:
            return i, int(m["resource"]["target"]["averageUtilization""
    ↪ ])
    return None, None

class Controller:
    def __init__(self, a, kube: Kube | None = None):
        self.a = a
        apply_give_back_only(a)
        # v7: every rule of the governor counts in seconds; its count
    ↪ of decisions follows from the decision period, so
        # the period can change without changing any rule's time (at -
    ↪ -interval 60 every count is the one v6 used)
        # --interval 0 is a model's or a test's loop that does not sle
    ↪ ep: each call is one decision of the shipped minute
        period = float(a.interval) if float(a.interval) > 0 else 60.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        per = lambda sec: max(1, int(round(float(sec) / period)))
        pick = lambda n, sec: int(n) if n is not None else per(sec)
        self.n_slo_clear = pick(getattr(a, "slo_clear", None), getattr
    ↪ (a, "slo_clear_s", 180.0))
        self.n_cruise_after = pick(getattr(a, "cruise_after", None), g
    ↪ etattr(a, "cruise_after_s", 120.0)) \

            if getattr(a, "cruise_after", None) != 0 else 0
        self.n_strict_window = pick(getattr(a, "strict_window", None),
    ↪  getattr(a, "strict_window_s", 300.0))
        self.n_verdict_every = pick(getattr(a, "verdict_every", None),
    ↪  getattr(a, "verdict_every_s", 600.0))
        self.n_verdict_recheck = pick(getattr(a, "verdict_recheck", No

    ↪ ne), getattr(a, "verdict_recheck_s", 7200.0))
        self.n_verdict_trial = per(getattr(a, "verdict_trial_s", 1200.
    ↪ 0))
        self.step_scale = period / 60.0               # the compass's
    ↪  gains are per minute: a decision moves its share of one
        self.n_release = per(RELEASE_PERIOD_S)        # decisions bet

    ↪ ween two machines given back (at most one a minute)
        self.decisions = 0                            # decisions tak
    ↪ en, the governor's own clock for the rules above
        self.last_release = None                      # the decision
    ↪ at which the pool last gave a machine back
        self.log = open(a.audit, "a") if a.audit else None

        self.k = kube or Kube(a.kubectl, a.dry_run, self.audit, proxy=
    ↪ not getattr(a, "no_api_proxy", False))
        self.k.audit = self.audit
        self.host_cpu = HostCpuSampler()   # shared-host signal for ki
    ↪ nd; None means no scale-out proof
        self.g = Governor(law=mode_law("fleet")); self.g.set_mode(OBSE

    ↪ RVE)
        # the machine organ's own engine view: fed with machine-attrib
    ↪ utable pressure only (pods waiting for a place)
        self.gn = Governor(law=mode_law("fleet")); self.gn.set_mode(OB
    ↪ SERVE)
        self.rec_n = None
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.refused_at = None         # the first machine count the p
    ↪ ool refused (its top, read live), if any
        self.changed = {}
        self.target_at = {}            # (ns, hpa) -> when I last set
    ↪ its target
        self.nodes_restored = False

        self.m = Muscles(self.k, a, self.audit)
        self.cl = None
        if getattr(a, "closure", ""):
            from omnicompass.closure import ClosureLaw, ClosureNodes
            law = json.load(open(a.closure))
            law = law.get("setting", law).get("closure", law)

            law = {k: v for k, v in law.items() if k != "site"}
            # live decisions are 60 s apart, not simulator ticks: a ri
    ↪ se the release band absorbs over the release horizon
            # does not veto a release (derived from the band itself, n
    ↪ o new constant)
            from omnicompass.nervous_system import BAND

            law["rho_max"] = min(law.get("rho_max", 0.95), BAND[1])
    ↪   # the living band: no machine filled past 95%
            law.setdefault("turn_rise", law.get("delta_rel", -1.0) if
    ↪ law.get("delta_rel", -1.0) >= 0 else law.get("delta", 0.05))
            self.cl = ClosureNodes(ClosureLaw(**law))
        self.lp_hist = []

        self.cmd_nodes = None          # efferent record: the node cou
    ↪ nt last commanded (proprioception reads it back)
        self.cmd_hpa = {}              # efferent record: HPA targets
    ↪ last written
        from omnicompass.compass import Compass
        gp = self.g.p                  # the compass reads the engine

    ↪ in the engine's own parameters
        self.compass = Compass(E_max=gp.E_max, alpha_s=gp.alpha_s, bet
    ↪ a_s=gp.beta_s, delta=gp.delta)
        self.s_floor = None            # bare service time (ms): the f
    ↪ astest a request is served with no queue ahead of it
        self.reflex = {}               # (ns, name) -> replica floor t
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
↪ he pod reflex holds while the queue says it is needed
    self.pod_cap = {}              # (ns, name) -> request / limit
↪  share: what the HPA's target means in queue terms
    self.compass_law = None
    self.edge = None
    self.dial = getattr(a, "dial", "max")

    if getattr(a, "law", "governor") == "compass":
        from omnicompass.compass_law import Band, CompassLaw
        # the max (the default dial): the service held well inside
↪  its line (the compass's balance point at
        # --compass-center, 0.3 at the max: more room than the lin
↪ e, so every rush finds pods already there), no

        # machine ever given back below what the cluster ran on it
↪ s own; the tune-down (--dial save): the v5 edge
        # moves the balance point toward the line and the verdict
↪ gives machines back where the response time allows
        center = getattr(a, "compass_center", None)
        if center is None:

            center = 0.3 if self.dial == "max" else 0.4
        # one decision every --interval s; the service follows a t
↪ arget in about one HPA sync plus a pod start (tau)
        self.compass_law = CompassLaw(Band(0.0, 1.0, center=center
↪ ), dt=a.interval,
                          tau=getattr(a, "compass_tau", 60.0), kp=1

↪ .0, smooth=0.3)
        self.compass_law.kd *= 3.0                    # the same p
↪ ush as on every realm muscle (realms/compass_arm.py)
        # the v5 edge (the tune-down only): the knob's reaction is
↪  the time the service takes to follow it (one HPA
        # sync and a pod start, --compass-tau), in decisions

        from omnicompass.edge import Edge
        self.edge = Edge(react=getattr(a, "compass_tau", 60.0) / a
↪ .interval) if self.dial == "save" else None
        self.edge_base = center
        from omnicompass.verdict import Verdict
        self.verdict = Verdict(tolerance=getattr(a, "allow", 0.02)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ , min_samples=getattr(a, "verdict_samples", 200),
                                  probe_every=self.n_verdict_every, r
    ↪ echeck=self.n_verdict_recheck,
                                  max_trial=self.n_verdict_trial, inc
    ↪ remental=True)
        self.n_native = None          # the machines the cluster ran
    ↪ on its own when Omni started (the verdict's step 0)
        self.cruise = False           # cruise (rule 7): work waiting
    ↪  for a place, so every machine in service until the line is empt
    ↪ y
        self.cruise_hits = 0; self.cruise_clear = 0
        self.lat_t = None             # elapsed_seconds of the last r
    ↪ equest the verdict has seen
        self.compass_law_x = {}              # (ns, name) -> the comp
    ↪ ass's continuous HPA target, before rounding
        self.demand = {}              # (ns, hpa) -> [(time, demand)]
    ↪ : the CPU its pods use, in units of one pod's request
        self.pinned = {}              # (ns, hpa) -> [time]: decision
    ↪ s at which the autoscaler stood at its replica cap

    def _sensed(self, h):
        """Whether the probe senses the service this HPA scales (--sen
    ↪ sed ns/deployment,...; empty: every HPA, the
        single-service case). A muscle whose service I cannot sense st
    ↪ ays at the operator's own target: the probe's
        response time says nothing about it, and more pods for it comp
    ↪ ete for the machines of the service I do sense."""
        sel = [t.strip() for t in getattr(self.a, "sensed", "").split(
    ↪ ",") if t.strip()]
        ref = (h.get("spec", {}).get("scaleTargetRef", {}) or {}).get(
    ↪ "name", "")
        return not sel or f'{h["metadata"]["namespace"]}/{ref}' in sel

    def _app_demand(self, h):
        """The demand on an HPA's service, read from the autoscaler's
    ↪ own status: its pods' mean CPU utilisation (of
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    their request) times the pods running, i.e. the CPU used in un
↪ its of one pod's request. None if not reported."""
    st = h.get("status", {}) or {}
    for m in st.get("currentMetrics", []) or []:
        if m.get("type") == "Resource" and (m.get("resource") or {
↪ }).get("name") == "cpu":
            u = (m["resource"].get("current") or {}).get("averageU
↪ tilization")
            if u is not None:
                return float(u) / 100.0 * int(st.get("currentRepli
↪ cas", 0) or 0)
    return None

def _at_idle(self, h):
    """Whether an HPA's service stands at idle: at its least pods
↪ (spec.minReplicas), wanting no more, and running at
    no more than half its target utilisation. A served service is
↪ never at zero CPU (a health probe, a client's

    keep-alive), so idle is read from the autoscaler's own floor,
↪ not from a zero reading (amendment 9)."""
    lo = int((h.get("spec", {}) or {}).get("minReplicas", 1) or 1)
    st = h.get("status", {}) or {}
    cur, want = int(st.get("currentReplicas", 0) or 0), int(st.get
↪ ("desiredReplicas", 0) or 0)

    _, target = cpu_target(h)
    u = None
    for m in st.get("currentMetrics", []) or []:
        if m.get("type") == "Resource" and (m.get("resource") or {
↪ }).get("name") == "cpu":
            u = (m["resource"].get("current") or {}).get("averageU

↪ tilization")
    return cur == lo and want <= lo and u is not None and target i
↪ s not None and float(u) <= 0.5 * float(target)


def _rising(self, key, win):
    """Whether the demand is still growing: now above (1 + DEMAND_
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ RISE) times its least over the last window.
        While it grows, the pods a breach called are still owed to it;
    ↪  handing the operator's target back would remove
        them and start them again on the next rise."""
        now = time.time(); h = self.demand.get(key, []); past = [d for
    ↪  t, d in h if now - t <= win]

        return bool(past) and h[-1][1] > (1.0 + DEMAND_RISE) * min(pas
    ↪ t)


    def _steady(self, key, win):
        """Whether the demand has held still for one whole window: sam
    ↪ ples spanning it, its most within (1 +

        DEMAND_RISE) of its least. The autoscaler itself removes pods
    ↪ only after its scale-down window; a raise of the
        target (fewer, larger pods) waits for the same, so pods are ne
    ↪ ver removed from a demand that is still moving
        and started again when it rises."""
        now = time.time(); h = [(t, d) for t, d in self.demand.get(key

    ↪ , []) if now - t <= win]
        # a pinned gauge is not a steady demand: while the autoscaler
    ↪ stands at its replica cap, every pod is as busy
        # as it can be and the reading cannot rise however much the lo
    ↪ ad does; a window that touched the cap is not
        # steady (the wandering test: a target raised at the cap was t

    ↪ aken back on the next climb, 1.5 pod starts a run)
        if any(now - t <= win for t in self.pinned.get(key, [])):
            return False
        return bool(h) and now - h[0][0] >= 0.9 * win and max(d for _,
    ↪  d in h) <= (1.0 + DEMAND_RISE) * min(d for _, d in h)

    def _machine_room(self, pool):
        """The machines the system can still add to a pool of `pool` r
    ↪ eady workers, read live: up to the operator's own
        --max-nodes where given; else what the cluster's own autoscale
    ↪ r may add (its status); where Omni resizes the pool itself with
    ↪ the operator's command and no autoscaler
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    reports, no top but the one the pool shows: one under the firs
↪ t count it refused (none refused: unbounded);
    otherwise none (a fixed pool)."""
    if (self.a.max_nodes or 0) > 0:
        return max(0, int(self.a.max_nodes) - pool)
↪    # the operator's own top

    room = autoscaler_room(self.k)
    if room is not None:
        return room
    if self.a.mode == "nodepool" and self.a.node_scale_cmd:
        return UNBOUNDED if self.refused_at is None else max(0, se
↪ lf.refused_at - 1 - pool)

    return 0


def _max_nodes(self, s):
    """The machine lever's top, read live (the founder's rule of 1
↪ 3 October: from the floor up to what the system
    itself holds, never a number written in code): the operator's

↪ --max-nodes where given; else every ready worker
    the cluster has (the pool the lever opens and closes) plus the
↪  machines the system can still add."""
    if (self.a.max_nodes or 0) > 0:
        return int(self.a.max_nodes)
    if "_top" not in s:

↪     # read once a snapshot
        pool = int(s.get("pool", s["nodes"]))
        s["_top"] = max(int(self.a.min_nodes), min(UNBOUNDED, pool
↪  + self._machine_room(pool)))
    return s["_top"]

def _pool_command(self, n, n_now, why, **extra):
    """One node-pool command (the operator's own, --node-scale-cmd
↪ ). A count the pool refuses is its top, read live:
    the lever stays one under it from then on, and the decision go
↪ es on (nothing else is held back by it)."""
    cmd = self.a.node_scale_cmd.format(n=n)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.audit({"write": shlex.split(cmd), "why": why, "dry_run":
    ↪ self.a.dry_run, **extra})
        if self.a.dry_run:
            return True
        try:
            subprocess.run(shlex.split(cmd), check=True)

            return True
        except subprocess.CalledProcessError as e:
            if n > n_now:
                self.refused_at = n if self.refused_at is None else mi
    ↪ n(self.refused_at, n)
            self.audit({"refused": {"nodes": n, "now": n_now, "code":

    ↪ e.returncode}, "why": why,
                        "pool_top": None if self.refused_at is None el
    ↪ se self.refused_at - 1})
            return False


    def _live_ceiling(self, h):

        """The most replicas the machines can hold, one pod under it,
    ↪ read live: the allocatable CPU of every ready worker
        (closed ones included: the machine lever opens them) and of th
    ↪ e machines the system can still add, less the CPU
        every other pod asks for, in units of one of this service's po
    ↪ ds; where every node is a container on one machine

        (kind), that machine's CPU once. None where it cannot be read.
    ↪ """
        ref = (h.get("spec") or {}).get("scaleTargetRef") or {}
        ns = h["metadata"]["namespace"]
        if ref.get("kind") != "Deployment" or not ref.get("name"):
            return None

        try:
            dep = self.k.get("get", "deployment", ref["name"], "-n", n
    ↪ s, "-o", "json")
            nodes = [n for n in self.k.get("get", "nodes", "-o", "json
    ↪ ")["items"] if is_ready(n) and worker(n)]
            pods = self.k.get("get", "pods", "-A", "-o", "json")["item
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ s"]
        except Exception:
            return None
        tpl = dep["spec"]["template"]["spec"]
        req = sum(to_milli(c.get("resources", {}).get("requests", {}).
    ↪ get("cpu", "0")) for c in tpl.get("containers", []))

        if req <= 0 or not nodes:
            return None
        shared_host = one_host(nodes)
        if shared_host:
            # kind nodes are containers on this machine: count its CPU
    ↪  once, then use /proc/stat busy share

            # so host-side load generators and processes outside Kuber
    ↪ netes consume the same capacity budget.
            alloc = max(to_milli(n["status"]["allocatable"]["cpu"]) fo
    ↪ r n in nodes)
        else:
            alloc = sum(to_milli(n["status"]["allocatable"]["cpu"]) fo

    ↪ r n in nodes)
            alloc += self._machine_room(len(nodes)) * alloc / len(node
    ↪ s)
        sel = (dep["spec"].get("selector") or {}).get("matchLabels") o
    ↪ r {}
        names = {n["metadata"]["name"] for n in nodes}

        mine = lambda p: p["metadata"].get("namespace") == ns and sel
    ↪ and all((p["metadata"].get("labels") or {}).get(k_) == v for k_,
    ↪  v in sel.items())
        other = sum(to_milli(c.get("resources", {}).get("requests", {}
    ↪ ).get("cpu", "0")) for p in pods
                    if p["status"].get("phase") in ("Running", "Pendin

    ↪ g") and not mine(p)
                    and (p["spec"].get("nodeName") in names or p["stat
    ↪ us"].get("phase") == "Pending")
                    for c in p["spec"]["containers"])
        if shared_host:
            current = int((h.get("status") or {}).get("currentReplicas
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ", 0) or 0)
            return kind_replica_ceiling(alloc, int(other), int(req), c
    ↪ urrent, self.host_cpu.busy_share)
        return max(1, int((alloc - other) // req) - 1)

    def _replica_room(self, h, ns, name, win, obs, s):

        """The HPA's replica cap as a lever, up to what the machines c
    ↪ an hold, one pod under it, read live (the
        founder's rule of 13 October; --replica-ceiling N sets a ceili
    ↪ ng of the operator's own, 0 keeps the operator's cap
        unmoved). Only for a sensed service under the compass law. Whi
    ↪ le the autoscaler

        stands at its cap and the compass is at or past its centre (or
    ↪  the line is breached), the cap is raised to the
        replicas the autoscaler's own arithmetic asks for, ceil(r x u
    ↪ / x), never past the ceiling; once the demand has
        held still for one window, the compass is under its centre, no
    ↪ thing breaches and that arithmetic fits the

        operator's own cap again, the cap returns to it. The operator'
    ↪ s range is recorded before the first change, and
        the reset restores it."""
        given = int(getattr(self.a, "replica_ceiling", -1))
        if given == 0 or self.compass_law is None:
            return

        spec = h.get("spec", {}); st = h.get("status", {}) or {}
        ann = h["metadata"].get("annotations", {}) or {}
        lo0, hi0 = (int(x) for x in ann.get(RANGE_ANN, f"{spec.get('mi
    ↪ nReplicas', 1)},{spec.get('maxReplicas', 1)}").split(","))
        cap = int(spec.get("maxReplicas", hi0)); cur = int(st.get("cur
    ↪ rentReplicas", 0) or 0)

        _, tgt = cpu_target(h); dem = self._app_demand(h)
        if not tgt or dem is None:
            return
        need = int(math.ceil(100.0 * dem / float(tgt) - 1e-9))      #
    ↪ the replicas the autoscaler's arithmetic asks for
        pressed = self.compass_law.p >= self.compass_law.band.center o
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ r not obs["slo_clean"]
        ceil_ = given if given > 0 else None
        # Once Omni has raised the cap, refresh the shared-host ceilin
    ↪ g every tick:
        # utilization can climb after the first decision. Keep the liv
    ↪ e replica count

        # runnable if the refreshed ceiling is below it.
        if ceil_ is None and ((cur >= cap and pressed and need > cap)
    ↪ or cap > hi0):
            ceil_ = self._live_ceiling(h)
        if cap > hi0:
            safe_cap = bounded_replica_cap(hi0, cap, cur, ceil_)

            if safe_cap < cap:
                self.k.write(["patch", "hpa", name, "-n", ns, "--type=
    ↪ merge", "-p", json.dumps({"spec": {"maxReplicas": safe_cap}})],
                             f"replica room: cap {cap} -> {safe_cap} (
    ↪ live ceiling {ceil_}; current replicas {cur})")
                return

        if cur >= cap and pressed and need > cap and ceil_ is not None
    ↪  and cap < ceil_:
            new = min(ceil_, need)
            if RANGE_ANN not in ann:
                self.k.write(["annotate", "hpa", name, "-n", ns, "--ov
    ↪ erwrite", f"{RANGE_ANN}={lo0},{hi0}"], "replica room: record the

    ↪  operator's range")
            self.k.write(["patch", "hpa", name, "-n", ns, "--type=merg
    ↪ e", "-p", json.dumps({"spec": {"maxReplicas": new}})],
                         f"replica room: cap {cap} -> {new} (at the ca
    ↪ p, {need} asked, ceiling {ceil_})")
        elif cap > hi0 and need <= hi0 and self.compass_law.p < self.c

    ↪ ompass_law.band.center and obs["slo_clean"] and self._steady((ns
    ↪ , name), win):
            self.k.write(["patch", "hpa", name, "-n", ns, "--type=merg
    ↪ e", "-p", json.dumps({"spec": {"maxReplicas": hi0}})],
                         f"replica room: cap {cap} -> {hi0}, the opera
    ↪ tor's own (demand steady, {need} asked)")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            if int(spec.get("minReplicas", lo0)) == lo0:
                self.k.write(["annotate", "hpa", name, "-n", ns, f"{RA
    ↪ NGE_ANN}-"], "replica room: operator's range back, record remove
    ↪ d")

    def _new_latencies(self):

        """Response times (ms) of the requests served since the last d
    ↪ ecision (the probe's latency file)."""
        lf = getattr(self.a, "latency_file", "")
        if not lf:
            return []
        try:

            rows = list(csv.DictReader(open(lf)))
        except OSError:
            return []
        out, last = [], self.lat_t
        for row in rows:
            t, ms = row.get("elapsed_seconds"), row.get("latency_ms")

            if row.get("ok") != "1" or not t or not ms:
                continue
            t = float(t)
            if last is None or t > last:
                out.append(float(ms))
                self.lat_t = t if self.lat_t is None else max(self.lat

    ↪ _t, t)
        return [] if last is None else out

    def audit(self, rec):
        rec = {"time": time.time(), **rec}
        if self.log:

            self.log.write(json.dumps(rec) + "\n"); self.log.flush()
        return rec

    def killed(self):
        # this controller's own switch, or the master switch for the w
    ↪ hole harness (omnicompass/master.py)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return (os.environ.get("OMNI_KILL") == "1" or (self.a.kill_fil
↪ e and Path(self.a.kill_file).exists())
            or master.is_off())

def restore(self):
    for h in self.k.get("get", "hpa", "-A", "-o", "json")["items"]
↪ :
        rng = h["metadata"].get("annotations", {}).get(RANGE_ANN)
        if rng:
            lo0, hi0 = (int(x) for x in rng.split(","))
            ns, name = h["metadata"]["namespace"], h["metadata"]["
↪ name"]
            self.k.write(["patch", "hpa", name, "-n", ns, "--type=
↪ merge", "-p", json.dumps({"spec": {"minReplicas": lo0, "maxRepli
↪ cas": hi0}})],
                         "reset: restore the HPA's own replica ran
↪ ge")
            self.k.write(["annotate", "hpa", name, "-n", ns, f"{RA
↪ NGE_ANN}-"], "reset: remove range record")
    for h in self.k.get("get", "hpa", "-A", "-o", "json")["items"]
↪ :
        orig = h["metadata"].get("annotations", {}).get(ANNOTATION
↪ )
        if orig is None:
            continue
        ns, name = h["metadata"]["namespace"], h["metadata"]["name
↪ "]
        idx, _ = cpu_target(h)
        if idx is not None:
            self.k.write(["patch", "hpa", name, "-n", ns, "--type=
↪ json", "-p",
                          json.dumps([{"op": "replace", "path": f"
↪ /spec/metrics/{idx}/resource/target/averageUtilization", "value"
↪ : int(orig)}])],
                         "reset: restore original HPA target")
        self.k.write(["annotate", "hpa", name, "-n", ns, f"{ANNOTA
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ TION}-"], "reset: remove record")
        self.changed.clear()
        self.m.restore()
        cmd = getattr(self.a, "node_restore_cmd", "")
        if cmd and not self.nodes_restored:
            self.audit({"write": shlex.split(cmd), "why": "reset: rest
    ↪ ore node pool", "dry_run": self.a.dry_run})
            if not self.a.dry_run:
                subprocess.run(shlex.split(cmd), check=True)
            self.nodes_restored = True

    def _gain(self, h):
        """The CPU each pod of the HPA's deployment is guaranteed, ove
    ↪ r the operator's limit (1 when nothing conveyed):
        g = min(mean conveyed limit, 0.95 A / ceil(maxReplicas / machi
    ↪ nes in service)) / L. The guaranteed share is the
        one each pod keeps with the autoscaler's largest count spread
    ↪ over the machines in service, so the target it

        sets moves only when a machine idles or wakes, never each time
    ↪  a pod starts or leaves."""
        from omnicompass.nervous_system import BAND
        ns = h["metadata"]["namespace"]; ref_ = h.get("spec", {}).get(
    ↪ "scaleTargetRef", {}) or {}
        key = (ns, ref_.get("name", ""))

        g = self.m.gain.get(key, 1.0); base = self.m.base.get(key, 0.0
    ↪ ); s = getattr(self, "_snap", None)
        if base > 0 and s and s.get("nodes"):
            ann = h["metadata"].get("annotations", {}) or {}
            hi0 = int(ann.get(RANGE_ANN, f"1,{h['spec'].get('maxReplic
    ↪ as', 1)}").split(",")[1])

            per_node = s["alloc_m"] / s["nodes"]
            g = min(g, BAND[1] * per_node / math.ceil(hi0 / s["nodes"]
    ↪ ) / base)
        return max(1.0, g)

    def strict_step(self, s, obs):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """Strict C: Omni-Compass decides each deployment's replica fl
↪ oor itself: replicas = ceil(current x measured
    utilisation / target utilisation), up at once, down only to th
↪ e highest recommendation of the last
    --strict-window decisions; the HPA's minReplicas is set to tha
↪ t count, within its original range. Growth is never

    blocked: maxReplicas stays the operator's, so the HPA remains
↪ the fast up-reflex between Omni's decisions (the HPA
    reacts every 15 s; a count frozen for a 60 s decision would an
↪ swer a load step up to 45 s late). The Unified
    Control Switch restores the original range."""
    hist = getattr(self, "_rec_hist", {}); self._rec_hist = hist

    for h in s["hpas"]:
        ns, name = h["metadata"]["namespace"], h["metadata"]["name
↪ "]
        ann = h["metadata"].get("annotations", {}) or {}
        lo0, hi0 = (int(x) for x in ann.get(RANGE_ANN, f"{h['spec'
↪ ].get('minReplicas', 1)},{h['spec']['maxReplicas']}").split(",")

↪ )
        idx, tgt = cpu_target(h)
        orig_t = int(ann.get(ANNOTATION, tgt or 50))
        cur = int(h.get("status", {}).get("currentReplicas", 0) or
↪  lo0)
        util = None

        for m in h.get("status", {}).get("currentMetrics", []) or
↪ []:
            if m.get("type") == "Resource" and m.get("resource", {
↪ }).get("name") == "cpu":
                util = m["resource"].get("current", {}).get("avera
↪ geUtilization")

        if util is None:
            continue
        rec = max(lo0, min(hi0, int(math.ceil(cur * float(util) /
↪ (orig_t * self._gain(h)) - 1e-9))))
        hh = (hist.get((ns, name), []) + [rec])[-self.n_strict_win
↪ dow:]; hist[(ns, name)] = hh
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        want = rec if rec >= cur else max(hh)
        want = max(want, min(hi0, self.reflex.get((ns, name), 0)))
    # the fast pod reflex's floor stands while held
        if obs.get("security_block", 0.0) > 0.5:
            want = min(want, cur)                    # shield I1:
 no expansion during a security hold

        if RANGE_ANN not in ann:
            self.k.write(["annotate", "hpa", name, "-n", ns, "--ov
erwrite", f"{RANGE_ANN}={lo0},{hi0}"], "strict: record original
replica range")
        if h["spec"].get("minReplicas") != want or h["spec"]["maxR
eplicas"] != hi0:

            self.k.write(["patch", "hpa", name, "-n", ns, "--type=
merge", "-p", json.dumps({"spec": {"minReplicas": want, "maxRepl
icas": hi0}})],
                         f"strict: replica floor {cur} -> {want} d
ecided by Omni-Compass (utilisation {util}%, target {orig_t}%);
growth stays free up to {hi0}")

def pod_reflex(self):
    """The fast pod reflex (manuscript Section 5.3, preemptive coh
erence): the HPA's own staffing rule,
    replicas = current x busy / target, read from the live queue i
nstead of CPU averages a minute old.

    Busy comes from queueing physics: a replica serving requests i
n processor sharing answers in R = S / (1 - u),
    so u = 1 - S / R, with S the bare service time (the fastest te
nth of the window's requests, those with no queue
    ahead) and R the mean response of the same window. The operato

r's target is a share of the pod's CPU request; the queue runs o
n
    its limit, so the same promise in queue terms is target x requ
est / limit. The reflex only raises the replica
    floor to what that rule needs now and hands it back the moment
 the queue no longer needs it: no padding, no new
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    target, the operator's own promise met sooner. Zero cluster re
↪ ads while the queue is calm."""
    lf = getattr(self.a, "latency_file", "")
    if not lf or self.killed() or self.a.mode not in ("target", "n
↪ odepool"):
        return None

    from omni_controller.muscles import latency_window
    w = latency_window(lf, getattr(self.a, "reflex_window_s", 30.0
↪ ))
    if w["blind"] or len(w["ms"]) < 5:
        return None
    p10 = sorted(w["ms"])[len(w["ms"]) // 10]

    # S and R from the same window: the fastest tenth of the reque
↪ sts answered now, at the CPU the pods have now. An
    # all-time fastest would read every later change of a pod's CP
↪ U limit (convey) as a queue that is not there
    self.s_floor = p10
    R = sum(w["ms"]) / len(w["ms"])

    u = max(0.0, min(0.99, 1.0 - self.s_floor / R)) if R > 0 else
↪ 0.0
    if u <= 0.0 and not self.reflex:
        return None                          # calm and nothing he
↪ ld: no read, no write
    out = {}

    for h in self.k.get("get", "hpa", "-A", "-o", "json")["items"]
↪ :
        idx, tgt = cpu_target(h)
        if tgt is None:
            continue
        ns, name = h["metadata"]["namespace"], h["metadata"]["name

↪ "]
        ann = h["metadata"].get("annotations", {}) or {}
        lo0, hi0 = (int(x) for x in ann.get(RANGE_ANN, f"{h['spec'
↪ ].get('minReplicas', 1)},{h['spec']['maxReplicas']}").split(",")
↪ )
        orig_t = int(ann.get(ANNOTATION, tgt)) / 100.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            key = (ns, name)
            if key not in self.pod_cap:
                ref = h["spec"]["scaleTargetRef"]
                c0 = self.k.get("get", ref["kind"].lower(), ref["name"
    ↪ ], "-n", ns, "-o", "json")["spec"]["template"]["spec"]["containe
    ↪ rs"][0]
                req = to_milli(c0.get("resources", {}).get("requests",
    ↪  {}).get("cpu", "0") or "0")
                lim = to_milli(c0.get("resources", {}).get("limits", {
    ↪ }).get("cpu", "0") or "0")
                self.pod_cap[key] = (req / lim) if req > 0 and lim > 0
    ↪  else 1.0
            u_star = max(0.05, orig_t * self.pod_cap[key])       # the
    ↪  operator's promise in queue terms
            cur = int(h.get("status", {}).get("currentReplicas", 0) or
    ↪  lo0)
            desired = int(h.get("status", {}).get("desiredReplicas", 0
    ↪ ) or cur)
            need = min(hi0, int(math.ceil(cur * u / u_star - 1e-9)))
            held = self.reflex.get(key)
            if not getattr(self.a, "pod_reflex_writes", False):
                # the autoscaler is the muscle that makes and removes
    ↪ pods; I gauge what the queue needs and write
                # nothing, so no pod is started or stopped that the mu
    ↪ scle itself would not start or stop
                if need > max(cur, desired):
                    self.audit({"pod_reflex_reading": {f"{ns}/{name}":
    ↪  need}, "replicas": cur, "busy": round(u, 3),
                                "promise": round(u_star, 3), "R_ms": r
    ↪ ound(R, 1), "S_ms": round(self.s_floor, 1)})
                continue
            if need > max(cur, desired, h["spec"].get("minReplicas", 1
    ↪ ) or 1):
                if RANGE_ANN not in ann:
                    self.k.write(["annotate", "hpa", name, "-n", ns, "
    ↪ --overwrite", f"{RANGE_ANN}={lo0},{hi0}"], "pod reflex: record o
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ riginal replica range")
                self.k.write(["patch", "hpa", name, "-n", ns, "--type=
    ↪ merge", "-p", json.dumps({"spec": {"minReplicas": need}})],
                             f"pod reflex: floor {need} (queue busy {u
    ↪ :.2f} vs promise {u_star:.2f}, R {R:.0f} ms, S {self.s_floor:.0f
    ↪ } ms)")

                self.reflex[key] = need; out[key] = need
            elif held is not None and need <= max(desired, lo0):
                # the queue no longer needs the floor (or the HPA has
    ↪ caught up): hand it back. On top, the operator's
                # own minimum returns; in strict C the floor is Omni's
    ↪  own replica decision again (strict_step)

                del self.reflex[key]; out[key] = None
                if not getattr(self.a, "strict_replicas", False) and h
    ↪ ["spec"].get("minReplicas") == held:
                    self.k.write(["patch", "hpa", name, "-n", ns, "--t
    ↪ ype=merge", "-p", json.dumps({"spec": {"minReplicas": lo0}})],
                                 f"pod reflex: release floor {held} ->

    ↪  {lo0} (queue busy {u:.2f})")
                    out[key] = lo0
        if out:
            self.audit({"pod_reflex": {f"{k[0]}/{k[1]}": v for k, v in
    ↪  out.items()}, "busy": round(u, 3), "R_ms": round(R, 1), "S_ms":
    ↪  round(self.s_floor, 1)})

        return out


    def floor_step(self):
        """Fast path between governor decisions: add the nodes that pe
    ↪ nding and running pod requests need (nodepool mode)."""
        if self.killed() or self.a.mode != "nodepool" or not self.a.no

    ↪ de_scale_cmd:
            return None
        if getattr(self, "cruise", False):
            # cruise (rule 7, amendment 12): every machine is already
    ↪ in service, so a floor check can add nothing; and a
            # queue of other work starves the service's responses with
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ out any load on it, which the reflex would read as
            # a queue and answer with idle pods. Omni steps back: no r
    ↪ eads, no reflex, no conveyance until cruise ends
            return None
        self.pod_reflex()
        # energy to where the work is: a new serving pod gets its mach

    ↪ ine's idle CPU within three checks, not a decision
        self.ticks = getattr(self, "ticks", 0) + 1
        if getattr(self.a, "latency_file", "") and self.ticks % 3 == 0
    ↪ :
            try:
                self.m.convey()

            except Exception as e:  # a failed conveyance writes nothi
    ↪ ng more; the next one comes on time
                self.audit({"error": f"convey: {e}"})
        # one light read every check; the full snapshot (nodes, all po
    ↪ ds, node metrics, HPAs) only when a pod waits. The
        # controller shares CPUs with the service it protects (on kind

    ↪ , one 4-core runner), so its reads cost latency
        if not str(self.k.get("get", "pods", "-A", "--field-selector=s
    ↪ tatus.phase=Pending", "-o", "name")).strip():
            return None
        s = snapshot(self.k, getattr(self.a, "active_nodes_only", Fals
    ↪ e))

        n = max(1, s["open"]); per_node = s["alloc_m"] / max(1, s["nod
    ↪ es"])
        floor = max(int(math.ceil(s["req_m"] * (1.0 + self.a.headroom)
    ↪  / per_node)) if s["req_m"] > 0 else self.a.min_nodes, int(math.
    ↪ ceil(s["used_m"] / per_node)))
        floor = min(self._max_nodes(s), floor)

        if s["pending"] > 0 and floor > n and floor > (self.rec_n or 0
    ↪ ):
            if self._pool_command(floor, n, "scheduling floor (pending
    ↪  pods)"):
                self.rec_n = floor
                return floor
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return None

    def step(self):
        self.decisions += 1
        self.host_cpu.sample()              # two adjacent controller
↪ ticks provide a host CPU busy share

        if self.killed():
            self.restore()
            return self.audit({"decision": "killed", "mode": "observe"
↪ })
        s = snapshot(self.k, getattr(self.a, "active_nodes_only", Fals
↪ e)); self._snap = s

        # my orders are judged by the machines open to work; a machine
↪ 's capacity by the machines in service
        n = max(1, s["open"]); per_node = s["alloc_m"] / max(1, s["nod
↪ es"])
        if self.rec_n is None:
            self.rec_n = n

        repl = sum(int(h.get("status", {}).get("currentReplicas", 0) o
↪ r 0) for h in s["hpas"]) or n
        power_stress = 0.0; blind = {}
        if self.a.power_cmd and self.a.site_limit_w:
            try:
                power_stress = float(subprocess.run(self.a.power_cmd,

↪ shell=True, capture_output=True, text=True).stdout.strip()) / se
↪ lf.a.site_limit_w
                blind["power"] = False
            except ValueError:
                power_stress = 0.0; blind["power"] = True
        # proprioception (efferent -> afferent): did the last commands

↪  land? drift = |observed - commanded| / commanded
        drift = {}
        if self.cmd_nodes is not None:
            drift["nodes"] = abs(n - self.cmd_nodes) / max(1, self.cmd
↪ _nodes)
        for h in s["hpas"]:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            key = (h["metadata"]["namespace"], h["metadata"]["name"])
            if key in self.cmd_hpa:
                _, cur_t = cpu_target(h)
                if cur_t is not None:
                    drift["hpa " + "/".join(key)] = abs(cur_t - self.c
    ↪ md_hpa[key]) / max(1, self.cmd_hpa[key])

        nodes_landed = drift.get("nodes", 0.0) == 0.0
        self.cmd_nodes = None; self.cmd_hpa = {}
        obs = {"queue_ratio": min(2.0, s["pending"] / max(1, repl)), "
    ↪ load_ratio": min(2.0, s["used_m"] / max(1.0, self.rec_n * per_no
    ↪ de)),
               "power_stress": power_stress, "thermal": 0.0, "network_
    ↪ stress": 0.0, "drift_ratio": max(drift.values(), default=0.0),
               "stale": 0.0, "security_block": 0.0}
        extra = self.m.sense(power_stress)
        lp = extra.pop("latency_pressure", 0.0); p95 = extra.pop("late
    ↪ ncy_p95_ms", None)
        if getattr(self.a, "latency_file", "") and getattr(self.a, "sl
    ↪ o_ms", 0):
            blind["latency"] = bool(extra.pop("latency_blind", 0.0))
        age = extra.pop("latency_age_s", None)
        obs.update(extra)
        # afferent integrity: the share of declared senses that are bl
    ↪ ind enters the engine as its stale channel
        obs["stale"] = (sum(blind.values()) / len(blind)) if blind els
    ↪ e 0.0
        obs["queue_ratio"] = min(2.0, max(obs["queue_ratio"], lp))
        # SLO reflex: while the response-time target is breached, and
    ↪ for --slo-clear decisions after, Omni-Compass may
        # not pack replicas tighter than the workload's own HPA target
    ↪  and may not cap power (no energy at service's cost)
        self.lp_hist.append(lp)
        guarded = bool(getattr(self.a, "latency_file", "")) and getatt
    ↪ r(self.a, "slo_ms", 0)
        n_clear = self.n_slo_clear
        obs["slo_clean"] = (not guarded) or (not blind.get("latency",
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ False) and len(self.lp_hist) >= n_clear
                                            and all(x == 0.0 for x in
    ↪  self.lp_hist[-n_clear:]))
        self.g.nodes = self.rec_n; self.g.current_cap = 1.0
        d = self.g.step(obs, 0)
        floor = max(int(math.ceil(s["req_m"] * (1.0 + self.a.headroom)

    ↪  / per_node)) if s["req_m"] > 0 else self.a.min_nodes, int(math.
    ↪ ceil(s["used_m"] / per_node)))
        rec_n = max(self.a.min_nodes, min(self._max_nodes(s), max(self
    ↪ .rec_n + int(d["node_delta"]), floor)))
        rho = max(0.5, min(0.95, float(d["demand"])))
        from omnicompass.nervous_system import from_governor, node_rel

    ↪ ease_gate
        mode = "autopilot" if self.a.mode in ("target", "nodepool") el
    ↪ se "observe"
        auth = from_governor(self.g, obs, d, mode=mode)
        self.m.auth = auth
        breach_now = lp > 0.0 or blind.get("latency", False)

        # the machine organ's view: only pressure a machine release co
    ↪ uld cause (pods waiting for a place, a live
        # breach). Power and heat are relieved by a release, never wor
    ↪ sened by it, so they cannot veto one
        obs_n = dict(obs, queue_ratio=min(2.0, s["pending"] / max(1, r
    ↪ epl)), slo_clean=not breach_now,

                      power_stress=0.0, thermal=0.0)
        self.gn.nodes = self.rec_n; self.gn.current_cap = 1.0
        dn = self.gn.step(obs_n, 0)
        auth_n = from_governor(self.gn, obs_n, dn, mode=mode)
        if self.cl is not None:
            # the benchmarked law drives the machines: the closure law

    ↪  on requested cores (omnicompass/closure.py), the
            # scheduling floor stays underneath it
            self.cl.observe(s["req_m"] / 1000.0)
            # the machine organ's own pressure (as its release gate):
    ↪ pods waiting and live breaches, not modelled heat
            # or the whole body's latency push, which a machine releas
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ e does not cause
            cl_n = self.cl.decide(n, per_node / 1000.0, self.gn.last_p
    ↪ ush, self.a.min_nodes, self._max_nodes(s))
            rec_n = max(self.a.min_nodes, min(self._max_nodes(s), max(
    ↪ cl_n, floor)))
        compass_rec = None

        if self.compass_law is not None:
            # the service position in its compass, read as the GPU com
    ↪ pass reads it (omni_controller/gpu_compass.py): the mean
            # response time of the window between the bare service tim
    ↪ e (a tenth of the SLO) and the SLO; p95 at or
            # past the SLO, a blind sense, or a pod waiting for a plac

    ↪ e is past the wall
            slo = float(getattr(self.a, "slo_ms", 0) or 0)
            pos = 0.0
            if slo > 0 and getattr(self.a, "latency_file", ""):
                from omni_controller.muscles import latency_window
                w = latency_window(self.a.latency_file, getattr(self.a

    ↪ , "latency_window_s", 60.0))["ms"]
                bare = slo / 10.0
                mean = sum(w) / len(w) if w else (p95 or 0.0)
                pos = max(0.0, (mean - bare) / (slo - bare))
            if blind.get("latency", False) or s["pending"] > 0 or (p95
    ↪  is not None and slo > 0 and p95 >= slo):

                pos = 1.0
            if self.edge is not None:
                # the v5 edge: a breach while machines are given back
    ↪ teaches the cushion a floor; then the balance point
                # and the wall move with the service's own climb and w
    ↪ obble (never behind the earlier law's own point

                # unless that lesson says so)
                if breach_now and self.n_native is not None and n < se
    ↪ lf.n_native:
                    self.edge.learn_fall(0.1)
                center = self.edge.update(pos)
                base = self.edge_base if self.edge.floor <= 0.0 else 0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ .0
                self.compass_law.band.center = min(0.995, max(0.0, max
    ↪ (base, center)))
                self.compass_law.band.cushion = min(0.05, max(0.005, s
    ↪ elf.edge.react_part))
            F = self.compass_law.force(pos)

            # the verdict: the response times of the requests served s
    ↪ ince the last decision, at the machines the pool
            # stood at; then how many machines may be given back at al
    ↪ l (or the count a trial needs)
            if self.n_native is None:
                self.n_native = n

            self.verdict.observe(self._new_latencies())
            calm = self.compass_law.p < self.compass_law.band.wall_hig
    ↪ h and s["pending"] == 0 and not breach_now
            deepest, trial, ev = self.verdict.tick(calm)
            if self.dial == "max":
                deepest, trial = 0, False          # the max never giv

    ↪ es back a machine the cluster had on its own
            if ev:
                self.audit({"verdict": ev, "state": self.verdict.state
    ↪ , "machines_given_back_allowed": self.verdict.allowed,
                            "machines_native": self.n_native})
            if self.compass_law.p >= self.compass_law.band.wall_high:

                rec_n = max(floor, n + 1)
    ↪      # fail up: one machine more at once
            elif trial:
                rec_n = max(floor, self.n_native - deepest)
    ↪      # the trial's count (one machine per decision below)
            elif F < COMPASS_RELEASE and self.compass_law.p < self.com

    ↪ pass_law.band.center and self.n_native - (n - 1) <= deepest:
                rec_n = max(floor, n - 1)
    ↪      # one back, if the verdict and the release gate agree
            else:
                rec_n = max(floor, n)
            rec_n = max(self.a.min_nodes, min(self._max_nodes(s), rec_
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ n))
            compass_rec = {"position": round(self.compass_law.p, 4), "
    ↪ velocity": round(self.compass_law.v, 4), "force": round(F, 4),
                           "center": round(self.compass_law.band.center,
    ↪ 4), "wall": round(self.compass_law.band.wall_high, 4),
                           "verdict_state": self.verdict.state, "machines

    ↪ _given_back_allowed": self.verdict.allowed}
        scaling_up = any(int(h.get("status", {}).get("desiredReplicas"
    ↪ , 0) or 0) > int(h.get("status", {}).get("currentReplicas", 0) o
    ↪ r 0)
                         for h in s["hpas"])
        gate = node_release_gate(n, per_node, s["used_m"], s["pending"

    ↪ ], scaling_up, breach_now, rho, auth_n,
                                 senses_live=not any(blind.values()),
    ↪ last_command_landed=nodes_landed)
        if rec_n < n and not gate["ok"]:
            rec_n = n            # nervous system: the machine organ m
    ↪ ay not give a machine back now (reason audited)

        elif rec_n < n and self.last_release is not None and self.deci
    ↪ sions - self.last_release < self.n_release:
            rec_n = n            # at most one machine a minute, howev
    ↪ er often the governor decides (v7)
        elif rec_n < n:
            rec_n = n - 1        # one machine at a time: release is t

    ↪ he slow, reversible direction
            self.last_release = self.decisions
        # cruise (rule 7): work waiting for a place, decision after de
    ↪ cision, so every machine goes in service and stays
        # there, without second-guessing, until the line has been empt
    ↪ y for as many decisions

        ca = self.n_cruise_after
        if ca > 0 and self.a.mode == "nodepool":
            self.cruise_hits = self.cruise_hits + 1 if s["pending"] >
    ↪ 0 else 0
            if not self.cruise and self.cruise_hits >= ca:
                self.cruise = True; self.cruise_clear = 0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            self.audit({"cruise": "on", "pending": s["pending"]})
        elif self.cruise:
            self.cruise_clear = self.cruise_clear + 1 if (s["pendi
↪ ng"] == 0 and not scaling_up) else 0
            if self.cruise_clear >= ca:
                self.cruise = False

                self.audit({"cruise": "off", "pending": s["pending
↪ "]})
        if self.cruise:
            rec_n = min(self._max_nodes(s), n + max(1, int(self.a.
↪ max_node_step)))   # toward the top, a step a decision
    # idle (rule 8: one pedal, lifted all the way): nothing waitin

↪ g, no breach, and the sensed services' demand at
    # zero: straight to the breathing floor in one move (the body
↪ idles, never at zero, and wakes straight to the
    # work when it comes). Every check of the release gate still h
↪ olds except one machine per decision
    eb = float(getattr(self.a, "idle_demand", 0.05) or 0)

    if eb > 0 and self.a.mode == "nodepool" and not self.cruise an
↪ d rec_n > self.a.min_nodes and s["pending"] == 0 \
            and not breach_now and not scaling_up:
        sensed = [h for h in s["hpas"] if self._sensed(h)]
        dem = [self._app_demand(h) for h in sensed]
        dem = [x for x in dem if x is not None]

        idle = bool(sensed) and all(self._at_idle(h) for h in sens
↪ ed)
        g_ok = gate["ok"] or gate["reason"] == "release permitted"
        if dem and (max(dem) <= eb or idle) and g_ok and not any(b
↪ lind.values()) and nodes_landed:
            low = max(self.a.min_nodes, floor)

            # the machines left must carry what runs now at or und
↪ er the engine's utilisation target
            while low < rec_n and s["used_m"] / max(low * per_node
↪ , 1e-9) > rho:
                low += 1
            if low < rec_n:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                self.audit({"idle_floor": {"from": rec_n, "to": lo
↪ w, "demand": round(max(dem), 3), "at_idle": idle}})
                rec_n = low
    out = self.audit({"authority": {"calm": round(auth["scalars"][
↪ "calm"], 3), "execute": auth["execute"],
                                    "contract": {o: v.get("contrac
↪ t") for o, v in auth["organs"].items()},
                                    "scalars": {k: round(v, 3) for
↪  k, v in auth["scalars"].items()},
                                    "node_view": {"calm": round(au
↪ th_n["scalars"]["calm"], 3),
                                                  "scalars": {k: r
↪ ound(v, 3) for k, v in auth_n["scalars"].items()}},
                                    "node_gate": {"ok": gate["ok"]
↪ , "reason": gate["reason"], "util_after": round(gate["util_after
↪ "], 3)},
                                    "senses": {"blind": blind, "la
↪ tency_age_s": None if age is None else round(age, 1), "stale": o
↪ bs["stale"]},
                                    "proprioception": {k: round(v,
↪  3) for k, v in drift.items()}}})
    # the compass: where the engine stands on the wheel, whether e
↪ very level is inside Omega, whether the move at a
    # boundary points inward, and the ledger step
    fill = s["req_m"] / max(1.0, s["alloc_m"])
    levels = {"machine_fill": fill}
    moves = {"machine_fill": (1.0 if rec_n < n else -1.0 if rec_n
↪ > n else 0.0)}
    for o in ("cpufreq", "gpu", "power"):
        env = auth["organs"].get(o, {}).get("envelope")
        if env:
            levels[f"{o}_ceiling"] = env[1]
    forced = obs["queue_ratio"] > 0.0 or s["pending"] > 0
    self.audit({"compass": self.compass.read(d["state"]["E"], d["s
↪ tate"]["S"], levels, moves, forced, x=self.g.x, p=self.g.p)})
    out = self.audit({"decision": {"nodes_observed": n, "nodes_rec
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ommended": rec_n,
                                        "law": "compass" if self.compas
    ↪ s_law is not None else "closure" if self.cl is not None else "go
    ↪ vernor",
                                        "compass_law": compass_rec, "hp
    ↪ a_target_recommended": round(rho, 3),

                                        "E": d["state"]["E"], "U": d["s
    ↪ tate"]["U"], "pending": s["pending"],
                                        "power_cap": round(float(d["pow
    ↪ er_cap"]), 3), "change_permitted": bool(d["change_permitted"]),
                                        "rollback_authorized": bool(d["
    ↪ rollback_authorized"]),

                                        "thermal": round(obs["thermal"]
    ↪ , 3), "security_block": obs["security_block"],
                                        "power_stress": round(power_str
    ↪ ess, 3), "latency_p95_ms": p95,
                                        "queue_ratio": round(obs["queue
    ↪ _ratio"], 3), "slo_clean": obs["slo_clean"]}, "mode": self.a.mod

    ↪ e})
        if self.a.mode in ("target", "nodepool") and getattr(self.a, "
    ↪ strict_replicas", False):
            self.strict_step(s, obs)
            self.m.push(d, obs)
        elif self.a.mode in ("target", "nodepool"):

            for h in s["hpas"]:
                idx, cur = cpu_target(h)
                if cur is None:
                    continue
                ns, name = h["metadata"]["namespace"], h["metadata"]["
    ↪ name"]

                if not self._sensed(h):
                    continue    # a service the probe does not sense:
    ↪  its HPA stays at the operator's own target
                orig = int(h["metadata"].get("annotations", {}).get(AN
    ↪ NOTATION, cur))
                # the muscle's own clock: the autoscaler's scale-down
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ window (300 s unless the operator set one)
                win = float(((h["spec"].get("behavior") or {}).get("sc
    ↪ aleDown") or {}).get("stabilizationWindowSeconds", 300))
                dem = self._app_demand(h)
                if dem is not None:
                    self.demand[(ns, name)] = [(t, v) for t, v in self
    ↪ .demand.get((ns, name), []) if time.time() - t <= 2 * win] \
                        + [(time.time(), dem)]
                if int((h.get("status") or {}).get("currentReplicas",
    ↪ 0) or 0) >= int(h["spec"].get("maxReplicas", 10 ** 9)):
                    self.pinned[(ns, name)] = [t for t in self.pinned.
    ↪ get((ns, name), []) if time.time() - t <= 2 * win] + [time.time(
    ↪ )]
                # more headroom is always allowed; less never: at a gi
    ↪ ven load fewer pods always means a longer M/M/c wait
                # (no target above the operator's keeps the wait), so
    ↪ a raise only spends latency.
                # Omni on top earns its keep on machines, not by packi
    ↪ ng the operator's pods tighter
                # the same promise in queue terms: busy = target x req
    ↪ uest / limit. While convey() gives the pods a
                # limit g times the operator's, the target that keeps
    ↪ each pod exactly as busy is g times higher
                want = int(round(100 * min(rho, orig / 100.0) * self._
    ↪ gain(h)))
                back = False
                if self.compass_law is not None and getattr(self, "cru
    ↪ ise", False):
                    # cruise (amendment 12): the service's own autosca
    ↪ ler runs it as it would alone (the operator's target);
                    # Omni only holds every machine in service while t
    ↪ he queue drains
                    self.compass_law_x[(ns, name)] = orig * self._gain
    ↪ (h)
                    want = orig
                elif self.compass_law is not None:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                # the compass's push and pull on the target, insid
↪ e its cover [60% of the operator's, the operator's]
                # (in queue terms, times the conveyed gain): a low
↪ er target is more pods, so the up force lowers it
                g_ = self._gain(h); hi_t = orig * g_; lo_t = max(1
↪ 0.0, 0.6 * orig) * g_

                x = self.compass_law_x.get((ns, name), hi_t)
                load = not any(blind.values()) and s["pending"] ==
↪  0 and not obs["slo_clean"]
                if self.compass_law.p >= self.compass_law.band.wal
↪ l_high and load:
                    x = lo_t

↪    # fail up: the most pods the cover allows, at once
                elif self.compass_law.p >= self.compass_law.band.w
↪ all_high:
                    # past the wall, but not from load: a blind se
↪ nse, or pods waiting for a machine that is gone.
                    # More pods answer neither, so fail up is nati

↪ ve's own target, as on the card, where fail up is
                    # the card's own settings
                    x = hi_t; back = x != self.compass_law_x.get((
↪ ns, name), hi_t)
                elif x < hi_t and self.compass_law.p < self.compas
↪ s_law.band.center and obs["slo_clean"] and s["pending"] == 0:

                    # responses back inside the band, nothing wait
↪ ing. If the demand that called the extra pods has
                    # stopped growing (a fault, a spike that passe
↪ d), they were for it only: the operator's own
                    # target returns at once. While the demand sti
↪ ll grows they stay, so the autoscaler does not

                    # remove them and start them again on the next
↪  rise
                    if not self._rising((ns, name), win):
                        x = hi_t; back = True
                else:
                    F_ = compass_rec["force"]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                    x = x - (COMPASS_UP if F_ > 0 else COMPASS_DOW
↪ N) * F_ * (hi_t - lo_t) * self.step_scale
                x = max(lo_t, min(hi_t, x)); self.compass_law_x[(n
↪ s, name)] = x
                self._replica_room(h, ns, name, win, obs, s)
                want = int(round(x))

            want_h = want if obs["slo_clean"] else min(want, orig)
            if abs(cur - want_h) < self.a.min_target_change and no
↪ t (not obs["slo_clean"] and cur > orig):
                continue
            if cur == want_h:
                continue

            if want_h > cur and not back and not self._steady((ns,
↪  name), win):
                continue     # a raise (fewer pods) waits for a de
↪ mand that has held still for one window
            if want_h > cur and self.a.coast_step > 0:
                # coasting (rule 6): off the gas, the target eases

↪  toward fewer pods by at most coast_step points a
                # window, never in one jump; a demand that comes b
↪ ack half way finds the pods still running and is
                # met at once by the lower target, with no pod sta
↪ rted again. More pods (a lower target) is never
                # limited: the gas is always immediate

                want_h = min(want_h, cur + max(1, int(round(self.a
↪ .coast_step * self.step_scale))))
            # the autoscaler takes its window to answer a target.
↪ A raise inside that window moves the muscle
            # mid-movement and removes pods it then starts again,
↪ so a raise is held for one window. A lower target

            # (more pods, the safe direction) is never held: on a
↪ step up the pods are asked for at once, before the
            # line is missed. A response-time breach returns the o
↪ perator's target at once
            last = self.target_at.get((ns, name))
            # handing the operator's own target back is never held
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ : it is where native stands
                if obs["slo_clean"] and last is not None and time.time
    ↪ () - last < win and not back and want_h > cur:
                    continue
                self.target_at[(ns, name)] = time.time()
                self.changed.setdefault((ns, name), int(h["metadata"].
    ↪ get("annotations", {}).get(ANNOTATION, cur)))
                self.k.write(["annotate", "hpa", name, "-n", ns, "--ov
    ↪ erwrite", f"{ANNOTATION}={self.changed[(ns, name)]}"], "record o
    ↪ riginal target")
                self.k.write(["patch", "hpa", name, "-n", ns, "--type=
    ↪ json", "-p",
                              json.dumps([{"op": "replace", "path": f"
    ↪ /spec/metrics/{idx}/resource/target/averageUtilization", "value"
    ↪ : want_h}])],
                             f"HPA target to rho* = {want_h}%" + ("" i
    ↪ f obs["slo_clean"] else " (SLO reflex: not tighter than native)"
    ↪ ))
                self.cmd_hpa[(ns, name)] = want_h
            self.m.push(d, obs)
        if self.a.mode in ("target", "nodepool"):
            self.pod_reflex()
        if self.a.mode == "nodepool" and self.a.node_scale_cmd and rec
    ↪ _n != n:
            cfg = SimpleNamespace(minimum_nodes=self.a.min_nodes, maxi
    ↪ mum_nodes=self._max_nodes(s))
            acts, hits = enforce([{"action": "nodes", "target": rec_n,
    ↪  "direction": 1 if rec_n > n else -1}],
                                 {"actual_nodes": n, "power_cap": 1.0}
    ↪ , {"power_stress": power_stress, "security_block": obs["security
    ↪ _block"]}, cfg,
                                 ShieldLimits(power_limit=1e9, max_nod
    ↪ e_step=max(self.a.max_node_step, floor - n)))
            for act in acts:
                if self._pool_command(int(act["target"]), n, "node poo
    ↪ l size", shield_interventions=hits) and not self.a.dry_run:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                    self.cmd_nodes = int(act["target"])
        self.rec_n = rec_n
        return out


def parser():
    ap = argparse.ArgumentParser(description=__doc__, formatter_class=
    ↪ argparse.RawDescriptionHelpFormatter)
    ap.add_argument("--mode", choices=["observe", "target", "nodepool"
    ↪ ], default="observe")
    ap.add_argument("--interval", type=float, default=60.0, help="seco
    ↪ nds between governor decisions")
    ap.add_argument("--floor-interval", type=float, default=15.0, help
    ↪ ="seconds between scheduling-floor checks (nodepool mode)")
    ap.add_argument("--iterations", type=int, default=0, help="0 = run
    ↪  until stopped")
    ap.add_argument("--dry-run", action="store_true")
    ap.add_argument("--kubectl", default="kubectl")
    ap.add_argument("--audit", default="omni_audit.jsonl")
    ap.add_argument("--kill-file", default="/tmp/omni.kill")
    ap.add_argument("--no-api-proxy", action="store_true", help="read
    ↪ through a new kubectl process every time instead of one kubectl
    ↪ proxy (the controller's own cost is higher)")
    ap.add_argument("--restore-only", action="store_true", help="put e
    ↪ very setting back from the records on the objects and exit (the
    ↪ watchdog's way back)")
    ap.add_argument("--node-scale-cmd", default="")
    ap.add_argument("--cruise-after", type=int, default=int(os.environ
    ↪ ["CRUISE_AFTER"]) if os.environ.get("CRUISE_AFTER") else None,
                    help="decisions in a row with work waiting for a p
    ↪ lace before cruise puts every machine in service "
                         "(and decisions with the line empty before it
    ↪  ends); 0 turns cruise off; unset: --cruise-after-s")
    ap.add_argument("--cruise-after-s", type=float, default=120.0,
                    help="the same in seconds (v7: every rule of the g
    ↪ overnor counts in seconds, so its decision period can "
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                      "change without changing any rule's time)")
    ap.add_argument("--idle-demand", "--brake-demand", dest="idle_dema
    ↪ nd", type=float,
                    default=float(os.environ.get("IDLE_DEMAND", os.env
    ↪ iron.get("BRAKE_DEMAND", 0.05))),
                    help="the sensed services' demand (in pods' worth
    ↪ of CPU) at or under which the pool idles: the "
                         "machines go straight to the breathing floor
    ↪ (one pedal lifted all the way); 0 turns it off")
    ap.add_argument("--coast-step", type=int, default=int(os.environ.g
    ↪ et("COAST_STEP", 25)),
                    help="the most the HPA target may ease toward fewe
    ↪ r pods in one autoscaler window (points of "
                         "utilisation; 0: no limit). Adding pods is ne
    ↪ ver limited")
    ap.add_argument("--min-nodes", type=int, default=int(os.environ.ge
    ↪ t("MIN_NODES", 2)),
                    help="machines always in service, ready for the ne
    ↪ xt burst (the founder's floor: two)")
    ap.add_argument("--max-nodes", type=int, default=0,
                    help="the machine lever's top; 0, the default: rea
    ↪ d live, every ready worker plus what the cluster's "
                         "autoscaler may still add")
    ap.add_argument("--max-node-step", type=int, default=2)
    ap.add_argument("--min-target-change", type=int, default=3)
    ap.add_argument("--law", choices=["governor", "compass"], default=
    ↪ "governor",
                    help="governor (default): the engine's allocation
    ↪ law; compass: the compass law at the v5 edge on the HPA "
                         "target and the node pool")
    ap.add_argument("--allow", type=float, default=0.02, help="the mos
    ↪ t a machine given back may add to the response time")
    ap.add_argument("--verdict-samples", type=int, default=200, help="
    ↪ requests measured before and after a machine is given back on tr
    ↪ ial")
    ap.add_argument("--verdict-every", type=int, default=None, help="d
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ecisions between trials (unset: --verdict-every-s)")
    ap.add_argument("--verdict-every-s", type=float, default=600.0, he
    ↪ lp="seconds between give-back trials")
    ap.add_argument("--verdict-recheck", type=int, default=None, help=
    ↪ "decisions before a refused machine is tried again (unset: --ver
    ↪ dict-recheck-s)")

    ap.add_argument("--verdict-recheck-s", type=float, default=7200.0,
    ↪  help="seconds before a refused machine is tried again")
    ap.add_argument("--verdict-trial-s", type=float, default=1200.0, h
    ↪ elp="seconds a give-back trial's phase may take before it is aba
    ↪ ndoned")
    ap.add_argument("--give-back-only", action="store_true",

                    help="the cloud's rule in one word (v7): the machi
    ↪ nes alone, given back after their own trial and woken on a "
                         "breach; no autoscaler moved, no processor co
    ↪ nveyed, no power capped, the tune-down; so the bill can "
                         "only fall or stay")
    ap.add_argument("--compass-tau", type=float, default=60.0, help="s

    ↪ econds the service takes to follow a lever (the compass's dampin
    ↪ g)")
    ap.add_argument("--compass-center", type=float, default=None,
                    help="where the compass holds the service (0 the b
    ↪ are service time, 1 the SLO); default 0.3 at the max, "
                         "0.4 at the tune-down")

    ap.add_argument("--dial", choices=["max", "save"], default=os.envi
    ↪ ron.get("OMNI_DIAL", "max"),
                    help="max (default): the most work, faster, never
    ↪ a machine given back below the cluster's own; save: "
                         "the tune-down (the v5 edge toward the line,
    ↪ machines given back where the response time allows)")

    ap.add_argument("--replica-ceiling", type=int, default=-1,
                    help="the most replicas Omni-Compass may raise a s
    ↪ ensed HPA's cap to while it binds (compass law): "
                         "-1, the default, reads it live (what the mac
    ↪ hines can hold, one pod under); N, a ceiling of the "
                         "operator's own; 0 keeps the operator's cap u
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ nmoved")
    ap.add_argument("--sensed", default="",
                    help="ns/deployment,... whose response time the --
    ↪ latency-file measures; only their HPAs are moved "
                         "(empty: every HPA, the single-service case)"
    ↪ )

    ap.add_argument("--closure", default="", help="JSON with the closu
    ↪ re-law setting (e.g. tuning/GLOBAL_LEAGUE_PREREGISTRATION.json):
    ↪  the benchmarked law decides the node count")
    ap.add_argument("--strict-replicas", action="store_true", help="st
    ↪ rict C: Omni-Compass sets replica counts; the HPA is pinned")
    ap.add_argument("--pod-reflex-writes", action="store_true",

                    help="let the pod reflex raise the HPA's replica f
    ↪ loor itself (default: it gauges and writes nothing)")
    ap.add_argument("--reflex-window-s", type=float, default=30.0, hel
    ↪ p="window of probe samples the fast pod reflex reads")
    ap.add_argument("--strict-window", type=int, default=None, help="d
    ↪ ecisions a scale-down waits for (unset: --strict-window-s)")

    ap.add_argument("--strict-window-s", type=float, default=300.0, he
    ↪ lp="seconds a scale-down waits for (highest recent recommendatio
    ↪ n)")
    ap.add_argument("--headroom", type=float, default=0.5, help="spare
    ↪  capacity kept above pod requests (0.5 = 50%%, the default)")
    ap.add_argument("--active-nodes-only", action="store_true",

                    help="count only nodes in service (schedulable, or
    ↪  cordoned but still carrying work) and the pods and usage on the
    ↪ m")
    ap.add_argument("--node-restore-cmd", default="", help="command ru
    ↪ n once when the reset fires, returning the node pool to native")
    add_muscle_args(ap)

    ap.add_argument("--power-cmd", default="")
    ap.add_argument("--site-limit-w", type=float, default=0.0)
    return ap


def safe_step(c, fails):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """One decision. A failed decision is recorded and skipped: it wri
    ↪ tes nothing, so the cluster keeps the last settings
    that landed, and the next decision comes at the normal cadence. Th
    ↪ ere is no automated fallback (manuscript Section
    5.8: the Unified Control Switch is mechanical, explicit, operator-
    ↪ controlled and 'does not rely on automated fallback

    inference'). Only a human flips the switch, for the whole harness
    ↪ at once: --kill-file present (or OMNI_KILL=1) turns
    Omni-Compass OFF and hands every setting back to native; removing
    ↪ it turns Omni-Compass back ON. Boundaries are never
    handled by switching anything off: the living band and the shield
    ↪ clamp every level inside its range."""

    try:
        c.step()
        return 0
    except Exception as e:
        fails += 1
        err = getattr(e, "stderr", "") or ""

        c.audit({"error": repr(e)[:500], "stderr": str(err)[-500:], "c
    ↪ onsecutive_failures": fails})
        print(f"decision failed ({fails} in a row): {e!r} {err}", file
    ↪ =sys.stderr, flush=True)
        return fails

def main(argv=None):
    a = parser().parse_args(argv)
    if a.restore_only:
        # the watchdog's way back for a controller that died: every se
    ↪ tting back to the operator's, from the records

        # kept on the objects themselves (annotations), then exit
        c = Controller(a); c.restore(); c.audit({"decision": "restore
    ↪ only: every setting handed back"})
        return 0
    master.refuse_if_off("kubernetes controller")
    c = Controller(a); i = 0; fails = 0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    args = list(sys.argv[1:] if argv is None else argv)
    master.register("kubernetes controller", restore=[[sys.executable,
    ↪  "-m", "omni_controller.controller", *args, "--restore-only"]],
                    stale_s=max(120.0, 5 * a.interval))
    import signal

    def master_off(*_):
        # the master switch pulled from the command line (tools/omni_s
    ↪ witch.py off): hand everything back now and exit
        try:
            c.restore()
        finally:

            c.audit({"decision": "master switch: OFF; every setting ha
    ↪ nded back; exiting"})
            sys.exit(0)
    signal.signal(signal.SIGTERM, master_off)
    import atexit, resource
    t0 = time.time()

    def overhead():   # the controller's own cost: CPU seconds of this
    ↪  process and every kubectl/script it ran
        me, kids = resource.getrusage(resource.RUSAGE_SELF), resource.
    ↪ getrusage(resource.RUSAGE_CHILDREN)
        cpu = me.ru_utime + me.ru_stime + kids.ru_utime + kids.ru_stim
    ↪ e

        c.audit({"overhead": {"cpu_s": round(cpu, 2), "wall_s": round(
    ↪ time.time() - t0, 1),
                              "cores_mean": round(cpu / max(1e-9, time
    ↪ .time() - t0), 4)}})
    atexit.register(overhead)
    while a.iterations == 0 or i < a.iterations:

        master.heartbeat()
        t_dec = time.time()
        fails = safe_step(c, fails); i += 1
        c.audit({"decision_ms": round(1000 * (time.time() - t_dec), 1)
    ↪ })
        if a.iterations == 0 or i < a.iterations:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            waited = 0.0
            while waited + 1e-9 < a.interval:
                dt = min(a.floor_interval, a.interval - waited) if a.m
    ↪ ode == "nodepool" else a.interval - waited
                time.sleep(dt); waited += dt
                if a.mode == "nodepool" and waited + 1e-9 < a.interval
    ↪ :
                    try:
                        c.floor_step()
                    except Exception as e:
                        c.audit({"error": "floor check: " + repr(e)[:5
    ↪ 00], "stderr": str(getattr(e, "stderr", "") or "")[-500:]})

if __name__ == "__main__":
    main()
```

omni_controller/gpu_compass.py

445 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Omni-Compass on one GPU through two wires: the compass law (omnicom
    ↪ pass/compass_law.py) on a real card.

The card keeps its own control: NVIDIA's firmware still boosts and sti
    ↪ ll protects the chip. Omni holds two settings the
card already accepts, and nothing else:
  up wire    the clock ceiling: how high boost may climb (nvidia-smi -
    ↪ lgc MIN,MAX; -rgc resets it)
  down wire  the power limit: the lid above what that ceiling draws (n
    ↪ vidia-smi -pl W)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
Every decision (--interval seconds):
  read      nvidia-smi: power.draw, temperature, utilization, power.li
    ↪ mit, clocks.sm; the workload's response times
  position  the service as one place in its compass, 0 calm to 1 the l
    ↪ ine: response time only (the mean over the last

            --latency-window-s, between a tenth of the line, the bare
    ↪ service time, and the line; the 95th percentile at
            or past the line, or a failed request, is past the wall).
    ↪ A card that is busy is doing its work; being busy
            is not a breach and is not read as one
  native    what the card does on its own, learned from its own meter

    ↪ before the compass may lower anything: while the
            ceiling is at the top and the card is busy, its clock and
    ↪ its draw (the clock its own power limit holds it
            at, and what that costs). Until --learn-samples busy readi
    ↪ ngs are in, the ceiling stays at the top
  race      while the card is saturated (utilization at or over --race

    ↪ -util: work is waiting), the ceiling goes to the
            top and the lid to the start limit, so a burst is served a
    ↪ t full speed; the compass paces only the slack
  force     the compass: pull to the center, push against what is risi
    ↪ ng, tanh-bounded; past the 0.95 wall: fail up
  verdict   how far the ceiling may go (omnicompass/verdict.py): while

    ↪  the service is calm, a paired trial: the ceiling
            at the top until --verdict-samples requests are measured,
    ↪ then one 15 MHz step past the deepest step
            already allowed until as many again are measured; the card
    ↪ 's own time on each request (the workload's
            service_ms, the wait in the queue left out) is compared: a

    ↪ t most --allow slower and the step is allowed,
            slower than that and it is refused and not tried again for
    ↪  --verdict-recheck decisions. Where no step
            passes, the ceiling stays at the top: the card runs as it
    ↪ does alone
  law       down gain 0.0125, the compass's center at the v5 edge (omn
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ icompass/edge.py: 1 - (climb x reaction + 3.09 x
           wobble) of the card's own response-time position, never be
    ↪ low 0.4 unless a line crossed while the ceiling was
           held under the top has taught it otherwise; the wall moves
    ↪  out with the reaction part), the speed floor at the
           card's own busy clock (amendment 8)

  steady    while the card is saturated against its own power limit (w
    ↪ ork waiting and the draw at the limit), the
           firmware boosts a step, hits the limit and is knocked back
    ↪ : a sawtooth. The ceiling is then held at the
           card's own busy clock under that limit (what the sawtooth
    ↪ averages to), so the same watts serve the work

           without the knock-backs (amendment 9). Only under an opera
    ↪ tor's cap (the start limit under the card's
           factory limit, amendment 12): on the card's own limit the
    ↪ firmware's boost is left to serve the burst. It
           never holds under that clock, and blind always fails up
  write     up wire: the ceiling moves by the force (fast up, gently d

    ↪ own), inside its cover: from the card's own busy
           clock (never slower than native while there is work) to th
    ↪ e top; down wire: the lid at the card's own busy
           draw plus --lid-headroom, never under it and never over th
    ↪ e start limit, inside the declared envelope;
           fail up: ceiling to the top and the lid to the start limit

    ↪  at once
  guards    blind (meters unreadable, response times stale): fail up;
    ↪ heat (the card reports a thermal or hardware
           slowdown): never tighten; one writer: a power limit neithe
    ↪ r mine nor the start means another writer, so
           observe only from then on and exit 5; read-back: every wri

    ↪ te is read back
  restore   on exit, kill file or SIGTERM: clocks reset (-rgc) and the
    ↪  power limit back to the start, read back

The audit (--audit) carries the same records the bench reads from the
    ↪ one-wire governor (snapshot, decision with
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
telemetry and decided_by, write and actuator for each power-limit writ
    ↪ e, restored), plus clock_write records.
Exit: 0 clean, 3 restore failed, 4 a write refused, 5 another writer.
"""
from __future__ import annotations

import argparse
import json
import math
import os
import shlex
import signal

import subprocess
import sys
import time


from omnicompass import master
from omnicompass.compass_law import Band, CompassLaw, clamp

from omnicompass.verdict import Verdict
from omni_controller.gpu_governor import query, snapshot, throttle, sl
    ↪ owed, WriteFailed, SNAPSHOT
from omni_controller.muscles import latency_sense, latency_window

# the law (docs/GPU_PREREGISTRATION.md, amendment 8): the down gain (s
    ↪ hare of the top clock per unit of force), the compass's
# center (where it holds the response time, 0 the bare service time an
    ↪ d 1 the line) and the speed floor (a share of the
# card's own busy clock); the same in realms/gpu_card.py
LAW = {"down": 0.0125, "center": 0.4, "floor": 1.0}

def smi_run(smi, args):
    try:
        p = subprocess.run(shlex.split(smi) + args, capture_output=Tru
    ↪ e, text=True, timeout=20)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return p.returncode, p.stderr.strip()[:300]
    except (subprocess.SubprocessError, OSError) as e:
        return -1, f"{type(e).__name__}: {e}"[:300]


def query_top_clock(smi, g):
    try:
        out = subprocess.run(shlex.split(smi) + ["-i", str(g), "--quer
    ↪ y-gpu=clocks.max.sm", "--format=csv,noheader,nounits"],
                             capture_output=True, text=True, timeout=1
    ↪ 0, check=True).stdout
        return float(out.strip().splitlines()[0])
    except (subprocess.SubprocessError, OSError, ValueError, IndexErro
    ↪ r):
        return None


def query_default_limit(smi, g):
    """The card's factory power limit (watts), or None if the driver w
    ↪ ill not say. A start limit under it means an
    operator's cap is underneath (amendment 12)."""
    try:
        out = subprocess.run(shlex.split(smi) + ["-i", str(g), "--quer
    ↪ y-gpu=power.default_limit", "--format=csv,noheader,nounits"],
                             capture_output=True, text=True, timeout=1
    ↪ 0, check=True).stdout
        return float(out.strip().splitlines()[0])
    except (subprocess.SubprocessError, OSError, ValueError, IndexErro
    ↪ r):
        return None

def query_min_clock(smi, g):
    """The lowest graphics clock the card supports (the floor of a -lg
    ↪ c range); 300 MHz if the driver will not list them."""
    try:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        out = subprocess.run(shlex.split(smi) + ["-i", str(g), "--quer
    ↪ y-supported-clocks=graphics", "--format=csv,noheader,nounits"],
                             capture_output=True, text=True, timeout=1
    ↪ 0, check=True).stdout
        return int(min(float(x) for x in out.split() if x.strip()))
    except (subprocess.SubprocessError, OSError, ValueError):

        return 300


class GpuCompass:
    def __init__(self, a):
        self.a = a

        self.g = int(str(a.gpus).split(",")[0])
        self.log = open(a.audit, "a")
        self.writes = 0
        self.foreign = False
        self.clock_set = False
        self.enforced_ok = query(a.smi, [self.g], enforced=True) is no

    ↪ t None
        s = query(a.smi, [self.g], self.enforced_ok)
        if s is None:
            raise SystemExit("nvidia-smi unreadable at start: no snaps
    ↪ hot, so I take no authority")
        snap = snapshot(a.smi, [self.g])

        self.start = s[self.g]["limit"]
        # an operator's cap underneath: the start limit under the card
    ↪ 's factory limit (unknown: treated as no cap)
        dflt = query_default_limit(a.smi, self.g)
        self.capped = dflt is not None and self.start < dflt - 1.0
        self.expect = self.start

        self.top = query_top_clock(a.smi, self.g) or s[self.g]["clock_
    ↪ mhz"]
        self.floor_w = max(float(a.floor_w or 0.0), s[self.g]["min"])
        self.c_floor = query_min_clock(a.smi, self.g)
        # the clock ceiling's cover: the card's own lowest supported c
    ↪ lock, read live (nothing fixed); an operator may set
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        # a share of the top instead (--clock-min-share)
        self.c_lo = max(self.c_floor, a.clock_min_share * self.top)
        self.ceiling = self.top            # where the compass holds t
    ↪ he ceiling (continuous)
        self.written_ceiling = self.top    # what the card was last to
    ↪ ld

        self.busy_clk, self.busy_draw = [], []    # the card on its ow
    ↪ n: busy clock and busy draw, ceiling at the top
        self.prof = dict(LAW)
        if a.down_gain is not None:
            self.prof["down"] = a.down_gain
        self.verdict = Verdict(tolerance=a.allow, min_samples=a.verdic
    ↪ t_samples, probe_every=a.verdict_every,
                               recheck=a.verdict_recheck)
        self.svc_t = None                  # elapsed_seconds of the la
    ↪ st request whose service time the verdict has seen
        self.brain = CompassLaw(Band(0.0, 1.0, center=self.prof["cente
    ↪ r"]), dt=a.interval, tau=2.0 * a.interval, kp=1.0, smooth=0.3)

        self.brain.kd *= 3.0
        # the v5 edge: the clock ceiling answers within the compass's
    ↪ own damping time (2 decisions)
        from omnicompass.edge import Edge
        self.edge = Edge(react=2.0)
        self.audit({"snapshot": {str(self.g): {"limit_w": self.start,
    ↪ "min_limit_w": s[self.g]["min"],
                                               "enforced_w": s[self.g]
    ↪ ["enforced"] if self.enforced_ok else None,
                                               "clock_top_mhz": self.t
    ↪ op,
                                               **{f: snap[f][str(self.
    ↪ g)] for f in SNAPSHOT}}},
                    "engine": "compass, two wires", "mode": a.mode, "l
    ↪ aw": self.prof,
                    "verdict": {"allow": a.allow, "samples": a.verdict
    ↪ _samples, "every": a.verdict_every,
                                "recheck": a.verdict_recheck},
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                  "covers": {"clock_mhz": [round(self.c_lo), round(s
↪ elf.top)], "power_w": [self.floor_w, self.start]}})
    if a.mode == "cap" and snap["power.management"][str(self.g)].l
↪ ower() != "enabled":
        self.audit({"refused": "power management not Enabled: a wr
↪ itten limit would not bind"})

        raise SystemExit("power management not Enabled: cap mode r
↪ efused, no authority taken")

def audit(self, rec):
    self.log.write(json.dumps({"time": time.time(), **rec}) + "\n"
↪ ); self.log.flush()

def position(self, util):
    a = self.a
    ls = latency_sense(a.latency_file, a.latency_window_s) if a.la
↪ tency_file and a.slo_ms else None
    if ls is not None and ls["blind"]:

        return None, ls
    resp = 0.0
    if ls is not None:
        # the position is the mean response time of the window bet
↪ ween the bare service time and the line (what
        # the model reads); the 95th percentile at or past the lin

↪ e, or any failed request, is past the wall
        bare = a.slo_ms / 10.0
        w = latency_window(a.latency_file, a.latency_window_s)["ms
↪ "]
        mean = sum(w) / len(w) if w else ls["p95"]
        resp = (mean - bare) / (a.slo_ms - bare)

        if ls["fail"] or ls["p95"] >= a.slo_ms:
            resp = max(resp, 1.0)
    return resp, ls

def service_costs(self):
    """The card's own time (ms) on each request finished since the
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  last decision (the workload's service_ms)."""
        import csv
        try:
            rows = list(csv.DictReader(open(self.a.latency_file)))
        except (OSError, TypeError):
            return []

        out, last = [], self.svc_t
        for row in rows:
            t, svc = row.get("elapsed_seconds"), row.get("service_ms")
            if row.get("ok") != "1" or not t or not svc:
                continue
            t = float(t)

            if last is None or t > last:
                out.append(float(svc))
                self.svc_t = t if self.svc_t is None else max(self.svc
    ↪ _t, t)
        if last is None:                    # the first read only finds
    ↪  where the file stands

            return []
        return out

    def learn(self, r):
        """The card on its own: while the ceiling is at the top and th
    ↪ e card is busy, its clock and draw are native's."""

        if r is not None and self.written_ceiling >= self.top and r["l
    ↪ imit"] >= self.start - 1.0 and r["util"] >= 0.9:
            self.busy_clk = (self.busy_clk + [r["clock_mhz"]])[-200:]
            self.busy_draw = (self.busy_draw + [r["draw"]])[-200:]

    def native(self):

        """(busy clock, busy draw) of the card on its own, or (None, N
    ↪ one) until enough busy readings are in."""
        if len(self.busy_clk) < self.a.learn_samples:
            return None, None
        c, d = sorted(self.busy_clk), sorted(self.busy_draw)
        return c[len(c) // 2], d[int(0.9 * (len(d) - 1))]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def write_clock(self, mhz, why):
        mhz = int(round(mhz))
        cmd = ["-i", str(self.g), "-lgc", f"{self.c_floor},{mhz}"]
        if self.a.mode != "cap" or self.foreign:
            self.audit({"would_clock_write": cmd, "why": why}); return

        rc, err = smi_run(self.a.smi, cmd)
        self.audit({"clock_write": cmd, "why": why, "rc": rc, "stderr"
    ↪ : err})
        if rc != 0:
            raise WriteFailed(f"nvidia-smi -lgc {self.c_floor},{mhz} r
    ↪ eturned {rc}: {err}")

        self.clock_set = True
        self.writes += 1

    def write_limit(self, w, why):
        w = int(w)
        cmd = ["nvidia-smi", "-i", str(self.g), "-pl", str(w)]

        if self.a.mode != "cap" or self.foreign:
            self.audit({"would_write": cmd, "why": why}); return
        self.audit({"write": cmd, "why": why})
        t0 = time.time()
        rc, err = smi_run(self.a.smi, ["-i", str(self.g), "-pl", str(w
    ↪ )])

        act = {"gpu": self.g, "requested_w": w, "t_requested": t0, "rc
    ↪ ": rc, "stderr": err}
        if rc != 0:
            self.audit({"actuator": act, "write_failed": cmd})
            raise WriteFailed(f"nvidia-smi -pl {w} returned {rc}: {err
    ↪ }")

        self.writes += 1
        s = query(self.a.smi, [self.g], self.enforced_ok)
        if s is not None:
            back = s[self.g]
            act.update({"readback_w": back["limit"], "enforced_w": bac
    ↪ k["enforced"], "t_readback": time.time(),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                    "realized": abs(back["limit"] - w) < 1.0, "ove
↪ rride": back["enforced"] < back["limit"] - 1.0})
        if act["realized"]:
            act["delay_s"] = round(act["t_readback"] - t0, 3)
            self.expect = w
    self.audit({"actuator": act})

def step(self):
    a, g = self.a, self.g
    s = query(a.smi, [g], self.enforced_ok)
    if s is None:
        p, ls, r = None, None, None

    else:
        r = s[g]
        if abs(r["limit"] - self.expect) >= 1.0 and not self.forei
↪ gn:
            self.foreign = True
            self.audit({"foreign_writer": {"gpu": g, "reads_w": r[

↪ "limit"], "expected_w": self.expect},
                        "action": "observe only from now on; both
↪ wires left to the other writer"})
        p, ls = self.position(r["util"])
    self.learn(r)
    n_clk, n_draw = self.native()

    thr = throttle(a.smi, [g]) if r is not None else None
    heat = slowed((thr or {}).get(g))
    saturated = r is not None and r["util"] >= a.race_util
    # the verdict: the card's own time on the requests since the l
↪ ast decision, at the step the ceiling stood at;
    # then the deepest step the compass may use now, or the step a

↪  trial needs
    self.verdict.observe(self.service_costs())
    if p is not None:
        # the v5 edge: past the line while the ceiling was held un
↪ der the top teaches the cushion a floor; then the
        # balance point and the wall move with the card's own clim
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ b and wobble
            if p >= 1.0 and self.written_ceiling < self.top:
                self.edge.learn_fall(0.1)
            center = self.edge.update(p)
            base = self.prof["center"] if self.edge.floor <= 0.0 else
    ↪ 0.0

            self.brain.band.center = min(0.995, max(0.0, max(base, cen
    ↪ ter)))
            self.brain.band.cushion = min(0.05, max(0.005, self.edge.r
    ↪ eact_part))
        calm = p is not None and p < self.brain.band.wall_high and not
    ↪  saturated

        deepest, trial, ev = self.verdict.tick(calm)
        if getattr(self.a, "dial", "max") == "max":
            # the max: the card's own clock ceiling stays at the top w
    ↪ hile it serves (its firmware boosts to its own power
            # limit: native already runs it flat out), so no step belo
    ↪ w the top is tried; the steady hold under an

            # operator's cap (no knock-backs) and fail up still apply
            deepest, trial = 0, False
        if ev:
            self.audit({"verdict": ev, "state": self.verdict.state, "d
    ↪ eepest_step": self.verdict.allowed})
        at_limit = r is not None and r["draw"] >= 0.97 * r["limit"]

        if p is not None and saturated and at_limit and n_clk is not N
    ↪ one and self.capped:
            # saturated against the card's own limit: hold the ceiling
    ↪  at the card's own busy clock under that limit,
            # no knock-backs; the lid stays at the start limit
            self.brain.force(p)

            ceiling = clamp(round(n_clk / a.min_change_mhz) * a.min_ch
    ↪ ange_mhz, self.c_lo, self.top)
            lid = self.start
            who = "steady_under_limit"
        elif p is None or p >= self.brain.band.wall_high or saturated:
            # fail up past the wall or blind; and race while work wait
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ s (the card saturated: a queue is forming), so a
            # burst is always served at full speed and the compass pac
    ↪ es only the slack between bursts
            if p is not None:
                self.brain.force(p)
            ceiling, lid = self.top, self.start

            who = "blind_fail_up" if p is None else "fail_up" if p >=
    ↪ self.brain.band.wall_high else "race"
        elif trial:
            self.brain.force(p)
            ceiling = self.top - deepest * a.min_change_mhz
            lid = self.start

            who = "verdict_trial"
        else:
            F = self.brain.force(p)
            # the speed floor: never under the clock the card reaches
    ↪ on its own while busy (until that is learned,
            # the top), so work waiting on the card is never served sl

    ↪ ower than native
            c_floor = self.top if n_clk is None else max(self.c_lo, mi
    ↪ n(self.top, n_clk * self.prof["floor"]))
            # and never past the deepest step the verdict has allowed
    ↪ (none allowed: the ceiling stays at the top)
            c_floor = max(c_floor, self.top - deepest * a.min_change_m

    ↪ hz)
            # the ceiling moves in whole clock steps, as the card's ow
    ↪ n clock does: the force times the gain (a share
            # of the top clock per unit of force) rounded to whole --m
    ↪ in-change-mhz steps; a pull under half a step
            # moves nothing and is not stored up, so a calm card is pa

    ↪ ced only when the pull is clearly down
            down = self.prof["down"]
            step = (a.up_gain if F > 0 else down) * F * self.top
            step = round(step / a.min_change_mhz) * a.min_change_mhz
            ceiling = clamp(self.ceiling + step, c_floor, self.top)
            if heat and ceiling < self.ceiling:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            ceiling, who = self.ceiling, "thermal_hold"
        else:
            who = "compass"
        # the lid: the start limit scaled to what a fully busy car
↪ d draws at this ceiling (a fifth of the draw does not
        # scale with the clock; the rest goes as clock^2.5, clock

↪ times voltage squared), plus headroom; at the top
        # clock the lid is the start limit, so the lid never adds
↪ a hammer of its own
        # the lid: never under what the card draws on its own whil
↪ e busy (its own meter, not a curve), plus
        # headroom; the start limit until that is learned

        lid = self.start if n_draw is None else clamp(math.ceil(n_
↪ draw * (1.0 + a.lid_headroom)), self.floor_w, self.start)
    rec = {"decision": {str(g): {"telemetry": None if r is None el
↪ se {
                "util": r["util"], "draw_w": r["draw"], "temp_c": r
↪ ["temp"], "limit_w": r["limit"],

                "enforced_w": r["enforced"], "clock_mhz": r["clock_
↪ mhz"], "throttle": (thr or {}).get(g)},
            "position": None if p is None else round(p, 4), "veloci
↪ ty": round(self.brain.v, 4),
            "center": round(self.brain.band.center, 4), "wall": rou
↪ nd(self.brain.band.wall_high, 4),

            "latency_p95_ms": None if not ls else ls.get("p95"),
            "ceiling_mhz": round(ceiling), "want_w": int(lid), "dec
↪ ided_by": who,
            "native_busy_clock_mhz": n_clk, "native_busy_draw_w": n
↪ _draw,
            "verdict_state": self.verdict.state, "verdict_deepest_s

↪ tep": self.verdict.allowed}}}
    self.audit(rec)
    self.ceiling = ceiling
    if abs(ceiling - self.written_ceiling) >= a.min_change_mhz or
↪ (ceiling >= self.top and self.written_ceiling < self.top):
        if ceiling >= self.top and self.clock_set and a.mode == "c
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ap" and not self.foreign:
                rc, err = smi_run(a.smi, ["-i", str(g), "-rgc"])
                self.audit({"clock_write": ["-i", str(g), "-rgc"], "wh
    ↪ y": who, "rc": rc, "stderr": err})
                if rc != 0:
                    raise WriteFailed(f"nvidia-smi -rgc returned {rc}:
    ↪  {err}")
                self.clock_set = False
            elif ceiling < self.top:
                self.write_clock(ceiling, who)
            self.written_ceiling = ceiling
        cur = r["limit"] if r is not None else self.expect

        if abs(lid - cur) >= a.min_change_w or (lid == self.start and
    ↪ cur != lid):
            self.write_limit(lid, who)

    def restore(self):
        failed = []

        if self.a.mode == "cap" and not self.foreign:
            rc, err = smi_run(self.a.smi, ["-i", str(self.g), "-rgc"])
            self.audit({"clock_write": ["-i", str(self.g), "-rgc"], "w
    ↪ hy": "restore", "rc": rc, "stderr": err})
            if rc != 0:
                failed.append(f"-rgc returned {rc}: {err}")

            s = query(self.a.smi, [self.g], self.enforced_ok)
            if s is None or abs(s[self.g]["limit"] - self.start) >= 1.
    ↪ 0:
                try:
                    self.write_limit(self.start, "reset: the limit rea
    ↪ d at start")

                except WriteFailed as e:
                    failed.append(str(e))
        s = query(self.a.smi, [self.g], self.enforced_ok) or {}
        back = s[self.g]["limit"] if self.g in s else None
        ok = self.foreign or (not failed and back is not None and abs(
    ↪ back - self.start) < 1.0)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.audit({"restored": {str(self.g): back}, "start": {str(sel
    ↪ f.g): self.start}, "ok": ok,
                    "writes": self.writes, "foreign_writer": self.fore
    ↪ ign, "restore_write_failed": failed})
        return ok

def parser():
    ap = argparse.ArgumentParser(description=__doc__, formatter_class=
    ↪ argparse.RawDescriptionHelpFormatter)
    ap.add_argument("--mode", choices=["watch", "cap"], default="watch
    ↪ ")

    ap.add_argument("--dial", choices=["max", "save"], default=os.envi
    ↪ ron.get("OMNI_DIAL", "max"),
                    help="max (default): the clock ceiling never stepp
    ↪ ed below the top while the card serves; save: the "
                         "tune-down (the verdict's steps below the top
    ↪  where the card's time on a request allows)")

    ap.add_argument("--gpus", default="0")
    ap.add_argument("--smi", default=os.environ.get("NVIDIA_SMI", "nvi
    ↪ dia-smi"))
    ap.add_argument("--interval", type=float, default=2.0)
    ap.add_argument("--duration", type=float, default=0.0)
    ap.add_argument("--audit", default="gpu_compass_audit.jsonl")

    ap.add_argument("--kill-file", default="/tmp/omni-gpu-kill")
    ap.add_argument("--latency-file", default="")
    ap.add_argument("--slo-ms", type=float, default=0.0)
    ap.add_argument("--latency-window-s", type=float, default=5.0, hel
    ↪ p="seconds of response times the position reads")
    ap.add_argument("--race-util", type=float, default=0.95, help="uti

    ↪ lization at which work is waiting: race, never pace")
    ap.add_argument("--learn-samples", type=int, default=15, help="bus
    ↪ y readings of the card on its own before the compass may lower a
    ↪ nything")
    ap.add_argument("--floor-w", type=float, default=0.0, help="the de
    ↪ clared envelope's lowest watts")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ap.add_argument("--clock-min-share", type=float, default=0.0,
                    help="the clock ceiling's cover, as a share of the
    ↪  top; 0 (the default): the card's own lowest supported clock")
    ap.add_argument("--allow", type=float, default=0.02, help="the mos
    ↪ t a ceiling step may add to the card's own time on a request")
    ap.add_argument("--verdict-samples", type=int, default=30, help="r
    ↪ equests measured at native and at the trial step")
    ap.add_argument("--verdict-every", type=int, default=8, help="deci
    ↪ sions between trials")
    ap.add_argument("--verdict-recheck", type=int, default=900, help="
    ↪ decisions before a refused step is tried again")
    ap.add_argument("--up-gain", type=float, default=0.10, help="share
    ↪  of the top clock moved per unit of force, up")
    ap.add_argument("--down-gain", type=float, default=None, help="sha
    ↪ re of the top clock moved per unit of force, down (default: the
    ↪ law's)")
    ap.add_argument("--lid-headroom", type=float, default=0.10, help="
    ↪ the lid above the draw the ceiling takes")
    ap.add_argument("--min-change-mhz", type=float, default=15.0)
    ap.add_argument("--min-change-w", type=float, default=3.0)
    return ap


def main(argv=None):
    a = parser().parse_args(argv)
    master.refuse_if_off("GPU governor (two wires)")
    gov = GpuCompass(a)
    # what puts the card back if this process dies without doing it it
    ↪ self (the watchdog runs it)
    back = ([[a.smi, "-i", str(gov.g), "-rgc"], [a.smi, "-i", str(gov.
    ↪ g), "-pl", str(int(round(gov.start)))]]
            if a.mode == "cap" else [])
    master.register("GPU governor (two wires)", restore=back, stale_s=
    ↪ max(60.0, 5 * a.interval))
    stop = {"now": False}
    signal.signal(signal.SIGTERM, lambda *_: stop.__setitem__("now", T
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ rue))
    t0 = time.time()
    failed = False
    try:
        while not stop["now"] and not os.path.exists(a.kill_file) and
    ↪ not master.is_off() and (a.duration <= 0 or time.time() - t0 < a
    ↪ .duration):
            try:
                master.heartbeat(); gov.step()
            except WriteFailed as e:
                gov.audit({"fatal": f"write failed: {e}"}); failed = T
    ↪ rue
                break
            except Exception as e:  # noqa: BLE001  a failed decision
    ↪ is logged; the kill path still runs
                gov.audit({"error": f"{type(e).__name__}: {e}"})
            end = time.time() + a.interval
            while time.time() < end and not stop["now"] and not os.pat
    ↪ h.exists(a.kill_file) and not master.is_off():
                time.sleep(0.2)
    finally:
        ok = gov.restore()
    return 5 if gov.foreign else 3 if not ok else 4 if failed else 0

if __name__ == "__main__":
    sys.exit(main())
```

omni_controller/gpu_governor.py

529 lines.

```
"""Omni-Compass on one GPU box, no Kubernetes: the engine reads each G
    ↪ PU's own meter and may lower its power limit.

Every decision (--interval seconds), for each GPU in --gpus:
  sense     nvidia-smi: power.draw, temperature.gpu, utilization.gpu,
    ↪ power.limit (the device's own readings)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
          the workload's response-time file (--latency-file, elapsed
  ↪ _seconds,latency_ms,ok) if given
engine    the Omni-Compass governor, throughput law (omnicompass/ada
  ↪ pter.py): load = utilization, power stress =
          draw / the limit found at start, heat = temperature / --te
  ↪ mp-limit, queue = response-time pressure.

          Its directive power_cap is the share of the start limit th
  ↪ e GPU may draw.
shield    limit = max(cap x start limit, draw x (1 + --headroom), --
  ↪ min-share x start limit, the device's minimum
          limit), never above the start limit; whole watts; a change
  ↪  under --min-change-w is not written.

          --min-share bounds the slowdown: a card held at that share
  ↪  of its limit runs a burst only a little slower.
busy gate utilization (smoothed over decisions) at or above --util-g
  ↪ ate: the start limit. A busy card is the
          bottleneck; slowing it grows the queue faster than it save
  ↪ s energy. The cap returns once utilization is

          back under the gate less --util-band.
reflexes  a blind sense (nvidia-smi unreadable, or the response-time
  ↪  file stale or empty): the start limit, at once
          a response-time breach (p95 > --slo-ms), and for --slo-cle
  ↪ ar decisions after it: the start limit, at once
read-back no new write until the last one is read back from the devi

  ↪ ce (power.limit within 1 W of what I wrote)
enforced  the card obeys enforced.power.limit, which another authori
  ↪ ty (a lower board or system limit) can hold under
          the limit I request. The engine senses the enforced limit;
  ↪  each write is read back at once (requested,
          return code, power.limit, enforced limit, delay), and enfo

  ↪ rced under requested is recorded as an override.
          A driver without enforced.power.limit: power.limit is used
  ↪  and the snapshot says so.
speed lock (--baseline-file, from tools/gpu_baseline.py on a run wit
  ↪ hout Omni): the limit is set by response time
          alone. Over the last --lock-window-s of the response-time
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  ↪ file, the mean, 95th and 99th percentile are each
         divided by the baseline's at the same arrival rate; the wo
  ↪ rst of the three is the speed ratio. The line is
         1 - --speed-gain (0.99: at least 1% faster than without Om
  ↪ ni). Above the line: the start limit, at once.
         Under the line less --lock-margin: lower by --lock-step x

  ↪ start, times the slack in margins (up to
         --lock-boost), at most once per --lock-hold-s (the window
  ↪ must see the step before the next). Between: held. Never under -
  ↪ -lock-floor x start.
         Speed won elsewhere (CPU conveyed to the serving pods, sho
  ↪ rter queues) shows as a ratio under the line,

         and the lock spends it on watts; with nothing won elsewher
  ↪ e it holds the start limit.
one writer the limit must be what I last wrote (or the start limit).
  ↪  Any other value means another writer: I stop
         writing for the rest of the run (observe only), record "fo
  ↪ reign_writer", leave its limit alone on kill

         (restoring would fight it), and exit 5 so the bench marks
  ↪ the run invalid. Two controllers on one limit is
         how production is lost.
heat     the device reporting a thermal or hardware slowdown (clock
  ↪ -limit reasons 0x8, 0x20, 0x40, 0x80): never
         tighten; the limit may only stay or rise (fail up).

envelope  every decision records every rule that held the engine's r
  ↪ equest back ("blocked_by") and the one that
         decided ("decided_by": engine, a floor, the busy gate, a r
  ↪ eflex, heat, or the speed lock), so a limit that
         did not move names its cause, and a result is credited to
  ↪ the rule that produced it.

envelope  --floor-w, the buyer's declared lowest watts (the confirma
  ↪ tion run requires it, scripts/gpu_paired.sh
floor    ENVELOPE): the limit is never set under it. The highest wa
  ↪ tts are the limit read at start.
outer    when the card's own controller (board, BMC or system polic
  ↪ y) already holds enforced.power.limit under the
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  holds     limit I set, a lower write that stays above that enforced
    ↪ value would change nothing the card does: it is
            not written ("outer_controller_holds"). Only a write that
    ↪ would actually bind, or a return upward, goes out.
Modes
  watch     everything above is computed and audited; nothing is writt
    ↪ en (the control arm)
  cap       the limit is written with nvidia-smi -i <gpu> -pl <W>. Ref
    ↪ used at start unless every GPU reports
            power.management Enabled. A write the device refuses (nonz
    ↪ ero return) ends the run: recorded, the start
            limit restored, exit 4, and the bench marks the arm invali
    ↪ d. No clock locks are ever written.
Kill switch
  the kill file (or SIGTERM) restores every GPU to the limit read at s
    ↪ tart, reads it back, and exits.
  The start limits are recorded first in the audit ("snapshot": power.
    ↪ limit, enforced.power.limit, default, min,
  max, persistence mode, power management, per GPU).
"""
from __future__ import annotations

import argparse, copy, json, math, os, shlex, signal, subprocess, sys,
    ↪  time
from pathlib import Path

ROOT = Path(__file__).resolve().parents[1]
sys.path.insert(0, str(ROOT))
from omnicompass import master
from omnicompass.adapter import Governor, mode_law, AUTOPILOT, OBSERVE
    ↪ , observe_vector, assimilate, ASSIMILATION
from omnicompass.core import U_AUTHORITY, State
from omni_controller.muscles import latency_sense

FIELDS = "index,power.draw,temperature.gpu,utilization.gpu,power.limit
    ↪ ,power.min_limit,clocks.sm"
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
ENFORCED = "enforced.power.limit"
SNAPSHOT = ("power.limit", "enforced.power.limit", "power.default_limi
    ↪ t", "power.min_limit", "power.max_limit",
             "persistence_mode", "power.management")
REASONS = ("clocks_event_reasons.active", "clocks_throttle_reasons.act
    ↪ ive")   # newer, older drivers

HEAT_BITS = 0x8 | 0x20 | 0x40 | 0x80   # HW slowdown, SW thermal slowd
    ↪ own, HW thermal slowdown, HW power brake


def slowed(reason):
    """True when the device reports a thermal or hardware slowdown in

    ↪ its clock-limit reasons (hex bit mask)."""
    try:
        return bool(int(str(reason), 16) & HEAT_BITS)
    except (TypeError, ValueError):
        return False

def blocked_by(requested, draw, start, min_w, headroom, min_share, slo
    ↪ _clean, gated, heat, lock, floor_w=0.0):
    """Every rule whose floor or override sits above the engine's own
    ↪ request (whole watts), in a fixed order."""
    engine_w = math.floor(requested * start)

    b = []
    if floor_w and floor_w > engine_w:
        b.append("envelope_floor")
    if not slo_clean:
        b.append("slo_or_blind_reflex")
    if gated:

        b.append("busy_gate")
    if math.ceil(draw * (1.0 + headroom)) > engine_w:
        b.append("draw_headroom_floor")
    if min_share * start > engine_w:
        b.append("share_floor")
    if min_w > engine_w:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        b.append("device_minimum")
    if heat:
        b.append("thermal_hold")
    if lock:
        b.append("speed_lock")
    return b

STATE = ("E", "U", "I_U", "S", "B", "B_dot")
MEASURED = ("E", "U", "I_U", "S", "B")   # the memoryless part of the
    ↪ observation map (B_dot exists only through history)


def measured_state(o, p):
    """h without memory: the state the telemetry alone points to (the
    ↪ targets assimilate() blends toward). Computed by
    assimilate() itself from a zero prior, so it is the engine's own m
    ↪ ap, not a second one."""
    z = assimilate(State(0.0, 0.0, 0.0, 0.0, 0.0, 0.0), o, copy.deepco
    ↪ py(p))
    return {k: getattr(z, k) / ASSIMILATION for k in MEASURED}


def window_stats(path, window_s, now=None):
    """Mean, 95th and 99th percentile (ms) and arrival rate (served pe
    ↪ r second) of the successful requests in the last
    window_s of the response-time file; None when blind (stale beyond
    ↪ two windows, or under 20 requests)."""
    try:
        age = (now if now is not None else time.time()) - os.path.getm
    ↪ time(path)
        rows = [l.split(",") for l in Path(path).read_text().splitline
    ↪ s()[1:] if l.strip()]
    except OSError:
        return None
    if not rows or age > 2.0 * window_s:
        return None
    t_end = float(rows[-1][0])
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ms = sorted(float(r[1]) for r in rows if float(r[0]) >= t_end - wi
    ↪ ndow_s and r[2].strip() == "1")
    if len(ms) < 20:
        return None
    span = min(window_s, max(1.0, t_end - float(rows[0][0])))
    tot = 0.0

    for v in ms:              # plain left-to-right addition, as the C
    ↪ ++ twin does (Python 3.12's sum() compensates)
        tot += v
    return {"mean": tot / len(ms), "p95": ms[min(len(ms) - 1, int(0.95
    ↪  * len(ms)))],
            "p99": ms[min(len(ms) - 1, int(0.99 * len(ms)))], "rate":

    ↪ len(ms) / span, "n": len(ms)}


def baseline_at(base, rate):
    """The baseline's mean, p95 and p99 at an arrival rate, linear bet
    ↪ ween its rate bins, flat beyond the ends."""

    bins = base["bins"]
    if rate <= bins[0]["rate"]:
        return bins[0]
    if rate >= bins[-1]["rate"]:
        return bins[-1]
    for lo, hi in zip(bins, bins[1:]):

        if lo["rate"] <= rate <= hi["rate"]:
            f = (rate - lo["rate"]) / (hi["rate"] - lo["rate"])
            return {k: lo[k] + f * (hi[k] - lo[k]) for k in ("mean", "
    ↪ p95", "p99")}

def shield_limit(cap, draw, start, min_w, headroom, min_share, slo_cle
    ↪ an):
    """The shield: limit = max(cap x start, draw x (1 + headroom), min
    ↪ _share x start, device minimum), never above start,
    whole watts. Returns (want_w, the bound that decided it). Twinned
    ↪ in C++ (cpp/src/gpu_rules.cpp)."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    share_floor = min_share * start
    floor = max(draw * (1.0 + headroom), min_w, share_floor)
    engine_w = math.floor(cap * start)
    want = int(min(start, max(engine_w, math.ceil(floor))))
    bound = ("slo_or_blind_reflex" if not slo_clean else "start_ceilin
    ↪ g" if want >= start and engine_w >= start

             else "share_floor" if math.ceil(floor) > engine_w and flo
    ↪ or == share_floor
             else "draw_headroom_floor" if math.ceil(floor) > engine_w
    ↪  and floor > min_w
             else "device_minimum" if math.ceil(floor) > engine_w else
    ↪  "engine")

    return want, bound


def busy_gate(u_prev, util, gated_prev, gate, band):
    """Utilization smoothed over decisions (u_prev None: the first rea
    ↪ ding) and the gate with its band. Returns

    (u, gated). Twinned in C++."""
    u = 0.5 * (util if u_prev is None else u_prev) + 0.5 * util
    return u, (u >= gate or (gated_prev and u >= gate - band))


def lock_decide(ratio, cur, start, min_w, since_last, speed_gain, lock

    ↪ _margin, lock_step, lock_boost, lock_floor, lock_hold_s):
    """The speed lock's step from the worst response-time ratio agains
    ↪ t the baseline. Returns (want_w, bound, line,
    aim). Twinned in C++."""
    line = 1.0 - speed_gain
    aim = line * (1.0 - lock_margin)

    floor = max(min_w, lock_floor * start)
    if ratio > line:
        want, bound = start, "speed_lock_release"
    elif ratio < aim and since_last >= lock_hold_s:
        mult = min(lock_boost, max(1.0, (aim - ratio) / max(1e-6, line
    ↪  * lock_margin)))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        want, bound = max(floor, cur - mult * lock_step * start), "spe
    ↪ ed_lock_spend"
    else:
        want, bound = cur, "speed_lock_hold"
    return int(min(start, max(floor, want))), bound, line, aim

def throttle(smi, gpus):
    """The device's own record of why its clock is held down (power ca
    ↪ p, thermal, ...), as a bit mask; None if the
    driver does not report it."""
    for f in REASONS:
        try:
            out = subprocess.run(shlex.split(smi) + [f"--query-gpu=ind
    ↪ ex,{f}", "--format=csv,noheader,nounits"],
                                 capture_output=True, text=True, timeo
    ↪ ut=10, check=True).stdout
            return {int(x.split(",")[0]): x.split(",")[1].strip() for
    ↪ x in out.strip().splitlines()}
        except (subprocess.SubprocessError, OSError, ValueError, Index
    ↪ Error):
            continue
    return None

class WriteFailed(RuntimeError):
    """The device refused a power-limit write: the arm ends (the kill
    ↪ path still restores)."""

def snapshot(smi, gpus):
    """{field: {gpu: value}} for every SNAPSHOT field, each queried al
    ↪ one; "unsupported" where the driver refuses it."""
    out = {}
    for f in SNAPSHOT:
        try:
            r = subprocess.run(shlex.split(smi) + [f"--query-gpu=index
    ↪ ,{f}", "--format=csv,noheader,nounits"],
                               capture_output=True, text=True, timeout
    ↪ =10, check=True).stdout
            vals = {int(x.split(",")[0]): x.split(", 1)[1].strip() f
    ↪ or x in r.strip().splitlines()}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        except (subprocess.SubprocessError, OSError, ValueError, Index
    ↪ Error):
            vals = {}
        out[f] = {str(g): vals.get(g, "unsupported") for g in gpus}
    return out

def query(smi, gpus, enforced=False):
    """{gpu: {"draw", "temp", "util", "limit", "min", "clock_mhz", "en
    ↪ forced"}} from the device, or None if nvidia-smi
    cannot be read. enforced: also read enforced.power.limit (else "en
    ↪ forced" is power.limit)."""

    try:
        fields = FIELDS + ("," + ENFORCED if enforced else "")
        out = subprocess.run(shlex.split(smi) + [f"--query-gpu={fields
    ↪ }", "--format=csv,noheader,nounits"],
                             capture_output=True, text=True, timeout=1
    ↪ 0, check=True).stdout

        rows = {}
        for line in out.strip().splitlines():
            v = [x.strip() for x in line.split(",")]
            rows[int(v[0])] = {"draw": float(v[1]), "temp": float(v[2]
    ↪ ), "util": float(v[3]) / 100.0,
                               "limit": float(v[4]), "min": float(v[5]

    ↪ ), "clock_mhz": float(v[6]),
                               "enforced": float(v[7]) if enforced els
    ↪ e float(v[4])}
        return {g: rows[g] for g in gpus} if all(g in rows for g in gp
    ↪ us) else None
    except (subprocess.SubprocessError, OSError, ValueError, IndexErro

    ↪ r):
        return None


class GpuGovernor:
    def __init__(self, a):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.a = a
        self.gpus = [int(g) for g in str(a.gpus).split(",") if g.strip
    ↪ () != ""]
        self.log = open(a.audit, "a")
        self.eng = {g: Governor(law=mode_law("throughput")) for g in s
    ↪ elf.gpus}

        for e in self.eng.values():
            e.set_mode(AUTOPILOT if a.mode == "cap" else OBSERVE)
            e.nodes = 1
        self.cap = {g: 1.0 for g in self.gpus}
        self.written = {}          # gpu -> last limit written (W), un
    ↪ til read back

        self.lp_hist = []
        self.writes = 0
        self.projected = {}
        self.reasons_ok = True     # False once the driver shows it do
    ↪ es not report clock-limit reasons
        self.util_avg = {}         # gpu -> utilization smoothed over

    ↪ decisions (busy gate)
        self.gated = {}            # gpu -> True while the busy gate h
    ↪ olds the start limit
        bf = getattr(a, "baseline_file", "")
        self.baseline = json.loads(Path(bf).read_text()) if bf else No
    ↪ ne   # speed lock: the run without Omni

        self.lock_at = {}          # gpu -> time of the lock's last ch
    ↪ ange
        self.clock = time.time     # replaceable, so a simulation in v
    ↪ irtual time can drive the lock's hold
        self.req_at = {}           # gpu -> (limit requested, time req
    ↪ uested) until it reads back

        self.foreign = False       # True once another writer changed
    ↪ a limit: observe only from then on
        self.enforced_ok = query(a.smi, self.gpus, enforced=True) is n
    ↪ ot None
        s = query(a.smi, self.gpus, self.enforced_ok)
        if s is None:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        raise SystemExit("nvidia-smi unreadable at start: no snaps
↪ hot, so I take no authority")
    snap = snapshot(a.smi, self.gpus)
    self.start = {g: s[g]["limit"] for g in self.gpus}
    self.expect = dict(self.start)   # gpu -> the limit that shoul
↪ d be there: the start, or my last write that landed

    self.min = {g: s[g]["min"] for g in self.gpus}
    self.audit({"snapshot": {str(g): {"limit_w": self.start[g], "m
↪ in_limit_w": self.min[g],
                                      "enforced_w": s[g]["enforced
↪ "] if self.enforced_ok else None,
                                      **{f: snap[f][str(g)] for f

↪ in SNAPSHOT}} for g in self.gpus},
                "senses": ENFORCED if self.enforced_ok else "power
↪ .limit (the driver does not report enforced.power.limit)",
                "mode": a.mode})
    off = [g for g in self.gpus if snap["power.management"][str(g)
↪ ].lower() != "enabled"]

    if a.mode == "cap" and off:
        self.audit({"refused": f"power management not Enabled on G
↪ PU {off}: a written limit would not bind"})
        raise SystemExit(f"power management not Enabled on GPU {of
↪ f}: cap mode refused, no authority taken")

def audit(self, rec):
    self.log.write(json.dumps({"time": time.time(), **rec}) + "\n"
↪ ); self.log.flush()

def set_limit(self, g, w, why):
    cmd = ["nvidia-smi", "-i", str(g), "-pl", str(int(w))]

    if self.a.mode != "cap" or self.foreign:
        # watch: computed and recorded, never executed; after anot
↪ her writer appeared, likewise
        self.audit({"would_write": cmd, "why": why, **({"withheld"
↪ : "another writer owns the limit"} if self.foreign else {})})
        return
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.audit({"write": cmd, "why": why})
        t0 = time.time()
        try:
            p = subprocess.run(shlex.split(self.a.smi) + ["-i", str(g)
    ↪ , "-pl", str(int(w))], capture_output=True, text=True, timeout=2
    ↪ 0)

            rc, err = p.returncode, p.stderr.strip()[:300]
        except (subprocess.SubprocessError, OSError) as e:
            rc, err = -1, f"{type(e).__name__}: {e}"[:300]
        act = {"gpu": g, "requested_w": int(w), "t_requested": t0, "rc
    ↪ ": rc, "stderr": err}
        if rc != 0:

            self.audit({"actuator": act, "write_failed": cmd})
            raise WriteFailed(f"GPU {g}: nvidia-smi -pl {int(w)} retur
    ↪ ned {rc}: {err}")
        self.writes += 1
        self.written[g] = int(w)
        s = query(self.a.smi, [g], self.enforced_ok)

        if s is not None:
            back = s[g]
            act.update({"readback_w": back["limit"], "enforced_w": bac
    ↪ k["enforced"], "t_readback": time.time(),
                        "realized": abs(back["limit"] - w) < 1.0, "ove
    ↪ rride": back["enforced"] < back["limit"] - 1.0})

            if act["realized"]:
                act["delay_s"] = round(act["t_readback"] - t0, 3); sel
    ↪ f.expect[g] = int(w)
        if not act.get("realized"):
            self.req_at[g] = (int(w), t0)
        self.audit({"actuator": act})

    def killed(self):
        return os.path.exists(self.a.kill_file)


    def restore(self):
        """Kill switch: every GPU back to the limit read at start, rea
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ d back from the device."""
        s = query(self.a.smi, self.gpus, self.enforced_ok) or {}
        failed = []
        for g in self.gpus:
            if self.foreign:
                break                  # another writer owns the limit
    ↪ : restoring would fight it
            if self.a.mode == "cap" and (g not in s or abs(s[g]["limit
    ↪ "] - self.start[g]) >= 1.0):
                try:
                    self.set_limit(g, self.start[g], "kill switch: the
    ↪  limit read at start")
                except WriteFailed as e:
                    failed.append(str(e))
        s = query(self.a.smi, self.gpus, self.enforced_ok) or {}
        back = {str(g): (s[g]["limit"] if g in s else None) for g in s
    ↪ elf.gpus}
        ok = not failed and all(v is not None and abs(v - self.start[i
    ↪ nt(g)]) < 1.0 for g, v in back.items())
        self.audit({"restored": back, "enforced": {str(g): (s[g]["enfo
    ↪ rced"] if g in s else None) for g in self.gpus},
                    "start": {str(g): self.start[g] for g in self.gpus
    ↪ }, "ok": ok, "writes": self.writes,
                    "foreign_writer": self.foreign,
                    "restore_write_failed": failed})
        return ok

    def speed_lock(self, g, cur, slo_clean):
        """The limit from response time against the run without Omni (
    ↪ see the module docstring). Returns
        (want_w, bound, why, record)."""
        a, start = self.a, self.start[g]
        st = window_stats(a.latency_file, a.lock_window_s) if a.latenc
    ↪ y_file else None
        if st is None or not slo_clean:
            return int(start), "speed_lock_blind", "speed lock: no res
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ponse-time window (or SLO reflex), the start limit", None
        b = baseline_at(self.baseline, st["rate"])
        ratios = {k: st[k] / b[k] for k in ("mean", "p95", "p99")}
        ratio = max(ratios.values())
        want, bound, line, aim = lock_decide(ratio, cur, start, self.m
    in[g], self.clock() - self.lock_at.get(g, -1e18),
                                            a.speed_gain, a.lock_marg
    in, a.lock_step, a.lock_boost, a.lock_floor, a.lock_hold_s)
        if want != int(cur):
            self.lock_at[g] = self.clock()
        rec = {"rate": round(st["rate"], 2), "ratios": {k: round(v, 4)
     for k, v in ratios.items()},
               "line": line, "aim": round(aim, 4), "n": st["n"]}
        why = f"speed lock: worst ratio {ratio:.3f} vs line {line:.3f}
     ({bound.split('_')[-1]}), limit {want} W"
        return want, bound, why, rec

    def step(self):
        a = self.a
        s = query(a.smi, self.gpus, self.enforced_ok)
        blind = s is None
        lp, p95, served = 0.0, None, None
        if a.latency_file and a.slo_ms:
            ls = latency_sense(a.latency_file, a.latency_window_s)
            served = ls["ok"]
            blind = blind or ls["blind"]
            if not ls["blind"]:
                p95 = ls["p95"]
                lp = max(0.0, ls["p95"] / a.slo_ms - 1.0)
                if ls["fail"]:
                    lp = max(lp, ls["fail"] / (ls["ok"] + ls["fail"]))
        self.lp_hist.append(lp)
        slo_clean = not blind and len(self.lp_hist) >= a.slo_clear and
     all(x == 0.0 for x in self.lp_hist[-a.slo_clear:])
        thr = throttle(a.smi, self.gpus) if s is not None and self.rea
    sons_ok else None
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    self.reasons_ok = self.reasons_ok and (s is None or thr is not
↪  None)
    rec = {"decision": {}, "blind": blind, "served_in_window": ser
↪ ved, "latency_p95_ms": p95, "latency_pressure": round(lp, 3), "s
↪ lo_clean": slo_clean}
    for g in self.gpus:

        if s is None:
            # blind: no give-back of power I cannot see; the start
↪  limit, at once
            if self.cap[g] == 1.0 or self.foreign:
                continue
            want, why, cur = self.start[g], "blind sense: the limi

↪ t read at start", None
            self.cap[g] = 1.0
        else:
            r = s[g]; cur = r["limit"]
            if abs(cur - self.expect[g]) >= 1.0 and not (g in self
↪ .written and abs(cur - self.written[g]) < 1.0):

                if g not in self.written or not self.foreign:
                    # neither what I last wrote nor what was there
↪  before: another writer
                    if not self.foreign:
                        self.audit({"foreign_writer": {"gpu": g, "
↪ reads_w": cur, "expected_w": self.expect[g],

                                                              "pending_w"
↪ : self.written.get(g)},
                                    "action": "observe only from n
↪ ow on; the limit left to the other writer"})
                    self.foreign = True; self.expect[g] = cur; sel
↪ f.written.pop(g, None)

            if g in self.written and abs(cur - self.written[g]) >=
↪  1.0:
                # read-back: my last write has not landed; no new
↪ order on top of it
                rec["decision"][str(g)] = {"hold": "last write not
↪  read back", "wrote_w": self.written[g], "reads_w": cur}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                continue
            if g in self.written:
                self.expect[g] = int(self.written.pop(g))
            if g in self.req_at:       # a write that had not read
↪  back at once has now landed
                w0, t0 = self.req_at.pop(g)

                self.audit({"actuator_realized": {"gpu": g, "reque
↪ sted_w": w0, "readback_w": cur,
                                                  "enforced_w": r[
↪ "enforced"], "delay_s": round(time.time() - t0, 3)}})
            # the limit the card obeys (enforced), not the one I m
↪ eant

            e = self.eng[g]; e.current_cap = min(1.0, r["enforced"
↪ ] / self.start[g])
            obs = {"queue_ratio": min(2.0, lp), "load_ratio": r["u
↪ til"], "power_stress": r["draw"] / self.start[g],
                   "thermal": r["temp"] / a.temp_limit, "network_s
↪ tress": 0.0, "drift_ratio": 0.0,

                   "stale": 0.0, "security_block": 0.0}
            # the chain, recorded whole: what the device said, the
↪  state it puts the engine in, what I had projected
            # for this moment, the projection for the next, what t
↪ he engine asked for, what the shield allowed
            seen = assimilate(e.x, observe_vector(obs, 0), copy.de

↪ epcopy(e.p))
            meas = measured_state(observe_vector(obs, 0), e.p)
            prev = self.projected.get(g)
            d = e.step(obs, 0)
            self.projected[g] = {k: getattr(e.x, k) for k in STATE
↪ }

            requested = float(d["power_cap"])
            cap = requested if slo_clean else 1.0
            want, bound = shield_limit(cap, r["draw"], self.start[
↪ g], self.min[g], a.headroom, getattr(a, "min_share", 0.0), slo_c
↪ lean)
            gate = getattr(a, "util_gate", 0.0)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            if gate:
                self.util_avg[g], self.gated[g] = busy_gate(self.u
↪ til_avg.get(g), r["util"], self.gated.get(g, False),
                                                            gate,
↪ getattr(a, "util_band", 0.1))
                if self.gated[g]:

                    want, bound = int(self.start[g]), "busy_gate"
                    cap = 1.0
            why = ("response-time reflex: the limit read at start"
↪  if not slo_clean
                   else f"busy gate: utilization {self.util_avg[g]
↪ :.2f}, the limit read at start" if bound == "busy_gate"

                   else f"engine cap {cap:.3f} of {self.start[g]:.
↪ 0f} W; floor draw {r['draw']:.0f} W x {1 + a.headroom:.2f}, "
                        f"share floor {getattr(a, 'min_share', 0.0
↪ ):.2f}")
            lock = None
            if self.baseline is not None:

                want, bound, why, lock = self.speed_lock(g, cur, s
↪ lo_clean)
            heat = slowed((thr or {}).get(g))
            if heat and want < cur:
                # the device is slowing itself for heat or a hardw
↪ are limit: never tighten on top of it

                want, bound, why = int(cur), "thermal_hold", "ther
↪ mal or hardware slowdown reported: no tightening"
            floor_w = float(getattr(a, "floor_w", 0.0) or 0.0)
            if floor_w and want < floor_w:
                # the buyer's declared lowest watts: never under i
↪ t

                want, bound, why = int(math.ceil(min(floor_w, self
↪ .start[g]))), "envelope_floor", f"declared envelope floor {floor
↪ _w:.0f} W"
            blocks = blocked_by(requested, r["draw"], self.start[g
↪ ], self.min[g], a.headroom, getattr(a, "min_share", 0.0),
                                slo_clean, self.gated.get(g, False
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ) if gate else False, heat, self.baseline is not None, floor_w)
                # the card's own controller already holds it lower: a
    ↪ lower write above the enforced value changes nothing
                outer = r["enforced"] < cur - 1.0 and r["enforced"] -
    ↪ 1.0 <= want < cur
                self.cap[g] = want / self.start[g]

                rec["decision"][str(g)] = {
                    "telemetry": {"util": r["util"], "draw_w": r["draw
    ↪ "], "temp_c": r["temp"], "limit_w": cur,
                                  "enforced_w": r["enforced"],
                                  "clock_mhz": r["clock_mhz"], "thrott
    ↪ le": (thr or {}).get(g)},

                    "state_observed": {k: round(getattr(seen, k), 4) f
    ↪ or k in STATE},
                    "state_measured": {k: round(v, 4) for k, v in meas
    ↪ .items()},
                    "state_projected_before": None if prev is None els
    ↪ e {k: round(v, 4) for k, v in prev.items()},

                    "prediction_error": None if prev is None else {k:
    ↪ round(getattr(seen, k) - prev[k], 4) for k in STATE},
                    "state_projected_next": {k: round(v, 4) for k, v i
    ↪ n self.projected[g].items()},
                    "u_push": round(e.last_push * U_AUTHORITY, 4),   #
    ↪  the U-channel command on the evolved state

                    "admissible": bool(d["change_permitted"]), "reques
    ↪ ted_cap": round(requested, 4),
                    "granted_cap": round(cap, 4), "shield_bound": boun
    ↪ d, "want_w": want,
                    "engine_w": math.floor(requested * self.start[g]),
    ↪  "blocked_by": blocks,

                    "decided_by": "speed_lock" if bound.startswith("sp
    ↪ eed_lock") else bound,
                    "outer_controller_holds": outer,
                    "engine_cap": round(requested, 3), "E": round(d["s
    ↪ tate"]["E"], 3), "U": round(d["state"]["U"], 3),
                    "speed_lock": lock}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            if cur is not None and abs(want - cur) < a.min_change_w an
    ↪ d not (want == self.start[g] and cur != want):
                continue
            if s is not None and rec["decision"].get(str(g), {}).get("
    ↪ outer_controller_holds"):
                continue

            if cur is not None and want == int(cur):
                continue
            self.set_limit(g, want, why)
        self.audit(rec)

def parser():
    ap = argparse.ArgumentParser(description=__doc__, formatter_class=
    ↪ argparse.RawDescriptionHelpFormatter)
    ap.add_argument("--mode", choices=["watch", "cap"], default="watch
    ↪ ")
    ap.add_argument("--gpus", default="0", help="GPU indexes, comma se

    ↪ parated")
    ap.add_argument("--smi", default=os.environ.get("NVIDIA_SMI", "nvi
    ↪ dia-smi"))
    ap.add_argument("--interval", type=float, default=2.0)
    ap.add_argument("--duration", type=float, default=0.0, help="secon
    ↪ ds to run (0: until killed)")

    ap.add_argument("--audit", default="gpu_audit.jsonl")
    ap.add_argument("--kill-file", default="/tmp/omni-gpu-kill")
    ap.add_argument("--headroom", type=float, default=0.3, help="limit
    ↪  never below draw x (1 + headroom)")
    ap.add_argument("--min-share", type=float, default=0.70, help="lim
    ↪ it never below this share of the start limit (0: off)")

    ap.add_argument("--floor-w", type=float, default=0.0, help="the de
    ↪ clared envelope's lowest watts: never under it (0: off)")
    ap.add_argument("--util-gate", type=float, default=0.5, help="smoo
    ↪ thed utilization at which the start limit returns (0: off)")
    ap.add_argument("--util-band", type=float, default=0.1, help="the
    ↪ cap resumes below --util-gate less this band")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ap.add_argument("--baseline-file", default="", help="speed lock: b
    ↪ aseline from tools/gpu_baseline.py (off when empty)")
    ap.add_argument("--speed-gain", type=float, default=0.01, help="sp
    ↪ eed lock line: at least this much faster than baseline")
    ap.add_argument("--lock-boost", type=float, default=5.0, help="lar
    ↪ gest multiple of --lock-step in one step down")

    ap.add_argument("--lock-margin", type=float, default=0.08, help="s
    ↪ pend watts only while this far under the line")
    ap.add_argument("--lock-step", type=float, default=0.02, help="sha
    ↪ re of the start limit given up per decision")
    ap.add_argument("--lock-hold-s", type=float, default=10.0, help="s
    ↪ econds between two steps down")

    ap.add_argument("--lock-window-s", type=float, default=60.0, help=
    ↪ "response-time window the lock reads")
    ap.add_argument("--lock-floor", type=float, default=0.5, help="the
    ↪  lock never holds the limit under this share of start")
    ap.add_argument("--min-change-w", type=float, default=5.0)
    ap.add_argument("--temp-limit", type=float, default=83.0, help="GP

    ↪ U temperature read as heat 1.0")
    ap.add_argument("--latency-file", default="")
    ap.add_argument("--slo-ms", type=float, default=0.0)
    ap.add_argument("--latency-window-s", type=float, default=30.0)
    ap.add_argument("--slo-clear", type=int, default=3)
    return ap

def main(argv=None):
    a = parser().parse_args(argv)
    master.refuse_if_off("GPU governor (one wire)")
    gov = GpuGovernor(a)

    back = [[a.smi, "-i", str(g), "-pl", str(int(round(gov.start[g])))
    ↪ ] for g in gov.gpus] if a.mode == "cap" else []
    master.register("GPU governor (one wire)", restore=back, stale_s=m
    ↪ ax(60.0, 5 * a.interval))
    stop = {"now": False}
    signal.signal(signal.SIGTERM, lambda *_: stop.__setitem__("now", T
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ rue))
    t0 = time.time()
    failed = warned = False
    try:
        while not stop["now"] and not gov.killed() and not master.is_o
    ↪ ff() and (a.duration <= 0 or time.time() - t0 < a.duration):
            try:
                master.heartbeat(); gov.step()
            except WriteFailed as e:   # the actuator refused: the arm
    ↪  ends here, never carries on as if watching
                gov.audit({"fatal": f"write failed: {e}"}); failed = T
    ↪ rue
                break
            except Exception as e:  # noqa: BLE001  a failed decision
    ↪ is logged; the kill path still runs
                gov.audit({"error": f"{type(e).__name__}: {e}"})
            if gov.foreign and not warned:
                print("omni-gpu: another writer changed the power limi
    ↪ t; observing only", file=sys.stderr, flush=True)
                warned = True
            end = time.time() + a.interval
            while time.time() < end and not stop["now"] and not gov.ki
    ↪ lled() and not master.is_off():
                time.sleep(0.2)
    finally:
        ok = gov.restore()
    return 5 if gov.foreign else 3 if not ok else 4 if failed else 0


if __name__ == "__main__":
    sys.exit(main())
```

omni_controller/muscles.py

756 lines.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Live muscles for the Kubernetes controller beyond HPA and nodes.

Each muscle pulls (afferent) and pushes (efferent) through kubectl, re
    ↪ cords what it changed so the reset can hand

the muscle back, and tags every write with its muscle name in the audi
    ↪ t log.

  power_cap   push: at the max (the default dial) the cap is never set
    ↪  under native: each machine's idle CPU is conveyed
              to the capped deployments' running pods (convey: one cli

    ↪ ck under the machine, its last 5% never handed out,
              never under the operator's limit), and the frequency cei
    ↪ ling and the GPU limit stay at their top. The
              tune-down (--dial save): CPU limit of each running pod =
    ↪  base limit x the governor's power cap, never under
              the pod's own request nor its use plus headroom (nothing

    ↪  fixed), resized in place (no restart; Linux CFS
              quota throttles the containers for real); pull: power fr
    ↪ om --power-cmd
  heat        pull: thermal state from the harness heat law driven by
    ↪ live power stress (modelled: kind has no thermometer)
  security    pull: ConfigMap key "hold" == "true" means a security ho

    ↪ ld; the shield then blocks every expansion
  rollout     push: pause a deployment's rollout while the governor do
    ↪ es not permit change; resume it when it does;
              undo a rollout that has exceeded its progress deadline w
    ↪ hen the governor authorises rollback
  batch       push: admit (unsuspend) held batch Jobs, one per decisio
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  ↪ n, only when change is permitted and load and power
           stress are under the compass's wall less one cushion (0.
  ↪ 95 - 0.05: one click under, the nervous system's
           own admit gate); running Jobs are never suspended
latency    pull: 95th-percentile response time over the last --late
  ↪ ncy-window-s from --latency-file (CSV written by

           scripts/latency_probe.py); pressure max(0, p95 / --slo-m
  ↪ s - 1) enters the engine as queue pressure
cpu_pstate  hardware connector. pull: --rapl-cmd prints package watt
  ↪ s (e.g. from /sys/class/powercap/intel-rapl);
           push: --cpufreq-cmd with {khz}, the frequency ceiling =
  ↪ max frequency x power cap (e.g. writing

           scaling_max_freq with scripts/cpufreq_ceiling.sh {khz},
  ↪ see hardware/SCHEDUTIL.md, or `cpupower frequency-set -u {khz}kH
  ↪ z`); kill runs it with the maximum frequency
gpu        hardware connector. pull: --gpu-query-cmd prints "watts,
  ↪ celsius[,min_watts[,slowdown_celsius]]" (e.g.
           `nvidia-smi --query-gpu=power.draw,temperature.gpu,power

  ↪ .min_limit --format=csv,noheader,nounits` plus the
           card's slowdown temperature): the card's own figures, re
  ↪ ad live. One degree under its own slowdown
           temperature reads as heat 1.0 (--gpu-temp-limit only for
  ↪  a card that does not report it); push:
           --gpu-power-cmd with {w}, the power limit = max limit x

  ↪ power cap, never under the card's own minimum
           (e.g. `nvidia-smi -pl {w}`); kill restores the maximum l
  ↪ imit
rightsize   push: each running pod's CPU *request* follows its measu
  ↪ red use x (1 + headroom), resized in place through the
           pods/resize subresource (no restart); never above the li

  ↪ mit, never below --rightsize-min-m; no decrease while
           the SLO is breached, no increase during a security hold;
  ↪  kill restores every original request
coldstart   push: a deployment with no work waiting (ConfigMap key "
  ↪ queue" == 0, the queue a KEDA scaler would read) for
           --coldstart-idle decisions is scaled to zero; it is scal
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ed back to its recorded replica count the moment
              work is waiting; kill restores the recorded count
  batch_pace  push: while power stress or heat is high, one running Jo
    ↪ b labelled omnicompass.io/pausable=true is suspended
              per decision (checkpointed training pauses instead of th
    ↪ e site going over its limit); it is resumed when

              stress and heat are back down; kill resumes every Job Om
    ↪ ni paused
  contain     push: an agent namespace whose measured CPU use exceeds
    ↪ --contain-cpu-m, or any namespace during a security
              hold, gets a ResourceQuota (limits.cpu = budget) and its
    ↪  running pods' CPU limits are scaled in place so the

              total fits the budget; lifted when use is back under bud
    ↪ get; kill deletes the quota and restores the limits
  cooling     facility connector. push: --cooling-cmd with {c}, the su
    ↪ pply-air setpoint moved between --cooling-min-c and
              --cooling-max-c by the heat state (warm setpoint while c
    ↪ ool, saving chiller energy; cold setpoint as heat

              rises); kill runs it with --cooling-restore-c
  Hardware connectors are off unless their commands are given (not ava
    ↪ ilable on CI runners); the mechanism is the same.
"""
from __future__ import annotations

import csv, json, math, shlex, subprocess, time
import re

CPU_ANN = "omnicompass.io/original-cpu-limit"
PAUSE_ANN = "omnicompass.io/paused-by-omni"
BATCH_LABEL = "omnicompass.io/batch=true"

PAUSABLE_LABEL = "omnicompass.io/pausable=true"
REQ_ANN = "omnicompass.io/original-cpu-request"
REPL_ANN = "omnicompass.io/original-replicas"
PACE_ANN = "omnicompass.io/paced-by-omni"
QUOTA = "omni-containment"
LIM_ANN = "omnicompass.io/original-limits"
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def milli(v):
    v = str(v)
    return float(v[:-1]) if v.endswith("m") else float(v) * 1000.0

def ref(s):
    ns, name = s.split("/", 1)
    return ns, name

class Muscles:
    def __init__(self, k, a, audit):
        self.k, self.a, self.audit = k, a, audit
        self.gain = {}       # (ns, deployment) -> mean conveyed CPU l
    ↪ imit / operator's limit
        self.base = {}       # (ns, deployment) -> operator's CPU limi

    ↪ t (millicores)
        self.thermal = 0.32  # harness initial thermal state
        self.gpu_min_w = 0.0     # the card's own minimum power limit,
    ↪  read live (0 until the card reports it)
        self.gpu_heat_c = 0.0    # one degree under the card's own slo
    ↪ wdown temperature, read live (0: not reported)

    def at_max(self):
        """The max (the default dial): no level is ever set under what
    ↪  native runs."""
        return getattr(self.a, "dial", "max") == "max"

    # ---- afferent -----------------------------------------------
    ↪ -----------------------------------------------
    def sense(self, power_stress):
        o = {}
        if getattr(self.a, "thermal_model", False):
            self.thermal = min(1.35, max(0.0, 0.86 * self.thermal + 0.

    ↪ 14 * (0.34 + 0.62 * min(1.35, power_stress))))
            o["thermal"] = self.thermal
        if getattr(self.a, "rapl_cmd", ""):
            o["cpu_watts"] = self._read(self.a.rapl_cmd)
        if getattr(self.a, "gpu_query_cmd", ""):
            out = self._run_out(self.a.gpu_query_cmd)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            try:
                vals = [float(x) for x in out.split(",")]
                w, t = vals[:2]
                o["gpu_watts"], o["gpu_celsius"] = w, t
                if len(vals) > 2 and vals[2] > 0:
                    self.gpu_min_w = vals[2]                    # the
↪ card's own floor
                if len(vals) > 3 and vals[3] > 1:
                    self.gpu_heat_c = vals[3] - 1.0             # one
↪ degree under the card's own slowdown
                limit = self.gpu_heat_c or self.a.gpu_temp_limit
                o["thermal"] = max(o.get("thermal", 0.0), min(1.35, t
↪ / max(1.0, limit)))
            except ValueError:
                pass
        lf = getattr(self.a, "latency_file", "")
        if lf and getattr(self.a, "slo_ms", 0):
            ls = latency_sense(lf, self.a.latency_window_s)
            o["latency_blind"] = 1.0 if ls["blind"] else 0.0
            o["latency_age_s"] = ls["age_s"]
            if not ls["blind"]:
                o["latency_p95_ms"] = ls["p95"]
                o["latency_pressure"] = max(0.0, ls["p95"] / self.a.sl
↪ o_ms - 1.0)
                if ls["fail"]:        # failed requests in a live wind
↪ ow are real service failures: full pressure share
                    o["latency_pressure"] = max(o["latency_pressure"],
↪  ls["fail"] / (ls["ok"] + ls["fail"]))
        cm = getattr(self.a, "security_configmap", "")
        if cm:
            ns, name = ref(cm)
            try:
                data = self.k.get("get", "configmap", name, "-n", ns,
↪ "-o", "json").get("data", {}) or {}
                o["security_block"] = 1.0 if str(data.get("hold", ""))
↪ .lower() == "true" else 0.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            except Exception:
                o["security_block"] = 0.0
        return o

    def _run_out(self, cmd):
        return subprocess.run(cmd, shell=True, capture_output=True, te
    ↪ xt=True).stdout.strip()

    def _read(self, cmd):
        try:
            return float(self._run_out(cmd).split()[0])
        except (ValueError, IndexError):
            return float("nan")

    def _hw(self, template, value, why):
        cmd = template.format(khz=int(value), w=int(value), v=value)
        self.audit({"write": shlex.split(cmd), "why": why, "dry_run":
    ↪ self.a.dry_run})
        if not self.a.dry_run:
            subprocess.run(shlex.split(cmd), check=True)

    # ---- efferent ---------------------------------------------------
    ↪ ------------------------------------------------
    def push(self, d, obs, killed=False):
        if killed:
            return
        cap = 1.0 if self.at_max() else float(d["power_cap"])     # th
    ↪ e max: never under native
        self._power_cap(cap, obs)
        self._hardware(cap, obs)
        self._rollout(bool(d["change_permitted"]), bool(d["rollback_au
    ↪ thorized"]))
        self._batch(bool(d["change_permitted"]), obs)
        for name, fn in (("rightsize", lambda: self._rightsize(obs)),
    ↪ ("coldstart", self._coldstart),
                         ("batch_pace", lambda: self._batch_pace(obs))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ , ("contain", lambda: self._contain(obs)),
                        ("cooling", lambda: self._cooling(obs))):
            self._guard(name, fn)

    def _may(self, organ, what):
        """Nervous-system authority for an organ ("expand", "contract"
    ↪ , "admit", "pause"); without it, everything allowed."""
        a = getattr(self, "auth", None)
        if not a:
            return True
        return bool(a.get("organs", {}).get(organ, {}).get(what, False
    ↪ ))

    def _envelope(self, organ, default):
        a = getattr(self, "auth", None)
        return (a or {}).get("organs", {}).get(organ, {}).get("envelop
    ↪ e", default)

    def _guard(self, name, fn):
        """One lever failing is logged and never stops the others (nor
    ↪  the reset)."""
        try:
            fn()
        except Exception as e:  # noqa: BLE001

            err = getattr(e, "stderr", "") or str(e)
            self.audit({"error": f"{name}: {type(e).__name__}: {str(er
    ↪ r).strip()[:400]}"})

    # ---- new levers ------------------------------------------------
    ↪ ------------------------------------------------

    def _named_usage(self, ns, sel=None):
        args = ["top", "pods", "-n", ns, "--no-headers"] + (["-l", sel
    ↪ ] if sel else [])
        try:
            out = self.k.get(*args)
        except Exception:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            return {}
        return {line.split()[0]: milli(line.split()[1]) for line in st
    ↪ r(out).strip().splitlines() if line.strip()}

    def _rightsize(self, obs):
        for target in filter(None, getattr(self.a, "rightsize_deployme
    ↪ nts", "").split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
    ↪ , "json")
            ann = dep["metadata"].get("annotations", {}) or {}
            c0 = dep["spec"]["template"]["spec"]["containers"][0].get(
    ↪ "resources", {})
            base = c0.get("requests", {}).get("cpu")
            if base is None:
                continue
            if REQ_ANN not in ann:
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , f"{REQ_ANN}={int(milli(base))}m"], "rightsize: record original
    ↪  CPU request")
            sel = ",".join(f"{k}={v}" for k, v in dep["spec"]["selecto
    ↪ r"]["matchLabels"].items())
            use = self._named_usage(ns, sel)
            for pod in self._pods(dep, ns):
                pn = pod["metadata"]["name"]
                if pn not in use:
                    continue
                res = pod["spec"]["containers"][0].get("resources", {}
    ↪ )
                cur = milli(res.get("requests", {}).get("cpu", base))
                lim = milli(res.get("limits", {}).get("cpu", "1000000m
    ↪ "))
                want = int(min(lim, max(self.a.rightsize_min_m, math.c
    ↪ eil(use[pn] * (1.0 + self.a.rightsize_headroom) / 10.0) * 10)))
                if want < cur and (not obs.get("slo_clean", True) or n
    ↪ ot self._may("pods", "contract")):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                continue  # SLO reflex / nervous system: no shrink
↪ ing without contraction authority
            if want > cur and obs.get("security_block", 0.0) > 0.5
↪ :
                continue  # shield I1: no expansion during a secur
↪ ity hold

            if abs(want - cur) < self.a.cap_min_change_m:
                continue
            self.k.write(["patch", "pod", pn, "-n", ns, "--subreso
↪ urce", "resize", "--type=json", "-p",
                          json.dumps([{"op": "replace", "path": "/
↪ spec/containers/0/resources/requests/cpu", "value": f"{want}m"}]

↪ )],
                         f"rightsize: CPU request {int(cur)}m -> {
↪ want}m in place (use {int(use[pn])}m)")

def _coldstart(self):
    sig = getattr(self.a, "coldstart_signal", "")

    if not sig:
        return
    sns, sname = ref(sig)
    try:
        q = float((self.k.get("get", "configmap", sname, "-n", sns
↪ , "-o", "json").get("data") or {}).get("queue", "0"))

    except Exception:
        return
    self._idle = getattr(self, "_idle", 0) + 1 if q <= 0 else 0
    for target in filter(None, getattr(self.a, "coldstart_deployme
↪ nts", "").split(",")):
        ns, name = ref(target)

        dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
↪ , "json")
        ann = dep["metadata"].get("annotations", {}) or {}
        rep = int(dep["spec"].get("replicas", 1))
        if q > 0 and rep == 0 and REPL_ANN in ann:
            self.k.write(["scale", "deployment", name, "-n", ns, f
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ "--replicas={ann[REPL_ANN]}"], f"coldstart: wake to {ann[REPL_AN
    ↪ N]} (queue {q:g})")
            elif self._idle >= self.a.coldstart_idle and rep > 0 and s
    ↪ elf._may("pods", "contract"):
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , "--overwrite", f"{REPL_ANN}={rep}"], "coldstart: record replic
    ↪ as")
                self.k.write(["scale", "deployment", name, "-n", ns, "
    ↪ --replicas=0"], f"coldstart: scale to zero (idle {self._idle} de
    ↪ cisions)")

    def _batch_pace(self, obs):
        if not getattr(self.a, "batch_pace", False):
            return
        hot = obs.get("power_stress", 0.0) >= self.a.pace_high or obs.
    ↪ get("thermal", 0.0) >= self.a.pace_heat \
            or (getattr(self, "auth", None) is not None and self._may(
    ↪ "batch", "pause"))
        calm = obs.get("power_stress", 1.0) <= self.a.pace_low and obs
    ↪ .get("thermal", 1.0) < self.a.pace_heat - 0.06
        jobs = self.k.get("get", "jobs", "-A", "-l", PAUSABLE_LABEL, "
    ↪ -o", "json")["items"]
        if hot:
            run = [j for j in jobs if not j["spec"].get("suspend")]
            if run:
                j = run[0]; ns, name = j["metadata"]["namespace"], j["
    ↪ metadata"]["name"]
                self.k.write(["annotate", "job", name, "-n", ns, "--ov
    ↪ erwrite", f"{PACE_ANN}=true"], "batch_pace: record pause")
                self.k.write(["patch", "job", name, "-n", ns, "--type=
    ↪ merge", "-p", json.dumps({"spec": {"suspend": True}})],
                             f"batch_pace: pause job (power stress {ob
    ↪ s.get('power_stress', 0.0):.2f}, heat {obs.get('thermal', 0.0):.
    ↪ 2f})")
        elif calm:
            paced = [j for j in jobs if j["spec"].get("suspend") and (
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ j["metadata"].get("annotations") or {}).get(PACE_ANN) == "true"]
            if paced:
                self._resume_job(paced[0], "batch_pace: resume job (st
    ↪ ress and heat back down)")

    def _resume_job(self, j, why):

        ns, name = j["metadata"]["namespace"], j["metadata"]["name"]
        self.k.write(["patch", "job", name, "-n", ns, "--type=merge",
    ↪ "-p", json.dumps({"spec": {"suspend": False}})], why)
        self.k.write(["annotate", "job", name, "-n", ns, f"{PACE_ANN}-
    ↪ "], "batch_pace: clear pause record")

    def _quota(self, ns):
        try:
            return self.k.get("get", "resourcequota", QUOTA, "-n", ns,
    ↪  "-o", "json")
        except Exception:
            return None

    def _contain(self, obs):
        """Contain on over-budget use or a security hold; while contai
    ↪ ned each running pod gets an equal share of the
        budget as its CPU limit (in place); lift only when use is unde
    ↪ r 80% of the budget (release band) and no hold."""

        for ns in filter(None, getattr(self.a, "contain_namespaces", "
    ↪ ").split(",")):
            total = sum(self._named_usage(ns).values())
            budget = float(self.a.contain_cpu_m)
            hold = obs.get("security_block", 0.0) > 0.5
            q = self._quota(ns)

            if q is None and (total > budget or hold):
                self.k.write(["create", "quota", QUOTA, "-n", ns, f"--
    ↪ hard=limits.cpu={int(budget)}m"],
                             f"contain: quota limits.cpu={int(budget)}
    ↪ m (use {int(total)}m)")
                q = {"metadata": {"annotations": {}}}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        elif q is not None and total < 0.8 * budget and not hold:
            self._release(ns, q, "contain: use back under budget,
↪ lift containment")
            continue
        if q is None:
            continue

        held = json.loads((q["metadata"].get("annotations") or {})
↪ .get(LIM_ANN, "{}"))
        run = [p for p in self.k.get("get", "pods", "-n", ns, "-o"
↪ , "json")["items"] if p["status"].get("phase") == "Running"
               and p["spec"]["containers"][0].get("resources", {})
↪ .get("limits", {}).get("cpu") is not None]

        share = max(10, int(budget / max(1, len(run)) / 10) * 10)
        changed = False
        for p in run:
            pn = p["metadata"]["name"]; lim = p["spec"]["container
↪ s"][0]["resources"]["limits"]["cpu"]
            if pn not in held:

                held[pn] = lim; changed = True
            want = min(share, int(milli(held[pn])))
            if int(milli(lim)) != want:
                self.k.write(["patch", "pod", pn, "-n", ns, "--sub
↪ resource", "resize", "--type=json", "-p",
                              json.dumps([{"op": "replace", "path"

↪ : "/spec/containers/0/resources/limits/cpu", "value": f"{want}m"
↪ }])],
                             f"contain: pod CPU limit {lim} -> {wa
↪ nt}m in place (budget share)")
        if changed:
            # the original limits live on the quota object, so a r

↪ eset in any process can restore them
            self.k.write(["annotate", "resourcequota", QUOTA, "-n"
↪ , ns, "--overwrite", f"{LIM_ANN}={json.dumps(held, sort_keys=Tru
↪ e)}"],
                         "contain: record original pod CPU limits"
↪ )
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def _release(self, ns, q, why):
        # the quota goes first: while it stands, Kubernetes refuses to
    ↪  raise a pod's limit back above the budget share
        held = json.loads((q["metadata"].get("annotations") or {}).get
    ↪ (LIM_ANN, "{}"))
        self.k.write(["delete", "resourcequota", QUOTA, "-n", ns], f"{
    ↪ why}: delete quota")
        for pn, lim in held.items():
            self._guard(f"{why} {pn}", lambda pn=pn, lim=lim: self.k.w
    ↪ rite(
                ["patch", "pod", pn, "-n", ns, "--subresource", "resiz
    ↪ e", "--type=json", "-p",
                 json.dumps([{"op": "replace", "path": "/spec/containe
    ↪ rs/0/resources/limits/cpu", "value": lim}])],
                f"{why}: restore pod CPU limit {lim}"))

    def _cooling(self, obs):
        cmd = getattr(self.a, "cooling_cmd", "")
        if not cmd:
            return
        th = obs.get("thermal", 0.5)
        x = min(1.0, max(0.0, (th - 0.5) / 0.5))
        c = round(self.a.cooling_max_c - (self.a.cooling_max_c - self.
    ↪ a.cooling_min_c) * x, 1)
        c = round(min(c, max(self.a.cooling_min_c, self._envelope("coo
    ↪ ling", [0, 99])[1])), 1)   # nervous-system envelope
        if abs(c - getattr(self, "_setpoint", -99.0)) >= 0.5:
            self._hw(cmd.replace("{c}", "{v}"), c, f"cooling: supply-a
    ↪ ir setpoint {c} C (heat {th:.2f})")
            self._setpoint = c

    def _pods(self, dep, ns):
        sel = ",".join(f"{k}={v}" for k, v in dep["spec"]["selector"][
    ↪ "matchLabels"].items())
        return [p for p in self.k.get("get", "pods", "-n", ns, "-l", s
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ el, "-o", "json")["items"]
                if p["status"].get("phase") == "Running"]

    def _pod_usage(self, dep, ns):
        sel = ",".join(f"{k}={v}" for k, v in dep["spec"]["selector"][
    ↪ "matchLabels"].items())
        try:
            out = self.k.get("top", "pods", "-n", ns, "-l", sel, "--no
    ↪ -headers")
        except Exception:
            return []
        return [milli(line.split()[1]) for line in str(out).strip().sp
    ↪ litlines() if line.strip()]

    def _resize(self, pod, ns, value, why):
        self.k.write(["patch", "pod", pod["metadata"]["name"], "-n", n
    ↪ s, "--subresource", "resize", "--type=json", "-p",
                      json.dumps([{"op": "replace", "path": "/spec/con
    ↪ tainers/0/resources/limits/cpu", "value": value}])], why)

    def _power_cap(self, cap, obs):
        """In-place pod resize (no restart): each running pod's CPU li
    ↪ mit = base limit x cap; the kernel's CFS quota
        enforces it. The deployment template is not changed, so no rol
    ↪ lout is triggered."""
        if not obs.get("slo_clean", True):
            cap = 1.0  # SLO reflex: no power capping while service is
    ↪  (or was just) over its response-time target
        if getattr(self.a, "latency_file", "") or self.at_max():
            # a request-served workload: its work is set by arrivals,
    ↪ not by the cap, so throttling it saves no energy
            # (the same CPU-seconds run later) and only adds wait. The
    ↪  energy goes where the work is: convey(). And at
            # the max every capped pod gets its machine's idle CPU, ne
    ↪ ver less than its operator gave it
            return self.convey(obs)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        for target in filter(None, getattr(self.a, "cap_deployments",
    ↪ "").split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
    ↪ , "json")
            ann = dep["metadata"].get("annotations", {}) or {}

            c0 = dep["spec"]["template"]["spec"]["containers"][0]
            tmpl = c0.get("resources", {}).get("limits", {}).get("cpu"
    ↪ )
            if tmpl is None:
                continue
            base = milli(ann.get(CPU_ANN, tmpl))

            req = milli(c0.get("resources", {}).get("requests", {}).ge
    ↪ t("cpu", "0"))
            want = int(max(req, round(base * max(self.a.cap_min, min(1
    ↪ .0, cap)) / 10.0) * 10))
            # reflex: never cap a pod below what it is using plus head
    ↪ room (as the node muscle never goes below requests)

            use = self._pod_usage(dep, ns)
            if use:
                want = int(min(base, max(want, math.ceil(max(use) * (1
    ↪ .0 + self.a.cap_headroom) / 10.0) * 10)))
            if CPU_ANN not in ann:
                self.k.write(["annotate", "deployment", name, "-n", ns

    ↪ , f"{CPU_ANN}={int(base)}m"], "power_cap: record original CPU li
    ↪ mit")
            for pod in self._pods(dep, ns):
                cur = milli(pod["spec"]["containers"][0].get("resource
    ↪ s", {}).get("limits", {}).get("cpu", tmpl))
                if obs.get("security_block", 0.0) > 0.5 and want > cur

    ↪ :
                    continue  # shield I1: no expansion during a secur
    ↪ ity hold
                if abs(want - cur) < self.a.cap_min_change_m:
                    continue
                self._resize(pod, ns, f"{want}m", f"power_cap: pod CPU
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  limit to {want}m in place (cap {cap:.3f})")

    def convey(self, obs=None):
        """Energy to where the work is (omnicompass/conveyance.py, on
    ↪ one machine's CPU).

        A serving pod's CPU limit is a quota: a request that needs mor
    ↪ e CPU than one quota period allows waits for the
        next period, while the machine it runs on sits idle. That wait
    ↪  is energy withheld from the work, not saved: the
        request uses the same CPU-seconds either way. So each machine'
    ↪ s idle CPU is conveyed to the serving pods on it:

            c_i = min( max(L_i, (0.95 A_j - Q_j) / |P_j|), 0.95 A_j )

        A_j the machine's allocatable CPU, Q_j the requests of every o
    ↪ ther pod on it, P_j the serving pods on it, L_i the
        operator's own limit. The machine's last five percent is never

    ↪  handed out (the living band), a pod never gets
        less than its operator gave it, and the requests (what the sch
    ↪ eduler and the autoscaler read) are untouched.
        Resized in place through pods/resize: no pod restarts. No expa
    ↪ nsion during a security hold. The reset
        returns every pod to L_i.

        On kind every node is a container on one machine and reports t
    ↪ hat machine's whole CPU as its own, so the limits
        the nodes hand out sum to more than the machine: a ceiling, no
    ↪ t a use, and the kernel's fair scheduler arbitrates
        when the serving pods ask for more than the machine, as it doe

    ↪ s for native's pods. v7 adds one guard, the same
        as the replica room's (capacity.py): on such a shared host no
    ↪ limit is raised while the machine's measured busy
        share is at or over 75% or cannot be read; limits already give
    ↪ n stay, and lowering is never held back. Each hold
        is written to the audit ("convey": "held"). Two other designs
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ were tried in the toy gate (tools/toy_gate.py,
        docs/OMNI_V7.md) and refused by it: the host's CPU counted onc
    ↪ e and shared by every serving pod (at the v6 KEDA
        runs' nine replicas, 3,500m / 9 is under the operator's 500m,
    ↪ so nothing is ever conveyed and the +64% work and
        -53% response time of conveyance are lost whole), and a hold w

    ↪ hile a pod starts on the host (a start wait 1%
        shorter for a LOSS on work and speed). The slower pod start of
    ↪  the v6 KEDA runs (+12.5% mean, EVEN on the
        three-run rule) is the busier host serving more requests: the
    ↪ price of the work, not a fault to hold against.
        The namespace's CPU quota, where the governor's role can read

    ↪ it, bounds every raise (omni_controller/quota.py);
        where it cannot be read, no budget is known and the raise proc
    ↪ eeds as on v6, Kubernetes' own admission the
        authority: the first v7 trial read an unreadable quota as zero
    ↪  and conveyed nothing (docs/OMNI_V7.md, section 1).

        Conveyance is on by default. It moves no work: the same reques
    ↪ ts run with less waiting. (The +26% CPU seen on
        kind is more requests served, because that load is closed-loop
    ↪ , not waste.) Optionally, --convey-on (a share
        of --slo-ms) engages it only once the 95th-percentile response
    ↪  time reaches convey-on x SLO and releases it

        below convey-off x SLO, returning every serving pod to L_i; a
    ↪ blind latency sense engages it (service first)."""
        from omnicompass.nervous_system import BAND
        obs = obs or {}
        targets = [ref(t) for t in filter(None, getattr(self.a, "cap_d
    ↪ eployments", "").split(","))]

        if not targets:
            return None
        engaged = self._convey_engaged()
        from omni_controller.capacity import HostCpuSampler, KIND_SCAL
    ↪ E_OUT_BUSY_LIMIT, one_host
        node_items = self.k.get("get", "nodes", "-o", "json")["items"]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    alloc = {n["metadata"]["name"]: milli(n["status"]["allocatable
↪ "]["cpu"]) for n in node_items}
    pods = [p for p in self.k.get("get", "pods", "-A", "-o", "json
↪ ")["items"]
            if p["status"].get("phase") in ("Running", "Pending")
↪ and p["spec"].get("nodeName")]

    shared = one_host(node_items)
    if not hasattr(self, "host_cpu"):
        self.host_cpu = HostCpuSampler()
    busy = self.host_cpu.sample() if shared else None
    # the shared host near its top, or unread: no limit is raised
↪ anywhere on it (v7); elsewhere nothing is held

    busy_hold = shared and (busy is None or busy >= KIND_SCALE_OUT
↪ _BUSY_LIMIT)
    from omni_controller.quota import CpuLimitBudget
    budget = CpuLimitBudget(self.k, self.audit)
    out = {}
    held = set()

    for ns, name in targets:
        self.gain[(ns, name)] = 1.0
        dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
↪ , "json")
        ann = dep["metadata"].get("annotations", {}) or {}
        c0 = dep["spec"]["template"]["spec"]["containers"][0]

        tmpl = c0.get("resources", {}).get("limits", {}).get("cpu"
↪ )
        if tmpl is None:
            continue
        base = milli(ann.get(CPU_ANN, tmpl))
        sel = dep["spec"]["selector"]["matchLabels"]

        mine = lambda p: p["metadata"].get("namespace", "default")
↪  == ns and all(
            (p["metadata"].get("labels", {}) or {}).get(k) == v fo
↪ r k, v in sel.items())
        serving, other = {}, {}
        for p in pods:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            node = p["spec"]["nodeName"]
            if mine(p) and p["status"].get("phase") == "Running":
                serving.setdefault(node, []).append(p)
            elif not mine(p):
                other[node] = other.get(node, 0.0) + sum(
                    milli(c.get("resources", {}).get("requests", {
↪ }).get("cpu", "0") or "0") for c in p["spec"]["containers"])
        if CPU_ANN not in ann and serving:
            self.k.write(["annotate", "deployment", name, "-n", ns
↪ , f"{CPU_ANN}={int(base)}m"], "convey: record original CPU limit
↪ ")
        got = []

        for node, ps in serving.items():
            a_j = alloc.get(node, 0.0)
            share = (BAND[1] * a_j - other.get(node, 0.0)) / len(p
↪ s)
            want = int(min(max(base, math.floor(share / 10.0) * 10
↪ ), BAND[1] * a_j)) if engaged else int(base)

            for p in ps:
                cur = milli(p["spec"]["containers"][0].get("resour
↪ ces", {}).get("limits", {}).get("cpu", tmpl))
                if obs.get("security_block", 0.0) > 0.5 and want >
↪  cur:
                    got.append(cur); continue  # shield I1: no exp

↪ ansion during a security hold
                if busy_hold and want > cur:
                    held.add(node); got.append(cur); continue  # t
↪ he shared host near its top, or unread
                permitted, reservations = budget.limit(ns, p, cur,
↪  want)

                if abs(permitted - cur) < self.a.cap_min_change_m:
                    got.append(cur); continue
                try:
                    self._resize(p, ns, f"{permitted}m", f"convey:
↪  {node} idle CPU to its {len(ps)} serving pod(s), limit {permitt
↪ ed}m in place"
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                                    if engaged else f"convey: respons
↪ e time calm, operator's limit {permitted}m in place")
                except Exception as error:
                    # Admission can race another writer. Never adv
↪ ertise a rejected increase to the HPA.
                    self.audit({"error": f"convey resize rejected:
↪  {type(error).__name__}: {str(getattr(error, 'stderr', '') or er
↪ ror).strip()[:400]}",
                                "pod": f"{ns}/{p['metadata']['name
↪ ']}", "accepted_limit_m": cur})
                    got.append(cur)
                    # Do not reuse uncertain headroom for other po
↪ ds in this decision.
                    budget.reserve(reservations, cur, permitted)
                    continue
                budget.reserve(reservations, cur, permitted)
                out[f"{ns}/{p['metadata']['name']}"] = permitted;
↪ got.append(permitted)

        # the gain g = mean conveyed limit / operator's limit: the
↪  replica organ reads it to keep the operator's
        # promise in queue terms (target x request / limit) while
↪ the limit is larger
        self.gain[(ns, name)] = (sum(got) / len(got) / base) if go
↪ t and base > 0 else 1.0

        self.base[(ns, name)] = base
    if held:
        self.audit({"convey": "held", "machines": sorted(held), "h
↪ ost_busy": None if busy is None else round(busy, 3),
                    "shared_host": shared})
    return out

def _convey_engaged(self):
    """Hysteresis on the response time: on at convey-on x SLO, off
↪  below convey-off x SLO; blind engages."""
    on, off = getattr(self.a, "convey_on", 0.0), getattr(self.a, "
↪ convey_off", 0.0)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        lf, slo = getattr(self.a, "latency_file", ""), getattr(self.a,
    ↪  "slo_ms", 0.0)
        if not on or not lf or not slo:
            return True
        ls = latency_sense(lf, self.a.latency_window_s)
        was = getattr(self, "_conveying", False)

        now = True if ls["blind"] else (ls["p95"] >= on * slo or (was
    ↪ and ls["p95"] >= off * slo))
        if now != was:
            self.audit({"convey": "engaged" if now else "released", "p
    ↪ 95_ms": None if ls["blind"] else round(ls["p95"], 1),
                        "slo_ms": slo, "blind": ls["blind"]})

        self._conveying = now
        return now


    def _hardware(self, cap, obs):
        cap = 1.0 if not obs.get("slo_clean", True) else max(self.a.ca
    ↪ p_min, min(1.0, cap))

        if obs.get("security_block", 0.0) > 0.5:
            cap = min(cap, getattr(self, "_last_cap", 1.0))  # shield
    ↪ I1: no expansion during a security hold
        if abs(cap - getattr(self, "_last_cap", 1.0)) < 0.02:
            return
        if getattr(self.a, "cpufreq_policy_root", ""):

            self._cpufreq_sysfs(cap, obs)
        if getattr(self.a, "cpufreq_cmd", "") and self.a.cpu_max_khz:
            lo, hi = self._envelope("cpufreq", [0.0, 1.0]); cap = min(
    ↪ max(cap, lo), hi)
            self._hw(self.a.cpufreq_cmd, self.a.cpu_max_khz * cap, f"c
    ↪ pu_pstate: frequency ceiling {int(self.a.cpu_max_khz * cap)} kHz

    ↪  (cap {cap:.3f})")
        if getattr(self.a, "gpu_power_cmd", "") and self.a.gpu_max_w:
            w = max(self.gpu_min_w, self.a.gpu_max_w * cap)
    ↪     # never under the card's own minimum
            self._hw(self.a.gpu_power_cmd, w, f"gpu: power limit {int(
    ↪ w)} W (cap {cap:.3f})")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self._last_cap = cap

    def _cpufreq_sysfs(self, cap, obs):
        """CPU frequency ceiling through the kernel's own policy files
    ↪  (hardware/cpufreq.py).
        ceiling = min(max(cap, envelope floor, schedutil request), env

    ↪ elope ceiling), where the schedutil request is
        min(1, 1.25 u) at the current CPU utilisation u: the ceiling n
    ↪ ever cuts below the frequency schedutil itself
        would ask for, so it only removes headroom the scheduler is no
    ↪ t using. The envelope ceiling (heat) wins last.
        The first write snapshots every policy; the reset restores tho

    ↪ se exact values."""
        from hardware.cpufreq import CpuFreqPolicies, schedutil_freque
    ↪ ncy_invariant
        if getattr(self, "_cf", None) is None:
            self._cf = CpuFreqPolicies(self.a.cpufreq_policy_root)
            snap = self._cf.capture_original()

            if getattr(self.a, "cpufreq_require_schedutil", False):
                self._cf.assert_schedutil()
            self.audit({"cpu_pstate_snapshot": [r.as_dict() for r in s
    ↪ nap]})
        lo, hi = self._envelope("cpufreq", [0.0, 1.0])
        u = float(obs.get("cpu_util", obs.get("load_ratio", 1.0)))

        c = min(max(cap, lo, schedutil_frequency_invariant(u)), hi)
        w = self._cf.apply_cap(c, dry_run=self.a.dry_run)
        self.audit({"cpu_pstate_write": w, "why": f"cpu_pstate: ceilin
    ↪ g {c:.3f} (cap {cap:.3f}, envelope [{lo:.3f}, {hi:.3f}], "
                                                f"schedutil request
    ↪ {schedutil_frequency_invariant(u):.3f} at u {u:.3f})"})

    def _rollout(self, permitted, rollback):
        for target in filter(None, getattr(self.a, "rollout_guard", ""
    ↪ ).split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ , "json")
            ann = dep["metadata"].get("annotations", {}) or {}
            paused = bool(dep["spec"].get("paused"))
            conds = {c["type"]: c for c in dep.get("status", {}).get("
    ↪ conditions", [])}
            stuck = conds.get("Progressing", {}).get("reason") == "Pro
    ↪ gressDeadlineExceeded"
            if rollback and stuck:
                self.k.write(["rollout", "undo", f"deployment/{name}",
    ↪  "-n", ns], "rollout: undo stuck rollout (rollback authorised)")
                continue
            if not permitted and not paused:
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , "--overwrite", f"{PAUSE_ANN}=true"], "rollout: record pause")
                self.k.write(["rollout", "pause", f"deployment/{name}"
    ↪ , "-n", ns], "rollout: pause (change not permitted)")
            elif permitted and paused and ann.get(PAUSE_ANN) == "true"
    ↪ :
                self.k.write(["rollout", "resume", f"deployment/{name}
    ↪ ", "-n", ns], "rollout: resume (change permitted)")
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , f"{PAUSE_ANN}-"], "rollout: clear pause record")

    def _batch(self, permitted, obs):
        if not getattr(self.a, "batch", False):
            return
        if not permitted or obs.get("security_block", 0.0) > 0.5:
            return
        if obs.get("load_ratio", 1.0) >= self.a.batch_load_max or obs.
    ↪ get("power_stress", 1.0) >= self.a.batch_power_max:
            return
        if not self._may("batch", "admit"):
            return
        jobs = self.k.get("get", "jobs", "-A", "-l", BATCH_LABEL, "-o"
    ↪ , "json")["items"]
        held = sorted((j for j in jobs if j["spec"].get("suspend")), k
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ey=lambda j: j["metadata"].get("creationTimestamp", ""))
        if held:
            j = held[0]; ns, name = j["metadata"]["namespace"], j["met
    ↪ adata"]["name"]
            self.k.write(["patch", "job", name, "-n", ns, "--type=merg
    ↪ e", "-p", json.dumps({"spec": {"suspend": False}})],

                         "batch: admit held job (headroom)")

    # ---- kill ----------------------------------------------------
    ↪ ------------------------------------------------
    def restore(self):
        self._guard("kill cooling", self._restore_cooling)

        self._guard("kill contain", self._restore_contain)
        self._guard("kill batch_pace", self._restore_pace)
        self._guard("kill coldstart", self._restore_coldstart)
        self._guard("kill rightsize", self._restore_rightsize)
        self._guard("kill hardware and power cap", self._restore_core)

    def _restore_cooling(self):
        if getattr(self.a, "cooling_cmd", ""):
            self._hw(self.a.cooling_cmd.replace("{c}", "{v}"), self.a.
    ↪ cooling_restore_c, "reset: restore cooling setpoint")
            self._setpoint = None

    def _restore_contain(self):
        for ns in filter(None, getattr(self.a, "contain_namespaces", "
    ↪ ").split(",")):
            q = self._quota(ns)
            if q is not None:
                self._release(ns, q, "reset")

    def _restore_pace(self):
        if getattr(self.a, "batch_pace", False):
            for j in self.k.get("get", "jobs", "-A", "-l", PAUSABLE_LA
    ↪ BEL, "-o", "json")["items"]:
                if j["spec"].get("suspend") and (j["metadata"].get("an
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ notations") or {}).get(PACE_ANN) == "true":
                    self._resume_job(j, "reset: resume paced job")

    def _restore_coldstart(self):
        for target in filter(None, getattr(self.a, "coldstart_deployme
    ↪ nts", "").split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
    ↪ , "json")
            ann = dep["metadata"].get("annotations", {}) or {}
            if REPL_ANN in ann:
                if int(dep["spec"].get("replicas", 1)) == 0:
                    self.k.write(["scale", "deployment", name, "-n", n
    ↪ s, f"--replicas={ann[REPL_ANN]}"], "reset: restore replicas")
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , f"{REPL_ANN}-"], "reset: clear replica record")

    def _restore_rightsize(self):
        for target in filter(None, getattr(self.a, "rightsize_deployme
    ↪ nts", "").split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
    ↪ , "json")
            orig = (dep["metadata"].get("annotations", {}) or {}).get(
    ↪ REQ_ANN)
            if orig:
                for pod in self._pods(dep, ns):
                    if pod["spec"]["containers"][0].get("resources", {
    ↪ }).get("requests", {}).get("cpu") != orig:
                        self.k.write(["patch", "pod", pod["metadata"][
    ↪ "name"], "-n", ns, "--subresource", "resize", "--type=json", "-p
    ↪ ",
                                      json.dumps([{"op": "replace", "p
    ↪ ath": "/spec/containers/0/resources/requests/cpu", "value": orig
    ↪ }])],
                                     "reset: restore original CPU requ
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ est in place")
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , f"{REQ_ANN}-"], "reset: remove request record")

    def _restore_core(self):
        if getattr(self, "_cf", None) is not None:
            self.audit({"cpu_pstate_restore": self._cf.restore(dry_run
    ↪ =self.a.dry_run), "why": "reset: exact pre-Omni CPU ceilings"})
        if getattr(self.a, "cpufreq_cmd", "") and self.a.cpu_max_khz a
    ↪ nd getattr(self, "_last_cap", 1.0) != 1.0:
            self._hw(self.a.cpufreq_cmd, self.a.cpu_max_khz, "reset: r
    ↪ estore maximum CPU frequency")
        if getattr(self.a, "gpu_power_cmd", "") and self.a.gpu_max_w a
    ↪ nd getattr(self, "_last_cap", 1.0) != 1.0:
            self._hw(self.a.gpu_power_cmd, self.a.gpu_max_w, "reset: r
    ↪ estore maximum GPU power limit")
        self._last_cap = 1.0
        for target in filter(None, getattr(self.a, "cap_deployments",
    ↪ "").split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
    ↪ , "json")
            orig = (dep["metadata"].get("annotations", {}) or {}).get(
    ↪ CPU_ANN)
            if orig:
                for pod in self._pods(dep, ns):
                    if pod["spec"]["containers"][0].get("resources", {
    ↪ }).get("limits", {}).get("cpu") != orig:
                        self._resize(pod, ns, orig, "reset: restore or
    ↪ iginal pod CPU limit in place")
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , f"{CPU_ANN}-"], "reset: remove CPU record")
        for target in filter(None, getattr(self.a, "rollout_guard", ""
    ↪ ).split(",")):
            ns, name = ref(target)
            dep = self.k.get("get", "deployment", name, "-n", ns, "-o"
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ , "json")
            if (dep["metadata"].get("annotations", {}) or {}).get(PAUS
    ↪ E_ANN) == "true":
                self.k.write(["rollout", "resume", f"deployment/{name}
    ↪ ", "-n", ns], "reset: resume rollout")
                self.k.write(["annotate", "deployment", name, "-n", ns
    ↪ , f"{PAUSE_ANN}-"], "reset: clear pause record")


def latency_sense(path, window_s, now=None):
    """The latency afferent with its integrity (manuscript Appendix J:
    ↪  the nervous system owns delay and dropout
    handling). Returns p95 of successful requests in the last window,
    ↪ the ok and failed counts in it, and the age of
    the newest sample against the wall clock. The sense is blind when
    ↪ its newest sample is older than two windows, or
    when the window holds no successful request: a hung probe stops wr
    ↪ iting, and its last clean window must not be read
    as the present."""
    import os, time
    try:
        age = (now if now is not None else time.time()) - os.path.getm
    ↪ time(path)
        rows = list(csv.DictReader(open(path)))
    except OSError:
        return {"p95": float("nan"), "ok": 0, "fail": 0, "age_s": floa
    ↪ t("inf"), "blind": True}
    if not rows:
        return {"p95": float("nan"), "ok": 0, "fail": 0, "age_s": age,
    ↪  "blind": True}
    t_end = float(rows[-1]["elapsed_seconds"])
    win = [r for r in rows if float(r["elapsed_seconds"]) >= t_end - w
    ↪ indow_s]
    ms = sorted(float(r["latency_ms"]) for r in win if r.get("ok") ==
    ↪ "1")
    fails = sum(1 for r in win if r.get("ok") != "1")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    p95 = ms[min(len(ms) - 1, int(0.95 * len(ms)))] if ms else float("
    ↪ nan")
    return {"p95": p95, "ok": len(ms), "fail": fails, "age_s": age, "b
    ↪ lind": age > 2.0 * window_s or not ms}

def latency_window(path, window_s, now=None):
    """The last window_s seconds of successful probe samples (ms), wit
    ↪ h the same integrity rule as latency_sense."""
    import os, time
    try:
        age = (now if now is not None else time.time()) - os.path.getm
    ↪ time(path)
        rows = list(csv.DictReader(open(path)))
    except OSError:
        return {"ms": [], "blind": True}
    if not rows:
        return {"ms": [], "blind": True}

    t_end = float(rows[-1]["elapsed_seconds"])
    ms = [float(r["latency_ms"]) for r in rows if r.get("ok") == "1" a
    ↪ nd float(r["elapsed_seconds"]) >= t_end - window_s]
    return {"ms": ms, "blind": age > 2.0 * window_s or not ms}

def latency_p95(path, window_s):
    """95th-percentile response time (ms) of successful requests in th
    ↪ e last window_s seconds of the probe CSV."""
    try:
        rows = list(csv.DictReader(open(path)))
    except OSError:

        return float("nan")
    if not rows:
        return float("nan")
    t_end = float(rows[-1]["elapsed_seconds"])
    ms = sorted(float(r["latency_ms"]) for r in rows if r.get("ok") ==
    ↪  "1" and float(r["elapsed_seconds"]) >= t_end - window_s)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    fails = sum(1 for r in rows if r.get("ok") != "1" and float(r["ela
    ↪ psed_seconds"]) >= t_end - window_s)
    if fails and not ms:
        return 1e9
    return ms[min(len(ms) - 1, int(0.95 * len(ms)))] if ms else float(
    ↪ "nan")

def add_args(ap):
    ap.add_argument("--cap-deployments", default="", help="ns/name[,ns
    ↪ /name]: power_cap muscle scales their CPU limit")
    ap.add_argument("--cap-min", type=float, default=0.0,
                    help="lowest power cap the tune-down applies, a sh
    ↪ are of the operator's limit; 0 (the default): nothing "
                         "fixed, the pod's own request and its use plu
    ↪ s headroom are the floor")
    ap.add_argument("--cap-min-change-m", type=int, default=20, help="
    ↪ smallest CPU-limit change written, millicores")

    ap.add_argument("--cap-headroom", type=float, default=0.3, help="p
    ↪ ower cap never below pod CPU usage x (1 + headroom)")
    ap.add_argument("--latency-file", default="", help="probe CSV (ela
    ↪ psed_seconds,latency_ms,ok) for the latency afferent")
    ap.add_argument("--slo-ms", type=float, default=0.0, help="95th-pe
    ↪ rcentile response-time target, ms")

    ap.add_argument("--latency-window-s", type=float, default=60.0)
    ap.add_argument("--convey-on", type=float, default=0.0,
                    help="0 (default): convey idle CPU always; > 0: on
    ↪ ly once p95 reaches this share of --slo-ms")
    ap.add_argument("--convey-off", type=float, default=0.25, help="re
    ↪ turn pods to the operator's limit once p95 is below this share")

    ap.add_argument("--slo-clear", type=int, default=None, help="decis
    ↪ ions the SLO must stay met before densifying or capping again (u
    ↪ nset: --slo-clear-s)")
    ap.add_argument("--slo-clear-s", type=float, default=180.0, help="
    ↪ seconds the SLO must stay met before densifying or capping again
    ↪ ")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ap.add_argument("--thermal-model", action="store_true", help="heat
    ↪  muscle: thermal state from the harness heat law")
    ap.add_argument("--security-configmap", default="", help="ns/name
    ↪ of a ConfigMap whose key 'hold' signals a security hold")
    ap.add_argument("--rollout-guard", default="", help="ns/name[,ns/n
    ↪ ame]: rollout muscle pauses, resumes, undoes")

    ap.add_argument("--batch", action="store_true", help="batch muscle
    ↪ : admit held Jobs labelled " + BATCH_LABEL)
    ap.add_argument("--batch-load-max", type=float, default=0.9,
                    help="admit held work only under this load: the co
    ↪ mpass's wall less one cushion (0.95 - 0.05)")
    ap.add_argument("--batch-power-max", type=float, default=0.9,

                    help="admit held work only under this power stress
    ↪ : the wall less one cushion, as the nervous system")
    ap.add_argument("--rapl-cmd", default="", help="cpu_pstate pull: p
    ↪ rints CPU package watts")
    ap.add_argument("--cpufreq-cmd", default="", help="cpu_pstate push
    ↪ : command template with {khz}")

    ap.add_argument("--cpufreq-policy-root", default="", help="cpu_pst
    ↪ ate push through sysfs policies (e.g. /sys/devices/system/cpu/cp
    ↪ ufreq); exact restore on kill")
    ap.add_argument("--cpufreq-require-schedutil", action="store_true"
    ↪ , help="refuse to act unless every policy runs schedutil")
    ap.add_argument("--cpu-max-khz", type=float, default=0.0)

    ap.add_argument("--gpu-query-cmd", default="", help="gpu pull: pri
    ↪ nts 'watts,celsius'")
    ap.add_argument("--gpu-power-cmd", default="", help="gpu push: com
    ↪ mand template with {w}")
    ap.add_argument("--gpu-max-w", type=float, default=0.0)
    ap.add_argument("--gpu-temp-limit", type=float, default=83.0,

                    help="GPU temperature read as heat 1.0 when the ca
    ↪ rd does not report its own slowdown temperature "
                         "(--gpu-query-cmd's fourth field; then one de
    ↪ gree under it)")
    ap.add_argument("--rightsize-deployments", default="", help="ns/na
    ↪ me[,ns/name]: rightsize muscle sets pod CPU requests from use")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ap.add_argument("--rightsize-headroom", type=float, default=0.3)
    ap.add_argument("--rightsize-min-m", type=int, default=50)
    ap.add_argument("--coldstart-deployments", default="", help="ns/na
    ↪ me[,ns/name]: scaled to zero when idle, woken on work")
    ap.add_argument("--coldstart-signal", default="", help="ns/name of
    ↪  a ConfigMap whose key 'queue' is the waiting work")
    ap.add_argument("--coldstart-idle", type=int, default=3, help="idl
    ↪ e decisions before scaling to zero")
    ap.add_argument("--batch-pace", action="store_true", help="batch_p
    ↪ ace muscle: pause Jobs labelled " + PAUSABLE_LABEL + " under str
    ↪ ess")
    ap.add_argument("--pace-high", type=float, default=0.95, help="pow
    ↪ er stress that pauses a job")
    ap.add_argument("--pace-low", type=float, default=0.8, help="power
    ↪  stress under which a paused job resumes")
    ap.add_argument("--pace-heat", type=float, default=0.96, help="hea
    ↪ t state that pauses a job")
    ap.add_argument("--contain-namespaces", default="", help="ns[,ns]:
    ↪  agent namespaces held to --contain-cpu-m")
    ap.add_argument("--contain-cpu-m", type=float, default=1000.0)
    ap.add_argument("--cooling-cmd", default="", help="cooling push: c
    ↪ ommand template with {c} (supply-air setpoint, C)")
    ap.add_argument("--cooling-min-c", type=float, default=18.0)
    ap.add_argument("--cooling-max-c", type=float, default=27.0)
    ap.add_argument("--cooling-restore-c", type=float, default=22.0)
```

omni_controller/quota.py

119 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Conservative CPU-limit admission budget; Kubernetes remains the fin
    ↪ al authority."""
from decimal import Decimal, InvalidOperation
import re

def cpu_milli(value):
    match = re.fullmatch(r'([+\-]?(?:\d+(?:\.\d*)?|\.\d+)(?:[eE][+\-]?
    ↪ \d+)?)([numkMGTPE]?)', str(value))
    if not match:

        raise ValueError('invalid CPU quantity')
    factor = {'n': '0.000001', 'u': '0.001', 'm': '1', '': '1000', 'k'
    ↪ : '1000000',
              'M': '1e9', 'G': '1e12', 'T': '1e15', 'P': '1e18', 'E':
    ↪ '1e21'}
    result = Decimal(match[1]) * Decimal(factor[match[2]])

    if not result.is_finite() or result < 0:
        raise ValueError('invalid CPU quantity')
    return result


def matches(quota, pod):

    """True/False for PriorityClass selectors; None means applicabilit
    ↪ y is unknown, so expansion stops."""
    spec = quota.get('spec', {})
    if spec.get('scopes'):
        return None
    expressions = spec.get('scopeSelector', {}).get('matchExpressions'

    ↪ , [])
    unknown = False
    for expr in expressions:
        if expr.get('scopeName') != 'PriorityClass':
            unknown = True
            continue
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        value = pod.get('spec', {}).get('priorityClassName', '')
        operator, values = expr.get('operator'), expr.get('values', []
    ↪ )
        if operator == 'In':
            selected = value in values
        elif operator == 'NotIn':

            selected = value not in values
        elif operator == 'Exists':
            selected = bool(value)
        elif operator == 'DoesNotExist':
            selected = not value
        else:

            unknown = True
            continue
        if not selected:
            return False
    return None if unknown else True

class CpuLimitBudget:
    """One convey pass: share each namespace's headroom across all tar
    ↪ get deployments.

    Never credit a decrease before the server reports it. Reserve succ

    ↪ essful increases locally
    so an eventually updated quota status cannot spend the same allowa
    ↪ nce twice in this pass.
    A quota whose status or scopes cannot be read as a number leaves t
    ↪ he native CPU limit in place.

    A namespace whose quotas cannot be read at all (the governor's rol
    ↪ e has no list permission, or the API refused) is
    **no budget known**, not a zero budget: the raise proceeds as it d
    ↪ id before the budget existed (omni-v6), and
    Kubernetes' own admission, which refuses any write over a quota th
    ↪ e governor cannot see, stays the authority; the
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    plug reads every write back and a refused one is audited and never
    ↪  advertised. The first v7 trial (Goldilocks, run
    38825214203) read the unreadable quota as zero and so never raised
    ↪  a limit: 5 commands a run against v6's 15, the
    host 4% busier against 40%, the response-time GAIN gone and the po
    ↪ d start wait a LOSS (docs/OMNI_V7.md, section 1).

    """
    def __init__(self, kube, audit):
        self.kube, self.audit, self.namespaces, self.unreadable = kube
    ↪ , audit, {}, set()

    def _load(self, namespace):

        if namespace in self.namespaces:
            return self.namespaces[namespace]
        try:
            quotas = self.kube.get('get', 'resourcequota', '-n', names
    ↪ pace, '-o', 'json')['items']
            budgets = []

            for quota in quotas:
                spec = quota.get('spec', {}).get('hard', {})
                status = quota.get('status', {})
                hard = status.get('hard', {})
                if 'limits.cpu' not in spec and 'limits.cpu' not in ha
    ↪ rd:

                    continue
                try:
                    ceiling = min(cpu_milli(x['limits.cpu']) for x in
    ↪ (spec, hard))
                    remaining = max(Decimal(0), ceiling - cpu_milli(st
    ↪ atus['used']['limits.cpu']))

                except (KeyError, ValueError, InvalidOperation):
                    remaining = Decimal(0)
                budgets.append([quota, remaining])
        except Exception as error:
            if namespace not in self.unreadable:                    #
    ↪ said once a pass, not once a pod
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            self.audit({'quota': 'no budget known: the raise proce
↪ eds, Kubernetes admission is the authority',
                        'namespace': namespace, 'reason': f'quota
↪ read unavailable: {type(error).__name__}'})
        self.unreadable.add(namespace)
        budgets = []

    self.namespaces[namespace] = budgets
    return budgets

def limit(self, namespace, pod, current, desired):
    current, desired = Decimal(str(current)), Decimal(str(desired)
↪ )

    if desired <= current:
        return int(desired), []
    budgets = self._load(namespace)
    applicable = []
    allowance = desired - current
    for entry in budgets:                       # an unreadable na

↪ mespace has no entries: the allowance stands
        selected = matches(entry[0], pod)
        if selected is False:
            continue
        applicable.append(entry)
        allowance = min(allowance, entry[1] if selected is True el

↪ se Decimal(0))
    permitted = int(current + allowance)
    if permitted < desired:
        self.audit({'quota': 'CPU limit expansion bounded', 'names
↪ pace': namespace,
                    'pod': pod['metadata']['name'], 'desired_m': i

↪ nt(desired), 'permitted_m': permitted})
    return permitted, applicable

@staticmethod
def reserve(entries, current, accepted):
    delta = max(Decimal(0), Decimal(str(accepted)) - Decimal(str(c
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ urrent)))
        for entry in entries:
            entry[1] = max(Decimal(0), entry[1] - delta)
```

omnicompass/__init__.py

5 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
```

omnicompass/adapter.py

309 lines.

```
"""Omni-Compass stack governor.

  sense      : stack telemetry -> normalized observation vector
  assimilate : observation blended into the six-state engine state
  evolve     : one macro step of equations (1)-(7) with u = 0
  allocate   : engine state -> directive (capacity, change gating, pow
    ↪ er, rollback, routing, alerting, paging)
  authority  : OBSERVE | AUTOPILOT; kill() revokes authority and retur
    ↪ ns control to the native managers
"""
from __future__ import annotations

import math
from collections import deque
from dataclasses import dataclass, asdict, field
from typing import Any, Dict, List, Optional

from .core import State, Params, macro_step, v_eff, control_command, U
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ _AUTHORITY

OBSERVE = "observe"
AUTOPILOT = "autopilot"

# Engine parameters used for stack governance (fixed, not sampled).

STACK_PARAMS = Params(alpha=4.2, beta_int=0.0, beta_ext=0.0, k=1.7, si
    ↪ gma_1=0.38, delta=0.705, gamma_1=1.35,
                      gamma_c=1.0, lambda_0=-0.40, lambda_1=1.55, lamb
    ↪ da_2=1.15, c=1.0, E_max=2.0,
                      omega_B=1.0, Q_B=2.5, alpha_s=0.12, beta_s=0.10,
    ↪  mu=3.782, alpha_E=3.487, alpha_U=4.2,

                      lambda_I=0.719, lambda_U=0.0)
INITIAL_STATE = State(E=0.12, U=0.82, I_U=0.0, S=0.0, B=0.0, B_dot=0.0
    ↪ )
ASSIMILATION = 0.339

def clamp(v: float, lo: float, hi: float) -> float:
    return lo if v < lo else hi if v > hi else v


def observe_vector(obs: Dict[str, float], conflicts: int) -> Dict[str,
    ↪  float]:

    """Normalize telemetry. Inputs are the stack's delayed observation
    ↪ s."""
    return {
        "q": clamp(float(obs.get("queue_ratio", 0.0)), 0.0, 2.0),
        "load": clamp(float(obs.get("load_ratio", 0.0)), 0.0, 2.0),
        "power": clamp(float(obs.get("power_stress", 0.0)), 0.0, 1.5),

        "thermal": clamp(float(obs.get("thermal", 0.0)), 0.0, 1.5),
        "network": clamp(float(obs.get("network_stress", 0.0)), 0.0, 1
    ↪ .5),
        "drift": clamp(float(obs.get("drift_ratio", 0.0)), 0.0, 1.5),
        "stale": clamp(float(obs.get("stale", 0.0)), 0.0, 1.0),
        "security": clamp(float(obs.get("security_block", 0.0)), 0.0,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 1.0),
        "conflict": clamp(conflicts / 4.0, 0.0, 1.0),
    }


def assimilate(x: State, o: Dict[str, float], p: Params) -> State:
    """Blend the observation into the engine state and set the forcing
    ↪  terms."""
    q, load, pw, th, nw, dr, st, sec, cf = (o[k] for k in
        ("q", "load", "power", "thermal", "network", "drift", "stale",
    ↪  "security", "conflict"))
    e_obs = clamp(0.25 * q + 0.18 * max(0.0, load - 0.85) + 0.16 * pw
    ↪ + 0.13 * th + 0.10 * nw + 0.08 * dr
                  + 0.06 * cf + 0.04 * st, 0.0, 1.5)
    u_obs = clamp(1.0 - (0.27 * q + 0.18 * pw + 0.16 * th + 0.12 * nw
    ↪ + 0.12 * dr + 0.10 * cf + 0.05 * st), 0.0, 1.0)
    s_obs = clamp(0.36 * th + 0.28 * pw + 0.18 * nw + 0.10 * sec + 0.0
    ↪ 8 * st - 0.20 * q, -1.0, 1.0)
    b_obs = clamp(0.52 * pw + 0.26 * th + 0.22 * dr, -1.0, 1.5)
    i_obs = clamp(q + dr + cf, 0.0, 2.0)
    a = ASSIMILATION
    p.beta_int = clamp(0.58 * q + 0.42 * max(0.0, load - 0.75), 0.0, 1
    ↪ .0)
    p.beta_ext = clamp(0.33 * pw + 0.27 * th + 0.20 * nw + 0.12 * st +
    ↪  0.08 * sec, 0.0, 1.0)
    return State(E=(1 - a) * x.E + a * e_obs, U=(1 - a) * x.U + a * u_
    ↪ obs, I_U=(1 - a) * x.I_U + a * i_obs,
                 S=(1 - a) * x.S + a * s_obs, B=(1 - a) * x.B + a * b_
    ↪ obs, B_dot=(1 - a) * x.B_dot + a * (b_obs - x.B))

@dataclass(frozen=True)
class AllocationLaw:
    """Engine state -> governing directive.

    release    capacity removed only while push <= push_release (the e
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
↪ ngine's controller reports convergence)
add        without backlog, capacity added only while push >= push
↪ _add (the engine's controller reports need)
push       equation (2) control law evaluated on the evolved state
↪  with target sigma = +1:
           u = clip(-f_U(x) + KP (1 - U), -U_AUTHORITY, U_AUTHORIT

↪ Y);  push = u / U_AUTHORITY
           (f_U contains the double-well drift and -(dE/dt)/E_max
↪ from equation (1))
headroom   rho* = clamp(rho0 - kI*I_U - kE*E, rho_min, rho0)
sizing     load_s = load * cap_now if size_at_full_cap else load
capacity   n_req = ceil(n * load / rho*) + ceil(kq * q * n);  delt

↪ a = clamp(n_req - n, -down_max, +up_max)
guard      no capacity removal while q >= guard_queue
band       capacity removed only when n_req <= n - down_band
dwell      capacity removed only after surplus persists for down_d
↪ well intervals and no earlier than
           down_after_add intervals after the last addition

envelope   no capacity addition while observed power >= power_ceil
↪ ing (power_ceiling_backlog while q >= guard_queue)
security   no capacity addition while a security block is observed
change     Terraform plans only while U >= U_gate, only in the dir
↪ ection of the live capacity decision
power      q < guard_queue and U >= U_gate: cap = clamp(cap_now *

↪ load * (1 + margin), cap_min, 1)   (trim to demand)
           q >= guard_queue at the power envelope: cap = max(cap_m
↪ in, cap_now - spread_step)      (spread)
           q >= guard_queue below the envelope: cap held (capacity
↪  added as nodes; 1 at max_nodes)
           otherwise cap = 1; always cap <= 1 - cap_gain * max(0,

↪ B - B_cap)
rollback   a proposed rollback is authorised if S >= S_rollback, U
↪  is falling, or security blocks change
replicas   direct actuation: desired = ceil(replicas * load / rho*
↪ ) (the HPA formula with the engine-set target),
           increases unless capacity is being reduced, decreases o
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ nly while reducing;
              otherwise autoscaler increases approved unless reducing
    ↪ , decreases only while reducing
    consistency a step that expands capacity never tightens the power
    ↪ cap
    paging     none: the governor holds every action a paged operator

    ↪ would take
    """
    rho0: float = 0.914
    rho_min: float = 0.627
    kI: float = 0.252
    kE: float = 0.297

    kq: float = 0.795
    up_max: int = 2
    down_max: int = 1
    guard_queue: float = 0.05
    power_ceiling: float = 0.95
    power_ceiling_backlog: float = 1.00

    spread_step: float = 0.05
    backlog_release: bool = False
    size_at_full_cap: bool = False
    push_release: float = 0.005
    push_add: float = -9.0
    U_gate: float = 0.481

    margin: float = 0.006
    cap_min: float = 0.706
    B_cap: float = 0.40
    cap_gain: float = 0.60
    S_rollback: float = 0.55
    route_network: float = 0.20

    down_band: int = 4
    down_dwell: int = 4
    down_after_add: int = 4
    min_nodes: int = 8
    max_nodes: int = 40
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
@dataclass
class Governor:
    law: AllocationLaw = field(default_factory=AllocationLaw)
    mode: str = AUTOPILOT
    killed: bool = False

    x: State = field(default_factory=lambda: State(**asdict(INITIAL_ST
    ↪ ATE)))
    p: Params = field(default_factory=lambda: Params(**asdict(STACK_PA
    ↪ RAMS)))
    t: float = 0.0
    current_cap: float = 1.0

    nodes: int = 20
    surplus_streak: int = 0
    since_add: int = 99
    last_push: float = 0.0
    log: deque = field(default_factory=lambda: deque(maxlen=4096))
    evolve: bool = True

    def kill(self) -> None:
        """Revoke authority; the engine continues to compute and log d
    ↪ irectives."""
        self.killed = True

    def set_mode(self, mode: str) -> None:
        if mode not in (OBSERVE, AUTOPILOT):
            raise ValueError(mode)
        self.mode = mode

    @property

    def has_authority(self) -> bool:
        return self.mode == AUTOPILOT and not self.killed

    def step(self, obs: Dict[str, float], conflicts: int) -> Dict[str,
    ↪  Any]:
        """Sense, assimilate, evolve, allocate."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        o = observe_vector(obs, conflicts)
        U_before = self.x.U
        xa = assimilate(self.x, o, self.p)
        if self.evolve:
            xn, _ = macro_step(xa, self.p, self.t, target=None)
        else:

            xn = xa
        self.x = xn
        self.t += 0.1
        L = self.law
        n = int(self.nodes)
        u_push, _ = control_command(xn, self.p, self.t, +1)

        push = u_push / U_AUTHORITY
        self.last_push = push
        rho = clamp(L.rho0 - L.kI * xn.I_U - L.kE * xn.E, L.rho_min, L
    ↪ .rho0)
        converged = push <= L.push_release
        load_sized = o["load"] * self.current_cap if L.size_at_full_ca

    ↪ p else o["load"]
        n_req = math.ceil(n * load_sized / rho) + math.ceil(L.kq * o["
    ↪ q"] * n)
        delta = max(-L.down_max, min(L.up_max, n_req - n))
        if delta < 0 and not converged:
            delta = 0

        if delta > 0 and o["q"] < L.guard_queue and push < L.push_add:
            delta = 0
        if delta < 0 and (o["q"] >= L.guard_queue or n_req > n - L.dow
    ↪ n_band):
            delta = 0
        self.surplus_streak = self.surplus_streak + 1 if delta < 0 els

    ↪ e 0
        if delta < 0 and (self.surplus_streak < L.down_dwell or self.s
    ↪ ince_add < L.down_after_add):
            delta = 0
        ceiling = L.power_ceiling_backlog if o["q"] >= L.guard_queue e
    ↪ lse L.power_ceiling
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if delta > 0 and (o["power"] >= ceiling or n >= L.max_nodes):
            delta = 0
        if o["security"] > 0.5:
            delta = min(delta, 0)
        self.since_add = 0 if delta > 0 else self.since_add + 1
        if delta < 0:

            self.surplus_streak = 0
        at_envelope = o["power"] >= ceiling
        if o["q"] < L.guard_queue and xn.U >= L.U_gate:
            cap = clamp(self.current_cap * o["load"] * (1.0 + L.margin
    ↪ ), L.cap_min, 1.0)
        elif o["q"] >= L.guard_queue and L.spread_step > 0.0:

            if at_envelope:
                cap = clamp(self.current_cap - L.spread_step, L.cap_mi
    ↪ n, 1.0)
            else:
                cap = 1.0 if L.backlog_release else (self.current_cap
    ↪ if n < L.max_nodes else 1.0)

        elif o["q"] >= L.guard_queue and L.backlog_release:
            cap = 1.0
        else:
            cap = 1.0
        cap = min(cap, clamp(1.0 - L.cap_gain * max(0.0, xn.B - L.B_ca
    ↪ p), L.cap_min, 1.0))

        if delta > 0:
            cap = max(cap, self.current_cap)
        command = clamp(0.5 * (v_eff(xn, self.p) / max(self.p.c, 1e-9)
    ↪  + 1.0), 0.0, 1.0)
        d = {
            "node_delta": int(delta),

            "change_permitted": xn.U >= L.U_gate and o["security"] <=
    ↪ 0.5,
            "power_cap": cap,
            "rollback_authorized": xn.S >= L.S_rollback or xn.U < U_be
    ↪ fore or o["security"] > 0.5,
            "route_shift": o["network"] > L.route_network,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            "state": {"E": xn.E, "U": xn.U, "I_U": xn.I_U, "S": xn.S,
    ↪ "B": xn.B},
            "demand": rho,
            "load": o["load"],
            "command": command,
        }

        self.log.append({"mode": self.mode, "killed": self.killed, **{
    ↪ k: v for k, v in d.items() if k != "state"},
                         **d["state"]})
        return d

def directive_to_actions(d: Dict[str, Any], stack_state: Dict[str, Any
    ↪ ], proposals: List[Dict[str, Any]],
                         cfg, direct_actuation: bool = False) -> List[
    ↪ Dict[str, Any]]:
    """Directive -> executable stack actions. direct_actuation: capaci
    ↪ ty is owned by the governor; no Terraform plans."""

    tag = "Omni-Compass"
    out: List[Dict[str, Any]] = []
    cur = int(stack_state["actual_nodes"])
    target = int(max(cfg.minimum_nodes, min(cfg.maximum_nodes, cur + i
    ↪ nt(d["node_delta"]))))
    if target != cur:

        out.append({"manager": tag, "action": "nodes", "target": targe
    ↪ t, "direction": 1 if target > cur else -1})
    if not direct_actuation and d["change_permitted"] and any(p["actio
    ↪ n"] == "terraform_plan" for p in proposals):
        tf_dir = 1 if target > stack_state["terraform_desired_nodes"]
    ↪ else -1

        live_dir = 1 if target > cur else -1 if target < cur else 0
        if abs(target - stack_state["terraform_desired_nodes"]) >= 2 a
    ↪ nd live_dir in (0, tf_dir):
            out.append({"manager": tag, "action": "terraform_plan", "t
    ↪ arget": target,
                        "direction": 1 if target > stack_state["terraf
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ orm_desired_nodes"] else -1})
    reps = [int(p["target"]) for p in proposals if p["action"] == "rep
    ↪ licas"]
    if direct_actuation:
        cur_r = int(stack_state["replicas"])
        rt = max(20, min(500, math.ceil(cur_r * float(d["load"]) / max
    ↪ (float(d["demand"]), 1e-9))))
        if (rt > cur_r and d["node_delta"] >= 0) or (rt < cur_r and d[
    ↪ "node_delta"] < 0):
            out.append({"manager": tag, "action": "replicas", "target"
    ↪ : rt, "direction": 1 if rt > cur_r else -1})
        reps = []

    if reps:
        cur_r = int(stack_state["replicas"])
        rt = None
        if d["node_delta"] >= 0 and max(reps) > cur_r:
            rt = max(reps)
        elif d["node_delta"] < 0 and min(reps) < cur_r:

            rt = min(reps)
        if rt is not None:
            out.append({"manager": tag, "action": "replicas", "target"
    ↪ : rt,
                        "direction": 1 if rt > cur_r else -1})
    cap = float(d["power_cap"])

    if any(a["direction"] > 0 and a["action"] in ("nodes", "terraform_
    ↪ plan", "replicas") for a in out):
        cap = max(cap, float(stack_state["power_cap"]))
    if abs(cap - stack_state["power_cap"]) > 1e-9:
        out.append({"manager": tag, "action": "power_cap", "target": c
    ↪ ap,

                    "direction": -1 if cap < stack_state["power_cap"]
    ↪ else 1})
    if d["route_shift"]:
        out.append({"manager": tag, "action": "route_shift", "target":
    ↪  1.0, "direction": 1})
    if any(p["action"] == "rollback" for p in proposals) and d["rollba
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ck_authorized"]:
        out.append({"manager": tag, "action": "rollback", "target": 1.
    ↪ 0, "direction": -1})
    alerts = [p for p in proposals if p["action"] == "alert"]
    if alerts:
        out.append({"manager": tag, "action": "alert", "target": max(i
    ↪ nt(p["target"]) for p in alerts), "direction": 1})
    return out


THROUGHPUT_MODE = dict(backlog_release=True, power_ceiling=9.0, power_
    ↪ ceiling_backlog=9.0, spread_step=0.0, B_cap=9.0,
                       size_at_full_cap=True, kI=0.05, kE=0.40, cap_mi
    ↪ n=0.65, down_band=1, down_dwell=10,
                       down_after_add=3, kq=0.30, U_gate=0.45, push_re
    ↪ lease=0.01)
FLEET_MODE = dict(THROUGHPUT_MODE, rho0=0.829, rho_min=0.769, kI=0.072
    ↪ , kE=0.487, kq=0.635, down_band=3, down_dwell=1, down_after_add=
    ↪ 5, push_release=0.053, cap_min=0.695, margin=0.131, U_gate=0.85,
    ↪  up_max=8)
FLEET_BALANCED_MODE = dict(FLEET_MODE, push_release=0.0098, push_add=0
    ↪ .0098)
FLEET_WEAR_MODE = dict(FLEET_MODE, push_release=0.0035, push_add=0.003
    ↪ 5)
FLEET_DECISION_SECONDS = 60


def mode_law(mode: str, base: "AllocationLaw" = None) -> "AllocationLa
    ↪ w":
    """Operating modes.

    power_protect  the site power limit is enforced (envelope, spread-
    ↪ and-throttle, bath cap; shield I4 active)
    fleet          throughput mode with constants selected on the 15-s
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ econd fleet harness (fleet/), decisions every 60 s;
                  energy-first: the equation (2) release gate is leni
    ↪ ent and the add gate is off
    fleet_balanced fleet with the equation (2) gate active in both dir
    ↪ ections at 0.0098 (release and add)
    fleet_wear     fleet with the equation (2) gate active in both dir

    ↪ ections at 0.0035 (release and add)
    throughput     the power envelope is not enforced (same power rule
    ↪ s as the native stack); caps released on backlog;
                  capacity sized at full power (load * cap_now), so p
    ↪ ower trimming does not trigger machine starts;
                  constants selected by constrained search on develop

    ↪ ment seeds (minimum energy subject to backlog,
                  health, recovery, reversal and invariant constraint
    ↪ s)
    """
    from dataclasses import replace
    base = base or AllocationLaw()

    if mode == "power_protect":
        return base
    if mode == "throughput":
        return replace(base, **THROUGHPUT_MODE)
    if mode == "fleet":
        return replace(base, **FLEET_MODE)

    if mode == "fleet_balanced":
        return replace(base, **FLEET_BALANCED_MODE)
    if mode == "fleet_wear":
        return replace(base, **FLEET_WEAR_MODE)
    raise ValueError(mode)
```

omnicompass/authority_contract.py

59 lines.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Executable authority/evidence contracts for Omni-Compass.

This module does not claim that a plant obeyed Omni. It defines the mi
    ↪ nimum links that must

exist before software may promote a claim from COMPUTED -> REQUESTED -
    ↪ > ENFORCED -> ATTRIBUTED
-> BENEFICIAL -> RESTORED. Missing evidence can only lower a claim lev
    ↪ el, never raise it.
"""
from __future__ import annotations

from dataclasses import dataclass, asdict
from enum import IntEnum
from typing import Any, Iterable

class ClaimLevel(IntEnum):
    COMPUTED=0; REQUESTED=1; ENFORCED=2; ATTRIBUTED=3; BENEFICIAL=4; R

    ↪ ESTORED=5

@dataclass(frozen=True)
class AuthorityContract:
    muscle_id: str
    resource: str

    writer: str
    command: str
    bounds: str
    readback: str
    conflict_set: tuple[str,...]
    meter: tuple[str,...]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    guardrails: tuple[str,...]
    restore: str
    evidence_class: str
    def to_dict(self):
        d=asdict(self); d['conflict_set']=list(self.conflict_set); d['
    ↪ meter']=list(self.meter); d['guardrails']=list(self.guardrails);
    ↪  return d

GPU_POWER = AuthorityContract(
    'nvidia.gpu.power_limit','GPU board power envelope','omni_controll
    ↪ er/gpu_governor.py',
    'nvidia-smi -i <gpu> -pl <watts>','device min <= watts <= frozen s
    ↪ tart limit',
    'power.limit + enforced.power.limit',
    ('VBIOS','BMC/SMBPBI/chassis','application clocks','foreign host w
    ↪ riter'),
    ('DCGM/NVML device joules','integrated board power','optional wall
    ↪  meter','RAPL package meter (separate domain)'),
    ('successful work','SLO','no thermal/HwPowerBrake confound','Watch
    ↪  writes == 0'),
    'restore frozen starting board-power limit and read back','physica
    ↪ l')

RAPL_METER = AuthorityContract(
    'intel.rapl.meter','CPU package energy meter','read-only',
    'read energy_uj','read-only','start/end energy_uj + max_energy_ran
    ↪ ge_uj',(),
    ('RAPL package joules','optional DRAM joules','optional psys joule
    ↪ s'),
    ('wrap-aware delta','domain labels remain separate'), 'none (read-
    ↪ only)','physical-meter')

K8S_REPLICA = AuthorityContract(
    'kubernetes.replicas','workload replica allocation','Omni Kubernet
    ↪ es adapter/native controller',
    'scale/patch replica target','declared min/max + safety envelope',
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 'observed desired/actual replicas',
    ('HPA','operator','GitOps/deployment writer'),('work','latency','p
    ↪ ending/backlog','optional node/wall energy'),
    ('SLO','health','backlog','unsafe == 0'),'restore/hand back origin
    ↪ al controller state','external-software')

CONTRACTS={x.muscle_id:x for x in (GPU_POWER,RAPL_METER,K8S_REPLICA)}

def catalogue(): return {k:v.to_dict() for k,v in CONTRACTS.items()}
```

omnicompass/ce_score.py

32 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Control-effort index. Experiment-defined. Sweep weights; don't trop
    ↪ hy one set."""
from __future__ import annotations
from typing import Dict

SWEEPS = {
    "balanced": dict(replica_change=1, pod_move=1, node_provision=8, n
    ↪ ode_suspend=8, resize=2, reversal=4, power_cap_travel=1),
    "node_heavy": dict(replica_change=1, pod_move=1, node_provision=16
    ↪ , node_suspend=16, resize=2, reversal=4, power_cap_travel=1),

    "replica_heavy": dict(replica_change=4, pod_move=2, node_provision
    ↪ =8, node_suspend=8, resize=2, reversal=8, power_cap_travel=1),
    "resize_heavy": dict(replica_change=1, pod_move=1, node_provision=
    ↪ 8, node_suspend=8, resize=8, reversal=4, power_cap_travel=1),
    "uniform": dict(replica_change=1, pod_move=1, node_provision=1, no
    ↪ de_suspend=1, resize=1, reversal=1, power_cap_travel=1),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
}


def ce(row: Dict, weights: Dict[str, float]) -> float:
    return (
        weights.get("replica_change", 0) * float(row.get("replica_chan
    ↪ ge_units", 0))
        + weights.get("pod_move", 0) * float(row.get("evictions", 0))
        + weights.get("node_provision", 0) * float(row.get("node_start
    ↪ s", 0))
        + weights.get("node_suspend", 0) * float(row.get("node_stops",
    ↪  0))
        + weights.get("resize", 0) * float(row.get("request_changes",
    ↪ 0))
        + weights.get("reversal", 0) * float(row.get("replica_reversal
    ↪ s", 0))
        + weights.get("power_cap_travel", 0) * float(row.get("power_ca
    ↪ p_travel", 0))
    )


def all_sweeps(row: Dict) -> Dict[str, float]:
    return {name: ce(row, w) for name, w in SWEEPS.items()}
```

omnicompass/closure.py

250 lines.

```
"""Closure governor: machines governed by the Omni-Compass closure law
    ↪ , preemptive coherence and the dual-bath tracker.

Sources (the owner's manuscript): Section 5 (5c preemptive coherence:
    ↪ forward projection tau_fwd = Phi_dt(x) and
correction -lambda grad psi), Chapter 20 (master closure law F = G0 +
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ Gc, Gc = -rho beta Dh, zero in the interior,
inward near the boundary with margin delta), Chapters 29-30 (the wheel
    ↪ : expansion, turning point dE/dt = 0, compression;
release only after the turn, ignition before the threshold), Chapter 3
    ↪ 1 (dual-bath exchange dU/dt = -alpha E + beta S,
dE/dt = alpha U - gamma B).

Cluster realisation (one pool)
  state        r(t)  requested cores (what the pods ask for);  n machi
    ↪ nes;  c = cores x ALLOC per machine
  dual bath    level L and rate v of r, the exchange pair of Chapter 3
    ↪ 1 in discrete form:

                innovation e = r - (L + v dt)
                L <- L + v dt + a e          (coherence bath absorbs
    ↪ the observation)
                v <- (1 - g) v + b e / dt    (deviation bath exchange
    ↪ s with it; g = redistribution damping)
  projection   r_fwd(tau) = L + v tau  for tau in [0, H]          (5c:

    ↪  Phi over the look-ahead horizon)
  admissible   h(tau) = r_fwd(tau) / (n c) - rho_max  <= 0      (Chapt
    ↪ er 20: the admissible domain)
  closure Gc   if max_{tau <= H_add} h(tau) > -delta (projected bounda
    ↪ ry approach, within one boot of lead):
                add k = ceil( (max r_fwd / (rho_max - delta) - n c) /

    ↪  c ) machines        (beta sized to restore delta)
  interior G0  energy descent: remove one machine only if it stays adm
    ↪ issible with margin for the whole release horizon,
                max_{tau <= H_rel} r_fwd(tau) / ((n - 1) c) <= rho_ma
    ↪ x - delta,
              and only after the turn (v <= 0: past the peak, the met

    ↪ ric flip), and only while the six-state engine's
              equation (2) push <= push_release
  interior     nothing else happens: inside the domain the platform ph
    ↪ ysics runs unmodified (Gc = 0)
"""
from __future__ import annotations
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
import math
from dataclasses import dataclass


@dataclass(frozen=True)

class ClosureLaw:
    rho_max: float = 0.95      # admissibility boundary: requested cor
    ↪ es / allocatable cores
    delta: float = 0.05        # inwardness margin
    H_add: int = 8             # look-ahead for the closure correction
    ↪  (ticks); >= the boot delay

    H_rel: int = 40            # look-ahead a release must survive (ti
    ↪ cks)
    a: float = 0.5             # dual-bath coupling: level absorption
    b: float = 0.1             # dual-bath coupling: rate exchange
    g: float = 0.05            # redistribution damping of the rate ba
    ↪ th

    push_release: float = 0.2  # engine gate on release
    turn: bool = True          # release only after the turning point
    ↪ (v <= 0)
    delta_rel: float = -1.0    # release band: a release must fit at r
    ↪ ho_max - delta_rel (hysteresis; < 0 means = delta)
    z: float = 0.0             # deviation-bath band: a release must s

    ↪ urvive z standard deviations of the tracker's
                               # innovation over the release horizon (
    ↪ Chapter 31: the deviation bath carries the noise;
                               # the band is wide where demand is nois
    ↪ y, tight where it is calm)
    tone: bool = False         # muscle tone: release = park (alive, l

    ↪ ow power, instant wake), not power-off; parked
                               # machines beyond the reserve needed wi
    ↪ thin tone_H are powered off
    site: bool = False         # whole body (multi-cluster sites): the
    ↪  law runs on the site total, one warm reserve for
                               # the site, and traffic shift lets a cl
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ uster use another's already-powered machines
    tone_H: int = 960          # reserve horizon (ticks): the largest
    ↪ demand seen over this window sets the warm reserve
    coord: bool = False        # nervous-system coordination: pods dec
    ↪ ided first, machines on those pods, and the two
                               # organs never move in opposite directi

    ↪ ons in one decision
    wake_first: bool = False   # whole body: a site that needs a machi
    ↪ ne wakes a parked one in any cluster before it cold-
                               # boots one (traffic shift carries the
    ↪ load; a wake costs no start, a boot costs one)
    dwell: int = 0             # release only after this many consecut

    ↪ ive calm decisions (resource-aware envelope,
                               # Proposition 2: no release outside the
    ↪  calm set; 0 = no dwell requirement)
    turn_rise: float = 0.0     # the turning-point veto binds only for
    ↪  a rise larger than this share of one machine over
                               # the release horizon (v * H_rel > turn

    ↪ _rise * c); 0 = any rise vetoes (the benchmarked
                               # law). A rise smaller than the release
    ↪  band cannot carry demand through the band, so it
                               # is no reason to hold a machine (one s
    ↪ mall rise must not hold every machine for a run)

class ClosureNodes:
    def __init__(self, law: ClosureLaw = ClosureLaw()):
        self.L = None; self.v = 0.0; self.law = law; self.calm = 0; se
    ↪ lf.s2 = 0.0; self.hist = []

    def observe(self, r: float, dt: float = 1.0) -> None:
        a, b, g = self.law.a, self.law.b, self.law.g
        if self.law.tone:
            self.hist.append(r)
            if len(self.hist) > self.law.tone_H:
                self.hist.pop(0)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if self.L is None:
            self.L = r; return
        pred = self.L + self.v * dt
        e = r - pred
        self.s2 = 0.95 * self.s2 + 0.05 * e * e
        self.L = pred + a * e
        self.v = (1.0 - g) * self.v + b * e / dt

    def reserve(self, c: float) -> int:
        """Machines the law expects to need within the tone horizon (l
    ↪ argest recent demand at the working boundary)."""
        if not self.hist:
            return 0
        return int(math.ceil(max(self.hist) / ((self.law.rho_max - sel
    ↪ f.law.delta) * c) - 1e-9))

    def fwd_max(self, H: int) -> float:
        return max(self.L + self.v * tau for tau in range(0, H + 1)) i
    ↪ f self.L is not None else 0.0

    def decide(self, n: int, c: float, push: float, n_min: int, n_max:
    ↪  int) -> int:
        """Target machine count for this tick."""
        L = self.law
        if self.L is None:
            return n
        peak_add = max(self.fwd_max(L.H_add), 0.0)
        if n <= 0 or peak_add / (n * c) - L.rho_max > -L.delta:
            self.calm = 0
            need = math.ceil(peak_add / ((L.rho_max - L.delta) * c) -
    ↪ 1e-9)
            return int(min(n_max, max(n_min, need, n)))
        peak_rel = max(self.fwd_max(L.H_rel), 0.0) + L.z * math.sqrt(s
    ↪ elf.s2 * max(1, L.H_rel)) * L.a
        band = L.delta if L.delta_rel < 0 else L.delta_rel
        calm = n - 1 >= n_min and peak_rel / ((n - 1) * c) <= L.rho_ma
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ x - band \
            and (not L.turn or self.v * L.H_rel <= L.turn_rise * c) an
    ↪ d push <= L.push_release
        self.calm = self.calm + 1 if calm else 0
        if calm and self.calm > L.dwell:
            self.calm = 0

            return n - 1
        return n


# ------------------------------------------------------------------------
    ↪ ------------------------------------------------

# Self-calibrating closure law: every margin is derived, none is tuned
    ↪  per workload.
#
#   tracker      dual bath (level L, rate v); the gains are chosen by
    ↪ the data: a bank of trackers from slow-trend to fast-
#                trend (a, b) runs side by side and the one with the s

    ↪ mallest running one-step prediction error drives the
#                forecast (model selection by prediction error; the fa
    ↪ stest member is the critically damped a = 1/2,
#                b = a^2 / (2 - a))
#   noise        sigma^2 = running variance of the tracker's one-step
    ↪ innovation (the deviation bath of Chapter 31)

#   add horizon  H_add = boot delay + 1 tick: a machine ordered now is
    ↪  serving when the projection arrives
#   release hor. H_rel = boot delay / park fraction: the energy break-
    ↪ even between keeping a machine parked and booting
#                it cold again (a parked machine draws park_frac x idl
    ↪ e per tick, a cold start draws boot x idle)

#   boundary     requested cores <= allocatable cores (rho_max = 1, th
    ↪ e physical limit); no fixed margin
#   margin       z(t) sigma sqrt(H): the forecast error over the horiz
    ↪ on at confidence z;
#                z(t) = z95 x max(1, S / S*), S the six-state engine's
    ↪  stress (equation 6) and S* its equilibrium,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
#                delta - alpha_s S* - (3/4) beta_s S*^2 = 0: the engin
    ↪ e widens the margin when it is stressed
#   Gc (add)     if projected peak over H_add + margin > n c: add ceil
    ↪ ((peak + margin) / c) - n machines
#   G0 (release) one machine, only if projected peak over H_rel + marg
    ↪ in over max(H_rel, T*) <= (n - 1) c (the machine is

#                not expected back within the learned break-even T* be
    ↪ low), after the turn (v <= 0), and while
#                the engine's push <= push_release; the released machi
    ↪ ne is parked
#   power-off    learned break-even (ski rental with measured return t
    ↪ imes): every release at level k opens a record

#                that closes when demand needs k machines again; X = t
    ↪ he time it took. A parked machine is powered off
#                when it has been parked T* ticks, T* = argmin_T sum_i
    ↪  cost_i(T), cost_i = park_frac X_i if X_i <= T,
#                else park_frac T + boot (energy in idle-machine ticks
    ↪ ; still-open records are right-censored at their

#                age). Before any record exists T* = boot / park_frac,
    ↪  the deterministic ski-rental rule (never more than
#                twice the energy of a controller that knows the futur
    ↪ e). Nothing is tuned: T* is computed from the
#                workload's own return times, per workload, while it r
    ↪ uns

# ------------------------------------------------------------------
    ↪ ------------------------------------------------
@dataclass(frozen=True)
class AutoClosureLaw:
    boot: int = 6                  # boot delay of a cold machine (tic
    ↪ ks): a property of the plant

    park_frac: float = 0.25        # parked power / idle power: a prop
    ↪ erty of the hardware
    z95: float = 1.6449            # one-sided 95% normal quantile
    a: float = 0.5
    push_release: float = 0.2
    site: bool = False
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    # read by the plant (same interface as ClosureLaw)
    tone: bool = True
    rho_max: float = 1.0
    delta: float = 0.0

    @property

    def b(self) -> float:
        return self.a * self.a / (2.0 - self.a)

    @property
    def H_add(self) -> int:
        return self.boot + 1

    @property
    def H_rel(self) -> int:
        return int(math.ceil(self.boot / self.park_frac))

    @property

    def tone_H(self) -> int:
        return self.H_rel


def stress_equilibrium(delta: float, alpha_s: float, beta_s: float) ->
    ↪  float:

    """Positive root of delta - alpha_s S - (3/4) beta_s S^2 = 0 (the
    ↪ engine's stress equilibrium, equation 6)."""
    qa = 0.75 * beta_s
    return (-alpha_s + math.sqrt(alpha_s * alpha_s + 4.0 * qa * delta)
    ↪ ) / (2.0 * qa) if qa > 0 else delta / alpha_s

class AutoClosureNodes:
    def __init__(self, law: AutoClosureLaw = AutoClosureLaw(), s_eq: f
    ↪ loat = None):
        self.law = law; self.L = None; self.v = 0.0; self.s2 = 0.0; se
    ↪ lf.n_obs = 0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.S = 0.0; self.s_eq = s_eq if s_eq else stress_equilibrium
    ↪ (0.5, 0.12, 0.10)
        self.hist = []; self.ages = []; self.n_last = 0
        self.t = 0; self.open = []; self.closed = []   # release recor
    ↪ ds: (level, t0) open; X closed

    BANK = ((0.2, 0.002), (0.2, 0.02), (0.5, 0.005), (0.5, 0.05), (0.5
    ↪ , 1.0 / 6.0))

    def observe(self, r: float, dt: float = 1.0) -> None:
        if self.L is None:
            self.L = r; self.bank = [[r, 0.0, 0.0] for _ in self.BANK]

    ↪ ; return
        self.n_obs += 1; self.t += 1
        self.ages = [x + 1 for x in self.ages]
        w = max(1.0 / self.n_obs, 0.02)            # running mean firs
    ↪ t, then a 50-tick exponential window
        for (a, b), m in zip(self.BANK, self.bank):

            pred = m[0] + m[1] * dt
            e = r - pred
            m[2] = (1.0 - w) * m[2] + w * e * e
            m[0] = pred + a * e
            m[1] = m[1] + b * e / dt
        best = min(self.bank, key=lambda m: m[2])

        self.L, self.v, self.s2 = best


    def z(self) -> float:
        return self.law.z95 * max(1.0, self.S / self.s_eq) if self.s_e
    ↪ q > 0 else self.law.z95

    def peak(self, H: int, H_noise: int = None) -> float:
        """Projected peak over H ticks (level + trend) plus the foreca
    ↪ st-error margin accumulated over H_noise ticks."""
        if self.L is None:
            return 0.0
        Hn = H if H_noise is None else H_noise
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return max(self.L + self.v * tau for tau in range(0, H + 1)) +
    ↪  self.z() * math.sqrt(self.s2 * Hn)

    GRID = (0, 6, 12, 24, 48, 96, 192, 384, 768, 1440)

    def threshold(self) -> int:

        L = self.law
        if not self.closed and not self.open:
            return L.H_rel
        cens = [self.t - t0 for _, t0 in self.open]
        def cost(T):
            c = sum(L.park_frac * x if x <= T else L.park_frac * T + L

    ↪ .boot for x in self.closed)
            return c + sum(L.park_frac * T + L.boot if a > T else L.pa
    ↪ rk_frac * a for a in cens)
        return min(self.GRID, key=lambda T: (cost(T), T))

    def reserve(self, c: float) -> int:

        """Machines to keep powered (running + parked younger than the
    ↪  learned break-even T*); older parked go off."""
        T = self.threshold()
        self.ages = [x for x in self.ages if x < T]
        return self.n_last + len(self.ages)

    def decide(self, n: int, c: float, push: float, n_min: int, n_max:
    ↪  int) -> int:
        L = self.law
        if self.L is None:
            return n
        need = int(math.ceil(max(self.peak(L.H_add), 0.0) / c - 1e-9))

        still = []
        for lvl, t0 in self.open:            # a release record closes
    ↪  when demand needs its level again
            if need >= lvl:
                self.closed.append(self.t - t0)
            else:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                still.append((lvl, t0))
        self.open = still[-200:]; self.closed = self.closed[-400:]
        if n <= 0 or need > n:
            t = int(min(n_max, max(n_min, need)))
            self.ages.sort(); del self.ages[max(0, len(self.ages) - (t
    ↪  - n)):]     # wake the longest parked first

            self.n_last = t
            return t
        # release only if the machine is not expected back within the
    ↪ learned break-even T*: the trend is projected over
        # the release horizon, the forecast error is accumulated over
    ↪ max(H_rel, T*)

        if n - 1 >= n_min and self.peak(L.H_rel, max(L.H_rel, self.thr
    ↪ eshold())) <= (n - 1) * c and self.v <= 0.0 \
                and push <= L.push_release:
            self.ages.append(0); self.n_last = n - 1; self.open.append
    ↪ ((n, self.t))
            return n - 1

        self.n_last = n
        return n
```

omnicompass/compass.py

163 lines.

```
"""The Omni-Compass, computed.

I read my own state on the compass every decision and say where I am,
    ↪ in the compass's own terms.

The wheel (Chapter 29). My deviation E, scaled by its ceiling E_max, r
    ↪ uns along the horizontal; its rate of change runs
along the vertical. A reading is a point on that wheel. Its heading is
    ↪  measured clockwise from north, as on the face:

    +   A     0 deg   rising through rest
    ⇄   Δ    45 deg   expansion: above rest and rising, exchange under
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  way
    >   B    90 deg   peak extension: the turn, where the metric flips
    ↪  (k -> -k)
    T   Λ   135 deg   dispersion: above rest and easing, the ceiling h
    ↪ olds
    -   Ω   180 deg   falling through rest

    ≈   Π   225 deg   compression: below rest and settling into the ba
    ↪ sin
    <   Γ   270 deg   deepest compression: the turn at the floor
    ✦   Ψ   315 deg   re-alignment: below rest and rising, ignition ah
    ↪ ead

The four quadrants are the strokes of the closed circle (Chapters 29-3
    ↪ 0):
    I   Expansion     above rest, rising
    II  Dispersion    above rest, easing
    III Compression   below rest, falling
    IV  Re-alignment  below rest, rising

The wheel turns I -> II -> III -> IV -> I. Crossing from IV into I is
    ↪ ignition; the turn at peak extension is the
metric flip. The state is continuous through every crossing: nothing s
    ↪ witches off, nothing restarts.

The rim carries the 24 letters in their places on the face, 15 degrees

    ↪  each, clockwise from A at north.

The axle is the structural basin S. Its rest point S* solves equation
    ↪ (6): delta - alpha_s S - (3/4) beta_s S^2 = 0.

Closing the circle (Chapter 1, the Unified Circle Principle):

    X' = G(X),  X(0) in Omega          Omega is the living band: ever
    ↪ y level inside [0.05, 0.95]
    G(X) . n(X) <= 0 on the boundary    at a boundary the next move po
    ↪ ints inward, never outward
    grad L(X) . G(X) <= 0               the ledger L, the engine's com
    ↪ posite storage over all six states
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                                        (omnicompass.storage.composite
    ↪ _V), descends when nothing is forcing it
    => lim X(t) in M*                   the state settles into the bas
    ↪ in
I check all three every decision and report them. The ledger may rise
    ↪ while outside load forces me; I report that as

forcing, never hide it.
"""
from __future__ import annotations

import math
from dataclasses import dataclass, field

from typing import Dict, List, Optional

from omnicompass.nervous_system import BAND

RIM = ["A", "E", "Z", "Δ", "H", "θ", "B", "I", "K", "Λ", "M", "N",
       "Ω", "Ξ", "O", "Π", "P", "Σ", "Γ", "T", "Y", "Ψ", "Φ", "X"]

POINTS = [("+", "rising through rest"), ("⇄", "expansion, exchange und
    ↪ er way"), (">", "peak extension, the turn"),
          ("T", "dispersion, the ceiling holds"), ("−", "falling throu
    ↪ gh rest"), ("≈", "compression, settling into the basin"),
          ("<", "deepest compression, the turn at the floor"), ("✦", "
    ↪ re-alignment, ignition ahead")]

QUADRANTS = {1: "Expansion", 2: "Dispersion", 3: "Compression", 4: "Re
    ↪ -alignment"}


def phi(S: float, alpha_s: float, beta_s: float, delta: float) -> floa
    ↪ t:

    """Basin potential, equation (5)."""
    return alpha_s * S * S / 2.0 + beta_s * S ** 3 / 4.0 - delta * S


def axle(alpha_s: float, beta_s: float, delta: float) -> float:
    """S*, the rest point of the axle: the positive root of delta - al
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ pha_s S - (3/4) beta_s S^2 = 0."""
    q = 0.75 * beta_s
    if q <= 0:
        return delta / alpha_s if alpha_s > 0 else 0.0
    return (-alpha_s + math.sqrt(alpha_s * alpha_s + 4.0 * q * delta))
    ↪  / (2.0 * q)

def heading(e: float, rate: float) -> float:
    """Degrees clockwise from north: north is rising (rate > 0), east
    ↪ is extension (e > 0)."""
    if abs(e) < 1e-12 and abs(rate) < 1e-12:

        return 0.0
    return math.degrees(math.atan2(e, rate)) % 360.0


def quadrant(e: float, rate: float) -> int:
    if e > 0:

        return 1 if rate > 0 else 2
    return 3 if rate < 0 else 4


def in_omega(levels: Dict[str, float]) -> Dict[str, bool]:
    lo, hi = BAND

    return {k: lo - 1e-9 <= v <= hi + 1e-9 for k, v in levels.items()}


def inward(level: float, move: float, eps: float = 0.01) -> bool:
    """G . n <= 0 on the boundary of Omega: at (or past) the floor the
    ↪  move is not downward, at the ceiling not upward."""

    lo, hi = BAND
    if level >= hi - eps and move > 0:
        return False
    if level <= lo + eps and move < 0:
        return False
    return True
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
@dataclass
class Compass:
    """Reads the engine each decision and keeps the previous reading t
    ↪ o form rates and the ledger step."""

    E_max: float = 1.0
    alpha_s: float = 0.12
    beta_s: float = 0.10
    delta: float = 0.5
    prev_e: Optional[float] = None
    prev_L: Optional[float] = None

    scale: float = 0.0            # running RMS of the rate, so the wh
    ↪ eel is round in its own units
    turns: int = 0                # full circles closed (IV -> I cross
    ↪ ings)
    last_q: Optional[int] = None
    trail: List[str] = field(default_factory=list)

    def read(self, E: float, S: float, levels: Dict[str, float] = None
    ↪ , moves: Dict[str, float] = None,
             forced: bool = False, x=None, p=None) -> Dict:
        """x, p: the engine's full state and parameters; with them the
    ↪  ledger is the composite storage of all six

        states. Without them it is the storage of the two the reading
    ↪ names, E^2/2 + Phi(S) - Phi(S*)."""
        e = E / max(self.E_max, 1e-12)
        raw = 0.0 if self.prev_e is None else e - self.prev_e
        self.scale = raw * raw if self.scale == 0.0 else 0.9 * self.sc
    ↪ ale + 0.1 * raw * raw

        rate = raw / math.sqrt(self.scale) if self.scale > 1e-18 else
    ↪ 0.0
        h = heading(e, rate)
        q = quadrant(e, rate)
        if self.last_q == 4 and q == 1:
            self.turns += 1
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        pt, meaning = POINTS[int(((h + 22.5) % 360) // 45)]
        letter = RIM[int(((h + 7.5) % 360) // 15)]
        s_star = axle(self.alpha_s, self.beta_s, self.delta)
        parts = {}
        if x is not None and p is not None:
            from omnicompass.storage import composite_V
            cv = composite_V(x, p, 1)
            L = cv["V"]; parts = {k: round(v, 5) for k, v in cv.items(
↪ ) if k.startswith("V_")}
            s_star = cv["S_star"]
        else:
            L = 0.5 * e * e + phi(S, self.alpha_s, self.beta_s, self.d
↪ elta) - phi(s_star, self.alpha_s, self.beta_s, self.delta)
        dL = None if self.prev_L is None else L - self.prev_L
        levels = levels or {}; moves = moves or {}
        omega = in_omega(levels)
        lo, hi = BAND
        outside = {k: ("below the floor" if levels[k] < lo else "above
↪  the ceiling") for k, ok in omega.items() if not ok}
        heading_in = {k: (moves.get(k, 0.0) > 0 if levels[k] < lo else
↪  moves.get(k, 0.0) < 0) for k in outside}
        inw = {k: inward(levels[k], moves.get(k, 0.0)) for k in levels
↪ }
        r = {"heading_deg": round(h, 1), "letter": letter, "point": pt
↪ , "meaning": meaning,
             "quadrant": q, "stroke": QUADRANTS[q], "e": round(e, 4),
↪ "rate": round(rate, 3),
             "axle_S": round(S, 4), "axle_rest": round(s_star, 4), "le
↪ dger": round(L, 5),
             "ledger_step": None if dL is None else round(dL, 5), "led
↪ ger_parts": parts,
             "descent": None if dL is None else (dL <= 1e-9 or forced)
↪ , "forced": forced,
             "omega_held": all(omega.values()) if omega else True, "in
↪ ward": all(inw.values()) if inw else True,
             "outside": outside, "returning": heading_in,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
             "circles_closed": self.turns}
        self.prev_e, self.prev_L, self.last_q = e, L, q
        return r


def omega_words(r: Dict) -> str:
    if r["omega_held"]:
        return "Ω held"
    parts = [f"{k} {w}, {'returning' if r['returning'].get(k) else 'he
    ↪ ld'}" for k, w in r["outside"].items()]
    return "Ω: " + "; ".join(parts)

def say(r: Dict) -> str:
    """One line in the compass's own terms."""
    step = "" if r["ledger_step"] is None else f" {r['ledger_step']:+.
    ↪ 4f}{' (forced)' if r['forced'] and r['ledger_step'] > 0 else ''}
    ↪ "

    return (f"{r['letter']} {r['point']} {r['heading_deg']:5.1f}° {r['
    ↪ stroke']}: {r['meaning']} | "
            f"{omega_words(r)} | G·n≤0 {'yes' if r['inward'] else 'NO'
    ↪ } | "
            f"L {r['ledger']:.4f}{step} | axle S {r['axle_S']} (rest {
    ↪ r['axle_rest']}) | circles {r['circles_closed']}")
```

omnicompass/compass_law.py

176 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The compass: one smooth law for every muscle, and the plug every mu
    ↪ scle is wired through.

A muscle is a plug with one wire in and one wire out. The plug reads i
    ↪ ts meters and writes its lever; all the
thinking is here, in the brain, written once for every muscle.

The plug (Plug)
  read      the service reading (response time, temperature, queue) an
    ↪ d the lever as it stands
  write     one value; the plug clips it to the cover, sends it, and r
    ↪ eads back what the device took
  restore   the lever back to the snapshot, the value read once before
    ↪  the first write; it never moves after that
  one writer if the lever is found at a value the brain did not write,
    ↪  someone else owns it: the brain stops writing
            and leaves that value alone (restoring over it would fight
    ↪  the new owner)

Two bands
  cover     the outer band, the lever's hard range (the device's or th
    ↪ e buyer's lowest and highest setting); every
            write is clipped to it, so nothing the math does can set t
    ↪ he lever outside
  compass      the service reading as a position in its band, 0 to 1 (
    ↪ 0: calm, 1: the service line); the brain pulls it
            to the bottom of the compass, the center (0.5 by default);
    ↪  the walls run to 0.05 and 0.95, and the last 5% on
            each side is cushion (10% in all) before the line

The force (CompassLaw.force), the physics of a ball in a compass with
    ↪ the right friction
  pull      K_P x (position - center): gentle near the bottom, harder
    ↪ up the walls
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  push      K_D x velocity: whatever is shoving the position (a load r
    ↪ ising, heat building) is met by an equal and
            opposite push; it is also the friction that stops the ball
    ↪  sloshing past the bottom (with K_D chosen for
            critical damping it glides to the center and stops, no ove
    ↪ rshoot, no ringing)

  smooth    the force is A x tanh(raw / A): a spring near the center t
    ↪ hat bends over and flattens into its maximum A,
            never a corner, never a hammer; the same shape the engine
    ↪ already uses for v_eff (omnicompass/core.py)
  fail up   past the 0.95 wall the up side goes to its full force at o
    ↪ nce, and the down side may not act until the

            position is back inside the compass


Two forces (antagonist pairs)
  up        a positive force adds capacity, power, cooling or speed (s
    ↪ cale out, raise a clock, start a chiller)
  down      a negative force takes it back (scale in, lower a limit, w

    ↪ arm a setpoint)
  each side has its own gain (lever units per unit of force), because
    ↪ adding and taking back do not cost the same;
  a muscle with two wires (a GPU's clock range and power limit) gives
    ↪ each side its own lever; a one-wire muscle
  carries both directions on its one lever

The frozen engine (omnicompass/core.py) and its proofs are untouched;
    ↪ this is a separate law, run as its own arm.
"""
from __future__ import annotations

import math
from dataclasses import dataclass, field
from typing import Optional



def clamp(v, lo, hi):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return lo if v < lo else hi if v > hi else v


@dataclass
class Band:
    """A reading's band: lo is calm (position 0), hi is the line (posi
    ↪ tion 1)."""
    lo: float
    hi: float
    center: float = 0.5
    cushion: float = 0.05

    def position(self, x: float) -> float:
        return (x - self.lo) / (self.hi - self.lo)

    @property
    def wall_low(self) -> float:
        return self.cushion

    @property
    def wall_high(self) -> float:
        return 1.0 - self.cushion

@dataclass
class CompassLaw:
    """The brain's law for one muscle. dt: seconds between decisions;
    ↪ tau: the muscle's response time in seconds
    (how long the service reading takes to follow the lever); kd defau
    ↪ lts to critical damping for that response."""

    band: Band
    dt: float
    tau: float
    kp: float = 1.0
    kd: Optional[float] = None
    authority: float = 1.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    smooth: float = 0.5          # the velocity estimate's smoothing (
↪ 0: raw difference, near 1: heavily smoothed)
    p: Optional[float] = field(default=None, init=False)
    v: float = field(default=0.0, init=False)

    def __post_init__(self):

        if self.kd is None:
            # a first-order muscle with response tau under a P-D pull:
↪  critical damping when kd = 2 sqrt(kp tau) - 1
            # scaled to the decision period; never negative
            self.kd = max(0.0, 2.0 * math.sqrt(self.kp * self.tau / se
↪ lf.dt) - 1.0) * self.dt

    def sense(self, reading: float) -> float:
        p = self.band.position(reading)
        if self.p is not None:
            self.v = self.smooth * self.v + (1.0 - self.smooth) * (p -
↪  self.p) / self.dt

        self.p = p
        return p

    def force(self, reading: float) -> float:
        """Positive: the up side (add capacity); negative: the down si
↪ de (take it back). Bounded by the authority."""

        p = self.sense(reading)
        if p >= self.band.wall_high:
            return self.authority                                    # f
↪ ail up: past the wall, full force up at once
        raw = self.kp * (p - self.band.center) + self.kd * self.v
        f = self.authority * math.tanh(raw / self.authority)

        if f < 0.0 and self.v > 0.0 and p > self.band.center:
            f = 0.0                                                  # n
↪ ever take back while it climbs above the center
        return f
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class ForeignWriter(Exception):
    pass


class Plug:
    """One wire in, one wire out. Subclasses implement _read_service,
    ↪ _read_lever and _send; everything else is here."""

    def __init__(self, lo: float, hi: float, tolerance: float = 1e-6):
        self.lo, self.hi, self.tol = lo, hi, tolerance
        self.snapshot: Optional[float] = None
        self.last_written: Optional[float] = None

        self.owned = True
        self.writes = 0
        self.clipped = 0

    # the wires ----------------------------------------------------------
    ↪ -----------------------------------------
    def _read_service(self) -> float:
        raise NotImplementedError

    def _read_lever(self) -> float:
        raise NotImplementedError

    def _send(self, value: float) -> None:
        raise NotImplementedError

    # the contract -------------------------------------------------------
    ↪ -----------------------------------------
    def attach(self) -> float:

        """Read the lever once, before any write: the restore point. I
    ↪ t never moves after this."""
        self.snapshot = self._read_lever()
        return self.snapshot

    def read(self) -> float:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return self._read_service()

    def lever(self) -> float:
        return self._read_lever()

    def write(self, value: float) -> Optional[float]:
        """Clip to the cover, check nobody else moved the lever, send,
    ↪  read back. None: not written (not owned)."""
        if not self.owned:
            return None
        now = self._read_lever()
        expected = self.last_written if self.last_written is not None
    ↪ else self.snapshot
        if expected is not None and abs(now - expected) > self.tol:
            self.owned = False                                    # s
    ↪ omeone else moved it: it is theirs now
            raise ForeignWriter(f"lever at {now}, last written {expect
    ↪ ed}")
        v = clamp(value, self.lo, self.hi)
        self.clipped += int(v != value)
        if abs(v - now) <= self.tol:
            return now
        self._send(v)
        self.last_written = self._read_lever()
        self.writes += 1
        return self.last_written

    def restore(self) -> bool:
        """The lever back to the snapshot. Left alone when someone els
    ↪ e owns it. True: at the snapshot (or not ours)."""
        if not self.owned or self.snapshot is None:
            return True
        if abs(self._read_lever() - self.snapshot) > self.tol:
            self._send(self.snapshot)
        self.last_written = None
        return abs(self._read_lever() - self.snapshot) <= self.tol
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`omnicompass/configurations.py`

70 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Named engine configurations.

Default remains omnicompass.core (symmetric_verified). This module doe
    ↪ s not

replace it. printed_eight_line is the marketing-plate transcription.

  symmetric_verified  claim-2 / package core
    dE = -alpha_E E + beta_int + beta_ext + v_eff
    dU = mu U (1-U^2) - dE/E_max - lambda_U U + u
    dI = 1-U - sigma_1 E - delta S - lambda_I I_U

    v  = cos(omega_B t / 2) * c * tanh(lambda_0 + lambda_1 (U-0.5) + l
    ↪ ambda_2 S)

  printed_eight_line  plate species (not the held-out evidence core)
    dE = -alpha E + beta_int + beta_ext + v_eff
    dU = alpha (1-U) - dE/E_max - k U (1-U) + u

    dI = 1-U - sigma_1 E - delta S
    v  = c * tanh(lambda_0 + lambda_1 (U-U_t) + lambda_2 S)
"""
from __future__ import annotations

import math

from typing import Callable

from .core import EPS, KP, U_AUTHORITY, Params, State, derivatives as
    ↪ core_derivatives, v_eff as core_v_eff
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
SYMMETRIC = "symmetric_verified"
PRINTED = "printed_eight_line"
DEFAULT = SYMMETRIC


def printed_v_eff(x: State, p: Params, t: float = 0.0, U_t: float = 0.
    ↪ 5) -> float:
    z = p.lambda_0 + p.lambda_1 * (x.U - U_t) + p.lambda_2 * x.S
    return p.c * math.tanh(z)


def printed_derivatives(x: State, p: Params, t: float, u: float = 0.0,
    ↪  U_t: float = 0.5) -> State:
    v = printed_v_eff(x, p, t, U_t)
    dE = -p.alpha * x.E + p.beta_int + p.beta_ext + v
    dU = p.alpha * (1.0 - x.U) - dE / max(p.E_max, 1e-6) - p.k * x.U *
    ↪  (1.0 - x.U) + u
    dI = (1.0 - x.U) - p.sigma_1 * x.E - p.delta * x.S

    dS = p.delta - p.alpha_s * x.S - 0.75 * p.beta_s * x.S * x.S
    dBd = p.gamma_c * p.delta * x.S - (p.omega_B / max(p.Q_B, EPS)) *
    ↪ x.B_dot - p.omega_B ** 2 * x.B
    return State(dE, dU, dI, dS, x.B_dot, dBd)

def derivatives_for(name: str) -> Callable:
    if name == SYMMETRIC:
        return core_derivatives
    if name == PRINTED:
        return printed_derivatives
    raise ValueError(name)

def control_command_for(name: str, x: State, p: Params, t: float, targ
    ↪ et: float):
    deriv = derivatives_for(name)
    drift = deriv(x, p, t, 0.0).U
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    raw = -drift + KP * (float(target) - x.U)
    return max(-U_AUTHORITY, min(U_AUTHORITY, raw)), raw


def describe(name: str) -> str:
    return {
        SYMMETRIC: "package / claim-2 cubic U; owns held-out evidence"
    ↪ ,
        PRINTED: "plate logistic U; executable; not the default",
    }[name]
```

omnicompass/conveyance.py

101 lines.

```
"""Conveyance law: moving a conserved budget ("juice") between organs.

Manuscript sources (interpretation of the English, not only the symbol
    ↪ s):
  Ch. 29 §8   E_system = E + U + S + B, dE_system/dt = 0 over the cycl
    ↪ e: "Energy redistributes. Energy reorganizes.
              Energy does not diverge."
    ↪     -> the budget is conserved, only moved
  Ch. 31 §4   "When E grows locally, B increases to distribute gradien
    ↪ ts." -> flow runs down the gradient of need
  Ch. 31 §5   stability requires Re(lambda_i) <= 0
    ↪       -> the flow must provably converge
  Ch. 30 §5-7 ignition is a "redistribution surge ... controlled relea
    ↪ se", with state continuity (no discontinuity)

    ↪       -> the reserve is released continuously
  Ch. 29 §6   compression: "backpressure develops through S ... struct
    ↪ ured inward rotation"
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪       -> surplus is pulled back smoothly

The law. Organs i hold allocations a_i of a budget A (watts, cores, ..
    ↪ .), have need d_i (the budget that would serve
their work at the engine's utilisation target rho), and a deficit ("lo

    ↪ cal deviation")
        e_i = d_i / (rho a_i) - 1        (> 0 needs juice, < 0 holds s
    ↪ urplus)
The redistribution mediator moves budget by the replicator flow
        da_i/dt = kappa a_i (e_i - e_bar),       e_bar = sum_j a_j e_j
    ↪  / A

Properties (proved in docs/CONVEYANCE_LAW.md, checked in tests/test_co
    ↪ nveyance.py):
  P1 conservation      sum_i da_i/dt = 0 exactly: the budget is moved,
    ↪  never created
  P2 gradient flow     it is the Shahshahani gradient of F(a) = sum_i
    ↪ (d_i / rho) ln a_i on the simplex sum a_i = A;

                       F is strictly concave, so F rises monotonically
    ↪  (Lyapunov function)
  P3 convergence       unique equilibrium a_i* = A d_i / D (D = sum d_
    ↪ i): every organ at the same deficit e*,
                       reached exponentially: da_i/dt = (kappa/rho)(d_
    ↪ i - a_i D/A), rate kappa D / (rho A), and the

                       linearisation has eigenvalues -kappa D/(rho A)
    ↪ < 0 (Re(lambda) <= 0, Ch. 31 §5)
  P4 bounds            organ floors and ceilings (device minimum, TDP)
    ↪  are kept by projection; budget an organ cannot
                       take because it is at its ceiling returns to th
    ↪ e others (water-filling), and budget left over

                       when every organ is at its need is held back as
    ↪  reserve, not spent
Reserve (Ch. 30 surge): R = the budget needed to cover the demand rise
    ↪  the rate tracker projects over one actuation
delay; released continuously to organs whose deficit stays positive af
    ↪ ter the flow."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
from __future__ import annotations

from typing import List, Sequence


def deficits(a: Sequence[float], d: Sequence[float], rho: float) -> Li
    ↪ st[float]:
    return [di / (rho * max(ai, 1e-12)) - 1.0 for ai, di in zip(a, d)]


def replicator_step(a: Sequence[float], d: Sequence[float], rho: float
    ↪ , kappa: float, dt: float = 1.0) -> List[float]:
    """One exact step of da_i/dt = (kappa/rho)(d_i - a_i D/A), the clo
    ↪ sed form of the replicator flow (P3):
    a_i(t+dt) = a_i* + (a_i - a_i*) exp(-kappa D dt / (rho A)); conser
    ↪ ves sum a_i to rounding (P1)."""
    import math
    A = sum(a); D = sum(d)
    if A <= 0 or D <= 0:
        return list(a)
    k = math.exp(-kappa * D * dt / (rho * A))
    return [A * di / D + (ai - A * di / D) * k for ai, di in zip(a, d)
    ↪ ]

def project(a: Sequence[float], lo: Sequence[float], hi: Sequence[floa
    ↪ t], budget: float) -> List[float]:
    """Water-filling projection onto {lo_i <= a_i <= hi_i, sum a_i <=
    ↪ budget}: organs pinned at a bound keep it, the
    rest share the remainder in proportion to their unconstrained allo
    ↪ cation (P4). Exact in <= n rounds."""
    a = [min(max(x, l), h) for x, l, h in zip(a, lo, hi)]
    for _ in range(len(a) + 1):
        tot = sum(a)
        if tot <= budget + 1e-9:
            return a
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        free = [i for i in range(len(a)) if a[i] > lo[i] + 1e-12]
        over = tot - budget
        share = sum(a[i] - lo[i] for i in free)
        if share <= 0:
            return a
        a = [max(lo[i], a[i] - over * (a[i] - lo[i]) / share) if i in
    ↪ free else a[i] for i in range(len(a))]
    return a


class Conveyance:
    """The budget law for a set of organs sharing one budget (e.g. GPU
    ↪  groups under one site power cap).
    step(need, lo, hi) returns allocations; the flow moves budget towa
    ↪ rd need, the projection keeps bounds, and the
    reserve holds back what the projected rise needs, releasing it con
    ↪ tinuously where deficits stay positive."""

    def __init__(self, n: int, budget: float, rho: float = 0.8, kappa:
    ↪  float = 1.0):
        self.budget, self.rho, self.kappa = budget, rho, kappa
        self.a = [budget / n] * n
        self.prev = None
        self.rate = [0.0] * n

    def step(self, need: Sequence[float], lo: Sequence[float], hi: Seq
    ↪ uence[float]) -> List[float]:
        # the living band: every organ keeps at least 5% of its range
    ↪ (idle, never off) and never takes more than 95%
        from omnicompass.nervous_system import BAND

        lo = [max(l, BAND[0] * h) for l, h in zip(lo, hi)]
        hi = [max(l, BAND[1] * h) for l, h in zip(lo, hi)]
        need = [max(x, 1e-9) for x in need]
        if self.prev is not None:           # rate tracker for the res
    ↪ erve (the dual-bath rate channel)
            self.rate = [0.5 * r + 0.5 * (x - p) for r, x, p in zip(se
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ lf.rate, need, self.prev)]
        self.prev = list(need)
        reserve = min(0.5 * self.budget, sum(max(0.0, r) for r in self
    ↪ .rate))
        want = [min(h, x / self.rho) for x, h in zip(need, hi)]
    ↪    # budget each organ can use at rho

        want = [max(w, l) for w, l in zip(want, lo)]
    ↪      # a device cannot go below its floor
        spend = max(sum(lo), min(self.budget - reserve, sum(want)))
    ↪     # never spend budget nobody needs
        a = replicator_step(self.a, [w * self.rho for w in want], self
    ↪ .rho, self.kappa)

        a = [x * spend / max(sum(a), 1e-12) for x in a]
        a = project(a, lo, [max(l, min(h, w)) if sum(want) <= spend el
    ↪ se h for l, h, w in zip(lo, hi, want)], spend)
        # surge (Ch. 30): release the reserve continuously to organs s
    ↪ till in deficit, up to their ceiling
        left = self.budget - sum(a)

        short = [max(0.0, min(h, x / self.rho) - ai) for x, h, ai in z
    ↪ ip(need, hi, a)]
        tot = sum(short)
        if tot > 0 and left > 0:
            a = [ai + min(s, left * s / tot) for ai, s in zip(a, short
    ↪ )]

        self.a = a
        return a
```

omnicompass/core.py

240 lines.

```
"""Omni-Compass core: six-state ODE, RK4 integrator, bounded feedforwa
    ↪ rd-plus-proportional controller.

State x = (E, U, I_U, S, B, B_dot).

  (1) dE/dt    = -alpha_E E + beta_int + beta_ext + v_eff
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  (2) dU/dt    = mu U (1 - U^2) - (dE/dt)/E_max - lambda_U U + u,   |u
    ↪ | <= U_AUTHORITY
  (3) dI_U/dt  = (1 - U) - sigma_1 E - delta S - lambda_I I_U
  (4) v_eff    = cos(omega_B t / 2) * c * tanh(lambda_0 + lambda_1 (U
    ↪ - 0.5) + lambda_2 S)
  (5) Phi(S)   = alpha_s S^2 / 2 + beta_s S^3 / 4 - delta S

  (6) dS/dt    = -dPhi/dS = delta - alpha_s S - (3/4) beta_s S^2
  (7) dB/dt    = B_dot ;  dB_dot/dt = gamma_c delta S - (omega_B/Q_B)
    ↪ B_dot - omega_B^2 B
  (8) R_B[n]   = finite-difference audit of (7); never fed back into t
    ↪ he state.

Controller (one micro step, zero-order hold across all four RK4 stages
    ↪ ):
  u = clip(-f_U(x, t) + KP (sigma - U), -U_AUTHORITY, +U_AUTHORITY)
where f_U is the uncontrolled U drift and sigma in {-1, +1} is the loc
    ↪ ked target.
"""

from __future__ import annotations

import math
from dataclasses import dataclass, asdict, fields
from typing import Dict, List, Optional, Tuple

EPS = 1e-12
KP = 12.0
U_AUTHORITY = 25.0
MACRO_STEPS = 20
MICRO_STEPS = 10
MACRO_DT = 0.1

MICRO_DT = MACRO_DT / MICRO_STEPS
BASIN_TOL = 0.10
CONVEY_WINDOW = 5
CERT_WINDOW = 10

PARAMETER_RANGES: Dict[str, Tuple[float, float]] = {
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    "alpha": (4.2, 4.2), "beta_int": (0.0, 1.0), "beta_ext": (0.0, 1.0
    ↪ ), "k": (1.7, 1.7),
    "sigma_1": (0.38, 0.38), "delta": (0.01, 1.0), "gamma_1": (1.35, 1
    ↪ .35), "gamma_c": (1.0, 1.0),
    "lambda_0": (-2.0, 2.0), "lambda_1": (0.1, 3.0), "lambda_2": (0.0,
    ↪  2.0), "c": (0.5, 5.0),

    "E_max": (1.0, 10.0), "omega_B": (0.1, 5.0), "Q_B": (0.5, 10.0), "
    ↪ alpha_s": (0.05, 0.25),
    "beta_s": (0.05, 0.25), "mu": (2.0, 6.0), "alpha_E": (4.2, 4.2), "
    ↪ alpha_U": (4.2, 4.2),
    "lambda_I": (0.5, 2.0), "lambda_U": (0.0, 0.5),
}

# alpha, k, gamma_1, alpha_U do not enter equations (1)-(8).


@dataclass
class State:
    E: float

    U: float
    I_U: float
    S: float
    B: float
    B_dot: float

    def as_tuple(self) -> Tuple[float, ...]:
        return (self.E, self.U, self.I_U, self.S, self.B, self.B_dot)


@dataclass
class Params:

    alpha: float = 4.2
    beta_int: float = 0.0
    beta_ext: float = 0.0
    k: float = 1.7
    sigma_1: float = 0.38
    delta: float = 0.5
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    gamma_1: float = 1.35
    gamma_c: float = 1.0
    lambda_0: float = 0.0
    lambda_1: float = 1.0
    lambda_2: float = 0.5
    c: float = 1.0

    E_max: float = 2.0
    omega_B: float = 1.0
    Q_B: float = 2.5
    alpha_s: float = 0.12
    beta_s: float = 0.10
    mu: float = 4.0

    alpha_E: float = 4.2
    alpha_U: float = 4.2
    lambda_I: float = 1.0
    lambda_U: float = 0.1

# ------------------------------------------------------------------ eq
    ↪ uations
def v_eff(x: State, p: Params, t: float = 0.0) -> float:
    z = p.lambda_0 + p.lambda_1 * (x.U - 0.5) + p.lambda_2 * x.S
    return math.cos(0.5 * p.omega_B * t) * (p.c * math.tanh(z))

def phi(S: float, p: Params) -> float:
    return 0.5 * p.alpha_s * S * S + 0.25 * p.beta_s * S ** 3 - p.delt
    ↪ a * S

def s_flow(S: float, p: Params) -> float:
    return p.delta - p.alpha_s * S - 0.75 * p.beta_s * S * S


def derivatives(x: State, p: Params, t: float, u: float = 0.0) -> Stat
    ↪ e:

    v = v_eff(x, p, t)
    dE = -p.alpha_E * x.E + p.beta_int + p.beta_ext + v
    dU = p.mu * x.U * (1.0 - x.U * x.U) - dE / max(p.E_max, 1e-6) - p.
    ↪ lambda_U * x.U + u
    dI = (1.0 - x.U) - p.sigma_1 * x.E - p.delta * x.S - p.lambda_I *
    ↪ x.I_U
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    dS = s_flow(x.S, p)
    dBd = p.gamma_c * p.delta * x.S - (p.omega_B / max(p.Q_B, EPS)) *
    ↪ x.B_dot - p.omega_B ** 2 * x.B
    return State(dE, dU, dI, dS, x.B_dot, dBd)

def _axpy(x: State, k: State, h: float) -> State:
    return State(x.E + h * k.E, x.U + h * k.U, x.I_U + h * k.I_U, x.S
    ↪ + h * k.S, x.B + h * k.B, x.B_dot + h * k.B_dot)


def rk4_step(x: State, p: Params, t: float, h: float, u: float = 0.0)

    ↪ -> State:
    k1 = derivatives(x, p, t, u)
    k2 = derivatives(_axpy(x, k1, 0.5 * h), p, t + 0.5 * h, u)
    k3 = derivatives(_axpy(x, k2, 0.5 * h), p, t + 0.5 * h, u)
    k4 = derivatives(_axpy(x, k3, h), p, t + h, u)
    c = h / 6.0

    return State(*(a + c * (b1 + 2 * b2 + 2 * b3 + b4) for a, b1, b2,
    ↪ b3, b4 in
                   zip(x.as_tuple(), k1.as_tuple(), k2.as_tuple(), k3.
    ↪ as_tuple(), k4.as_tuple())))

def bath_residual(prev: State, cur: State, nxt: State, p: Params, h: f
    ↪ loat) -> float:
    d2 = (nxt.B - 2.0 * cur.B + prev.B) / (h * h)
    dm = (cur.B - prev.B) / h
    return d2 + (p.omega_B / max(p.Q_B, EPS)) * dm + p.omega_B ** 2 *
    ↪ cur.B - p.gamma_c * p.delta * cur.S

# ------------------------------------------------------------------ co
    ↪ ntroller
def control_command(x: State, p: Params, t: float, target: int) -> Tup
    ↪ le[float, float]:

    """Return (u, raw) for one micro step. raw is the unclipped comman
    ↪ d."""
    drift = derivatives(x, p, t, 0.0).U
    raw = -drift + KP * (float(target) - x.U)
    return max(-U_AUTHORITY, min(U_AUTHORITY, raw)), raw
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def basin_sign(U: float) -> int:
    if abs(U - 1.0) <= BASIN_TOL:
        return 1
    if abs(U + 1.0) <= BASIN_TOL:
        return -1

    return 0


def nearest_basin_sign(U: float) -> int:
    return 1 if abs(U - 1.0) <= abs(U + 1.0) else -1

def macro_step(x: State, p: Params, t0: float, target: Optional[int],
               micro_steps: int = MICRO_STEPS, macro_dt: float = MACRO
    ↪ _DT) -> Tuple[State, Dict[str, float]]:
    """Advance one macro interval. target=None runs the plant with u=0
    ↪  (observe)."""

    h = macro_dt / micro_steps
    t = t0
    u_abs = u_sq = u_peak = 0.0
    sat = 0
    for _ in range(micro_steps):
        if target is None:

            u = raw = 0.0
        else:
            u, raw = control_command(x, p, t, target)
        u_abs += abs(u) * h
        u_sq += u * u * h
        u_peak = max(u_peak, abs(u))

        sat += int(abs(raw) > U_AUTHORITY + EPS)
        x = rk4_step(x, p, t, h, u)
        t += h
    return x, {"u_abs": u_abs, "u_sq": u_sq, "u_peak": u_peak, "satura
    ↪ ted": sat}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# ------------------------------------------------------------- tr
    ↪ ajectory
@dataclass
class Result:
    final: State

    U_hist: List[float]
    target_sign: int
    born: int
    convey: int
    convey_start: int
    convey_confirm: int

    cert: int
    cert_start: int
    cert_complete: int
    max_streak: int
    actuator_abs_integral: float
    actuator_sq_integral: float

    actuator_peak: float
    actuator_saturated_periods: int


def simulate(x0: State, p: Params, target: Optional[int] = None, contr
    ↪ olled: bool = True) -> Result:

    """Canonical 20-macro-step trajectory with CONVEY-5 / CERT-10 pred
    ↪ icates.

    target defaults to the nearest basin of U0. controlled=False runs
    ↪ u=0.
    """

    tgt = nearest_basin_sign(x0.U) if target is None else int(target)
    b0 = basin_sign(x0.U)
    born = int(b0 != 0)
    streak = 1 if born else 0
    ssign = b0 if born else 0
    best = streak
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    convey = cert = 0
    cs = cc = ts = tc = -1
    ua = usq = upk = 0.0
    nsat = 0
    x = x0
    hist = [x0.U]

    for m in range(1, MACRO_STEPS + 1):
        x, a = macro_step(x, p, (m - 1) * MACRO_DT, tgt if controlled
    ↪ else None)
        ua += a["u_abs"]; usq += a["u_sq"]; upk = max(upk, a["u_peak"]
    ↪ ); nsat += a["saturated"]
        hist.append(x.U)

        b = basin_sign(x.U)
        if b:
            if b == ssign:
                streak += 1
            else:
                ssign, streak = b, 1

        else:
            ssign, streak = 0, 0
        best = max(best, streak)
        if not convey and streak >= CONVEY_WINDOW:
            convey, cs, cc = 1, m - CONVEY_WINDOW + 1, m
        if not cert and streak >= CERT_WINDOW:

            cert, ts, tc = 1, m - CERT_WINDOW + 1, m
    return Result(x, hist, tgt, born, convey, cs, cc, cert, ts, tc, be
    ↪ st, ua, usq, upk, nsat)


def sample_state(rng) -> State:

    return State(float(rng.uniform(0.0, 1.0)), float(rng.uniform(-1.0,
    ↪  1.0)), float(rng.uniform(0.0, 1.0)),
                 float(rng.uniform(-1.0, 1.0)), float(rng.uniform(-1.0
    ↪ , 1.0)), float(rng.uniform(-1.0, 1.0)))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def sample_params(rng) -> Params:
    return Params(**{k: float(rng.uniform(lo, hi)) for k, (lo, hi) in
    ↪ PARAMETER_RANGES.items()})


def s_roots(p: Params) -> Tuple[float, float]:
    """Roots of equation (6): S_minus < 0 < S_plus."""
    a = 0.75 * p.beta_s
    d = math.sqrt(p.alpha_s ** 2 + 4.0 * a * p.delta)
    return (-p.alpha_s - d) / (2.0 * a), (-p.alpha_s + d) / (2.0 * a)
```

omnicompass/disruption_budget.py

31 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Karpenter-shaped voluntary node-down budget.

Not Karpenter. Caps how many nodes Omni may remove in a window.
allowed ≈ ceil(n0 * pct/100), then optional absolute ceiling.
"""
from __future__ import annotations
import math


def allowed_downs(n0: int, pct: float, abs_cap: int = 0) -> int:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    n0 = max(0, int(n0))
    raw = int(math.ceil(n0 * max(0.0, float(pct)) / 100.0)) if pct els
    ↪ e n0
    if abs_cap and abs_cap > 0:
        raw = min(raw, int(abs_cap))
    return max(0, raw)

def apply_node_delta(delta: int, used: int, allow: int) -> tuple[int,
    ↪ int, bool]:
    """Return (delta, used, blocked). Only clips negative (voluntary s
    ↪ hrink)."""

    if delta >= 0:
        return int(delta), int(used), False
    room = max(0, int(allow) - int(used))
    if room <= 0:
        return 0, int(used), True
    take = max(delta, -room)  # delta is negative

    return int(take), int(used) - int(take), False
```

omnicompass/edge.py

93 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The v5 edge: the compass's balance point is not a fixed middle, it
    ↪ moves with each muscle's own risk.

One Edge per knob. Every decision it reads the service position (0 cal
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ m, 1 the service line) and keeps the cushion the
knob needs in front of the line:

    cushion = climb x reaction + z x wobble

  climb     the largest rise of the position seen within one reaction
    ↪ time, per decision (how fast the service has been
            climbing lately); times the reaction, it is the rise that
    ↪ can land before the knob's own action does
  reaction  the decisions the knob takes to act: its own, not the plan
    ↪ t's (a power cap answers in one decision; a machine
            pool only once its machines have started)
  wobble    the step-to-step spread of the position over the window (d
    ↪ ivided by root 2: the spread of one step)
  z         3.09: 99.9% of steps inside the cushion

It widens at once when the need rises and narrows slowly when it falls
    ↪  (a driver doubles the following distance the
moment rain starts, and closes it slowly after). A fall (the service o
    ↪ ver its line) while, or soon after, Omni held
something back teaches the knob a floor under its cushion, forgotten s
    ↪ lowly. With memory, the worst climb and wobble the
knob has shown are kept as long as its own physics carries them.

The balance point is 1 - cushion; the wall (where the law fails up at
    ↪ once) moves with the reaction part of it. The
realms use this through realms/compass_arm_v5.py; the live controllers
    ↪  through omni_controller/ (--law v5). Pure math,
no I/O; the frozen engine (omnicompass/core.py) is untouched.
"""

from __future__ import annotations

import math


class Edge:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def __init__(self, react: float, z: float = 3.09, window: int = 20
↪ , narrow: float = 0.05, start: float = 0.5,
                 memory: float = 0.0, fall_decay: float = 0.9995, est:
↪  int = 2):
        self.react = max(1.0, float(react))
        self.z, self.window, self.narrow, self.est = z, int(window), n
↪ arrow, est
        self.mem = memory
        self.fall_decay = fall_decay
        self.hist = []
        self.cushion = 1.0 - start
        self.react_part = 0.05

        self.climb_mem = 0.0
        self.wob_mem = 0.0
        self.floor = 0.0                        # learned from a fall: t
↪ he least cushion this knob needs

    def learn_fall(self, step: float) -> None:

        """A fall while, or soon after, Omni held something back: this
↪  knob needs more room than its statistics said."""
        self.floor = min(1.0, max(self.floor, self.cushion) + step)

    def update(self, p: float) -> float:
        """Read one position; return the balance point (1 - cushion)."
↪ ""
        self.hist.append(min(p, 1.0))
        if len(self.hist) > self.window + 1:
            self.hist.pop(0)
        h = self.hist
        if len(h) >= 3 and self.est == 2:

            r = max(1, int(round(self.react)))
            d = [b - a for a, b in zip(h, h[1:])]
            md = sum(d) / len(d)
            wob = math.sqrt(sum((x - md) ** 2 for x in d) / max(1, len
↪ (d) - 1)) / math.sqrt(2.0)
            if r < len(h):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                rise = max(h[i + r] - h[i] for i in range(len(h) - r))
            else:
                rise = max(0.0, max(d)) * r                          # lo
    ↪ nger than the window: the steepest climb, extrapolated
            climb = max(0.0, rise) / r                               # pe
    ↪ r decision, so climb x reaction is the rise

        elif len(h) >= 3:
            climb = max(max(0.0, b - a) for a, b in zip(h, h[1:]))
            m = sum(h) / len(h)
            wob = math.sqrt(sum((x - m) ** 2 for x in h) / (len(h) - 1
    ↪ ))
        else:

            climb, wob = 0.05, 0.05
        if self.mem > 0:
            # held longer: the worst climb and spread this knob has sh
    ↪ own, forgotten slowly
            self.climb_mem = max(climb, self.climb_mem * self.mem)
            self.wob_mem = max(wob, self.wob_mem * self.mem)

            climb, wob = self.climb_mem, self.wob_mem
        react_part = min(1.0, climb * self.react)
        need = min(1.0, max(react_part + self.z * wob, self.floor))
        self.floor *= self.fall_decay
        if need >= self.cushion:
            self.cushion = need                                      # wi

    ↪ den at once
        else:
            self.cushion = max(need, self.cushion * (1.0 - self.narrow
    ↪ ))   # narrow slowly
        self.react_part = max(0.005, react_part)
        return 1.0 - self.cushion

def physics_memory(horizon: float, window: int) -> float:
    """The forgetting factor for a knob whose risks last `horizon` dec
    ↪ isions (its own slowest physics): none if that is
    inside the window, else 1 - 1 / horizon per decision."""

    return (1.0 - 1.0 / horizon) if horizon > window else 0.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`omnicompass/master.py`

150 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The kill switch (the master switch): one OFF for the whole harness,
    ↪  not one muscle at a time.

Its purpose is security: if anything gets into Omni-Compass's brain an
    ↪ d tries to drive a system for its own ends, or
anything rogue happens, one switch in a human hand turns Omni-Compass'
    ↪ s governing off everywhere at once. It is not
the reset (the one pedal lifted all the way at the end of a run, which
    ↪  hands one governor's settings back).

Every Omni-Compass governor on a machine (the Kubernetes controller, t
    ↪ he GPU governors, any muscle they drive) obeys one
switch, in a human hand:

  OFF   the switch file exists (OMNI_MASTER_OFF, by default /tmp/omni-
    ↪ compass/OFF). Every running governor sees it at its
        next decision, puts every setting it ever wrote back to the va
    ↪ lue it read before its first write, reads each one
        back, writes its last audit line and exits. No governor starts
    ↪  while the switch is OFF.
  ON    the switch file is removed. Nothing restarts by itself: a gove
    ↪ rnor runs again only when someone starts it.

The switch is also pulled from the command line, which signals every r
    ↪ egistered governor at once so none waits for its
next decision:

  python3 tools/omni_switch.py off [--reason TEXT]    turn the whole h
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ arness off, wait for every governor to restore
  python3 tools/omni_switch.py on                      allow governors
    ↪  to be started again
  python3 tools/omni_switch.py status                  OFF or ON, and
    ↪ every governor running

A governor that cannot read the switch (a filesystem it cannot reach)
    ↪ treats that as OFF: when in doubt, hand back.

If a governor dies without handing back (killed outright, the machine
    ↪ crashed, it hung), nothing it wrote may be left
in place. So every governor records, before its first write, the exact
    ↪  commands that put every setting back, and
renews a lease every decision. The watchdog finds any governor whose p
    ↪ rocess is gone or whose lease is older than its
limit and runs those commands for it:

  python3 tools/omni_switch.py watchdog [--stale 60] [--every 10]    k
    ↪ eep watching (run it as its own service)
  python3 tools/omni_switch.py watchdog --once                       o
    ↪ ne pass
"""
from __future__ import annotations

import atexit
import json
import os
import time

DEFAULT_DIR = "/tmp/omni-compass"

def switch_path() -> str:
    return os.environ.get("OMNI_MASTER_OFF", os.path.join(DEFAULT_DIR,
    ↪  "OFF"))

def registry_dir() -> str:
    return os.environ.get("OMNI_REGISTRY", os.path.join(os.path.dirnam
    ↪ e(switch_path()) or DEFAULT_DIR, "running"))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def is_off() -> bool:
    """True when the master switch is OFF (or cannot be read: when in
    ↪ doubt, hand back)."""
    p = switch_path()
    try:
        return os.path.exists(p)
    except OSError:
        return True


def reason() -> str:
    try:
        return json.loads(open(switch_path()).read()).get("reason", ""
    ↪ )
    except (OSError, ValueError):
        return ""
_ME = {}


def register(name: str, restore=None, stale_s: float = 60.0) -> str:
    """Record this governor as running, so the switch can signal it, w
    ↪ ith the commands (argument lists) that put every
    setting back if it dies without doing so itself; removed when the
    ↪ process exits cleanly."""
    d = registry_dir()
    os.makedirs(d, exist_ok=True)
    path = os.path.join(d, f"{os.getpid()}.json")
    rec = {"pid": os.getpid(), "name": name, "started": time.time(), "
    ↪ lease": time.time(), "stale_s": stale_s,
           "restore": restore or []}
    with open(path + ".tmp", "w") as f:
        json.dump(rec, f)
    os.replace(path + ".tmp", path)
    _ME.update(path=path, rec=rec)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def _gone():
        try:
            os.remove(path)
        except OSError:
            pass

    atexit.register(_gone)
    return path


def heartbeat():
    """Renew this governor's lease (called every decision)."""

    if not _ME:
        return
    _ME["rec"]["lease"] = time.time()
    try:
        with open(_ME["path"] + ".tmp", "w") as f:
            json.dump(_ME["rec"], f)

        os.replace(_ME["path"] + ".tmp", _ME["path"])
    except OSError:
        pass


def _alive(pid):

    try:
        os.kill(int(pid), 0)
        return True
    except OSError:
        return False

def records():
    out = []
    d = registry_dir()
    if not os.path.isdir(d):
        return out
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    for fn in sorted(os.listdir(d)):
        if not fn.endswith(".json"):
            continue
        try:
            rec = json.loads(open(os.path.join(d, fn)).read())
            rec["_path"] = os.path.join(d, fn)

            out.append(rec)
        except (OSError, ValueError):
            pass
    return out

def orphans(now=None):
    """Governors that are gone without handing back (process dead) or
    ↪ hung (lease older than its limit)."""
    now = now or time.time()
    return [r for r in records() if not _alive(r.get("pid", -1)) or no
    ↪ w - r.get("lease", 0) > r.get("stale_s", 60.0)]

def running():
    """Every governor registered as running whose process is alive."""
    return [r for r in records() if _alive(r.get("pid", -1))]

def refuse_if_off(name: str):
    """Called by every governor at start: no authority is taken while
    ↪ the master switch is OFF."""
    if is_off():
        raise SystemExit(f"{name}: the Omni-Compass master switch is O

    ↪ FF ({switch_path()}"
                         f"{': ' + reason() if reason() else ''}); not
    ↪ hing started. Turn it on with: "
                         "python3 tools/omni_switch.py on")
```

omnicompass/mathdrive.py

86 lines.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Math-driven actuation: the Omni-Compass equations move the system d
    ↪ irectly.

The frozen governor (adapter.Governor) evolves the equations open-loop
    ↪  (u = 0) and reads only a few derived numbers.
Here the equations are closed-loop and their own quantities ARE the ac
    ↪ tuator commands. No equation is changed; the
integrator, parameters and observation map are the frozen ones (omnico
    ↪ mpass/core.py, omnicompass/adapter.py).

Per decision
  1. sense      x <- assimilate(x, observe_vector(telemetry))
    ↪               (the frozen observation map)
  2. evolve     x <- macro_step(x, target = +1, macro_dt = clock)
    ↪               equations (1)-(7) with equation
                (2)'s controller ON: u = clip(-f_U(x) + 12 (1 - U), -2
    ↪ 5, 25) holds the healthy basin U = +1
  3. read the   effort  w = integral |u| dt / (25 clock)   in [0, 1]:
    ↪ how hard the math had to work to stay healthy
     math       need    I_U                                  equation (
    ↪ 3): unrelieved need, slow memory
                tide    B, B_dot                             equation (
    ↪ 7): the bath, second order, anticipates
                drive   v_eff                                equation (
    ↪ 4): the tanh-bounded drive
  4. actuate    capacity   n = ceil(fit (1 + g_w w + g_I max(0, I_U) +
    ↪  g_B max(0, B_dot))) machines
                           (released one at a time only while w <= w_r
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ elease: the math reports calm)
                pods       HPA target rho = clamp(rho0 - k_w w - k_I m
    ↪ ax(0, I_U), rho_min, rho0)
                power      cap = clamp(1 - g_cap max(0, B) + 2 w, cap_
    ↪ min, 1)   (the bath lowers power only when calm)
  clock: engine time advanced per decision. It sets how fast the math

    ↪ moves relative to the system: the bath's
  natural period is 2 pi / omega_B = 6.28 engine units, i.e. 6.28 / cl
    ↪ ock decisions.
"""
from __future__ import annotations

import math
from dataclasses import dataclass, replace

from omnicompass.adapter import STACK_PARAMS, INITIAL_STATE, observe_v
    ↪ ector, assimilate
from omnicompass.core import State, macro_step, v_eff, U_AUTHORITY

@dataclass(frozen=True)
class MathLaw:
    clock: float = 0.1
    g_w: float = 1.0

    g_I: float = 0.3
    g_B: float = 0.5
    w_release: float = 0.02
    dwell: int = 3
    rho0: float = 0.70
    rho_min: float = 0.50

    k_w: float = 0.5
    k_I: float = 0.1
    g_cap: float = 0.0
    cap_min: float = 0.8
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class MathDrive:
    def __init__(self, law: MathLaw = MathLaw()):
        self.law = law
        self.p = replace(STACK_PARAMS)
        self.x = State(**vars(INITIAL_STATE))
        self.t = 0.0

        self.calm = 0
        self.w = 0.0


    def step(self, obs, n, requests, cores_per_node):
        """Returns (hpa_target, node_target, power_cap, readout)."""
        L = self.law

        o = observe_vector(obs, 0)
        xa = assimilate(self.x, o, self.p)
        self.x, stats = macro_step(xa, self.p, self.t, target=+1, macr
    ↪ o_dt=L.clock)
        self.t += L.clock
        w = min(1.0, stats["u_abs"] / (U_AUTHORITY * L.clock))

        self.w = w
        x = self.x
        need = max(0.0, x.I_U); tide = max(0.0, x.B_dot)
        fit = requests / cores_per_node
        want = math.ceil(fit * (1.0 + L.g_w * w + L.g_I * need + L.g_B
    ↪  * tide) - 1e-9)

        tgt = n
        if want > n:
            tgt = want; self.calm = 0
        elif want < n:
            self.calm = self.calm + 1 if w <= L.w_release else 0
            if self.calm >= L.dwell:

                tgt = n - 1; self.calm = 0
        else:
            self.calm = 0
        rho = min(L.rho0, max(L.rho_min, L.rho0 - L.k_w * w - L.k_I *
    ↪ need))
        cap = min(1.0, max(L.cap_min, 1.0 - L.g_cap * max(0.0, x.B) +
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 2.0 * w))
        return rho, int(tgt), cap, {"w": w, "I_U": x.I_U, "B": x.B, "B
    ↪ _dot": x.B_dot, "U": x.U, "E": x.E,
                                    "v_eff": v_eff(x, self.p, self.t)}
```

omnicompass/muscle_sdk.py

316 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""OmniCompass Universal Muscle SDK.

This module does not change the six-state governor.  It standardises h
    ↪ ow a plant

surface earns authority beneath it: observe -> bound -> request -> exe
    ↪ cute ->
readback -> receipt -> restore.  Adapters may target Kubernetes, host
    ↪ controls,
GPU/accelerator controls, cloud/VM APIs, storage, network, runtimes, c
    ↪ ooling or

facility power without changing the governing state law.
"""
from __future__ import annotations

from dataclasses import asdict, dataclass, field
from enum import Enum
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
from time import monotonic, time
from typing import Any, Callable, Dict, Iterable, Mapping, Optional, P
    ↪ rotocol, Tuple


class Evidence(str, Enum):

    DESIGN = "D"
    SIMULATION = "S"
    LIVE_SOFTWARE = "L"
    PHYSICAL = "P"
    COMMERCIAL = "C"

class AutomationMode(str, Enum):
    DISABLED = "disabled"
    RECOMMEND = "recommend"
    MANUAL = "manual"
    EXTERNAL_APPROVAL = "external_approval"

    AUTOMATIC = "automatic"


class MuscleStatus(str, Enum):
    AVAILABLE = "available"
    DEGRADED = "degraded"

    BLIND = "blind"
    FAILED = "failed"
    RESTORING = "restoring"


@dataclass(frozen=True)

class TimingContract:
    observation_period_s: float
    decision_period_s: float
    actuation_delay_s: float = 0.0
    minimum_hold_s: float = 0.0
    cooldown_s: float = 0.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    timeout_s: float = 5.0
    stale_after_s: float = 30.0


@dataclass(frozen=True)
class CapabilityContract:

    minimum: float
    maximum: float
    resolution: float = 0.0
    max_step: Optional[float] = None
    max_rate_per_s: Optional[float] = None
    units: str = "unit"

    reversible: bool = True
    readback: bool = True

    def clamp(self, value: float, previous: Optional[float] = None, dt
    ↪ : Optional[float] = None) -> float:
        v = min(self.maximum, max(self.minimum, float(value)))

        if self.max_step is not None and previous is not None:
            v = min(previous + self.max_step, max(previous - self.max_
    ↪ step, v))
        if self.max_rate_per_s is not None and previous is not None an
    ↪ d dt is not None:
            step = max(0.0, dt) * self.max_rate_per_s

            v = min(previous + step, max(previous - step, v))
        if self.resolution > 0:
            v = round(v / self.resolution) * self.resolution
            v = min(self.maximum, max(self.minimum, v))
        return v

@dataclass(frozen=True)
class SafetyContract:
    hard_min: float
    hard_max: float
    fail_closed: bool = True
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    safe_default: Optional[float] = None
    forbidden: Tuple[str, ...] = ()

    def permits(self, value: float, context: Mapping[str, Any]) -> Tup
    ↪ le[bool, str]:
        if value < self.hard_min or value > self.hard_max:
            return False, "outside_hard_bounds"
        for key in self.forbidden:
            if bool(context.get(key, False)):
                return False, f"forbidden:{key}"
        return True, "permitted"

@dataclass(frozen=True)
class MuscleSpec:
    muscle_id: str
    plant_id: str
    resource_type: str

    adapter_version: str
    capability: CapabilityContract
    timing: TimingContract
    safety: SafetyContract
    automation: AutomationMode = AutomationMode.RECOMMEND
    evidence: Evidence = Evidence.DESIGN

    native_owner: str = "native"
    authority_priority: int = 100
    description: str = ""


@dataclass

class Observation:
    value: float
    timestamp: float = field(default_factory=time)
    quality: float = 1.0
    metadata: Dict[str, Any] = field(default_factory=dict)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def age(self, now: Optional[float] = None) -> float:
        return max(0.0, (time() if now is None else now) - self.timest
    ↪ amp)


@dataclass
class MuscleReceipt:
    muscle_id: str
    timestamp: float
    mode: str
    requested: Optional[float]
    bounded: Optional[float]

    realized: Optional[float]
    units: str
    permitted: bool
    reason: str
    observation_age_s: Optional[float] = None
    actuation_latency_s: Optional[float] = None

    actuator_residual: Optional[float] = None
    restored: Optional[bool] = None
    evidence: str = "D"
    metadata: Dict[str, Any] = field(default_factory=dict)

    def as_dict(self) -> Dict[str, Any]:

        return asdict(self)


class MuscleAdapter(Protocol):
    spec: MuscleSpec
    def observe(self) -> Observation: ...

    def snapshot_native(self) -> Any: ...
    def execute(self, value: float) -> None: ...
    def readback(self) -> float: ...
    def restore_native(self, snapshot: Any) -> None: ...
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class FunctionalMuscle:
    """Small adapter for public APIs/commands without coupling them to
    ↪  the brain."""
    def __init__(self, spec: MuscleSpec, observe: Callable[[], Observa
    ↪ tion], execute: Callable[[float], None],
                 readback: Callable[[], float], snapshot: Callable[[],
    ↪  Any], restore: Callable[[Any], None]):
        self.spec = spec
        self._observe, self._execute, self._readback = observe, execut
    ↪ e, readback
        self._snapshot, self._restore = snapshot, restore

    def observe(self): return self._observe()
    def execute(self, value): return self._execute(value)
    def readback(self): return float(self._readback())
    def snapshot_native(self): return self._snapshot()
    def restore_native(self, snapshot): return self._restore(snapshot)

class MuscleRuntime:
    """Uniform authority gate around one actuator.  The governor propo
    ↪ ses; this runtime earns and verifies authority."""
    def __init__(self, adapter: MuscleAdapter, audit: Optional[Callabl
    ↪ e[[Dict[str, Any]], None]] = None):

        self.adapter = adapter
        self.spec = adapter.spec
        self.audit = audit or (lambda _: None)
        self.native_snapshot: Any = None
        self.last_realized: Optional[float] = None
        self.last_write_mono: Optional[float] = None

        self.status = MuscleStatus.AVAILABLE


    def arm(self) -> None:
        if self.native_snapshot is None:
            self.native_snapshot = self.adapter.snapshot_native()
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def command(self, requested: float, context: Optional[Mapping[str,
↪  Any]] = None,
                approved: bool = False, now: Optional[float] = None) -
↪ > MuscleReceipt:
        context = dict(context or {})
        obs = self.adapter.observe()

        wall = time() if now is None else now
        age = obs.age(wall)
        mode = self.spec.automation
        reason = ""
        permitted = True
        bounded: Optional[float] = None

        realized: Optional[float] = None
        latency: Optional[float] = None

        if age > self.spec.timing.stale_after_s or obs.quality <= 0:
            permitted, reason, self.status = False, "stale_or_invalid_
↪ observation", MuscleStatus.BLIND

        elif mode == AutomationMode.DISABLED:
            permitted, reason = False, "disabled"
        elif mode in (AutomationMode.RECOMMEND, AutomationMode.MANUAL)
↪ :
            permitted, reason = False, mode.value
        elif mode == AutomationMode.EXTERNAL_APPROVAL and not approved

↪ :
            permitted, reason = False, "approval_required"

        if permitted:
            dt = None if self.last_write_mono is None else max(0.0, mo
↪ notonic() - self.last_write_mono)

            bounded = self.spec.capability.clamp(requested, self.last_
↪ realized, dt)
            permitted, reason = self.spec.safety.permits(bounded, cont
↪ ext)

        if permitted and self.last_write_mono is not None:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            elapsed = monotonic() - self.last_write_mono
            hold = max(self.spec.timing.minimum_hold_s, self.spec.timi
    ↪ ng.cooldown_s)
            if elapsed < hold:
                permitted, reason = False, "hold_or_cooldown"

        if permitted:
            self.arm()
            t0 = monotonic()
            self.adapter.execute(float(bounded))
            self.last_write_mono = monotonic()
            if self.spec.capability.readback:

                realized = self.adapter.readback()
                latency = monotonic() - t0
                self.last_realized = realized
            else:
                realized = float(bounded)
                self.last_realized = realized

            self.status = MuscleStatus.AVAILABLE
        elif reason == "":
            reason = "blocked"


        receipt = MuscleReceipt(
            muscle_id=self.spec.muscle_id, timestamp=wall, mode=mode.v

    ↪ alue,
            requested=float(requested), bounded=bounded, realized=real
    ↪ ized,
            units=self.spec.capability.units, permitted=permitted, rea
    ↪ son=reason,
            observation_age_s=age, actuation_latency_s=latency,

            actuator_residual=None if realized is None or bounded is N
    ↪ one else realized - bounded,
            evidence=self.spec.evidence.value,
            metadata={"observation_quality": obs.quality, "status": se
    ↪ lf.status.value},
        )
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.audit(receipt.as_dict())
        return receipt

    def restore(self) -> MuscleReceipt:
        self.status = MuscleStatus.RESTORING
        ok = False

        reason = "no_snapshot"
        realized = None
        if self.native_snapshot is not None:
            try:
                self.adapter.restore_native(self.native_snapshot)
                realized = self.adapter.readback() if self.spec.capabi
    ↪ lity.readback else None
                ok, reason = True, "restored"
                self.status = MuscleStatus.AVAILABLE
            except Exception as exc:  # deliberately auditable fail-cl
    ↪ osed boundary
                reason = f"restore_failed:{type(exc).__name__}"

                self.status = MuscleStatus.FAILED
        receipt = MuscleReceipt(
            muscle_id=self.spec.muscle_id, timestamp=time(), mode=self
    ↪ .spec.automation.value,
            requested=None, bounded=None, realized=realized, units=sel
    ↪ f.spec.capability.units,

            permitted=False, reason=reason, restored=ok, evidence=self
    ↪ .spec.evidence.value,
            metadata={"status": self.status.value},
        )
        self.audit(receipt.as_dict())
        return receipt

class MuscleRegistry:
    """Catalog of qualified plant surfaces.  Registration expands musc
    ↪ les, never the six-state core."""
    def __init__(self):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self._muscles: Dict[str, MuscleRuntime] = {}

    def register(self, runtime: MuscleRuntime) -> None:
        mid = runtime.spec.muscle_id
        if mid in self._muscles:
            raise ValueError(f"duplicate muscle_id: {mid}")
        self._muscles[mid] = runtime

    def get(self, muscle_id: str) -> MuscleRuntime:
        return self._muscles[muscle_id]

    def command(self, muscle_id: str, requested: float, **kwargs) -> M
    ↪ uscleReceipt:
        return self.get(muscle_id).command(requested, **kwargs)

    def restore_all(self) -> Dict[str, MuscleReceipt]:
        return {mid: m.restore() for mid, m in reversed(list(self._mus
    ↪ cles.items()))}

    def catalog(self) -> list[Dict[str, Any]]:
        out = []
        for mid, m in sorted(self._muscles.items()):
            s = m.spec
            out.append({
                "muscle_id": mid, "plant_id": s.plant_id, "resource_ty
    ↪ pe": s.resource_type,
                "mode": s.automation.value, "evidence": s.evidence.val
    ↪ ue, "units": s.capability.units,
                "min": s.capability.minimum, "max": s.capability.maxim
    ↪ um,
                "readback": s.capability.readback, "reversible": s.cap
    ↪ ability.reversible,
                "stale_after_s": s.timing.stale_after_s, "status": m.s
    ↪ tatus.value,
            })
        return out
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# Standard actuator classes.  These are categories/contracts, not clai
    ↪ ms that a connector is already physically verified.
STANDARD_MUSCLE_CLASSES = (
    "kubernetes.replicas", "kubernetes.cpu_request", "kubernetes.cpu_l
    ↪ imit", "kubernetes.memory_request",
    "kubernetes.memory_limit", "kubernetes.hpa_target", "kubernetes.po
    ↪ d_placement", "kubernetes.node_pool",
    "host.cpufreq", "host.cpu_quota", "host.cpuset", "host.memory", "h
    ↪ ost.io",
    "gpu.power_limit", "gpu.clock_envelope", "gpu.mig", "gpu.admission
    ↪ ",
    "cloud.instance_count", "cloud.instance_size", "cloud.placement",
    ↪ "cloud.start_stop", "cloud.capacity_policy",
    "storage.volume_size", "storage.tier", "storage.iops", "storage.th
    ↪ roughput", "storage.placement",
    "network.traffic_weight", "network.rate_limit", "network.bandwidth
    ↪ ", "network.routing",
    "application.concurrency", "application.worker_count", "applicatio
    ↪ n.queue_admission", "application.jvm_heap",
    "application.thread_pool", "application.batch", "facility.cooling_
    ↪ setpoint", "facility.rack_power", "facility.site_power",
)
```

`omnicompass/muscles.py`

159 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Infrastructure component catalog and fleet overhead model.

Each component records its role, deployment pattern, resource footprin
    ↪ t, the source of that

footprint and its evidence status, and its classification under the ke
    ↪ ep-or-remove rule:

  decision       control logic whose function the governor performs
    ↪    -> candidate for removal
  observability  telemetry and storage for humans, audit and control

    ↪    -> retained; control path replaced by direct sensing
  execution      machinery that performs the work
    ↪    -> retained
  security       cryptography, identity, policy, runtime detection
    ↪    -> retained unless a stronger guarantee is proven

Evidence status:
  measured       benchmark or production measurement published by the
    ↪ source
  documented     formula or default published in official documentatio
    ↪ n
  example        request values from a published example manifest

  assumption     modelling assumption; parameter exposed for sensitivi
    ↪ ty analysis

Energy per resource follows the Cloud Carbon Footprint method:
  W = vCPU * (W_min + u * (W_max - W_min)) + GB * W_mem, scaled by PUE
    ↪ .
"""
from __future__ import annotations

from dataclasses import dataclass, asdict
from typing import Dict, List
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
W_MIN_PER_VCPU = 0.434
W_MAX_PER_VCPU = 1.948
W_PER_GB = 0.392
ENERGY_SOURCE = ("Cloud Carbon Footprint coefficients (SPECpower-deriv
    ↪ ed), AMD EPYC 3rd generation: "
                "0.434 W min, 1.948 W max per vCPU; memory 0.392 W pe
    ↪ r GB (arXiv 2510.26413)")


@dataclass(frozen=True)
class Component:
    name: str
    role: str
    scope: str
    vcpu: float
    gib: float
    status: str
    source: str
    verdict: str
    note: str = ""


def kube_reserved_cpu(cores: int) -> float:
    """AKS kube-reserved CPU table (Microsoft Learn), cores -> vCPU, l
    ↪ inear between table points."""
    pts = [(1, 0.060), (2, 0.100), (4, 0.140), (8, 0.180), (16, 0.260)
    ↪ , (32, 0.420), (64, 0.740)]
    if cores <= 1:
        return pts[0][1]
    for (c0, v0), (c1, v1) in zip(pts, pts[1:]):
        if cores <= c1:
            return v0 + (v1 - v0) * (cores - c0) / (c1 - c0)
    c0, v0 = pts[-2]; c1, v1 = pts[-1]
    return v1 + (v1 - v0) * (cores - c1) / (c1 - c0)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
@dataclass
class Fleet:
    nodes: int = 100_000
    nodes_per_cluster: int = 5_000
    cores_per_node: int = 64
    gib_per_node: int = 256

    pods_per_node: int = 30
    series_per_node: int = 2_000
    long_term_replication: int = 3
    mean_cpu_utilization: float = 0.30
    pue: float = 1.18
    mesh: str = "sidecar"

    @property
    def clusters(self) -> int:
        return -(-self.nodes // self.nodes_per_cluster)

def catalog(f: Fleet) -> List[Component]:
    series = f.nodes * f.series_per_node
    C = []
    C.append(Component("kubelet + container runtime (kube-reserved)",
    ↪ "execution", "per node",
                       kube_reserved_cpu(f.cores_per_node) * f.nodes,
    ↪ 0.0, "documented",
                       "Microsoft Learn, AKS node resource reservation
    ↪ s (CPU table)", "retain",
                       "memory reservation not counted here"))
    C.append(Component("node-exporter (metrics agent)", "observability
    ↪ ", "per node", 0.050 * f.nodes,
                       100 / 1024 * f.nodes, "example", "OneUptime Dae
    ↪ monSet resource example (requests 50m / 100Mi)",
                       "retain for humans; control path replaced by di
    ↪ rect sensing"))
    C.append(Component("log collector (Fluentd / Fluent Bit)", "observ
    ↪ ability", "per node", 0.100 * f.nodes,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                    200 / 1024 * f.nodes, "example", "OneUptime Dae
↪ monSet resource example (requests 100m / 200Mi)",
                    "retain for audit and humans"))
C.append(Component("OpenTelemetry agent collector", "observability
↪ ", "per node", 0.100 * f.nodes,
                    128 / 1024 * f.nodes, "example", "OneUptime age
↪ nt-gateway topology (requests 100m / 128Mi)",
                    "retain for humans; control path replaced by di
↪ rect sensing"))
if f.mesh == "sidecar":
    C.append(Component("service-mesh sidecar proxies (Envoy, per p
↪ od)", "security", "per pod",
                       0.20 * f.pods_per_node * f.nodes, 60 / 1024
↪  * f.pods_per_node * f.nodes, "measured",
                       "Istio 1.24 benchmark at 1,000 req/s, 1 KB:
↪  ~0.20 vCPU, ~60 MB per sidecar",
                       "retain (mTLS); independent option: ambient
↪  mode",
                       "load-dependent; an idle sidecar measured ~
↪ 8 millicores / 40 Mi (Defense Unicorns)"))
else:
    C.append(Component("service-mesh ztunnel (ambient, per node)",
↪  "security", "per node",
                       0.06 * f.nodes, 12 / 1024 * f.nodes, "measu
↪ red",
                       "Istio 1.24 benchmark: ztunnel ~0.06 vCPU,
↪ ~12 MB", "retain (mTLS)"))
C.append(Component("Prometheus (in-cluster head series)", "observa
↪ bility", "per cluster",
                    0.0, 3.0e-6 * series, "measured", "Robust Perce
↪ ption: ~3 kB per head series (Prometheus 2.20+)",
                    "retain for humans; control scrape load removab
↪ le", "series_per_node is an assumption"))
C.append(Component("long-term metrics (Mimir ingesters)", "observa
↪ bility", "fleet",
                    series * f.long_term_replication / 300_000, 2.5
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  * series * f.long_term_replication / 300_000,
                       "documented", "Grafana Mimir capacity planning:
    ↪  1 core and 2.5 GB per 300,000 in-memory series",
                       "retain for audit"))
    C.append(Component("cluster autoscaler / Karpenter", "decision", "
    ↪ per cluster", 1.0 * f.clusters,
                       1.0 * f.clusters, "assumption", "typical contro
    ↪ ller sizing; not measured here",
                       "remove: governor owns capacity"))
    C.append(Component("HPA / VPA / KEDA controllers", "decision", "pe
    ↪ r cluster", 0.5 * f.clusters,
                       1.0 * f.clusters, "assumption", "typical contro
    ↪ ller sizing; not measured here",
                       "remove: governor owns replicas and sizing"))
    C.append(Component("power / thermal policy agents", "decision", "p
    ↪ er node", 0.010 * f.nodes,
                       32 / 1024 * f.nodes, "assumption", "typical nod
    ↪ e agent sizing; not measured here",
                       "remove: governor owns power caps"))
    C.append(Component("alert routing and paging (Alertmanager)", "dec
    ↪ ision", "per cluster", 0.2 * f.clusters,
                       0.5 * f.clusters, "assumption", "sizing scales
    ↪ with firing alerts (Grafana Mimir guidance)",
                       "remove paging path; keep audit notifications")
    ↪ )
    C.append(Component("Terraform as live capacity controller", "decis
    ↪ ion", "fleet", 0.0, 0.0, "assumption",
                       "run cost negligible; harm is stale overwrites
    ↪ (measured in the stack benchmark)",
                       "remove from the live control path; retain as a
    ↪ udit record"))
    return C


def watts(vcpu: float, gib: float, u: float, pue: float) -> float:
    return pue * (vcpu * (W_MIN_PER_VCPU + u * (W_MAX_PER_VCPU - W_MIN
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ _PER_VCPU)) + gib * 1.073741824 * W_PER_GB)


def fleet_report(f: Fleet) -> Dict:
    comps = catalog(f)
    total_vcpu = f.nodes * f.cores_per_node

    total_gib = f.nodes * f.gib_per_node
    fleet_w = watts(total_vcpu, total_gib, f.mean_cpu_utilization, f.p
    ↪ ue)
    rows = []
    for c in comps:
        lo, hi = watts(c.vcpu, c.gib, 0.0, f.pue), watts(c.vcpu, c.gib

    ↪ , 1.0, f.pue)
        rows.append({**asdict(c), "watts_low": lo, "watts_high": hi,
                     "mwh_per_year_low": lo * 8760 / 1e6, "mwh_per_yea
    ↪ r_high": hi * 8760 / 1e6,
                     "share_of_fleet_vcpu": c.vcpu / total_vcpu,
                     "share_of_fleet_energy_low": lo / fleet_w, "share

    ↪ _of_fleet_energy_high": hi / fleet_w})
    by_role = {}
    for r in rows:
        g = by_role.setdefault(r["role"], {"vcpu": 0.0, "share_of_flee
    ↪ t_vcpu": 0.0,
                                           "share_of_fleet_energy_low

    ↪ ": 0.0, "share_of_fleet_energy_high": 0.0,
                                           "mwh_per_year_low": 0.0, "
    ↪ mwh_per_year_high": 0.0})
        for k in g:
            g[k] += r[k]
    idle_vcpu = total_vcpu * (1.0 - f.mean_cpu_utilization)

    idle_w = f.pue * idle_vcpu * W_MIN_PER_VCPU
    return {"fleet": asdict(f), "clusters": f.clusters, "fleet_vcpu":
    ↪ total_vcpu, "fleet_mwh_per_year": fleet_w * 8760 / 1e6,
            "energy_model": ENERGY_SOURCE, "components": rows, "by_rol
    ↪ e": by_role,
            "idle_vcpu": idle_vcpu, "idle_share_of_fleet_vcpu": 1.0 -
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ f.mean_cpu_utilization,
            "idle_vcpu_share_of_fleet_energy": idle_w / fleet_w}
```

omnicompass/nervous.py

232 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Nervous system: one engine, many muscles.

Each muscle is a connector with five parts (domain map):
  afferent  sense

  engine    shared six-state field (not duplicated)
  efferent  push
  reflex    shield / bounds before push
  kill      return that muscle to its native controller

Status:

  wired     sense and push are executed in this tree
  sensed    telemetry is accepted; push is not issued
  open      connector registered; no plant; no push

This module does not replace adapter.Governor. It sits around it:
afferents merge into the observation vector the governor already under

    ↪ stands;
efferents are tagged by muscle so a kill is per-nerve, not a mystery w
    ↪ rite.
"""
from __future__ import annotations
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
from dataclasses import dataclass, field
from typing import Any, Callable, Dict, List, Optional


# Fit from the domain map. Advisory muscles never push from this runti
    ↪ me.
DIRECT = "direct"
SUPERVISORY = "supervisory"
ADVISORY = "advisory"
NOT_OURS = "not_omni"

WIRED = "wired"
SENSED = "sensed"
OPEN = "open"


@dataclass(frozen=True)
class Muscle:
    name: str
    family: str
    fit: str
    status: str
    reads: tuple
    pushes: tuple
    reflexes: tuple
    note: str = ""


# Registered nerves. Status is a claim about THIS tree, not a product
    ↪ slide.
CATALOG: List[Muscle] = [
    Muscle("nodes", "infra", DIRECT, WIRED,
           ("load_ratio", "pending", "requests"),
           ("node_delta", "actuation"),
           ("request_floor", "step_limit", "I2", "I5"),
           "fleet + k8s_controlplane"),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    Muscle("hpa", "infra", DIRECT, WIRED,
           ("utilization", "replicas"),
           ("hpa_target",),
           ("target_bounds_50_95",),
           "target write only when authority is on"),
    Muscle("power_cap", "infra", DIRECT, WIRED,
           ("power_stress", "site_limit"),
           ("power_cap",),
           ("I4", "cap_lo_hi"),
           "harness; live: CPU limits of capped deployments (omni_cont
    ↪ roller/muscles.py)"),
    Muscle("heat", "infra", DIRECT, SENSED,
           ("thermal",),
           (),
           ("thermal_limit",),
           "feeds E/S; live: harness heat law on live power, or GPU te
    ↪ mperature; no chiller write"),
    Muscle("network", "infra", DIRECT, SENSED,
           ("network_stress",),
           ("route_shift",),
           ("link_capacity",),
           "directive flag only"),
    Muscle("security", "infra", DIRECT, WIRED,
           ("security_block",),
           ("block_expansion",),
           ("I1",),
           "live: hold signal from a ConfigMap; blocks node, cap and b
    ↪ atch expansion"),
    Muscle("deployments", "infra", DIRECT, WIRED,
           ("rollout_progress",),
           ("pause", "resume", "undo"),
           ("change_permitted", "rollback_authorized"),
           "live: kubectl rollout pause / resume / undo"),
    Muscle("gpu", "infra", DIRECT, WIRED,
           ("gpu_power", "gpu_temp"),
           ("gpu_power_cap",),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        ("temp_limit", "cap_floor"),
        "hardware connector (nvidia-smi query and power limit); tes
↪ ted with fake hardware, not run on a GPU; MIG open"),
Muscle("cpu_pstate", "infra", DIRECT, WIRED,
        ("rapl_watts",),
        ("frequency_ceiling",),

        ("cap_floor",),
        "hardware connector (RAPL read, cpufreq ceiling); tested wi
↪ th fake hardware, not run on bare metal"),
Muscle("memory", "infra", DIRECT, OPEN,
        ("mem_used", "mem_request"),
        ("mem_request",),

        ("oom_margin",)),
Muscle("storage", "infra", SUPERVISORY, OPEN,
        ("io_load", "io_latency", "capacity"),
        ("tier", "volume_scale"),
        ("durability",)),
Muscle("batch_queue", "infra", DIRECT, WIRED,

        ("queue_depth", "load_ratio", "power_stress"),
        ("admit",),
        ("headroom", "I1"),
        "live: admit held Jobs (spec.suspend) with headroom; priori
↪ ty and deadlines open"),
Muscle("cooling", "facility", DIRECT, OPEN,

        ("inlet_c", "chiller_load"),
        ("setpoint_c", "fan_curve"),
        ("inlet_limit",)),
Muscle("grid", "facility", DIRECT, OPEN,
        ("price", "carbon", "demand_signal"),
        ("shed_kw", "shift"),

        ("contract_limit",)),
Muscle("training", "ai", DIRECT, OPEN,
        ("gpu_power", "step", "progress"),
        ("power_cap", "pack"),
        ("no_kill_midstep",)),
Muscle("inference", "ai", DIRECT, OPEN,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            ("qps", "latency", "gpu_mem"),
            ("replicas", "batch"),
            ("latency_slo",)),
    Muscle("agent_containment", "ai", DIRECT, OPEN,
            ("actions", "spend", "net"),
            ("cpu_cap", "mem_cap", "net_cap", "spend_cap"),
            ("hard_cap", "instant_kill"),
            "containment only; not value alignment"),
    Muscle("value_alignment", "ai", NOT_OURS, OPEN,
            (),
            (),
            (),
            "not a muscle Omni governs"),
]


def catalog_by_name() -> Dict[str, Muscle]:
    return {m.name: m for m in CATALOG}

def wired() -> List[Muscle]:
    return [m for m in CATALOG if m.status == WIRED]

def open_muscles() -> List[Muscle]:
    return [m for m in CATALOG if m.status == OPEN]


@dataclass
class NerveEvent:

    muscle: str
    kind: str  # sense | push | hold | kill | reflex
    payload: Dict[str, Any] = field(default_factory=dict)


@dataclass
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class Bundle:
    """One tick of the whole body."""
    obs: Dict[str, float]
    events: List[NerveEvent] = field(default_factory=list)
    kills: List[str] = field(default_factory=list)

    def sense(self, muscle: str, **vals: float) -> None:
        m = catalog_by_name()[muscle]
        for k, v in vals.items():
            self.obs[k] = float(v)
        self.events.append(NerveEvent(muscle, "sense", dict(vals)))
        if m.status == OPEN:

            self.events.append(NerveEvent(muscle, "hold", {"reason": "
    ↪ open"}))


    def kill(self, muscle: str) -> None:
        self.kills.append(muscle)
        self.events.append(NerveEvent(muscle, "kill", {}))

def merge_stack_obs(bundle: Bundle) -> Dict[str, float]:
    """Map extra nerves onto the governor's existing observation names
    ↪ ."""
    o = dict(bundle.obs)

    aliases = {
        "utilization": "load_ratio",
        "gpu_util": "load_ratio",
        "inlet_c": "thermal",
        "gpu_temp": "thermal",
        "rapl_watts": "power_stress",

        "gpu_power": "power_stress",
        "queue_depth": "queue_ratio",
        "spend": "queue_ratio",
    }
    for src, dst in aliases.items():
        if src in o and dst not in o:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            x = float(o[src])
            if src == "inlet_c":
                x = max(0.0, (x - 18.0) / 12.0)
            elif src == "gpu_temp":
                x = max(0.0, (x - 40.0) / 40.0)
            o[dst] = x
    return o


def allow_push(muscle: str, authority: bool, killed: List[str]) -> boo
    ↪ l:
    m = catalog_by_name()[muscle]
    if muscle in killed:
        return False
    if not authority:
        return False
    if m.fit in (ADVISORY, NOT_OURS):
        return False
    return m.status == WIRED


def tag_directive(d: Dict[str, Any], authority: bool, killed: List[str
    ↪ ]) -> Dict[str, Any]:
    """Attach which muscle may execute which field. Unwired fields sta
    ↪ y logged."""
    out = dict(d)
    nerves = {
        "node_delta": "nodes",
        "actuation": "nodes",
        "hpa_target": "hpa",
        "power_cap": "power_cap",
        "route_shift": "network",
    }
    permitted = {}
    for field_name, muscle in nerves.items():
        if field_name in out:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            permitted[field_name] = allow_push(muscle, authority, kill
    ↪ ed)
    out["nerve_permit"] = permitted
    out["nerve_killed"] = list(killed)
    return out
```

omnicompass/nervous_system.py

158 lines.

```
"""The supervisory nervous system: one evolving engine state grants au
    ↪ thority to every organ family.

Omni-Compass does not replace the specialist controllers. Each keeps i
    ↪ ts own mechanism:
- the HPA and VPA size pods;
- the Cluster Autoscaler and Karpenter size node pools;
- Linux schedutil picks CPU frequency;
- NVIDIA DCGM manages GPUs;
- rollout controllers and routers do their own work.

The nervous system decides, from one shared state, the envelope inside
    ↪  which each of them may act.

Inputs, all from the six-state engine (omnicompass/core.py, via the go
    ↪ vernor), and nothing tuned per organ:
  kappa  convergence   = 1 if push <= push_release, else push_release
    ↪ / push. This is the equation-(2) gate made
                         continuous: the further the engine is from it
    ↪ s basin, the less it may give back.
  h      basin health  = clamp((U - U_gate) / (1 - U_gate), 0, 1)
  sigma  stress ratio  = S / S*, where S* solves delta - alpha_s S - (
    ↪ 3/4) beta_s S^2 = 0 (equation 6)
  nu     unmet need    = max(0, I_U) (equation 3)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  calm                 = kappa * h * (1 - clamp(sigma - 1, 0, 1)) * (1
    ↪  - clamp(nu, 0, 1))
                         in [0, 1]; 1 means fully settled

Authority per organ:
  expand     may the organ add capacity or performance. Always yes, ex
    ↪ cept during a security hold.
  contract   may it give capacity or performance back. Only when calm
    ↪ >= the organ's reversibility threshold
             (theta_pods 0.5, theta_nodes 0.7: a node costs a boot to
    ↪ reverse) and the SLO is clean.
  step       fraction of the organ's surplus it may shed this decision
    ↪ . Equals calm.
  envelope   for continuous organs, the allowed range:
               cpufreq ceiling (fraction of cpuinfo_max) in [1 - 0.35
    ↪ calm, 1];
               GPU power limit (fraction of max) in [1 - 0.30 calm, 1]
    ↪ ;
               site power cap in the living band of its own range (not
    ↪ hing fixed: the device's own floor and top);
               traffic-shift fraction in [0, 0.5 calm];
               cooling supply-air setpoint (C) in [18, 18 + 9 calm].
             Heat above 0.96 forces the frequency and GPU ceilings dow
    ↪ n to 1 - 0.35 x excess.
  batch      admit held work only if calm >= 0.5 and power stress < 0.
    ↪ 9; pause pausable work if sigma > 1, power
             stress >= 0.95, or heat >= 0.96.
  rollback   the engine's rollback authorisation (S high, U falling, o
    ↪ r a security hold).

Global rules, applied last:
  - observe: every authority is computed and logged; execute is False
    ↪ everywhere.
  - kill: no authority at all.
  - security hold: no capacity organ may expand. Cooling is the one pr
    ↪ otective organ: "expand" there means more
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    cooling, which adds protection and no capacity, so it stays allowe
    ↪ d.
The safety shield (omnicompass/shield.py) stays downstream and can sti
    ↪ ll veto any action.
"""
from __future__ import annotations

from dataclasses import dataclass
from typing import Any, Dict

from omnicompass.closure import stress_equilibrium

ORGANS = ("pods", "nodes", "cpufreq", "gpu", "power", "batch", "routin
    ↪ g", "rollback")
# The living band (the founder's rule): every level the nervous system
    ↪  hands out lives between 5% and 95% of its range.
# Nothing is driven to zero (a part with no work idles down to its flo
    ↪ or, alive and ready) and nothing is driven to its

# absolute top (the last 5% is never spent). The band is applied last,
    ↪  to every envelope, so no organ can leave it.
BAND = (0.05, 0.95)


def in_band(lo: float, hi: float) -> list:

    """Clip an envelope [lo, hi] (fractions of the organ's range) into
    ↪  the living band, keeping lo <= hi."""
    b0, b1 = BAND
    h = min(b1, max(b0, hi))
    return [min(h, max(b0, lo)), h]

THETA = {"pods": 0.5, "nodes": 0.7, "cpufreq": 0.3, "gpu": 0.3, "power
    ↪ ": 0.3, "routing": 0.5}


def clamp(x, lo, hi):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return lo if x < lo else hi if x > hi else x


@dataclass(frozen=True)
class NervousInputs:
    E: float; U: float; I_U: float; S: float

    push: float
    push_release: float = 0.2
    U_gate: float = 0.5
    s_eq: float = 1.0
    security_block: float = 0.0
    slo_clean: bool = True

    power_stress: float = 0.0
    thermal: float = 0.0
    rollback: bool = False
    stale: float = 0.0              # fraction of declared senses tha
    ↪ t are blind (dropout, frozen, unreadable)
    mode: str = "autopilot"         # "observe" or "autopilot"

    killed: bool = False


def scalars(i: NervousInputs) -> Dict[str, float]:
    kappa = 1.0 if i.push <= i.push_release else i.push_release / max(
    ↪ i.push, 1e-12)

    h = clamp((i.U - i.U_gate) / max(1.0 - i.U_gate, 1e-12), 0.0, 1.0)
    sigma = i.S / i.s_eq if i.s_eq > 0 else 0.0
    nu = max(0.0, i.I_U)
    calm = kappa * h * (1.0 - clamp(sigma - 1.0, 0.0, 1.0)) * (1.0 - c
    ↪ lamp(nu, 0.0, 1.0))
    return {"kappa": kappa, "h": h, "sigma": sigma, "nu": nu, "calm":

    ↪ clamp(calm, 0.0, 1.0)}


def authority(i: NervousInputs) -> Dict[str, Any]:
    if i.killed:
        return {"execute": False, "killed": True, "organs": {}}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    sc = scalars(i); calm = sc["calm"]
    sec = i.security_block > 0.5
    hot = i.thermal >= 0.96
    excess = clamp(i.thermal - 0.96, 0.0, 1.0)
    org: Dict[str, Dict[str, Any]] = {}
    seeing = i.stale <= 0.0          # never give capacity back on a b
    ↪ lind sense; expanding stays allowed (the safe side)
    for o, th in THETA.items():
        ok = calm >= th and i.slo_clean and seeing
        org[o] = {"expand": not sec, "contract": ok, "step": calm if o
    ↪ k else 0.0}
    cf_lo = 1.0 - 0.35 * calm; gp_lo = 1.0 - 0.30 * calm
    cf_hi = 1.0 - 0.35 * excess if hot else 1.0; gp_hi = 1.0 - 0.35 *
    ↪ excess if hot else 1.0
    org["cpufreq"]["envelope"] = in_band(min(cf_lo, cf_hi), cf_hi)
    org["gpu"]["envelope"] = in_band(min(gp_lo, gp_hi), gp_hi)
    org["power"]["envelope"] = in_band(0.0, 1.0)      # the device's o
    ↪ wn range, its last 5% at each end never spent
    # routing is an amount moved, not a level: it may move nothing, ne
    ↪ ver more than the band's top
    org["routing"]["envelope"] = [0.0, min(BAND[1], 0.5 * calm) if not
    ↪  sec else 0.0]
    org["cooling"] = {"expand": True, "protective": True, "contract":
    ↪ calm >= 0.3 and seeing, "step": calm, "envelope": [18.0, 18.0 +
    ↪ 9.0 * calm]}
    org["batch"] = {"expand": (not sec) and seeing and calm >= 0.5 and
    ↪  i.power_stress < 0.9, "contract": True, "protective_contract":
    ↪ True,
                    "admit": (not sec) and seeing and calm >= 0.5 and
    ↪ i.power_stress < 0.9,
                    "pause": sc["sigma"] > 1.0 or i.power_stress >= 0.
    ↪ 95 or hot, "step": calm}
    org["rollback"] = {"expand": False, "contract": False, "authorized
    ↪ ": bool(i.rollback or sec), "step": 0.0}
    return {"execute": i.mode == "autopilot", "killed": False, "securi
    ↪ ty_hold": sec, "scalars": sc, "organs": org}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def from_governor(g, obs: Dict[str, Any], d: Dict[str, Any] = None, mo
    ↪ de: str = None) -> Dict[str, Any]:
    """Authority from a live omnicompass.adapter.Governor after its st
    ↪ ep (d = the step's directive)."""

    x = g.x; p = g.p; L = g.law
    return authority(NervousInputs(
        E=x.E, U=x.U, I_U=x.I_U, S=x.S, push=g.last_push, push_release
    ↪ =getattr(L, "push_release", 0.2),
        U_gate=getattr(L, "U_gate", 0.5), s_eq=stress_equilibrium(p.de
    ↪ lta, p.alpha_s, p.beta_s),

        security_block=float(obs.get("security_block", 0.0)), slo_clea
    ↪ n=bool(obs.get("slo_clean", True)),
        power_stress=float(obs.get("power_stress", 0.0)), thermal=floa
    ↪ t(obs.get("thermal", 0.0)),
        rollback=bool((d or {}).get("rollback_authorized", False)), st
    ↪ ale=float(obs.get("stale", 0.0)),

        mode=mode or g.mode, killed=g.killed))


def node_release_gate(n: int, per_node_m: float, used_m: float, pendin
    ↪ g: int, pods_scaling_up: bool,
                      latency_breach_now: bool, rho: float, node_auth:

    ↪  Dict[str, Any],
                      senses_live: bool = True, last_command_landed: b
    ↪ ool = True) -> Dict[str, Any]:
    """May the machine organ give one machine back now? Attribution: a
    ↪ n organ is held back only by stress it can cause
    or cure. The node organ reads its own engine view (fed with machin

    ↪ e-attributable pressure: pods waiting for a
    place), and the release must also pass:
      coordination  pods are not scaling up and latency is not breache
    ↪ d now (pods move first; machines never move
                    against them, the rule of the benchmarked coordina
    ↪ tion)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
      headroom      nothing is pending, and after the release the rema
    ↪ ining machines run at or below the engine's own
                    utilisation target rho: used / ((n - 1) x per_node
    ↪ ) <= rho
      authority     the node organ's own calm, security and stress gat
    ↪ es (authority() above) grant contraction

      senses        every declared sense is live (afferent integrity)
      proprioception the node organ's last command landed (efferent fe
    ↪ edback: no new order to a muscle that did not
                    carry out the previous one)
    Returns {"ok": bool, "reason": str, "util_after": float}."""
    util_after = used_m / max((n - 1) * per_node_m, 1e-9) if n > 1 els

    ↪ e float("inf")
    checks = [("one machine left", n > 1), ("pods waiting", pending ==
    ↪  0), ("pods scaling up", not pods_scaling_up),
              ("latency breached now", not latency_breach_now), (f"uti
    ↪ l after {util_after:.2f} > rho {rho:.2f}", util_after <= rho),
              ("node organ has no contraction authority", bool(node_au

    ↪ th.get("organs", {}).get("nodes", {}).get("contract", False))),
              ("a sense is blind", senses_live), ("last node command d
    ↪ id not land", last_command_landed)]
    failed = [name for name, ok in checks if not ok]
    return {"ok": not failed, "reason": "; ".join(failed) or "release
    ↪ permitted", "util_after": util_after}
```

`omnicompass/pools.py`

38 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Pool actuation policy. Does not change the frozen allocation law.

elastic     node off is allowed (HPA+CA cattle)
always_on   node off is illegal (GPU / pet). Negative node_delta is dr
    ↪ opped.
idle_power  negative node_delta becomes park (Ready, idle watts), not
    ↪ power-off.

Pack profiles are overlays on rho0 only. Frozen law stays at rho0=0.91
    ↪ 4.
"""
from __future__ import annotations

from typing import Any, Dict

POOLS = ("elastic", "always_on", "idle_power")
PACK_MID = {"rho0": 0.82}
PACK_HARD = {"rho0": 0.95}


def apply_pool(directive: Dict[str, Any], pool: str) -> Dict[str, Any]
    ↪ :
    if pool not in POOLS:
        raise ValueError(pool)
    d = dict(directive)
    delta = int(d.get("node_delta", 0))
    if pool == "always_on":
        if delta < 0:
            d["node_delta"] = 0
        d["actuation"] = "hold"
    elif pool == "idle_power" and delta < 0:
        d["actuation"] = "park"
    else:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        d["actuation"] = "nodes" if delta != 0 else "hold"
    d["pool"] = pool
    return d
```

omnicompass/shield.py

106 lines.

```
"""Safety shield: every governor action set is checked against declare
    ↪ d invariants before execution.

Invariants (each enforced by construction; every intervention is count
    ↪ ed):
  I1 security   no capacity expansion (nodes, Terraform, rollout) whil
    ↪ e a security block is observed
  I2 bounds     node targets lie in [minimum_nodes, maximum_nodes]; po
    ↪ wer cap in [0.65, 1.0]. When the current node
                count is itself outside the bounds and the rate limit
    ↪ I5 forbids reaching them in one step, the target
                must move toward the bounds (the only admissible direc
    ↪ tion): n > max -> max <= t < n, n < min -> n < t <= min
  I3 coherence  an action set never both expands capacity and tightens
    ↪  the power cap
  I4 power      no node addition whose projected power stress exceeds
    ↪ power_limit:
                projected = observed_power_stress * (n + k) / n
  I5 rate       node change per interval bounded by max_node_step

The shield is a runtime monitor: it guarantees the invariants for exec
    ↪ uted governor actions
under the observed state. It does not certify the plant model.
"""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
from __future__ import annotations

from dataclasses import dataclass
from typing import Any, Dict, List, Tuple

EXPAND = ("nodes", "terraform_plan", "rollout", "replicas")

@dataclass(frozen=True)
class ShieldLimits:
    power_limit: float = 1.00
    max_node_step: int = 4

    cap_lo: float = 0.65
    cap_hi: float = 1.00


def violations(actions: List[Dict[str, Any]], st: Dict[str, Any], obs:
    ↪  Dict[str, float], cfg,

               lim: ShieldLimits = ShieldLimits()) -> List[str]:
    """Invariants violated by an action set (used to score every arm i
    ↪ dentically)."""
    v = []
    n = max(1, int(st["actual_nodes"]))
    sec = float(obs.get("security_block", 0.0)) > 0.5

    for a in actions:
        k, t, d = a["action"], a.get("target"), a.get("direction", 0)
        if sec and d > 0 and k in ("nodes", "terraform_plan", "rollout
    ↪ "):
            v.append("I1")
        if k == "nodes":

            ti = int(t)
            inside = cfg.minimum_nodes <= ti <= cfg.maximum_nodes
            toward = (n > cfg.maximum_nodes and cfg.maximum_nodes <= t
    ↪ i < n) or (n < cfg.minimum_nodes and n < ti <= cfg.minimum_nodes
    ↪ )
            if not inside and not toward:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                v.append("I2")
            add = int(t) - n
            if abs(add) > lim.max_node_step:
                v.append("I5")
            if add > 0 and float(obs.get("power_stress", 0.0)) * (n +
    ↪ add) / n > lim.power_limit:

                v.append("I4")
        if k == "power_cap" and not lim.cap_lo <= float(t) <= lim.cap_
    ↪ hi:
            v.append("I2")
    up = any(a.get("direction", 0) > 0 and a["action"] in EXPAND for a
    ↪  in actions)

    tighten = any(a["action"] == "power_cap" and float(a["target"]) <
    ↪ float(st["power_cap"]) - 1e-9 for a in actions)
    if up and tighten:
        v.append("I3")
    return v

def enforce(actions: List[Dict[str, Any]], st: Dict[str, Any], obs: Di
    ↪ ct[str, float], cfg,
            lim: ShieldLimits = ShieldLimits()) -> Tuple[List[Dict[str
    ↪ , Any]], int]:
    """Return the largest invariant-satisfying subset/modification of

    ↪ the action set and the intervention count."""
    n = max(1, int(st["actual_nodes"]))
    sec = float(obs.get("security_block", 0.0)) > 0.5
    ps = float(obs.get("power_stress", 0.0))
    out, hits = [], 0
    for a in actions:

        a = dict(a)
        k = a["action"]
        if sec and a.get("direction", 0) > 0 and k in ("nodes", "terra
    ↪ form_plan", "rollout"):
            hits += 1
            continue
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if k == "nodes":
            r = int(a["target"])
            toward = (n > cfg.maximum_nodes and cfg.maximum_nodes <= r
    ↪  < n) or (n < cfg.minimum_nodes and n < r <= cfg.minimum_nodes)
            t = r if toward else max(cfg.minimum_nodes, min(cfg.maximu
    ↪ m_nodes, r))   # minimal intervention

            t = max(n - lim.max_node_step, min(n + lim.max_node_step,
    ↪ t))
            if t > n and ps > 0.0:
                k_max = int((lim.power_limit / ps) * n - n + 1e-9)
                t = min(t, n + max(0, k_max))
            if sec and t > n:

                hits += 1          # I1 after clamping: a clamp may tu
    ↪ rn a request into an expansion; not during a hold
                continue
            if t != int(a["target"]):
                hits += 1
            if t == n:

                continue
            a["target"], a["direction"] = t, (1 if t > n else -1)
        if k == "power_cap":
            c = max(lim.cap_lo, min(lim.cap_hi, float(a["target"])))
            if c != float(a["target"]):
                hits += 1

            a["target"] = c
        out.append(a)
    up = any(a.get("direction", 0) > 0 and a["action"] in EXPAND for a
    ↪  in out)
    if up:
        kept = []

        for a in out:
            if a["action"] == "power_cap" and float(a["target"]) < flo
    ↪ at(st["power_cap"]) - 1e-9:
                hits += 1
                continue
            kept.append(a)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        out = kept
    return out, hits
```

omnicompass/speed.py

96 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Speed-first allocation: the frozen six-state engine, a law that nev
    ↪ er trades response time for energy.

The frozen fleet law (adapter.AllocationLaw, FLEET_MODE) uses one numb

    ↪ er, rho*, both as the HPA target (how busy each
pod may run) and as the node-sizing target (how busy each machine may
    ↪ run). Saving machines therefore always meant
running pods hotter, which is where response time was lost. This law s
    ↪ eparates the two:

  pods      HPA target = rho* from the engine (equation: rho* = clamp(
    ↪ rho0 - kI I_U - kE E, rho_min, rho0)), with
            speed constants (rho0 near the latency knee) and the respo
    ↪ nse-time nerve feeding the queue observation
  machines  sized to what the pods ask for, not to how busy they are:
            n_up   = ceil(requests / (cores * ALLOC) * (1 + headroom_u

    ↪ p)) + ceil(kq * q * n)
            n_keep = ceil(peak requests over the last `window` decisio
    ↪ ns / (cores * ALLOC) * (1 + headroom))
            added at once when n < n_up (a pending pod costs response
    ↪ time);
            removed one per decision only when n >= n_keep + band for
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ dwell decisions, no sooner than after_add
            decisions after an addition, and only while the engine's e
    ↪ quation (2) push <= push_release
  ahead     while requests are rising, n_up += ceil(antic * trend * n)
    ↪ , trend = relative rise over antic_lag
            decisions (anticipation: machines boot before the pods tha
    ↪ t need them are created; antic = 0 disables)
  power     cap = 1 whenever work is waiting or pods are busy above ca
    ↪ p_busy; otherwise cap_idle
            (a cap slows service: S = S0 / cap, so capping a busy mach
    ↪ ine always costs response time)

The engine state (E, U, I_U, S, B, B_dot) is evolved by omnicompass.co
    ↪ re unchanged; only this mapping is new.
"""
from __future__ import annotations

import math

from dataclasses import dataclass, replace

from omnicompass.adapter import Governor, mode_law, AUTOPILOT


@dataclass(frozen=True)

class SpeedLaw:
    rho0: float = 0.60
    rho_min: float = 0.50
    kI: float = 0.10
    kE: float = 0.10
    kq: float = 0.50

    headroom: float = 0.10
    headroom_up: float = 0.0
    window: int = 10
    band: int = 1
    dwell: int = 5
    after_add: int = 5
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    push_release: float = 0.05
    cap_idle: float = 1.0
    cap_busy: float = 0.30
    antic: float = 0.0          # anticipation: extra machines = ceil(
    ↪ antic x rising request trend x n)
    antic_lag: int = 4          # decisions over which the trend is me
    ↪ asured


class SpeedGovernor:
    def __init__(self, law: SpeedLaw = SpeedLaw()):
        self.law = law

        base = replace(mode_law("throughput"), rho0=law.rho0, rho_min=
    ↪ law.rho_min, kI=law.kI, kE=law.kE)
        self.g = Governor(law=base)
        self.g.set_mode(AUTOPILOT)
        self.streak = 0
        self.since_add = 99

        self.hist = []
        self.rhist = []

    def step(self, obs, n, requests, cores_per_node):
        """Returns (hpa_target, node_target, power_cap)."""
        L = self.law

        self.g.nodes = n
        d = self.g.step(obs, 0)
        q = obs["queue_ratio"]
        self.hist = (self.hist + [requests])[-max(1, L.window):]
        n_up = math.ceil(requests / cores_per_node * (1.0 + L.headroom
    ↪ _up) - 1e-9) + math.ceil(L.kq * q * n)

        self.rhist = (self.rhist + [requests])[-64:]
        if L.antic > 0 and len(self.rhist) > L.antic_lag:
            past = self.rhist[-1 - L.antic_lag]
            trend = max(0.0, requests - past) / max(past, 1e-9)
            n_up += math.ceil(L.antic * trend * n - 1e-9)
        n_keep = math.ceil(max(self.hist) / cores_per_node * (1.0 + L.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ headroom) - 1e-9)
        tgt = n
        if n < n_up:
            tgt = n_up
            self.streak = 0
            self.since_add = 0

        else:
            self.since_add += 1
            if n >= max(n_keep, n_up) + L.band and q < 0.05:
                self.streak += 1
                if self.streak >= L.dwell and self.since_add >= L.afte
    ↪ r_add and self.g.last_push <= L.push_release:

                    tgt = n - 1
                    self.streak = 0
            else:
                self.streak = 0
        busy = obs["load_ratio"] > L.cap_busy or q > 0.0
        cap = 1.0 if busy or tgt > n else L.cap_idle

        return float(d["demand"]), int(tgt), cap
```

omnicompass/stack_sim.py

291 lines.

```
"""Synthetic fragmented-stack model: proposal behaviour of Kubernetes,
    ↪  Terraform, HPA/VPA,
Karpenter, Argo CD/Rollouts, Istio/Cilium, power/thermal, alerting and
    ↪  paging roles.

Each block is extracted verbatim from reference/omni_compass_reference
    ↪ _engine.py at the line shown.
"""
from __future__ import annotations
import math
from dataclasses import dataclass, field
from typing import Any, Dict, List, Tuple
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
import numpy as np

# --- source line 21897: ManagerBenchmarkConfig
@dataclass
class ManagerBenchmarkConfig:
    profile: str = "core"

    scenarios: int = 500
    steps: int = 48
    interval_minutes: int = 5
    initial_nodes: int = 20
    minimum_nodes: int = 8
    maximum_nodes: int = 40

    capacity_units_per_node: float = 100.0
    site_power_limit_kw: float = 33.0
    pue: float = 1.18
    node_idle_kw: float = 0.38
    node_dynamic_kw: float = 1.12
    terraform_apply_delay_steps: int = 8

    grafana_refresh_steps: int = 2
    datadog_eval_steps: int = 3
    prometheus_eval_steps: int = 2
    certification_streak: int = 4


    @property

    def dt_hours(self) -> float:
        return float(self.interval_minutes / 60.0)

# --- source line 21922: ManagerScenario
@dataclass
class ManagerScenario:

    scenario_id: int
    seed: int
    family: str
    event_start: int
    event_duration: int
    base_load_fraction: float
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    spike_multiplier: float
    failed_node_fraction: float
    telemetry_delay_steps: int
    telemetry_loss_probability: float
    network_efficiency_drop: float
    power_derate: float

    security_block_probability: float
    rollout_multiplier: float
    kafka_lag_steps: int
    alert_noise_probability: float
    batch_pressure_fraction: float
    operator_delay_steps: int

# --- source line 22021: _mom_clamp
def _mom_clamp(x: float, lo: float, hi: float) -> float:
    return float(min(hi, max(lo, x)))


# --- source line 22007: _MOM_FAMILY_WEIGHTS

_MOM_FAMILY_WEIGHTS = [
    ("normal_variation", 0.10),
    ("demand_spike", 0.14),
    ("node_rack_failure", 0.12),
    ("telemetry_fault", 0.12),
    ("kubernetes_terraform_conflict", 0.12),

    ("alert_incident", 0.10),
    ("power_thermal_network", 0.12),
    ("security_policy", 0.08),
    ("deployment_rollout", 0.06),
    ("compound_failure", 0.04),
]

# --- source line 22025: _mom_allocate_families
def _mom_allocate_families(n: int) -> List[str]:
    n = max(1, int(n))
    raw = [(name, n * weight) for name, weight in _MOM_FAMILY_WEIGHTS]
    counts = {name: int(math.floor(value)) for name, value in raw}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    remainder = n - sum(counts.values())
    order = sorted(raw, key=lambda item: (item[1] - math.floor(item[1]
    ↪ )), reverse=True)
    for i in range(remainder):
        counts[order[i % len(order)][0]] += 1
    families: List[str] = []

    for name, _ in _MOM_FAMILY_WEIGHTS:
        families.extend([name] * counts[name])
    return families[:n]


# --- source line 22039: _mom_generate_scenarios
def _mom_generate_scenarios(cfg: ManagerBenchmarkConfig, seed_base: in

    ↪ t) -> List[ManagerScenario]:
    families = _mom_allocate_families(cfg.scenarios)
    scenarios: List[ManagerScenario] = []
    for idx, family in enumerate(families):
        seed = int(seed_base) + idx * 1009 + 17
        rng = np.random.default_rng(seed)

        event_start = int(rng.integers(max(4, cfg.steps // 8), max(5,
    ↪ cfg.steps // 2)))
        event_duration = int(rng.integers(max(4, cfg.steps // 10), max
    ↪ (6, cfg.steps // 3)))
        values = {
            "spike_multiplier": 1.0,

            "failed_node_fraction": 0.0,
            "telemetry_delay_steps": int(rng.integers(0, 2)),
            "telemetry_loss_probability": float(rng.uniform(0.0, 0.015
    ↪ )),
            "network_efficiency_drop": 0.0,
            "power_derate": 1.0,

            "security_block_probability": 0.0,
            "rollout_multiplier": 1.0,
            "kafka_lag_steps": int(rng.integers(0, 2)),
            "alert_noise_probability": float(rng.uniform(0.0, 0.02)),
            "batch_pressure_fraction": float(rng.uniform(0.02, 0.10)),
        }
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if family == "demand_spike":
            values["spike_multiplier"] = float(rng.uniform(1.55, 2.35)
    ↪ )
            values["batch_pressure_fraction"] = float(rng.uniform(0.12
    ↪ , 0.32))
        elif family == "node_rack_failure":
            values["failed_node_fraction"] = float(rng.uniform(0.12, 0
    ↪ .38))
        elif family == "telemetry_fault":
            values["telemetry_delay_steps"] = int(rng.integers(3, 9))
            values["telemetry_loss_probability"] = float(rng.uniform(0
    ↪ .10, 0.35))
            values["kafka_lag_steps"] = int(rng.integers(2, 7))
        elif family == "kubernetes_terraform_conflict":
            values["spike_multiplier"] = float(rng.uniform(1.30, 1.85)
    ↪ )
            values["rollout_multiplier"] = float(rng.uniform(1.10, 1.3
    ↪ 5))
        elif family == "alert_incident":
            values["alert_noise_probability"] = float(rng.uniform(0.14
    ↪ , 0.38))
            values["telemetry_delay_steps"] = int(rng.integers(1, 5))
        elif family == "power_thermal_network":
            values["network_efficiency_drop"] = float(rng.uniform(0.18
    ↪ , 0.45))
            values["power_derate"] = float(rng.uniform(0.68, 0.86))
            values["spike_multiplier"] = float(rng.uniform(1.20, 1.65)
    ↪ )
        elif family == "security_policy":
            values["security_block_probability"] = float(rng.uniform(0
    ↪ .38, 0.82))
            values["rollout_multiplier"] = float(rng.uniform(1.10, 1.3
    ↪ 0))
        elif family == "deployment_rollout":
            values["rollout_multiplier"] = float(rng.uniform(1.30, 1.8
    ↪ 0))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            values["spike_multiplier"] = float(rng.uniform(1.10, 1.40)
    ↪ )
        elif family == "compound_failure":
            values["spike_multiplier"] = float(rng.uniform(1.55, 2.25)
    ↪ )
            values["failed_node_fraction"] = float(rng.uniform(0.12, 0
    ↪ .30))
            values["telemetry_delay_steps"] = int(rng.integers(3, 8))
            values["telemetry_loss_probability"] = float(rng.uniform(0
    ↪ .10, 0.28))
            values["network_efficiency_drop"] = float(rng.uniform(0.15
    ↪ , 0.40))
            values["power_derate"] = float(rng.uniform(0.70, 0.88))
            values["security_block_probability"] = float(rng.uniform(0
    ↪ .12, 0.42))
            values["rollout_multiplier"] = float(rng.uniform(1.15, 1.5
    ↪ 5))
            values["kafka_lag_steps"] = int(rng.integers(2, 7))
            values["alert_noise_probability"] = float(rng.uniform(0.08
    ↪ , 0.24))
            values["batch_pressure_fraction"] = float(rng.uniform(0.15
    ↪ , 0.35))
        scenarios.append(ManagerScenario(
            scenario_id=idx + 1,
            seed=seed,
            family=family,
            event_start=event_start,
            event_duration=event_duration,
            base_load_fraction=float(rng.uniform(0.52, 0.76)),
            operator_delay_steps=int(rng.integers(2, 9)),
            **values,
        ))
    return scenarios

# --- source line 22123: _mom_event_active
def _mom_event_active(scenario: ManagerScenario, step: int) -> bool:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return scenario.event_start <= step < (scenario.event_start + scen
    ↪ ario.event_duration)

# --- source line 22127: _mom_source_signals
def _mom_source_signals(scenario: ManagerScenario, step: int, cfg: Man
    ↪ agerBenchmarkConfig, rng: np.random.Generator) -> Dict[str, floa
    ↪ t]:
    phase = 2.0 * math.pi * step / max(1, cfg.steps)
    demand = scenario.base_load_fraction * (0.88 + 0.14 * math.sin(pha
    ↪ se - 0.7))
    demand *= float(rng.lognormal(mean=-0.5 * 0.035**2, sigma=0.035))
    active = _mom_event_active(scenario, step)
    if active:
        demand *= scenario.spike_multiplier
    batch = scenario.batch_pressure_fraction * (1.0 + 0.35 * math.sin(
    ↪ phase * 1.7 + 0.5))
    if active and scenario.family in ("demand_spike", "compound_failur
    ↪ e"):
        batch *= 1.65
    failed_fraction = scenario.failed_node_fraction if active else 0.0
    network_efficiency = 1.0 - (scenario.network_efficiency_drop if ac
    ↪ tive else 0.0)
    power_derate = scenario.power_derate if active else 1.0
    security_block = bool(active and rng.random() < scenario.security_
    ↪ block_probability)
    rollout = scenario.rollout_multiplier if active and scenario.famil
    ↪ y in ("kubernetes_terraform_conflict", "deployment_rollout", "se
    ↪ curity_policy", "compound_failure") else 1.0
    return {
        "demand_fraction": float(max(0.0, demand)),
        "batch_fraction": float(max(0.0, batch)),
        "failed_fraction": float(failed_fraction),
        "network_efficiency": float(_mom_clamp(network_efficiency, 0.4
    ↪ 0, 1.0)),
        "power_derate": float(_mom_clamp(power_derate, 0.55, 1.0)),
        "security_block": float(1.0 if security_block else 0.0),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        "rollout_multiplier": float(rollout),
        "event_active": float(1.0 if active else 0.0),
        "telemetry_drop": float(1.0 if rng.random() < scenario.telemet
    ↪ ry_loss_probability else 0.0),
        "alert_noise_datadog": float(1.0 if rng.random() < scenario.al
    ↪ ert_noise_probability else 0.0),

        "alert_noise_prometheus": float(1.0 if rng.random() < scenario
    ↪ .alert_noise_probability * 0.85 else 0.0),
    }

# --- source line 22157: _mom_delayed_observation
def _mom_delayed_observation(history: List[Dict[str, float]], delay_st

    ↪ eps: int) -> Dict[str, float]:
    if not history:
        return {}
    idx = max(0, len(history) - 1 - max(0, int(delay_steps)))
    return dict(history[idx])

# --- source line 22164: _mom_proposals
def _mom_proposals(state: Dict[str, Any], obs: Dict[str, float], scena
    ↪ rio: ManagerScenario, step: int, cfg: ManagerBenchmarkConfig, no
    ↪ ise_flags: Dict[str, float]) -> List[Dict[str, Any]]:
    proposals: List[Dict[str, Any]] = []
    actual_nodes = int(state["actual_nodes"])

    queue_ratio = float(obs.get("queue_ratio", 0.0))
    load_ratio = float(obs.get("load_ratio", 0.0))
    thermal = float(obs.get("thermal", 0.0))
    power_stress = float(obs.get("power_stress", 0.0))
    network_stress = float(obs.get("network_stress", 0.0))
    stale = bool(obs.get("stale", 0.0) > 0.5)

    security_block = bool(obs.get("security_block", 0.0) > 0.5)
    rollout = float(obs.get("rollout_multiplier", 1.0))


    hpa_target = int(round(state["replicas"] * _mom_clamp(0.90 + 0.55
    ↪ * load_ratio + 0.45 * queue_ratio, 0.65, 1.65)))
    hpa_target = max(20, min(500, hpa_target))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    if hpa_target != state["replicas"]:
        proposals.append({"manager":"HPA/VPA", "action":"replicas", "t
    ↪ arget":hpa_target, "direction":1 if hpa_target > state["replicas
    ↪ "] else -1})

    effective_need = max(load_ratio, queue_ratio + 0.70)

    karp_target = int(math.ceil(actual_nodes * _mom_clamp(effective_ne
    ↪ ed, 0.55, 1.65)))
    karp_target = max(cfg.minimum_nodes, min(cfg.maximum_nodes, karp_t
    ↪ arget))
    if queue_ratio > 0.25:
        karp_target = min(cfg.maximum_nodes, max(karp_target, actual_n

    ↪ odes + 1))
    elif queue_ratio < 0.05 and load_ratio < 0.63:
        karp_target = max(cfg.minimum_nodes, min(karp_target, actual_n
    ↪ odes - 1))
    if karp_target != actual_nodes:
        proposals.append({"manager":"Karpenter", "action":"nodes", "ta

    ↪ rget":karp_target, "direction":1 if karp_target > actual_nodes e
    ↪ lse -1})

    sustained = float(state["smoothed_load"])
    tf_target = int(math.ceil(cfg.initial_nodes * _mom_clamp(0.72 + 0.
    ↪ 55 * sustained + 0.35 * queue_ratio, 0.55, 1.70)))

    tf_target = max(cfg.minimum_nodes, min(cfg.maximum_nodes, tf_targe
    ↪ t))
    if scenario.family == "kubernetes_terraform_conflict" and _mom_eve
    ↪ nt_active(scenario, step):
        tf_target = max(cfg.minimum_nodes, min(cfg.maximum_nodes, tf_t
    ↪ arget + (2 if step % 2 == 0 else -2)))

    if tf_target != state["terraform_desired_nodes"]:
        proposals.append({"manager":"Terraform", "action":"terraform_p
    ↪ lan", "target":tf_target, "direction":1 if tf_target > state["te
    ↪ rraform_desired_nodes"] else -1})

    if rollout > 1.05:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        proposals.append({"manager":"Argo CD / Rollouts", "action":"ro
    ↪ llout", "target":rollout, "direction":1})
        if thermal > 0.95 or power_stress > 1.0 or security_block:
            proposals.append({"manager":"Argo CD / Rollouts", "action"
    ↪ :"rollback", "target":1.0, "direction":-1})

    if thermal > 0.86 or power_stress > 0.93:
        cap = _mom_clamp(1.0 - 0.22 * max(thermal - 0.80, power_stress
    ↪  - 0.86), 0.70, 0.98)
        proposals.append({"manager":"Power/Thermal", "action":"power_c
    ↪ ap", "target":cap, "direction":-1})

    if network_stress > 0.18:
        proposals.append({"manager":"Istio/Cilium", "action":"route_sh
    ↪ ift", "target":_mom_clamp(network_stress, 0.0, 1.0), "direction"
    ↪ :1})

    if security_block:

        proposals.append({"manager":"Vault/OPA", "action":"deny_change
    ↪ ", "target":1.0, "direction":-1})

    warning = queue_ratio > 0.20 or thermal > 0.82 or power_stress > 0
    ↪ .90 or network_stress > 0.25
    critical = queue_ratio > 0.48 or thermal > 0.98 or power_stress >

    ↪ 1.02
    if warning or noise_flags.get("alert_noise_datadog", 0.0) > 0.5:
        proposals.append({"manager":"Datadog", "action":"alert", "targ
    ↪ et":2 if critical else 1, "direction":1})
    if warning or noise_flags.get("alert_noise_prometheus", 0.0) > 0.5
    ↪ :

        proposals.append({"manager":"Prometheus/Alertmanager", "action
    ↪ ":"alert", "target":2 if critical else 1, "direction":1})
    if critical and not stale:
        proposals.append({"manager":"PagerDuty", "action":"page", "tar
    ↪ get":1, "direction":1})
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    if obs.get("batch_fraction", 0.0) > 0.15:
        proposals.append({"manager":"Slurm/Ray/Kueue", "action":"batch
    ↪ _admission", "target":obs.get("batch_fraction", 0.0), "direction
    ↪ ":1})
    return proposals

# --- source line 22228: _mom_conflict_count
def _mom_conflict_count(proposals: List[Dict[str, Any]]) -> Tuple[int,
    ↪  int]:
    conflicts = 0
    duplicate_alerts = 0
    node_dirs = [p["direction"] for p in proposals if p["action"] in (
    ↪ "nodes", "terraform_plan")]
    replica_dirs = [p["direction"] for p in proposals if p["action"] =
    ↪ = "replicas"]
    rollout_dirs = [p["direction"] for p in proposals if p["action"] i
    ↪ n ("rollout", "rollback")]
    if node_dirs and min(node_dirs) < 0 < max(node_dirs):
        conflicts += 1
    if replica_dirs and min(replica_dirs) < 0 < max(replica_dirs):
        conflicts += 1
    if rollout_dirs and min(rollout_dirs) < 0 < max(rollout_dirs):
        conflicts += 1
    has_scale_up = any(p["direction"] > 0 and p["action"] in ("nodes",
    ↪  "terraform_plan", "replicas", "rollout") for p in proposals)
    has_cap = any(p["action"] == "power_cap" for p in proposals)
    has_deny = any(p["action"] == "deny_change" for p in proposals)
    if has_scale_up and has_cap:
        conflicts += 1
    if has_scale_up and has_deny:
        conflicts += 1
    alerts = [p for p in proposals if p["action"] == "alert"]
    if len(alerts) > 1:
        duplicate_alerts = len(alerts) - 1
        conflicts += 1
    return int(conflicts), int(duplicate_alerts)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

omnicompass/storage.py

57 lines.

```
"""The engine's composite storage: the ledger that closes the circle.

Ported exactly from the engine source (composite_practical_lyapunov_va
    ↪ lue and its bath matrix, weights and S rest point,
docs/handoff/mathematics/omni_compass_engine_source_c527df2d.py); test
    ↪ s/test_core_parity.py checks it against that

source on 5,000 random states. The frozen engine (omnicompass/core.py)
    ↪  is not touched.
"""
from __future__ import annotations

import math

from typing import Dict, Tuple

from .core import EPS, Params, State, phi


def stable_S(p: Params) -> float:

    """S*, the stable rest of the axle: the root of delta - alpha_s S
    ↪ - (3/4) beta_s S^2 = 0 where the flow bends back."""
    a, b, c = 0.75 * p.beta_s, p.alpha_s, -p.delta
    if abs(a) <= EPS:
        return p.delta / max(p.alpha_s, EPS)
    disc = max(0.0, b * b - 4.0 * a * c)

    for r in ((-b + math.sqrt(disc)) / (2.0 * a), (-b - math.sqrt(disc
    ↪ )) / (2.0 * a)):
        if -p.alpha_s - 1.5 * p.beta_s * r < 0.0:
            return r
    raise RuntimeError("no stable S rest point")

def bath_P(p: Params) -> Tuple[float, float, float]:
    """(p11, p12, p22) of the positive-definite P solving A_B^T P + P
    ↪ A_B = -I for the bath (7)."""
    w = max(abs(p.omega_B), EPS); damp = max(w / max(abs(p.Q_B), EPS),
    ↪  EPS)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    p12 = 1.0 / (2.0 * w * w); p22 = (p12 + 0.5) / damp; p11 = damp *
    ↪ p12 + w * w * p22
    return p11, p12, p22


def composite_weights(p: Params) -> Dict[str, float]:

    alpha_s, beta_s = max(p.alpha_s, EPS), max(p.beta_s, EPS)
    p11, p12, p22 = bath_P(p)
    g = p.gamma_c * p.delta
    pg = (p12 * g, p22 * g)
    m_floor = alpha_s / 2.0
    return {"a_U": 1.0, "b_W": 1.0 / (2.0 * max(p.mu, EPS)), "c_E": 1.

    ↪ 0 / max(p.alpha_E, EPS),
            "w_I": 1.0 / max(p.lambda_I, EPS), "w_S": (pg[0] ** 2 + pg
    ↪ [1] ** 2 + 0.25) / (m_floor * m_floor),
            "d_B": 1.0, "S_floor": -alpha_s / (3.0 * beta_s)}

def composite_V(x: State, p: Params, sigma: int = 1) -> Dict[str, floa
    ↪ t]:
    """The composite storage of the whole engine, the ledger that clos
    ↪ es the circle:
    V = a_U (U - sigma)^2 / 2 + b_W W(U) + c_E E^2 / 2 + w_S (Phi(S) -
    ↪  Phi(S*)) + w_I I_U^2 / 2 + d_B z^T P z / 2,

    z = (B - B*, B_dot), B* = gamma_c delta S* / omega_B^2, W(U) = mu
    ↪ (U^2 - 1)^2 / 4."""
    sig = 1.0 if sigma >= 0 else -1.0
    w = composite_weights(p); s_star = stable_S(p)
    b_star = p.gamma_c * p.delta / max(abs(p.omega_B), EPS) ** 2 * s_s
    ↪ tar

    p11, p12, p22 = bath_P(p)
    z0, z1 = x.B - b_star, x.B_dot
    parts = {"V_U": 0.5 * w["a_U"] * (x.U - sig) ** 2, "V_W": w["b_W"]
    ↪  * 0.25 * p.mu * (x.U * x.U - 1.0) ** 2,
             "V_E": 0.5 * w["c_E"] * x.E ** 2, "V_S": w["w_S"] * (phi(
    ↪ x.S, p) - phi(s_star, p)),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            "V_I": 0.5 * w["w_I"] * x.I_U ** 2, "V_B": 0.5 * w["d_B"]
    ↪  * (p11 * z0 * z0 + 2 * p12 * z0 * z1 + p22 * z1 * z1)}
    return {"V": sum(parts.values()), **parts, "S_star": s_star, "B_st
    ↪ ar": b_star}
```

omnicompass/verdict.py

190 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The verdict: Omni-Compass moves a knob only where it measures that
    ↪ the muscle loses nothing by it.

Omni-Compass sits on top of a muscle that already works (a card's firm

    ↪ ware, an autoscaler, a chiller's loop). It does not
replace that muscle, and it has no reason to move the muscle's knob un
    ↪ less moving it costs the muscle nothing. The
verdict is how the brain finds that out, on the muscle itself, before
    ↪ it acts and again from time to time:

  steps     the knob's settings from native outward, in whole steps (s
    ↪ tep 0 is native: the muscle as it runs alone)
  cost      what each setting costs the muscle's own work, measured pe
    ↪ r piece of work (a card: the milliseconds it spends
            on one request, the wait in the queue left out, so more tr
    ↪ affic is never mistaken for a slower card)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  probe     while the service is calm, a paired trial: first the knob
    ↪ at native until min_samples pieces of work are
            measured (the reference, fresh, under the same traffic), t
    ↪ hen at one step past the deepest step already
            allowed until min_samples more are measured
  judge     the trial step's median cost against the reference's: no h

    ↪ igher (within the measurement's resolution,
            tolerance) and the step is allowed; higher and it is refus
    ↪ ed, the knob goes back, and that step is not tried
            again until recheck decisions have passed (the work may ha
    ↪ ve changed). A trial that sees the service leave
            calm is abandoned, and the knob goes back at once

  allowed   the compass may move the knob only between native and the
    ↪ deepest allowed step; where no step is allowed, the
            verdict is "left native" and the knob is never moved


  stepwise  for a knob that is slow to move back (a machine given back
    ↪  takes minutes to return), incremental=True runs

            the reference at the deepest step already allowed instead
    ↪ of at native, and judges the trial step against
            both that reference and the cost first measured at native,
    ↪  so steps can never add up past the allowance

The verdict never makes the knob more aggressive than the law: it only

    ↪  narrows where the law may go. Every probe and
every judgement is returned to the caller for the audit.


  in words  (Omni v7, judge="interval": the reports' own words, GAIN,
    ↪ EVEN and LOSS, as the code that steers the knob,
            docs/omni_v5/NEXT_VERSION_PLAN.md section 1) the trial ste

    ↪ p is read exactly as a report reads a row: the 95%
            interval of its change in cost, on the logarithm of each p
    ↪ iece of work's cost (so a heavy tail does not
            decide it), d = mean ln c_trial − mean ln c_ref ± 1.96 se.
    ↪  The interval wholly above zero is a LOSS: the step
            is refused and undone, whatever the allowance says. Wholly
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  below zero is a GAIN, and across zero is EVEN.
           While the interval is wider than the allowance (its half-w
    ↪ idth over τ = ln(1 + tolerance)) the trial measures
           on, up to three times min_samples. A GAIN or an EVEN step
    ↪ is allowed only if both estimates of its change
           are within the allowance: the median (the guard of the eng

    ↪ ines before v7, kept) and the mean of the log
           costs, d ≤ τ. A stepwise step is read, the same way, again
    ↪ st the costs first measured at native. On noisy
           work this refuses a step that truly costs 3% more against
    ↪ a 2% allowance about a quarter less often than the
           medians alone allowed it, and one that costs 5% more about

    ↪  half as often, while a free step is kept almost
           as often (tests/test_verdict_interval.py). judge="median"
    ↪ keeps the engines before v7 (the medians alone).
"""
from __future__ import annotations

import math

Z95 = 1.96                       # the two-sided 95% interval every re
    ↪ port reads (tools/readings.py)

def median(xs):
    s = sorted(xs)
    n = len(s)
    return None if n == 0 else (s[n // 2] if n % 2 else 0.5 * (s[n //
    ↪ 2 - 1] + s[n // 2]))

def log_stats(xs):
    """(mean, variance, n) of the logarithms of the positive costs; th
    ↪ e variance is infinite with fewer than two."""
    ls = [math.log(x) for x in xs if x is not None and x > 0]
    n = len(ls)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    if n == 0:
        return None
    m = sum(ls) / n
    var = sum((x - m) ** 2 for x in ls) / (n - 1) if n > 1 else math.i
    ↪ nf
    return m, var, n

def change_interval(ref, got, z=Z95):
    """The 95% interval of the change in log cost from ref to got (Wel
    ↪ ch's standard error), or None if either is empty."""
    a, b = log_stats(ref), log_stats(got)

    if a is None or b is None:
        return None
    d = b[0] - a[0]
    se = math.sqrt(a[1] / a[2] + b[1] / b[2]) if math.isfinite(a[1]) a
    ↪ nd math.isfinite(b[1]) else math.inf
    return d - z * se, d + z * se

class Verdict:
    def __init__(self, tolerance=0.005, min_samples=30, probe_every=12
    ↪ 0, recheck=1800, max_steps=60, max_trial=30,
                 incremental=False, judge="interval"):

        self.tol = tolerance
        self.judge = judge
        self.native_ref = None            # the costs measured at nati
    ↪ ve (incremental, judge="interval")
        self.min_n = min_samples
        self.probe_every = probe_every

        self.recheck = recheck
        self.max_steps = max_steps
        self.max_trial = max_trial        # decisions a trial phase ma
    ↪ y take before it is abandoned
        self.incremental = incremental
        self.native_cost = None           # the cost measured at nativ
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ e (incremental: the bound every step is held to)
        self.allowed = 0                  # deepest step allowed (0: n
    ↪ ative only)
        self.refused_until = {}           # step -> decision index bef
    ↪ ore which it is not tried again
        self.phase = None                 # None, "ref" (knob at nativ

    ↪ e) or "trial" (knob at the trial step)
        self.trial = None
        self.ref, self.got = [], []
        self.phase_t = 0
        self.t = 0
        self.last_probe = -10 ** 9

    @property
    def state(self):
        return "left native" if self.allowed == 0 else "acting"

    def observe(self, costs):

        """Costs (one per piece of work) measured since the last decis
    ↪ ion, under the step tick() last returned."""
        if self.phase == "ref":
            self.ref.extend(costs)
        elif self.phase == "trial":
            self.got.extend(costs)

    def _end(self):
        self.phase, self.trial, self.ref, self.got = None, None, [], [
    ↪ ]

    def tick(self, calm):

        """One decision. calm: the service is inside its compass and n
    ↪ othing waits (a trial is never run under stress).
        Returns (the step the knob must stand at during a trial, or th
    ↪ e deepest step the law may use; is_trial; event).
        The event, if any, is for the audit."""
        self.t += 1
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        event = None
        if self.phase is not None and (not calm or self.t - self.phase
    ↪ _t > self.max_trial):
            event = {"verdict": "trial abandoned (service not calm)" i
    ↪ f not calm else "trial abandoned (too little work)",
                     "step": self.trial}

            self._end()
        elif self.phase == "ref" and len(self.ref) >= self.min_n:
            self.phase, self.phase_t = "trial", self.t
        elif self.phase == "trial" and len(self.got) >= self.min_n:
            m0, mk = median(self.ref), median(self.got)
            if self.incremental and self.allowed == 0:

                self.native_cost = m0
                self.native_ref = list(self.ref)
            bound = m0 if self.native_cost is None else min(m0, self.n
    ↪ ative_cost)
            within = mk <= bound * (1.0 + self.tol)
            if self.judge == "interval":

                reading, ivs, wide, d_max = self._reading()
                if reading != "LOSS" and wide and len(self.got) < 3 *
    ↪ self.min_n:
                    return self._stand()                          # the
    ↪  evidence is wider than the allowance: it measures on
                if reading != "LOSS" and within and d_max <= math.log(

    ↪ 1.0 + self.tol):
                    self.allowed = self.trial
                    event = {"verdict": "step allowed", "step": self.t
    ↪ rial, "cost_native": m0, "cost_step": mk,
                             "reading": reading, "interval_ln": ivs}
                else:

                    self.refused_until[self.trial] = self.t + self.rec
    ↪ heck
                    event = {"verdict": "step refused: the muscle is s
    ↪ lower there", "step": self.trial,
                             "cost_native": m0, "cost_step": mk,
                             "reading": "LOSS" if reading == "LOSS" el
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ se "past the allowance", "interval_ln": ivs}
            elif within:
                self.allowed = self.trial
                event = {"verdict": "step allowed", "step": self.trial
    ↪ , "cost_native": m0, "cost_step": mk}
            else:

                self.refused_until[self.trial] = self.t + self.recheck
                event = {"verdict": "step refused: the muscle is slowe
    ↪ r there", "step": self.trial,
                         "cost_native": m0, "cost_step": mk}
            self._end()
        elif (self.phase is None and calm and self.t - self.last_probe

    ↪  >= self.probe_every
              and self.allowed < self.max_steps and self.refused_until
    ↪ .get(self.allowed + 1, -1) <= self.t):
            self.phase, self.trial, self.phase_t, self.last_probe = "r
    ↪ ef", self.allowed + 1, self.t, self.t
            self.ref, self.got = [], []

            event = {"verdict": "trial", "step": self.trial}
        if self.phase == "ref":
            return (self.allowed if self.incremental else 0), True, ev
    ↪ ent
        if self.phase == "trial":
            return self.trial, True, event

        return self.allowed, False, event


    def _stand(self):
        """The knob stays at the trial step for another decision (the
    ↪ trial measures on)."""
        return self.trial, True, None

    def _reading(self):
        """The trial's reading in the reports' words (tools/readings.p
    ↪ y: a 95% interval wholly on one side of zero is a
        GAIN or a LOSS, across zero is EVEN), against the reference an
    ↪ d, stepwise, against native: LOSS if any interval
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        is wholly above zero, GAIN if every interval is wholly below i
    ↪ t, else EVEN. Returns the reading, the intervals
        (for the audit), whether any interval is wider than the allowa
    ↪ nce (half-width over τ) and the largest estimate d."""
        tau = math.log(1.0 + self.tol)
        ivs = [change_interval(self.ref, self.got)]

        if self.incremental and self.native_ref:
            ivs.append(change_interval(self.native_ref, self.got))
        ivs = [iv for iv in ivs if iv is not None]
        if not ivs:
            return "EVEN", [], True, math.inf
        if any(lo > 0.0 for lo, _ in ivs):

            reading = "LOSS"
        elif all(hi < 0.0 for _, hi in ivs):
            reading = "GAIN"
        else:
            reading = "EVEN"
        wide = any((hi - lo) / 2.0 > tau for lo, hi in ivs)

        d_max = max((lo + hi) / 2.0 for lo, hi in ivs)
        return reading, [[round(lo, 5), round(hi, 5)] for lo, hi in iv
    ↪ s], wide, d_max
```

realms/__init__.py

6 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The realm harness: the muscle tower (945 in Omni v2) on modelled pl
    ↪ ants, native against Omni on top (docs/REALMS.md)."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

realms/compass_arm.py

186 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The compass law on every realm muscle (omnicompass/compass_law.py):
    ↪  each plant's knob held by its own compass.

Each plant's service is read as one position in its compass (0 calm, 1

    ↪  the line): the worst of its queue or lateness, its
load above half, and, for a storage site, its draw on the grid connect
    ↪ ion above half. The last period in violation
reads as past the wall (fail up). The compass's force moves the knob:
    ↪ a positive force adds capacity, power, cooling or
protection, a negative force gives it back, each knob inside its own c

    ↪ over. At the kill every knob returns to native.

Knob by plant (the override key the plant already obeys, its native va
    ↪ lue, its cover, and which way is "more"):
  compute_pool   power: limit share 0.4-1; replicas-type: the HPA targ
    ↪ et held at native (loosening it past the

                 operator's own costs the service time, the same rule
    ↪ as the card's speed floor); machine pools: one
                 machine released while the force is clearly down and
    ↪ the machines left cover the recent peak with
                 margin (RELEASE_MARGIN); admission: native
  thermal_zone   setpoint between the band's stress (colder, more cool
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ing) and calm ends; units: one released while the
                force is clearly down; power: native (a cooling cap m
    ↪ oves heat later, never away)
  energy_storage reserve between the band's ends (a lower reserve give
    ↪ s the battery to the site); power: native
  motion_axis    speed and effort: 0.4-1

  process_loop   setpoint from native toward the band's calm end; actu
    ↪ ator range 0.3-1; power 0.4-1
"""
from __future__ import annotations

from omnicompass.compass_law import Band, CompassLaw, clamp

UP, DOWN, RELEASE = 0.10, 0.02, -0.2
RELEASE_MARGIN = 0.3     # a machine goes back only when the rest cove
    ↪ rs the recent peak at 0.3 of the plant's own release level
# 0.3: the largest margin at which no node pool is later than native (
    ↪ results/realms/RELEASE_MARGIN_SWEEP.md, the

# per-muscle sweep of 2026-10-05: 0.6 saved 2.0% energy with 32 of 42
    ↪ pools later, 0.4 left 4 later, 0.3 none). A machine
# boots in minutes and a burst that comes in the meantime is served la
    ↪ te, so speed first holds the machines (the same
# rule as the verdict on real Kubernetes: a machine goes back only whe
    ↪ re it costs no speed)

def position(plant) -> float:
    if plant.vhist and plant.vhist[-1]:
        return 1.0
    if plant.template == "thermal_zone":                      # a zon

    ↪ e's service is its temperature against its limit
        P = plant.P
        return (plant.T - min(P["stress"], P["calm"])) / (P["t_limit"]
    ↪  - min(P["stress"], P["calm"]))
    o = plant.observe()
    p = max(o["queue_ratio"], (o["load_ratio"] - 0.5) / 0.5)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    if plant.template == "energy_storage":
        p = max(p, (o["power_stress"] - 0.5) / 0.5)
    return p


def release_safe(plant) -> bool:
    """A discrete unit goes back only when what is left covers the rec
    ↪ ent peak (the plant's own release window), with
    RELEASE_MARGIN of headroom on a machine pool: a machine boots in m
    ↪ inutes, so a burst that arrives after a release
    is served late until it is back."""
    P = plant.P
    if plant.template == "compute_pool":
        from .plants import RELEASE_WINDOW, RELEASE_FRAC
        n = plant.n
        return (n > P["n_min"] and not plant.pending and plant.Q <= 0.
    ↪ 0
                and len(plant.ahist) == RELEASE_WINDOW * P["startup_st
    ↪ eps"]
                and max(plant.ahist) / ((n - 1) * plant.mu(plant.cap))
    ↪  <= RELEASE_FRAC * 0.95 * RELEASE_MARGIN)
    u = plant.units_on
    return u > 1 and plant.T <= plant.setpoint() and plant.qc_cmd_avg
    ↪ / ((u - 1) * P["q_unit_w"]) <= 0.8
def capping_saves(plant) -> bool:
    """Whether a lower power cap saves energy on this pool at all (rac
    ↪ e to idle, MECHANISM_OF_ACTION 9.6).
    With throughput mu(c) ~ c^eps at power cap c and the autoscaler ho
    ↪ lding utilisation near its target u*, the energy
    per unit of work is (p_idle / u* + p_dyn c) / mu(c). Its slope at
    ↪ c = 1 is positive (a lower cap saves) only if
    eps < p_dyn / (p_idle / u* + p_dyn). Where idle power dominates (a
    ↪  quantum computer's cryostat, a network switch),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    running slower keeps the machines on longer and costs more than it
    ↪  saves: the cap is left native."""
    import math
    P = plant.P
    eps = math.log(plant.mu(1.0) / plant.mu(0.99)) / math.log(1.0 / 0.
    ↪ 99)   # the machine's own speed curve at full power

    u = P.get("target", 0.7)
    return eps < P["p_dyn"] / (P["p_idle"] / u + P["p_dyn"])


def effort_cap_saves(plant) -> bool:
    """Whether a lower effort cap saves energy on this axis at all (ME

    ↪ CHANISM_OF_ACTION 9.6).

    A cap on effort lowers the copper loss of a full-acceleration move
    ↪ , (J a_max / kt)^2 R, and stretches the move, during
    which the axis keeps drawing its idle power and turning against vi
    ↪ scous friction, p_idle + b v_max^2. It pays only

    where the first exceeds the second (a reaction wheel); elsewhere (
    ↪ traction, a flight axis, a robot joint) a slower
    move costs more than the current it saves, and the cap is left nat
    ↪ ive."""
    P = plant.P
    copper = (P["J"] * P["a_max"] / P["kt"]) ** 2 * P["R"]

    standing = P["p_idle"] + P["b"] * P["v_max"] ** 2
    return copper > standing


SLACK = 0.5             # a speed knob is offered only where the axis
    ↪  at full speed is busy at most half the time (Omni v3)

def speed_slack(plant) -> bool:
    """Whether the axis has slack to spend on a slower, gentler move a
    ↪ t all (Omni v3, docs/REALMS_PREREGISTRATION.md).
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    The compass may ease a motion axis down to 0.4 of its speed, which
    ↪  stretches every move by up to 2.5 times. An axis
    whose duty at full speed, task rate x (move time + dwell), is alre
    ↪ ady above one half has no room for that: tasks
    arrive in bunches, and a stretched move pushes the next ones past
    ↪ their deadline (a train on its timetable, a lift at

    rush hour). There the speed knob is left native, as the robot benc
    ↪ hmark's paired trial leaves it
    (docs/ROBOTICS_PREREGISTRATION.md). Computed from the plant's own
    ↪ figures before any decision."""
    import math
    P = plant.P

    v, a, D = P["v_max"], P["a_max"], P["D"]
    move = 2.0 * math.sqrt(D / a) if D < v * v / a else D / v + v / a
    return P["task_rate"] * (move + P["dwell"]) <= SLACK


def lever(plant, knob):

    """(override key, native value, low, high, sign): sign +1 when a h
    ↪ igher value is more capacity."""
    P, t = plant.P, plant.template
    if knob == "admission":
        return None
    if t == "compute_pool":

        if knob == "power":
            return ("power", 1.0, 0.4, 1.0, 1) if capping_saves(plant)
    ↪  else None
        if P.get("ca"):
            return ("release", None, 0, 0, 0)
        return None                                             # the H

    ↪ PA target is held at the operator's own
    if t == "thermal_zone":
        if knob == "setpoint":
            return ("setpoint", P["t_set"], min(P["stress"], P["calm"]
    ↪ ), max(P["stress"], P["calm"]), -1)
        if knob == "capacity":
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            return ("release", None, 0, 0, 0)
        # the cooling power cap gives nothing back: the heat the zone
    ↪ makes must leave it either way, so a lower cap only
        # lets the temperature drift up while the PI command grows and
    ↪  stages more units (and their fans). Native
        # (MECHANISM_OF_ACTION 9.6)

        return None
    if t == "energy_storage":
        if knob == "setpoint" and P.get("backup"):
            return None                                          # a bac
    ↪ kup reserve (a UPS) is kept for an outage: native
        if knob == "setpoint":

            # the reserve may go down to the stress end (the battery g
    ↪ iven to the site under strain), never above the
            # operator's own: a kWh held back in a calm battery is a k
    ↪ Wh bought from the grid (MECHANISM_OF_ACTION 9.6)
            return ("setpoint", P["reserve"], min(P["stress"], P["rese
    ↪ rve"]), P["reserve"], -1)

        return None                                              # a bat
    ↪ tery's power limit gives nothing back: native
    if t == "motion_axis":
        if knob == "power":
            return ("power", 1.0, 0.4, 1.0, 1) if effort_cap_saves(pla
    ↪ nt) else None

        return ("capacity", 1.0, 0.4, 1.0, 1) if speed_slack(plant) el
    ↪ se None
    if t == "process_loop":
        if knob == "setpoint":
            lo, hi = min(P["sp"], P["calm"]), max(P["sp"], P["calm"])
            return ("setpoint", P["sp"], lo, hi, 1 if P["sp"] > P["cal

    ↪ m"] else -1)
        if knob == "power":
            return ("power", 1.0, 0.4, 1.0, 1)
        return ("capacity", 1.0, 0.3, 1.0, 1)
    return None
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def compass_apply(plant, knob, dt=1.0, tau=3.0):
    """One decision: the plant's compass reads its position and moves
    ↪ its knob. Returns the override written."""
    lv = lever(plant, knob)
    if lv is None:
        plant.override = {}
        return {}
    if not hasattr(plant, "_compass_law"):
        plant._compass_law = CompassLaw(Band(0.0, 1.0), dt=dt, tau=tau
    ↪ , kp=1.0, smooth=0.3)
        plant._compass_law.kd *= 3.0
    plant._compass_law_x = lv[1]
    b = plant._compass_law
    F = b.force(position(plant))
    key, native, lo, hi, sign = lv
    if key == "release":
        ok = F < RELEASE and b.p < b.band.center and release_safe(plan
    ↪ t)
        plant.override = {"release": 1.0} if ok else {}
        return plant.override
    span = hi - lo
    if key == "setpoint" and plant.template == "energy_storage":
        # a battery's reserve is spent only where it buys service: at
    ↪ the connection's wall the reserve drops to the
        # stress end at once; anywhere else the operator's own reserve
    ↪ , so no round trip is paid for nothing (9.6)
        P = plant.P
        excess = plant.imp - P["p_lim_w"]                       # what
    ↪  the connection is over its limit by, now
        coverable = 0.0 < excess <= P["p_batt_w"] * plant.override.get
    ↪ ("power", 1.0)
        x = lo if (b.p >= b.band.wall_high and (coverable or plant.imp
    ↪  >= 0.95 * P["p_lim_w"] and excess <= 0.0)) else native
        plant._compass_law_x = x
        plant.override = {} if abs(x - native) < 1e-9 else {key: x}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return plant.override
    if b.p >= b.band.wall_high:
        x = hi if sign > 0 else lo                                  # f
    ↪ ail up: full capacity at once
    else:
        g = UP if F > 0 else DOWN

        x = clamp(plant._compass_law_x + sign * g * F * span, lo, hi)
    plant._compass_law_x = x
    plant.override = {} if abs(x - native) < 1e-9 else {key: x}
    return plant.override
```

realms/compass_arm_v5.py

1309 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
# The Omni v5 compass law, in the engine (additive beside the frozen v
    ↪ 3 law in realms/compass_arm.py). It is the engine
# change that makes this tree omni-v5: two math-only guardrails (the e
    ↪ dge, so nothing riding its limit falls off; the

# centre/hole, so nothing drops into a pit it cannot climb out of), fr
    ↪ ee arms otherwise, every move proven to harm nothing
# native holds on the modelled organism. Run by the v5 arm in realms/h
    ↪ arness.py and tools/run_realms_v5.py. Evidence class S.
#
#   free arms     every knob may move both ways inside its physical co
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ver; the only exclusions are knobs whose own
#                 physics says moving them cannot lower energy (a cool
    ↪ ing cap, a battery's power cap, a backup reserve,
#                 admission, a power cap on a machine racing to idle):
    ↪  the brain's knowledge, not a guardrail
#   the edge      the compass's balance point is not a fixed middle: i

    ↪ t is 1 - cushion, where
#                   cushion = climb (how fast the service has climbed
    ↪ lately, per decision) x reaction (decisions the knob
#                             takes to act) + z x wobble (the service'
    ↪ s own spread lately)
#                 widened at once when the need rises, narrowed slowly

    ↪  when it falls; past 1 - climb x reaction the
#                 law fails up at once (the wall moves with the cushio
    ↪ n too)
#   the hole      nothing is eased into a pit it cannot climb out of:
    ↪ a cooled zone never warmer than its cooling can
#                 recover (the Lindley reach), a process loop's setpoi

    ↪ nt never closer to its band's edge than the loop's
#                 own largest swing toward that edge (the loop reach),
    ↪  a serving pool never capped below the largest jump
#                 in demand it has shown; and nothing permanent: a mac
    ↪ hine handed back to a cloud is the cluster
#                 autoscaler's own decision (it shrinks from wherever

    ↪ it is left, so an early hand-back would leave the
#                 pool a machine short of native for good)
from __future__ import annotations

import copy
import csv

import math
from pathlib import Path

from omnicompass.compass_law import Band, CompassLaw
from omnicompass.edge import Edge as _CoreEdge, physics_memory
from .compass_arm import (UP, DOWN, RELEASE, clamp, position, release_
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ safe, capping_saves, effort_cap_saves,
                          speed_slack)
from .plants import CATCH_UP


class Cfg:

    def __init__(self, z=3.09, window=20, react_mult=1.0, narrow=0.05,
    ↪  start=0.5, target_hi=0.95, spend_beyond=False,
                 memory=0.0, target_free=True, est=1, snap=True, learn
    ↪ _fall=0.0, fall_decay=0.9995, hybrid=False,
                 base_center=0.5, base_wall=0.95, headroom=False, phys
    ↪ ics_memory=False, motion_safe=False,

                 motion_q=0.999, burst_window=20, hole_guard=False, dr
    ↪ op_guard=False, jump0=1.0, band=False,
                 hole_floor=True, precool=False, storage_shave=False,
    ↪ power_cap=False, loop_reach=False,
                 ca_release=False, dial="save", edge_util=0.95, line_z
    ↪ =3.09, hold_window=None, hold_margin=0.05,

                 heat_head=0.8, strain=0.5):
        self.dial = dial                        # "max" (the default bra
    ↪ in: every muscle pushed to its own limit for the most
                                                # work, the energy that
    ↪ takes shown as power given) or "save" (the tune-down:
                                                # the least energy for n

    ↪ ative's work)
        self.edge_util = edge_util              # max: how full a machin
    ↪ e pool runs on the forecast before it calls for more
        self.line_z = line_z                    # max: the wobbles of ma
    ↪ rgin a battery keeps its site's draw under its line
        self.hold_window = hold_window          # max: decisions a batte

    ↪ ry wired by its power reads its line before it holds
                                                # anything (None: the wi
    ↪ ndow)
        self.hold_margin = hold_margin          # max: the share of its
    ↪ line a battery wired by its power keeps clear at least
        self.heat_head = heat_head              # max: an axis is pushed
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  only while its motor is under this share of its heat rise
        self.strain = strain                  # max: and its tracking
    ↪ error under this share of its line
        self.loop_reach = loop_reach          # a process loop's setpo
    ↪ int never closer to its band's calm-side edge than the
                                              # loop's own largest swi
    ↪ ng toward that edge leaves room for (loop_clamp)
        self.ca_release = ca_release          # a machine pool under a
    ↪  cluster autoscaler: Omni may hand a machine back
                                              # (off in the default: t
    ↪ he autoscaler shrinks from wherever it is left, so an
                                              # early hand-back is per
    ↪ manent; the reflex rule: nothing permanent)
        self.storage_shave = storage_shave    # battery peak-shaving (
    ↪ discharge to hold an import limit) costs round-trip
                                              # energy, so it is a ser
    ↪ vice<->energy tradeoff, off in the no-harm default;
                                              # a service/Max dial tur
    ↪ ns it on. Off: the storage setpoint stays native.
        self.power_cap = power_cap            # a power cap on a servi
    ↪ ng pool whose response line is longer than one decision
                                              # (lever_v5); an interac
    ↪ tive pool's cap stays native either way
        self.hole_floor = hole_floor          # the hole guard never b
    ↪ elow the earlier law's balance point (hybrid)
        self.precool = precool                # a cooled zone may also
    ↪  sit warm while its headroom can pull it back in time
        self.band = band                      # a process loop's margi
    ↪ n read against its band's edge, not its setpoint
        self.jump0 = jump0                    # the jump in demand the
    ↪  brain assumes a pool can make in one decision until it
                                              # has seen a larger one
    ↪ (1.0: demand can double)
        self.drop_guard = drop_guard          # a pool that can turn r
    ↪ equests away is never capped below the largest jump
                                              # in demand it has seen
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ (a request turned away is work lost for good)
        self.hole_guard = hole_guard          # a cooled zone is never
    ↪  warmer than it can be pulled back from before its
                                              # cooling could run out
    ↪ (the hole a saturated cooling plant cannot climb out of)
        self.motion_safe = motion_safe        # a motion axis's speed

    ↪ and effort never below what its own physics needs
        self.motion_q = motion_q              # the share of next-deci
    ↪ sion arrival counts the speed must cover (z = 3.09)
        self.burst_window = burst_window      # decisions of arrival h
    ↪ istory the rate estimate keeps its peak over
        self.z, self.window, self.react_mult, self.narrow, self.start

    ↪ = z, window, react_mult, narrow, start
        self.memory = memory                  # 0: only the recent win
    ↪ dow; near 1: the worst climb ever seen, forgotten slowly
        self.target_free = target_free        # the autoscaler's targe
    ↪ t free both ways (False: held at the operator's, as v3)
        self.est = est                        # 1: level spread and th

    ↪ e steepest one-step climb x reaction; 2: the step-to-step
                                              # wobble and the largest
    ↪  rise seen within one reaction time
        self.snap = snap                      # at the wall: snap back
    ↪  to native (True) or climb back at the law's full force
        self.learn_fall = learn_fall          # > 0: a miss while Omni

    ↪  had given something back raises that plant's cushion floor
        self.fall_decay = fall_decay          # how slowly that floor
    ↪ is forgotten, per decision
        self.hybrid = hybrid                  # True: everything the e
    ↪ arlier law did stays (its balance point, its wall, its
                                              # fail-up), and the edge

    ↪  only ever adds: the balance point is the higher of the
                                              # earlier one and the ed
    ↪ ge, the wall the higher of the earlier one and the edge's
        self.base_center, self.base_wall = base_center, base_wall
        self.headroom = headroom              # a cooling zone's headr
    ↪ oom as a second gauge
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.physics_memory = physics_memory  # each plant remembers i
    ↪ ts risks for as long as its own physics carries them
        self.target_hi = target_hi            # a compute pool's utili
    ↪ zation may never be set past this (a queue at 1 explodes)
        self.spend_beyond = spend_beyond      # spend beyond native aw
    ↪ ay from the wall (the speed edge); False: the energy edge

def reaction_steps(plant, key=None) -> float:
    """Decisions the knob takes to act: the knob's own, not the plant'
    ↪ s (a power cap answers in one decision; a machine
    pool answers only once its machines have started)."""

    P, t = plant.P, plant.template
    dt = float(P.get("dt", P.get("dt_dec", 15.0)))
    if t == "compute_pool":
        if key == "power":
            return 1.0
        return max(1.0, float(P.get("startup_steps", 1)))

    if t == "process_loop":
        return max(1.0, (3.0 * P.get("tau", dt) + P.get("theta", 0.0))
    ↪  / dt)
    if t == "thermal_zone":
        # the cooling's own reaction: how long the spare cooling takes
    ↪  to pull the zone back across its band (the

        # passive time constant, hours, is how slowly it drifts withou
    ↪ t cooling, not how fast the loop answers)
        spare = max(P["units"] * P["q_unit_w"] - P["q_it_w"], 0.1 * P[
    ↪ "q_it_w"])
        return max(1.0, P["c_j_k"] * (P["t_limit"] - P["t_set"]) / spa
    ↪ re / dt)

    return 1.0


def lever_v5(plant, knob, cfg):
    """(override key, native, low, high, sign): sign +1 when a higher
    ↪ value is more capacity."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    P, t = plant.P, plant.template
    if knob == "admission":
        return None
    if t == "compute_pool":
        if knob == "power":
            # a pool whose response line is shorter than one decision
    ↪ (an interactive GPU or CPU, a radio, a switch) cannot
            # have a cap's one decision of slower service seen and und
    ↪ one inside its line, so its cap stays native (the
            # metered GPU, class P, is where an interactive cap is pro
    ↪ ven); a pool whose line is longer than a decision
            # (a batch queue, a training job, a terminal's moves) abso
    ↪ rbs it, held by the drop and latency floors
            ok = cfg.power_cap and capping_saves(plant) and P["slo_s"]
    ↪  >= P["dt"]
            return ("power", 1.0, 0.4, 1.0, 1) if ok else None
        if P.get("ca"):
            return ("release", None, 0, 0, 0) if cfg.ca_release else N
    ↪ one
        # the autoscaler's target, free both ways: lower is more machi
    ↪ nes, higher is fewer, never past target_hi
        if not cfg.target_free:
            return None
        return ("target", P["target"], 0.6 * P["target"], max(P["targe
    ↪ t"], cfg.target_hi), -1)
    if t == "thermal_zone":
        if knob == "setpoint":
            return ("setpoint", P["t_set"], min(P["stress"], P["calm"]
    ↪ ), max(P["stress"], P["calm"]), -1)
        if knob == "capacity":
            return ("release", None, 0, 0, 0)
        return None
    if t == "energy_storage":
        if knob == "setpoint" and not P.get("backup") and cfg.storage_
    ↪ shave:
            return ("setpoint", P["reserve"], min(P["stress"], P["rese
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ rve"]), P["reserve"], -1)
        return None
    if t == "motion_axis":
        if knob == "power":
            return ("power", 1.0, 0.4, 1.0, 1) if effort_cap_saves(pla
    ↪ nt) else None

        return ("capacity", 1.0, 0.4, 1.0, 1) if speed_slack(plant) el
    ↪ se None
    if t == "process_loop":
        if knob == "setpoint":
            lo, hi = min(P["sp"], P["calm"]), max(P["sp"], P["calm"])
            return ("setpoint", P["sp"], lo, hi, 1 if P["sp"] > P["cal

    ↪ m"] else -1)
        if knob == "power":
            return ("power", 1.0, 0.4, 1.0, 1)
        return ("capacity", 1.0, 0.3, 1.0, 1)
    return None

def memory_horizon(plant) -> float:
    """Decisions a plant carries a risk: its own slowest physics (a ro
    ↪ om's heat capacity over its loss to outside, a
    process loop's three time constants, a machine pool's start)."""
    P, t = plant.P, plant.template

    dt = float(P.get("dt", P.get("dt_dec", 15.0)))
    if t == "thermal_zone":
        return 3.0 * P["c_j_k"] / P["ua"] / dt
    if t == "process_loop":
        return (3.0 * P.get("tau", dt) + P.get("theta", 0.0)) / dt
    if t == "compute_pool":

        return float(P.get("startup_steps", 1))
    return 1.0


class Edge(_CoreEdge):
    """The v5 edge (omnicompass/edge.py) for one plant's knob: the kno
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ b's own reaction, and, with physics memory, its
    risks kept as long as the plant's own slowest physics carries them
    ↪ ."""

    def __init__(self, plant, cfg, key=None):
        mem = cfg.memory

        if cfg.physics_memory:
            mem = physics_memory(memory_horizon(plant), cfg.window)
        super().__init__(reaction_steps(plant, key) * cfg.react_mult,
    ↪ z=cfg.z, window=cfg.window, narrow=cfg.narrow,
                         start=cfg.start, memory=mem, fall_decay=cfg.f
    ↪ all_decay, est=cfg.est)

        self.cfg = cfg


def deadline_share(plant) -> float:
    """A motion axis's lateness ahead: the oldest waiting task's wait
    ↪ plus the time to clear the whole backlog at the

    axis's present speed, as a share of the deadline (0 when nothing w
    ↪ aits). It reads a late task before it is late."""
    w = getattr(plant, "waits", None)
    if not w:
        return 0.0
    P = plant.P

    clear = len(w) * (plant.move_time(plant.s) + P["dwell"])
    return (w[0] + clear) / P["deadline_s"]


def poisson_hi(mean: float, q: float) -> int:
    """The smallest count n with P(N <= n) >= q for a Poisson count of

    ↪  this mean."""
    if mean <= 0.0:
        return 0
    p = math.exp(-mean)
    c, n = p, 0
    while c < q and n < 100000:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        n += 1
        p *= mean / n
        c += p
    return n

def serve_time(plant, n: int, s: float) -> float:
    """Seconds to finish n tasks when the moves started within the nex
    ↪ t decision run at speed s and every later one at
    full speed (the brain's next decision can restore the speed only f
    ↪ or moves not yet started)."""
    if n <= 0:

        return 0.0
    P = plant.P
    cs = plant.move_time(s) + P["dwell"]
    c1 = plant.move_time(1.0) + P["dwell"]
    m = min(n, max(1, math.ceil(P["dt_dec"] / cs)))
    return m * cs + (n - m) * c1

def safe_speed(plant, cfg, lo: float) -> float:
    """The slowest speed a motion axis may be given at this decision,
    ↪ from its own physics:
      a move that would outlast one decision is never slowed (once sta

    ↪ rted its speed cannot be taken back, so the knob's
        reaction time is the whole move, and every task arriving meanw
    ↪ hile would wait behind it);
      a queue is never slowed (every task behind the move would finish
    ↪  later);
      the tasks waiting now and the most that can arrive in the next d

    ↪ ecision (the motion_q share of a Poisson count at the
        recent peak rate) are all finished inside the deadline even if
    ↪  the whole burst arrives at once;
      and the wake forecast over a whole deadline (the most that can a
    ↪ rrive in one deadline at the recent peak rate) is
        finished inside that deadline at the slowed speed, so the axis
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  always goes idle again and a delay is recovered
        before a later rush could make it permanent (an axis one task
    ↪ behind native in a rush stays behind it).
    1.0 is native (full speed): when work comes, the axis wakes straig
    ↪ ht to it."""
    P = plant.P

    dt = P["dt_dec"]
    hist = getattr(plant, "_v5_arr", None)
    if hist is None:
        hist = plant._v5_arr = []
    k = plant.k
    if k > 0:

        hist.append(plant.arrivals[k - 1])        # what the brain cou
    ↪ nted arriving in the last decision
        if len(hist) > cfg.burst_window:
            hist.pop(0)
    if plant.backlog > 1 or plant.move_time(1.0) + P["dwell"] > dt:
        return 1.0

    lam = max(plant.demand_rate, (max(hist) / dt) if hist else 0.0)
    burst = plant.backlog + poisson_hi(lam * dt, cfg.motion_q)
    w0 = plant.waits[0] if plant.waits else 0.0
    room = P["deadline_s"] - w0
    # the wake forecast over a whole deadline: the motion_q share of t
    ↪ he tasks that can arrive in one deadline at the recent

    # peak rate. A slowed axis must still finish all of them inside th
    ↪ at deadline, so it always goes idle again and any
    # delay is recovered before a later rush could make it permanent (
    ↪ a task one behind native in a rush stays behind)
    H = P["deadline_s"]
    n_h = poisson_hi(lam * H, cfg.motion_q)

    s = lo
    while s < 1.0:
        cycle = plant.move_time(s) + P["dwell"]
        if cycle <= dt and serve_time(plant, burst, s) <= room and n_h
    ↪  * cycle <= H:
            return s
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        s = min(1.0, s + 0.02)
    return 1.0


def effort_floor(plant) -> float:
    """The least effort a motion axis may be capped to: the torque its
    ↪  next full-speed move needs (inertia times the
    acceleration, the viscous drag at top speed, the standing load and
    ↪  the largest disturbance), as a share of its limit.
    Below it the axis cannot follow its own trajectory and falls behin
    ↪ d it."""
    P = plant.P
    need = P["J"] * P["a_max"] + P["b"] * P["v_max"] + abs(P["load_bia
    ↪ s"]) + P["dist"]
    return min(1.0, need / P["tau_max"])


class PoolTwin:
    """What the operator's own autoscaler would have had with no cap:
    ↪ the same arrivals the brain counts, the same rules
    (the HPA's tolerance, its scale-down window, the machines' start t
    ↪ ime). The brain knows the controller it sits on."""

    def __init__(self, P):
        self.n = int(P["n0"])
        self.pending = []
        self.Q = 0.0
        self.hist = []

    def step(self, P, k, lam):
        self.n += sum(1 for s in self.pending if s <= k)
        self.pending = [s for s in self.pending if s > k]
        dt, mu = P["dt"], P["mu"]
        A = lam * dt
        C = self.n * mu * dt
        adm = min(A, max(0.0, C + P["queue_limit_s"] * self.n * mu - s
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ elf.Q))
        served = min(self.Q + adm, C)
        self.Q += adm - served
        util = served / C if C > 0 else 1.0
        cur = self.n + len(self.pending)
        ratio = util / P["target"]

        rec = cur if abs(ratio - 1.0) <= 0.1 else math.ceil(self.n * r
    ↪ atio)
        self.hist = (self.hist + [rec])[-P["stab_steps"]:]
        want = rec if rec >= cur else min(cur, max(self.hist))
        want = int(clamp(want, P["n_min"], P["n_max"]))
        if want > cur:

            self.pending += [k + P["startup_steps"]] * min(want - cur,
    ↪  max(4, cur))
        elif want < cur:
            cut = cur - want
            while cut and self.pending:
                self.pending.pop()

                cut -= 1
            self.n = max(P["n_min"], self.n - cut)


    def machines_at(self, k):
        return self.n + sum(1 for s in self.pending if s <= k)

def drop_floor(plant, cfg) -> float:
    """The lowest power cap a request-serving pool may be given now. A
    ↪  pool with a bounded queue turns requests away once
    the queue is full, and a request turned away is work lost for good
    ↪ ; a burst that starts while the pool is capped finds

    less room than native would have had. So the capped pool must stil
    ↪ l serve, at once, what is queued plus the arrivals
    after the largest jump in demand this pool has shown (never less t
    ↪ han jump0, nor than the jump its operator's own target
    leaves room for, 1/target - 1), and nothing is capped while reques
    ↪ ts are queued or were turned away."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    P = plant.P
    hist = getattr(plant, "_v5_lam", None)
    if hist is None:
        hist = plant._v5_lam = []
        plant._v5_jump = max(cfg.jump0, 1.0 / P["target"] - 1.0)
        plant._v5_twin = PoolTwin(P) if not P.get("ca") else None

    k = plant.k
    twin = plant._v5_twin
    if k > 0:
        a = plant.lam[k - 1]
        if hist and hist[-1] > 0:
            plant._v5_jump = max(plant._v5_jump, a / hist[-1] - 1.0)

        hist.append(a)
        if len(hist) > cfg.window:
            hist.pop(0)
        if twin is not None:
            twin.step(P, k - 1, a)
    if plant.drop_share > 0.0 or not hist or plant.Q > (twin.Q if twin

    ↪  is not None else 0.0):
        return 1.0                                                  #
    ↪  turning requests away, or behind native: no cap
    # (1) no less serving capacity than native would have now: the cap
    ↪  spends only machines the autoscaler has added
    # beyond native's (it adds them because the cap raises the utilisa

    ↪ tion it sees)
    surplus = 1.0
    if twin is not None:
        n_arm = plant.n + sum(1 for s in plant.pending if s <= k)
        n_nat = twin.machines_at(k)
        surplus = (n_nat / n_arm) ** 2.5 if n_arm >= n_nat else 1.0

    # a cap acts until the next decision, so a burst that starts now m
    ↪ eets one decision of capped service: the queue it
    # leaves behind is at most the capacity the cap took away. It turn
    ↪ s requests away only if, on top of what native's
    # own queue would reach before the autoscaler's new machines start
    ↪  (startup_steps), it overfills the queue's bound
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    dt, n, S = P["dt"], plant.n, P["startup_steps"]
    C1 = n * P["mu"] * dt
    B1 = P["queue_limit_s"] * n * P["mu"]
    X1 = max(0.0, hist[-1] * (1.0 + plant._v5_jump) * dt - C1)
    room = B1 - plant.Q - S * X1                                        #
    ↪  what native's queue would leave free in the burst

    # (2) or a shortfall a burst cannot turn into requests turned away
    ↪ ; either one alone keeps the work
    if room <= 0.0:
        burst = 1.0
    elif room >= C1:
        burst = 0.0

    else:
        burst = (1.0 - room / C1) ** 2.5                                #
    ↪  mu(cap) = mu cap^0.4: C(cap) >= C1 - room
    return min(surplus, burst)

def latency_floor(plant, cfg) -> float:
    """The lowest power cap that keeps a serving pool's response time
    ↪ inside its line through a burst whenever native's
    would stay inside it (read after drop_floor, which keeps the pool'
    ↪ s arrival history and its largest jump). A cap acts
    until the next decision: if the burst (the latest arrivals after t

    ↪ he largest jump this pool has shown) outruns the
    capped capacity, the work the cap held back waits behind everythin
    ↪ g native itself would queue until its new machines
    start (startup_steps), and every request is served a little slower
    ↪ . At most, one capped decision leaves behind all the
    capacity it took away, whatever the burst. The cap is allowed only

    ↪  while that extra wait fits in the room native's own
    worst response time in the burst leaves under the line; where nati
    ↪ ve itself would be late, nothing is capped."""
    P = plant.P
    hist = getattr(plant, "_v5_lam", None)
    if not hist or plant.drop_share > 0.0:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return 1.0
    dt, n, S, slo = P["dt"], max(plant.n, 1), max(1, int(P["startup_st
    ↪ eps"])), P["slo_s"]
    mu1 = plant.mu(1.0)
    lam_b = hist[-1] * (1.0 + plant._v5_jump)
    grow = max(0.0, lam_b * dt - n * mu1 * dt)                      #

    ↪  native's own queue growth per decision in the burst
    room = slo - ((plant.Q + plant.H + grow * S) / (n * mu1) + 1.0 / m
    ↪ u1)
    if room <= 0.0:
        return 1.0
    c = 0.4

    while c < 1.0:
        mu_c = plant.mu(c)
        held = n * (mu1 - mu_c) * dt
    ↪ # the most one capped decision can leave behind:

    ↪  # all the capacity it took away (any burst)

        if held / (n * mu1) + (1.0 / mu_c - 1.0 / mu1) <= room:
            return c
        c = min(1.0, c + 0.02)
    return 1.0

# How far a wandering load runs over its line: the 99.9% quantile, ove
    ↪ r one hour of decisions, of the deepest excursion
# R = max(0, R - (k + x)) of a load whose spare capacity wanders as a
    ↪ standardized AR(phi) process x with mean k spreads
# (Lindley's recursion: the spare capacity pulls the excursion back, i
    ↪ ts shortfall pushes it on). In spreads x decisions.

# Rows phi = 0.8, 0.9, 0.95, 0.98; columns k = 0, 0.25, ..., 6. (Monte
    ↪  Carlo, 20,000 hours each: scratchpad/lindley_mc.py)
LINDLEY_PHI = (0.8, 0.9, 0.95, 0.98)
LINDLEY = (
    (152.708, 104.52, 70.88, 48.499, 34.735, 26.563, 20.498, 15.714, 1
    ↪ 1.983, 9.01, 6.777, 4.898, 3.411, 2.233, 1.426,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
     0.814, 0.432, 0.152, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0),
    (213.775, 159.008, 116.768, 83.079, 60.201, 46.878, 37.396, 29.04,
    ↪  22.051, 16.486, 12.974, 9.636, 6.317, 4.438,
     2.726, 1.381, 0.499, 0.157, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0),
    (289.729, 238.03, 190.297, 148.51, 112.981, 84.525, 66.894, 48.288
    ↪ , 36.794, 26.801, 17.795, 11.811, 7.975, 4.807,

     2.508, 1.017, 0.251, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0),
    (424.6, 365.52, 307.666, 254.623, 207.105, 162.118, 126.978, 97.33
    ↪ 1, 69.401, 51.264, 38.243, 24.412, 16.657, 9.051,
     3.737, 1.082, 0.082, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0),
)

def lindley_reach(phi: float, k: float) -> float:
    """The table read between its rows and columns (beyond its edges:
    ↪ the nearest row, and nothing past k = 6)."""
    k = max(0.0, k)
    if k >= 6.0:

        return 0.0
    j = int(k / 0.25)
    fk = k / 0.25 - j

    def row(r):
        return r[j] + (r[j + 1] - r[j]) * fk

    phi = clamp(phi, LINDLEY_PHI[0], LINDLEY_PHI[-1])
    for i in range(len(LINDLEY_PHI) - 1):
        if phi <= LINDLEY_PHI[i + 1]:
            f = (phi - LINDLEY_PHI[i]) / (LINDLEY_PHI[i + 1] - LINDLEY
    ↪ _PHI[i])

            return row(LINDLEY[i]) + (row(LINDLEY[i + 1]) - row(LINDLE
    ↪ Y[i])) * f
    return row(LINDLEY[-1])


def cooling_hole_ceiling(plant, cfg, native: float) -> float:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """The warmest setpoint a cooled zone may be given now, from its o
    ↪ wn physics: the hole is a cooling plant that runs
    out (the heat in exceeds everything its units can remove); then no
    ↪  setpoint can pull the zone down, and only the
    degrees the zone has in hand below its limit carry it through. So
    ↪ the zone may be held warmer than the operator's

    setpoint only by the degrees its worst plausible saturation would
    ↪ not need.


    The brain reads the heat the zone sheds each decision from its own
    ↪  energy balance (the cooling delivered plus what
    the room's mass stored) as the cooling's headroom h, the share of

    ↪ its installed capacity left, and keeps h's mean,
    spread and memory (lag-one correlation) over everything it has see
    ↪ n; the spread is never taken below what the
    step-to-step swing implies over the wander's correlation time. How
    ↪  far such a wander runs the room over its setpoint
    in an hour at 99.9% is the Lindley reach, in spreads x decisions;

    ↪ times the spread, Q / C and the decision gives the
    degrees. The ceiling leaves those degrees, plus the loop's own tra
    ↪ cking overshoot seen so far, below the limit.
    Nothing is raised until the brain has a window of readings."""
    P = plant.P
    Q = P["units"] * P["q_unit_w"] * plant.override.get("power", 1.0)

    t_prev = getattr(plant, "_v5_Tprev", plant.T)
    plant._v5_Tprev = plant.T
    q_heat = plant.qc_avg + P["c_j_k"] * (plant.T - t_prev) / P["dt"]
    h = 1.0 - q_heat / max(Q, 1e-9)
    st = getattr(plant, "_v5_hs", None)
    if st is None:

        st = plant._v5_hs = {"n": 0, "m": h, "v": 0.0, "dv": 0.0, "las
    ↪ t": h, "c": 0.0, "track": 0.1}
    st["n"] += 1
    n = st["n"]
    a = 1.0 / n                                                      #
    ↪ every reading kept: the whole memory
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    d = h - st["last"]
    dm = h - st["m"]
    st["m"] += a * dm
    st["v"] = (1.0 - a) * (st["v"] + a * dm * dm)
    st["c"] = (1.0 - a) * st["c"] + a * (h - st["m"]) * (st["last"] -
    ↪ st["m"])     # lag-one covariance

    st["dv"] = (1.0 - a) * st["dv"] + a * d * d
    st["last"] = h
    hh = st.setdefault("hh", [])                                    #
    ↪ the headroom's recent readings, for its trend
    hh.append(h)
    if len(hh) > cfg.window:

        hh.pop(0)
    if h > 0.0:
        st["track"] = max(st["track"], plant.T - plant.setpoint())  #
    ↪ the loop's own overshoot while it had headroom
    if len(hh) > 1:
        # the headroom read ahead: falling at its present rate (the st

    ↪ eeper of the fall over the window and over the
        # cooling's own answer time), would it run out before the cool
    ↪ ing could pull the zone back? Then the zone goes
        # into that hole at the operator's own temperature, never warm
    ↪ er: the setpoint is native until the fall stops
        react = reaction_steps(plant)

        r = max(1, min(len(hh) - 1, int(math.ceil(react))))
        fall = max(0.0, (hh[0] - hh[-1]) / (len(hh) - 1), (hh[-1 - r]
    ↪ - hh[-1]) / r)
        if h - fall * react <= 0.0:
            return native
    hi = max(P["stress"], P["calm"])

    # never behind what came before: the earlier law's own balance poi
    ↪ nt (the zone held at the middle of its band) stays
    # allowed from the first decision; only the degrees beyond it must
    ↪  be proven by the reach
    lo = min(P["stress"], P["calm"])
    floor = lo + cfg.base_center * (P["t_limit"] - lo) if (cfg.hybrid
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ and cfg.hole_floor) else native
    if n < cfg.window:
        return clamp(floor, native, hi)
    phi = clamp(st["c"] / st["v"], 0.0, 0.999) if st["v"] > 1e-12 else
    ↪  0.0
    tc = max(float(cfg.window), 1.0 / (1.0 - phi))                    #
    ↪  the wander's correlation time, in decisions
    sd = max(math.sqrt(st["v"]), math.sqrt(st["dv"]) * math.sqrt(tc /
    ↪ 2.0), 1e-6)
    reach = lindley_reach(1.0 - 1.0 / tc, st["m"] / sd)               #
    ↪  spreads x decisions
    rise = sd * Q / P["c_j_k"] * P["dt"] * reach                      #
    ↪  degrees the worst hour's saturation adds
    ceiling = max(P["t_limit"] - rise - st["track"], floor)
    if cfg.precool and h > 0.0:
        # or, while the cooling has headroom now: the degrees it can p
    ↪ ull back before that headroom could run out (it
        # falls by at most z step-to-step swings times the square root
    ↪  of the steps the pull-back takes), held only as
        # long as each decision proves it again; the zone is cooled ah
    ↪ ead of a surge instead of held back all hour
        fall = cfg.z * max(math.sqrt(st["dv"]), 1e-6)
        room = (h / fall) ** 2 - 1.0
        if room > 0.0:
            ceiling = max(ceiling, native + room * P["dt"] * h * Q / P
    ↪ ["c_j_k"] - st["track"])
    return clamp(ceiling, native, hi)


def cooling_headroom_position(plant) -> float:
    """A cooling zone's second gauge: how close its cooling is to runn
    ↪ ing flat out ((load ratio - 0.5) / 0.5). A room whose
    cooling has no spare capacity cannot be pulled back by any setpoin
    ↪ t, so its margin must already be there."""
    o = plant.observe()
    return (o["load_ratio"] - 0.5) / 0.5
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def v5_position(plant) -> float:
    """The service position the v5 law reads: the plant's own, and for
    ↪  a motion axis the deadline margin too, and for a
    cooling zone the cooling's own headroom too (every gauge the plant
    ↪  offers, the worst one decides)."""
    p = position(plant)
    if plant.template == "motion_axis":
        p = max(p, deadline_share(plant))
    elif plant.template == "thermal_zone" and getattr(plant, "_v5_head
    ↪ room", False):
        p = max(p, cooling_headroom_position(plant))
    return p


def band_position(plant) -> float:
    """A process loop's place in its own band: how far it strayed from
    ↪  its setpoint in the last decision plus how far
    that setpoint sits from the band's middle, in half-bands (1 is the
    ↪  band's edge). The plant's deviation reading is
    taken from wherever the setpoint is, so a setpoint eased toward th
    ↪ e band's calm end reads as calm while the margin
    to the edge shrinks; this is the margin itself."""
    P = plant.P
    return plant.dev + abs(plant.setpoint() - P["mid"]) / P["half"]


def loop_reach(plant, cfg, calm_low: bool):
    """How far this loop's disturbance pushes it off its setpoint towa
    ↪ rd the band's calm-side edge, in half-bands, from
    everything the brain has seen (the historian's low, or high, over
    ↪ each decision: a swing toward the band's middle
    cannot take the loop out, so it is not counted). The larger of the
    ↪  deepest such swing seen and its mean plus z
    spreads, the spread never below what the step-to-step swing implie
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ s over the swing's own correlation time (the reading
    the cooling hole guard uses). A loop slower than one decision is a
    ↪ lso read ahead: its swing now, carried on at its
    present climb (the steeper of the climb over the window and over t
    ↪ he loop's own answer time) for as long as the loop
    takes to answer once its setpoint goes back. None until the brain

    ↪ has a window of readings."""
    d = plant.dev_dn if calm_low else plant.dev_up
    st = getattr(plant, "_v5_ls", None)
    if st is None:
        st = plant._v5_ls = {"n": 0, "m": d, "v": 0.0, "dv": 0.0, "las
    ↪ t": d, "c": 0.0, "peak": 0.0, "h": []}

    st["n"] += 1
    n = st["n"]
    a = 1.0 / n                                                    #
    ↪ every reading kept: the whole memory
    dd = d - st["last"]
    dm = d - st["m"]

    st["m"] += a * dm
    st["v"] = (1.0 - a) * (st["v"] + a * dm * dm)
    st["c"] = (1.0 - a) * st["c"] + a * (d - st["m"]) * (st["last"] -
    ↪ st["m"])     # lag-one covariance
    st["dv"] = (1.0 - a) * st["dv"] + a * dd * dd
    st["last"] = d

    st["peak"] = max(st["peak"], d)
    h = st["h"]
    h.append(d)
    if len(h) > cfg.window:
        h.pop(0)
    if n < cfg.window:

        return None
    phi = clamp(st["c"] / st["v"], 0.0, 0.999) if st["v"] > 1e-12 else
    ↪  0.0
    tc = max(float(cfg.window), 1.0 / (1.0 - phi))                  #
    ↪  the swing's correlation time, in decisions
    sd = max(math.sqrt(st["v"]), math.sqrt(st["dv"]) * math.sqrt(tc /
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 2.0), 1e-9)
    reach = max(st["peak"], st["m"] + cfg.z * sd)
    P = plant.P
    answer = (P.get("tau", 0.0) + P.get("theta", 0.0)) / P["dt"]
    ↪  # decisions the loop takes to answer its setpoint
    if answer > 1.0:

        r = max(1, min(len(h) - 1, int(math.ceil(answer))))
        climb = max(0.0, (h[-1] - h[0]) / (len(h) - 1), (h[-1] - h[-1
    ↪ - r]) / r)
        reach = max(reach, d + climb * answer)
    return reach

def loop_clamp(plant, cfg, x: float, native: float) -> float:
    """The setpoint never sits closer to its band's calm-side edge tha
    ↪ n the loop's own reach leaves room for: at most
    (1 - reach) half-bands from the band's middle, and native once tha
    ↪ t room is gone. Before the brain has a window of

    readings the band reading alone holds the loop (the earlier law's
    ↪ own behaviour, as the hole guard allows)."""
    P = plant.P
    reach = loop_reach(plant, cfg, P["calm"] < P["mid"])
    if reach is None:
        return x

    room = (1.0 - reach) * P["half"]
    if room <= abs(native - P["mid"]):
        return native
    return clamp(x, P["mid"] - room, P["mid"] + room)

def raw_position(plant) -> float:
    """The service position without the last decision's violation flag
    ↪  (for the climb and wobble statistics)."""
    if plant.template == "motion_axis":
        o = plant.observe()
        return max(o["queue_ratio"], (o["load_ratio"] - 0.5) / 0.5, de
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ adline_share(plant))
    if plant.template == "thermal_zone":
        P = plant.P
        t = (plant.T - min(P["stress"], P["calm"])) / (P["t_limit"] -
    ↪ min(P["stress"], P["calm"]))
        return max(t, cooling_headroom_position(plant)) if getattr(pla
    ↪ nt, "_v5_headroom", False) else t
    o = plant.observe()
    p = max(o["queue_ratio"], (o["load_ratio"] - 0.5) / 0.5)
    if plant.template == "energy_storage":
        p = max(p, (o["power_stress"] - 0.5) / 0.5)
    # (a process loop's statistics stay on its deviation from its own
    ↪ setpoint: the cushion is for what the disturbance
    # does, while the setpoint's own offset toward the band's edge is
    ↪ the brain's known choice, read by the law itself)
    return p

# ---------------------------------------------------------------------
    ↪ ------------------------------------------------
# MAX, the work edge: the default brain (the founder's orders of 11 an
    ↪ d 12 October). Every muscle is pushed toward its
# own limit to do the most work, faster; never past its limit and neve
    ↪ r below native (native's own setting is always one
# of the brain's choices, so a muscle native already runs flat out sta
    ↪ ys native, wired and watched). The energy that
# takes is reported as power given, beside the work and the speed it b
    ↪ ought. One pedal: push for more, lift off for
# less, and lifting hands the setting back toward native.
#
#   compute pool   the machines the forecast needs are started before
    ↪ the rush lands: the recent peak arrivals widened
#                  by the largest rise this pool has shown within one
    ↪ machine start, plus the standing queue, at the edge
#                  utilisation. The HPA target is lowered just enough
    ↪ that the operator's own autoscaler starts them (a
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
#                   machine pool: a floor under its cluster autoscaler)
    ↪ . Never fewer machines than native would keep; the
#                   power cap and admission stay native (full clock, ev
    ↪ ery request admitted)
#   cooled zone     cooled ahead of the heat: the setpoint goes from th
    ↪ e operator's toward the band's cold end as the

#                   room nears its limit or its cooling nears flat out,
    ↪  both read ahead by the cooling's own answer time;
#                   never warmer than native
#   battery site    the charge is held for the line instead of spent on
    ↪  the first minutes of load, and only the draw
#                   that would cross the site's line (the forecast draw

    ↪  plus line_z of its step-to-step wobbles) is taken
#                   from it; a UPS lends only the charge above its outa
    ↪ ge floor (its band's stress end), never below it
#   motion axis     while tasks are waiting, its speed goes to the axis
    ↪ 's own peak (s_peak, realms/presets.py: the head the
#                   machine itself has above the everyday profile nativ

    ↪ e runs), never past it, and back to the everyday
#                   setting at once when the motor nears its heat limit
    ↪  or the tracking strains (an axis alone; inside a
#                   body it keeps its everyday speed, max_body_step); a
    ↪ n axis whose everyday setting is its limit (a
#                   wheel's saturation, a line speed, an overspeed gove

    ↪ rnor) and every effort (torque) limit stay native:
#                   native already runs them at their limit
#   process loop    native: the full actuator, native already runs it f
    ↪ lat out
def max_pool_want(plant, cfg) -> int:
    """The machines a pool needs when a machine started now is ready:

    ↪ the recent peak arrivals (what the brain counted,
    never the decision still to come) widened by the largest rise this
    ↪  pool has shown within one machine start (at
    first, the room its operator's own target leaves: 1/target - 1), p
    ↪ lus the standing queue, at the edge utilisation."""
    P = plant.P
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    k = plant.k
    S = max(1, int(P["startup_steps"]))
    st = getattr(plant, "_mx", None)
    if st is None:
        st = plant._mx = {"lam": [], "rise": max(0.0, 1.0 / P["target"
    ↪ ] - 1.0)}

    h = st["lam"]
    if k > 0:
        a = plant.lam[k - 1]
        if len(h) > 0:
            lo = min(h[-S:])
            if lo > 0.0:

                st["rise"] = max(st["rise"], a / lo - 1.0)
        h.append(a)
        if len(h) > max(cfg.window, S + 1):
            h.pop(0)
    line = getattr(plant, "B", 0.0) / (S * P["dt"])   # work waiting i
    ↪ n line: cleared within one machine start

    if not h and line <= 0.0:
        return int(P["n_min"])
    fore = max(h) * (1.0 + st["rise"]) if h else 0.0   # (nothing coun
    ↪ ted yet: the line alone)
    need = (fore + plant.Q / P["dt"] + line) / (plant.mu(1.0) * cfg.ed
    ↪ ge_util)

    return int(clamp(math.ceil(need - 1e-9), P["n_min"], P["n_max"]))


def max_cool(plant, cfg) -> float:
    """A cooled zone's setpoint for the most work: the operator's, mov
    ↪ ed toward the band's cold end as the room nears its

    limit or its cooling nears flat out. The cooling's load is read fr
    ↪ om the room's own energy balance (the cooling
    delivered plus what the room's mass stored) against its installed
    ↪ capacity, carried ahead at its present climb for the
    cooling's own answer time; heat that outruns the cooling is carrie
    ↪ d by the degrees the room already has in hand."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    P = plant.P
    native = P["t_set"]
    cold = min(P["stress"], P["calm"])
    Q = P["units"] * P["q_unit_w"]
    t_prev = getattr(plant, "_mx_T", plant.T)
    plant._mx_T = plant.T

    load = (plant.qc_avg + P["c_j_k"] * (plant.T - t_prev) / P["dt"])
    ↪ / max(Q, 1e-9)
    hist = getattr(plant, "_mx_q", None)
    if hist is None:
        hist = plant._mx_q = []
    hist.append(load)

    if len(hist) > cfg.window:
        hist.pop(0)
    react = reaction_steps(plant)
    climb = 0.0
    if len(hist) > 1:
        r = max(1, min(len(hist) - 1, int(math.ceil(react))))

        climb = max(0.0, (hist[-1] - hist[0]) / (len(hist) - 1), (hist
    ↪ [-1] - hist[-1 - r]) / r)
    ahead = load + climb * react
    room = (plant.T - cold) / max(P["t_limit"] - cold, 1e-9)
    risk = max(clamp((ahead - 0.8) / 0.2, 0.0, 1.0), clamp((room - 0.6
    ↪ ) / 0.3, 0.0, 1.0))

    return min(native, native - (native - cold) * risk)


def max_hold(plant, cfg, key):
    """A battery site's knob for the most work held inside its line: t
    ↪ he charge kept for the line, and only the draw

    that would cross the line taken from it. The draw is forecast from
    ↪  the brain's own readings: the last decision's net
    draw, plus its latest rise, plus line_z of its step-to-step wobble
    ↪ s. A UPS lends only the charge above its outage
    floor (its band's stress end); any other site, down to its band's
    ↪ stress end. A battery wired by its power holds its
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    charge while the line has room and gives native's full power once
↪ the line could need it (nothing locked: the
    discharge timed for the line)."""
    P = plant.P
    st = getattr(plant, "_mx_s", None)
    if st is None or plant.k <= 1 and st["n"] == 0:

        # the forecast starts at the site's first reading: before its
↪ first step a plant shows its initial values (no
        # draw at all), and the jump from them to the first reading is
↪  no climb of the line
        st = plant._mx_s = {"last": plant.net, "n": 0, "dv": 0.0, "ris
↪ e": 0.0}

        if plant.k < 1:
            st["last"] = None
    d = plant.net - st["last"] if st["last"] is not None else 0.0
    if st["last"] is not None and plant.k > 1:
        st["n"] += 1
        a = 1.0 / st["n"]

        st["dv"] = (1.0 - a) * st["dv"] + a * d * d
        st["rise"] = max(st["rise"], d)
    st["last"] = plant.net
    fore = plant.net + max(0.0, d) + cfg.line_z * math.sqrt(st["dv"])
    over = max(0.0, fore - P["p_lim_w"])                          # the
↪  draw that would cross the line this decision

    floor = P["stress"]
    if key == "power":
        # nothing locked: the battery's discharge timed for the line.
↪ While the line has room even after the largest
        # climb it has shown (and line_z of its wobbles, and a twentie
↪ th of the line), the charge is held: nothing is

        # spent, charging stays free; once the line could need it, the
↪  full power native gives. The charge native spends
        # early is still there when the line needs it
        win = cfg.window if cfg.hold_window is None else cfg.hold_wind
↪ ow
        if plant.net <= 0.0 or st["n"] < win:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            return {}                                                   #
    ↪  nothing to hold, or the line not yet read for a window
        room = max(cfg.line_z * math.sqrt(st["dv"]), st["rise"], cfg.h
    ↪ old_margin * P["p_lim_w"])
        return {} if fore + room >= P["p_lim_w"] else {"power": 0.0}
    if key == "setpoint":

        E, sq = P["e_wh"] * 3600.0, math.sqrt(P["eta_rt"])
        dt = P["dt"]
        # native plus: the operator's own reserve while nothing would
    ↪ cross the line (the site's own use of its
        # battery is native's), and below it, down to the floor, exact
    ↪ ly the draw that would cross

        r = clamp(plant.soc - over * dt / (E * sq), floor, P["reserve"
    ↪ ])
        return {} if abs(r - P["reserve"]) < 1e-12 else {"setpoint": r
    ↪ }
    # the ceiling the battery defends (the capacity knob): the line le
    ↪ ss the forecast's own margin

    cap = clamp(1.0 - (fore - plant.net) / P["p_lim_w"], 0.5, 1.0)
    return {"capacity": cap}


def max_units(plant, cfg):
    """A room's cooling units (its capacity knob, both ways): one more

    ↪  unit held on than its staging asks for while the
    room is at risk (its load read ahead, or its degrees in hand, as m
    ↪ ax_cool reads them); the staging's own otherwise."""
    P = plant.P
    native = P["t_set"]
    x = max_cool(plant, cfg)

    if x >= native - 1e-9 or plant.units_on >= P["units"]:
        return {}
    return {"units_min": float(plant.units_on + 1)}


def machines(pool) -> int:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """A pool's machines in service and starting."""
    return pool.n + len(pool.pending)


HEAT_HEAD, STRAIN = 0.8, 0.5     # an axis is pushed only while its mo
    ↪ tor is under 80% of its heat rise and its tracking

                                 # error under half its line (the glob
    ↪ al setting; a muscle's card may set its own)


def max_speed(plant, cfg):
    """An axis's speed for the most work: its own peak while tasks are

    ↪  waiting; None (the everyday setting, native) when
    it has no head above it, nothing waits, the motor is near its heat
    ↪  limit or the tracking strains."""
    P = plant.P
    peak = P.get("s_peak", 1.0)
    if peak <= 1.0 or plant.backlog <= 0:

        return None
    if plant.Tm > P["t_amb"] + cfg.heat_head * (P["t_lim"] - P["t_amb"
    ↪ ]) or plant.err_max > cfg.strain * P["e_max"]:
        return None
    return peak

def native_at_limit(template: str, knob: str) -> bool:
    """Whether native already runs this kind of knob at the top of its
    ↪  range, so the max has nothing above native to
    give it: every power limit at full (clock, torque, battery power,
    ↪ the site envelope), every admission gate open

    (nothing paced or turned away), a loop's actuator at its full rang
    ↪ e (an axis's speed is at its limit only where its
    machine has no peak above the everyday setting: the max then write
    ↪ s nothing)."""
    return knob in ("power", "admission") or (knob == "capacity" and t
    ↪ emplate in ("motion_axis", "process_loop"))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def max_ask(plant, knob, cfg, twin=None):
    """What a muscle asks for the most work this decision. A pool: the
    ↪  machines its forecast needs, never fewer than its
    twin (the brain's model of native: the same plant under its own au
    ↪ toscaler alone, on the same arrivals) runs now. A
    cooled zone at risk: a colder setpoint and the most its pull-down
    ↪ can add. None: the muscle asks nothing (it holds
    native, a donor's spare or a battery's own line)."""
    P, t = plant.P, plant.template
    if t == "compute_pool" and knob not in ("power", "admission"):
        base = machines(twin) if twin is not None else int(P["n_min"])
        want = max(max_pool_want(plant, cfg), base)
        return {"want": want, "base": base, "cur": machines(plant), "h
    ↪ eld": int(plant.override.get("floor", 0)),
                "unit_w": P["p_idle"], "line": "src"}
    if t == "thermal_zone" and knob == "setpoint":
        x = max_cool(plant, cfg)
        if x >= P["t_set"] - 1e-9:
            return None
        cop = plant.cop(x, plant.tout[min(plant.k, plant.steps - 1)])
        cost = max(0.0, P["units"] * P["q_unit_w"] - plant.qc_avg) / c
    ↪ op   # the most the pull-down can add
        return {"x": x, "cost": cost, "line": "zone"}
    if t == "motion_axis" and knob == "capacity":
        s = max_speed(plant, cfg)
        if s is None:
            return None
        # the power a faster profile can add, counted at its worst: th
    ↪ e axis's rated draw, going with the cube of the
        # speed scale (the torque of a faster acceleration, times the
    ↪ faster moves done each decision while tasks wait)
        return {"s": s, "cost": max(plant.rated_w, plant.power_w) * (s
    ↪  ** 3 - 1.0), "line": "axis"}
    return None
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# Every muscle its own card (the founder's question of 12 October, nig
    ↪ ht: does every muscle have its own tuning, maxed to
# its own benefit, instead of one global setting for a thousand muscle
    ↪ s?). A muscle's card is the brain's settings for

# that muscle alone (a pool's edge utilisation and window, a battery's
    ↪  line margin and window), found by an automatic
# search over every muscle on the development seeds and kept only wher
    ↪ e it beats the global setting beyond the noise on
# two separate sets of them and does no harm against native on any of
    ↪ their seeds under any load: never over its line more

# often, never less work, never its line cleared later (tools/tune_car
    ↪ ds.py; realms/muscle_cards_v5.csv). A muscle
# without a card runs the global setting; the tune-down never reads ca
    ↪ rds.
CARD_FILE = Path(__file__).with_name("muscle_cards_v5.csv")
CARD_KEYS = {"edge_util": float, "window": int, "line_z": float, "hold

    ↪ _window": int, "hold_margin": float,
             "heat_head": float, "strain": float}


def load_cards(path=CARD_FILE) -> dict:
    """{muscle_id: {setting: value}}: each muscle's own settings, an e

    ↪ mpty cell meaning the global one."""
    if not Path(path).exists():
        return {}
    out = {}
    with open(path, newline="") as f:
        for row in csv.DictReader(f):

            c = {k: cast(row[k]) for k, cast in CARD_KEYS.items() if r
    ↪ ow.get(k, "").strip()}
            if c:
                out[row["muscle_id"]] = c
    return out
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
CARDS = load_cards()


def card(plant, cfg):
    """The settings the max uses for this muscle: its own card over th
    ↪ e brain's (the same brain, the muscle's own numbers
    where it has them); the brain's own where it has none, and always
    ↪ under the tune-down."""
    own = getattr(plant, "_card", None)
    if not own or cfg.dial != "max":
        return cfg
    memo = getattr(plant, "_card_cfg", None)
    if memo is None or memo[0] is not cfg:
        c = copy.copy(cfg)
        for k, v in own.items():
            setattr(c, k, v)
        plant._card_cfg = memo = (cfg, c)
    return memo[1]


def body_card(plant, cfg, knob):
    """A muscle's card inside a body: its own, except that a battery w
    ↪ ired by its power keeps the body's margins on its
    line (its line_z and its hold margin never slimmer than the body's
    ↪ ): the line carries the whole body's swing, which
    the card, chosen for the battery alone, never saw. The body has th
    ↪ e last word on a line it shares."""
    c = card(plant, cfg)
    if c is cfg or knob != "power":
        return c
    memo = getattr(plant, "_body_card", None)
    if memo is None or memo[0] is not c:
        b = copy.copy(c)
        b.line_z = max(c.line_z, cfg.line_z)
        b.hold_margin = max(c.hold_margin, cfg.hold_margin)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        plant._body_card = memo = (c, b)
    return memo[1]


def max_apply(plant, knob, cfg, twin=None):
    """The max for a muscle alone (no body around it to share with): a
    ↪  pool's machines started before the rush and
    never fewer than its twin runs, a room cooled ahead of the heat, a
    ↪  battery's line clipped from its charge; every
    other knob native. The muscle's own card where it has one."""
    cfg = card(plant, cfg)
    P, t = plant.P, plant.template
    ov = {}
    a = max_ask(plant, knob, cfg, twin)
    if a is not None and t == "compute_pool":
        ov = {"floor": float(a["want"])} if a["want"] > P["n_min"] els
    ↪ e {}
        plant._mx_guard = a["want"] <= a["base"]        # the floor ad
    ↪ ds nothing beyond the twin's machines
        keep = max(a["want"], a["base"])
        if twin is not None and a["cur"] > keep:
            ov["cap"] = float(keep)       # the pedal lifted: machines
    ↪  the max added and no longer needs go back at once
                                          # (the autoscaler's own scal
    ↪ e-down holds them for its window), never below its twin
    elif a is not None and t == "thermal_zone":
        ov = {"setpoint": a["x"]}
    elif a is not None and t == "motion_axis":
        ov = {"capacity": a["s"]}
    elif t == "energy_storage" and knob in ("setpoint", "capacity", "p
    ↪ ower"):
        ov = max_hold(plant, cfg, knob)
    elif t == "thermal_zone" and knob == "capacity":
        ov = max_units(plant, cfg)
    plant.override = ov
    return ov
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class Bone:
    """The body's skeleton for the max: the lines every muscle stands
    ↪ on. A battery site's grid line and a room's
    cooling are loaded by the whole body (the body's power swing is lo

    ↪ ad on every site, the machines' power is heat in
    every room), so no muscle may take power the bone cannot carry: wh
    ↪ at the max adds is granted only out of the room the
    most loaded line has left, read one decision ahead (the line's lat
    ↪ est reading plus line_z of its own step-to-step
    wobbles; a battery that clips its own line counts the power it can

    ↪  still clip). With no room, the machines this
    brain added go back at once, never below what the pool's twin runs
    ↪  (the brain's model of native: the same pool under
    its own autoscaler alone, on the same arrivals), so a pool never h
    ↪ as fewer machines than native and the lines never
    carry more of this brain's power than they have room for. Nothing

    ↪ is taken from one muscle to give to another: the
    max never shaves (the tune-down does that, on the dial).

    A battery's charge counts as room on its line only while it lasts:
    ↪  a site whose battery covers its draw now, but
    whose charge above its floor runs out before power granted now cou

    ↪ ld be handed back, has as room only its line less
    its whole draw (the line a decision later carries all of it). And
    ↪ every room wired by its setpoint has a twin too:
    the same room under its operator's setpoint, warmed by native's he
    ↪ at (each pool's twin in place of the pool, every
    other source as it is), so the brain knows the temperature native

    ↪ would leave it at and never leaves it warmer."""

    def __init__(self, body, cfg):
        self.body, self.cfg = body, cfg
        self.st = {}
        self.twins = {}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.room_twins = {}
        from .harness import make_plant, scale_load_plant
        from .plants import pack
        for i, (p, r) in enumerate(zip(body.plants, body.rows)):
            pool = p.template == "compute_pool" and r["knob"] not in (
    ↪ "power", "admission")

            if pool or p.template == "thermal_zone":
    ↪ # every room: the brain's sense of native
                tw = pack(make_plant(r, body.seed, organism=True))
                if getattr(body, "load", None) is not None:
                    scale_load_plant(tw, body.load)
                (self.twins if pool else self.room_twins)[i] = tw

        zi = [i for i, p in enumerate(body.plants) if p.template == "t
    ↪ hermal_zone"]
        self._heat_of = {i: kh for i, kh in zip(zi, body.k_heat)}
    ↪   # each room's heat per W of the body's sources

    def advance_twin(self):

        """Step every twin one decision (each decides on the same arri
    ↪ vals native sees). First, the power the max's own
        machines added over their twins in the decision just metered:
    ↪ the lines' readings carry it, and it is this brain's
        step, not the line's own wobble, so the forecast is kept on th
    ↪ e line without it. Each room's twin is warmed by

        native's sources over the same decision: each pool's twin in p
    ↪ lace of the pool, every other source as it is."""
        b = self.body
        self.extra_w = sum(max(0, machines(b.plants[i]) - machines(tw)
    ↪ ) * b.plants[i].P["p_idle"]
                           for i, tw in self.twins.items())

        # native's source power: the body's own reading with each pool
    ↪ 's power replaced by its twin's (before the first
        # step the body reads its sources' nominal power, and so does
    ↪ native)
        native_src = b.src_w + sum(tw.power_w - b.plants[i].power_w fo
    ↪ r i, tw in self.twins.items())
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        for tw in self.twins.values():
            tw.step()
        n_z = max(1, len(b.zones))
        for i, tw in self.room_twins.items():
            tw.ext = {"heat_w": self._heat_of[i] * native_src / n_z}
            tw.T_read = tw.T                                          #
    ↪  its temperature when the real room is read
            tw.step()

    def _ahead(self, key, x, prior):
        """How far a line's reading can climb in one decision, from ev
    ↪ erything the brain has seen of it: the larger of

        line_z of its step-to-step wobbles and the largest single clim
    ↪ b it has shown (never forgotten: a line that once
        jumped can jump again), and never less than the prior (a twent
    ↪ ieth of the line) until it has shown more."""
        st = self.st.get(key)
        if st is None:

            st = self.st[key] = {"last": x, "n": 0, "dv": 0.0, "rise":
    ↪  0.0}
            return prior
        d = x - st["last"]
        st["last"] = x
        st["n"] += 1

        a = 1.0 / st["n"]
        st["dv"] = (1.0 - a) * st["dv"] + a * d * d
        st["rise"] = max(st["rise"], d)
        return max(self.cfg.line_z * math.sqrt(st["dv"]), st["rise"],
    ↪ prior)

    def room(self):
        """(room for machines, room for cooling): the W the body may s
    ↪ till add, one decision ahead. Each line is kept as
        (its gap to its limit, how far it can climb in one decision, i
    ↪ ts load per W of the body's power), so the room
        over a longer reach can be read too (room_for)."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        b = self.body
        own = getattr(self, "extra_w", 0.0)                             #
    ↪  this brain's own machines in the last reading
        self._all, self._src = [], []
        n_st = max(1, len(b.stores))
        for s, kl in zip(b.stores, b.k_load):

            P = s.P
            g = kl / n_st                                               #
    ↪  site draw per W of the body's power
            if g <= 0:
                continue
            E, sq = P["e_wh"] * 3600.0, math.sqrt(P["eta_rt"])

            clip = 0.0
            floor = s.override.get("setpoint", P["reserve"])
            if getattr(s, "override_kind", None) == "clip":
                clip = min(P["p_batt_w"], max(0.0, s.soc - P["stress"]
    ↪ ) * E * sq / P["dt"])
                floor = min(floor, P["stress"])

            cover = max(0.0, s.net - s.imp)                             #
    ↪  what the battery covers of the site's draw now
            lasts = max(0.0, s.soc - floor) * E * sq / (cover * P["dt"
    ↪ ]) if cover > 0.0 else math.inf   # decisions
            # the site's whole draw climbs on its own while the batter
    ↪ y covers it (the import then reads nothing): its

            # climb is read too, for the moment the battery stops cove
    ↪ ring
            up_net = self._ahead(("net", id(s)), s.net - g * own, 0.05
    ↪  * P["p_lim_w"])
            self._all.append((P["p_lim_w"] + clip - s.imp, self._ahead
    ↪ (id(s), s.imp - g * own, 0.05 * P["p_lim_w"]), g,

                              P["p_lim_w"] - s.net, lasts, up_net))
            if s.deferred_j > 0.0:
                # flexible load waiting at the site (held over, or the
    ↪  line): its catch-up has the connection's room first,
                # and the body may add only what the catch-up leaves (
    ↪ else every W added is a W of waiting work not done)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            base = s.net - getattr(s, "catch", 0.0)             #
↪  the site's draw before its catch-up
            self._all.append((CATCH_UP * P["p_lim_w"] - base - s.d
↪ eferred_j / P["dt"],
                              self._ahead(("catch", id(s)), base -
↪  g * own, 0.05 * P["p_lim_w"]), g, None, math.inf, 0.0))

    n_z = max(1, len(b.zones))
    for zn, kh in zip(b.zones, b.k_heat):
        P = zn.P
        h = kh / n_z                                            #
↪  room heat per W of the body's machine power
        if h <= 0:

            continue
        Q = P["units"] * P["q_unit_w"]
        self._src.append((Q - zn.qc_cmd_avg, self._ahead(id(zn), z
↪ n.qc_cmd_avg - h * own, 0.05 * Q), h))
        # and the room's own degrees: the heat that would carry it
↪  to its limit within one decision, its temperature

        # read ahead by its own step-to-step climb (a room at its
↪ limit has no room for heat, whatever its cooling has)
        c = P["c_j_k"] / P["dt"]
        self._src.append(((P["t_limit"] - zn.T) * c, self._ahead((
↪ "T", id(zn)), zn.T, 0.05) * c, h))
    return self.room_for(1)

def room_for(self, reach):
    """(room for machines, room for cooling) over reach decisions:
↪  each line's gap less its one-decision climb grown
    as the square root of the reach (its wobbles add up like a ran
↪ dom walk). A machine that takes reach decisions to

    start is started only if the lines can still carry it when it
↪ is ready: one started and cancelled burns its start.
    A battery whose charge runs out before power granted now could
↪  be off its line (reach, the decision its line
    takes to show it, and the body's cooling tail, TAIL) leaves it
↪ s line only the line less the site's whole draw, read
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        at the draw's own climb."""
        f = math.sqrt(max(1, reach))
        r_all = math.inf
        for gap, up, g, after, lasts, up_net in self._all:
            if after is not None and lasts < reach + 1 + TAIL:
                # the battery stops covering before power granted now,
    ↪  and the cooling its heat calls for, is off the line:
                # the line then carries the site's whole draw, climbin
    ↪ g at the draw's own pace
                r_all = min(r_all, (min(gap, after) - f * max(up, up_n
    ↪ et)) / g)
            else:
                r_all = min(r_all, (gap - f * up) / g)
        r_src = min([(gap - f * up) / h for gap, up, h in self._src],
    ↪ default=math.inf)
        return min(r_src, r_all), r_all

TAIL = 2   # decisions the body's power stays on its lines after machi
    ↪ nes are handed back: their heat reaches the rooms a
           # decision later, and the rooms' cooling answers over its o
    ↪ wn averaging, one more

def _units(room: float, unit: float, cap: int) -> int:
    """How many units of unit W fit in room W (cap when the room is un
    ↪ bounded)."""
    if not math.isfinite(room):
        return cap
    return max(0, min(cap, int(room // unit)))

def walk_room(p):
    """A room's pull-down handed back as the pedal is lifted: toward t
    ↪ he operator's setpoint over the cooling's own
    reaction time, never snapped (a setpoint snapped back kicks the ro
    ↪ om's own controller, which then overshoots warm
    of where native would have it)."""
    x = p.override.get("setpoint") if p.override else None
    native = p.P["t_set"]
    if x is None:
        return {}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    step = (native - min(p.P["stress"], p.P["calm"])) / max(1.0, react
    ↪ ion_steps(p))
    x = min(native, x + max(step, 1e-9))
    return {} if x >= native - 1e-9 else {"setpoint": x}

def queue_need(p):
    """The machines a pool's queue and its latest arrivals need now: n
    ↪ ever handed back while they are needed."""
    lam = p.lam[p.k - 1] if p.k > 0 else 0.0
    return int(math.ceil((lam + p.Q / p.P["dt"]) / max(p.mu(1.0), 1e-9
    ↪ ) - 1e-9))

def room_guard(body, bone):
    """Never warmer than native: a room warmer than its twin (the same
    ↪  room under its operator's settings and native's
    heat) is cured by its own knob where it has one: a room wired by i

    ↪ ts setpoint is cooled by the difference. A room
    whose own knob cannot cool it (its cooling units, a power or admis
    ↪ sion gate, or cooling already flat out) is cured by
    the body: its heat debt is handed back by the pools (heat_debt, ma
    ↪ x_body_step)."""
    for i, tw in bone.room_twins.items():

        p = body.plants[i]
        excess = p.T - getattr(tw, "T_read", tw.T)
        if excess <= 1e-9:
            continue
        knob = body.knobs[i]
        if knob == "setpoint":

            native = p.P["t_set"]
            x = max(min(p.P["stress"], p.P["calm"]), min(p.override.ge
    ↪ t("setpoint", native), native - excess))
            p.override = {"setpoint": x}

def heat_debt(body, bone):
    """The body's power (W) that would carry, over one decision, the h
    ↪ eat by which the rooms that cannot cure themselves
    stand warmer than their twins: a room wired by its cooling units o
    ↪ r a power or admission gate, or any room whose
    cooling is already flat out (its own knob cannot cool it further).
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  The pools hand it back (the other muscles kick
    in): the max's added machines go back until no such room is warmer
    ↪  than native's."""
    debt = 0.0
    n_z = max(1, len(body.zones))
    for i, tw in bone.room_twins.items():

        p = body.plants[i]
        excess = p.T - getattr(tw, "T_read", tw.T)
        if excess <= 1e-9:
            continue
        P = p.P
        flat_out = p.qc_cmd_avg >= p.units_on * P["q_unit_w"] * p.over

    ↪ ride.get("power", 1.0) - 1e-9
        if body.knobs[i] == "setpoint" and not flat_out:
            continue
        h = bone._heat_of[i] / n_z                                    #
    ↪  room heat per W of the body's sources
        if h > 0:

            debt = max(debt, excess * P["c_j_k"] / P["dt"] / h)
    return debt


def max_body_step(body, cfg, bone):
    """One decision of the max over one body: every battery that can c

    ↪ lips its own line or times its discharge for it,
    and the machines and cooling the muscles ask for are granted out o
    ↪ f the room the bone has left; with no room, or
    while a room that cannot cure itself stands warmer than native's (
    ↪ its heat debt), what this brain added goes back at
    once, never below what the twin runs nor what a pool's queue needs

    ↪ , and a room's pull-down is walked back, never
    snapped. A room is pulled down only if the bone can carry it for t
    ↪ he cooling's own reaction time, and no room wired by
    its setpoint is left warmer than its twin. Every other muscle is w
    ↪ ired, watched and native."""
    asks = []
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    for i, (p, knob) in enumerate(zip(body.plants, body.knobs)):
        t = p.template
        p.override_kind = None
        if t == "energy_storage" and knob in ("setpoint", "capacity",
    ↪ "power"):
            p.override = max_hold(p, body_card(p, cfg, knob), knob)

            p.override_kind = "clip" if knob in ("setpoint", "capacity
    ↪ ") else knob
            continue
        a = max_ask(p, knob, card(p, cfg), bone.twins.get(i))
        if a is None:
            p.override = walk_room(p) if t == "thermal_zone" and knob

    ↪ == "setpoint" else {}
            continue
        asks.append((p, a))
    r_src, r_all = bone.room()
    debt = heat_debt(body, bone)
    if debt > 0.0:

        r_src = min(r_src, -debt)                                       #
    ↪  a room that cannot cure itself: the pools give back
    if r_src < 0.0 or r_all < 0.0:
        # no room on a line: what this brain added goes back, as much
    ↪ as the shortfall needs (the pools holding the most
        # extra machines first, and in each the machines started last)

    ↪ , never below a pool's twin (nothing native has is
        # taken) nor below what its queue needs (a machine taken from
    ↪ a queue leaves its work waiting); the machines that
        # fit stay, held where they are. No room is pulled further bel
    ↪ ow the operator's setpoint until the bone has room
        # again: its pull-down is walked back

        short = -min(r_src, r_all)                                      #
    ↪  W of the body's power to give back
        for p, a in sorted(asks, key=lambda pa: -(pa[1].get("cur", 0)
    ↪ - pa[1].get("base", 0))):
            if a["line"] != "src":
                p.override = walk_room(p) if a["line"] == "zone" else
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ {}   # rooms walked back; axes: the everyday setting
                continue
            base = max(a["base"], int(p.P["n_min"]), min(a["cur"], que
    ↪ ue_need(p)))
            extra = max(0, a["cur"] - base)
            give = min(extra, int(math.ceil(short / a["unit_w"] - 1e-9

    ↪ ))) if short > 0.0 else 0
            short -= give * a["unit_w"]
            keep = a["cur"] - give
            if keep > base:                                          #
    ↪  extra machines that fit: held, not added to
                p.override = {"floor": float(keep), "cap": float(keep)

    ↪ }
                p._mx_guard = False
            else:                                                    #
    ↪  pinned at native's count: adds nothing
                p.override = ({"floor": float(base), "cap": float(base
    ↪ )} if extra else

                                ({"floor": float(base)} if base > p.P["n
    ↪ _min"] else {}))
                p._mx_guard = True
        room_guard(body, bone)
        return
    # pools by their shortfall first, then the rooms' pull-downs (cool

    ↪ ing ahead of the heat protects every plant in the room)
    order = {"src": 0, "zone": 1, "axis": 2}
    far, used = {}, 0.0                                              #
    ↪  the rooms over each start time; W granted so far
    for p, a in sorted(asks, key=lambda pa: (order[pa[1]["line"]],
                                             -(pa[1].get("want", 0) -

    ↪ max(pa[1].get("cur", 0), pa[1].get("base", 0))))):
        if a["line"] == "src":
            now = max(a["cur"], a["base"])
            add = max(0, a["want"] - now)
            can = 0
            if add:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            reach = int(p.P["startup_steps"])                    #
↪  the lines must carry it until it is ready
            if reach not in far:
                far[reach] = bone.room_for(reach)
            f_src, f_all = far[reach]
            can = min(_units(min(r_src, f_src - used), a["unit_w"]
↪ , add),
                      _units(min(r_all, f_all - used), a["unit_w"]
↪ , add))
        floor = max(now + can if add else a["want"], a["base"])
        r_src -= can * a["unit_w"]
        r_all -= can * a["unit_w"]

        used += can * a["unit_w"]
        p.override = {"floor": float(floor)} if floor > p.P["n_min
↪ "] else {}
        p._mx_guard = floor <= a["base"]
    elif a["line"] == "axis":
        # inside a body an axis keeps its everyday speed: the orga

↪ nisms run the hour around each battery site's peak,
        # where the bone almost never has room for an axis's worst
↪  case, and a faster axis's changed rhythm lands on
        # rooms and UPS lines already at their own limits (in the
↪ development runs its peak gave the body nothing
        # and crossed neighbours at their limits). Its peak is for

↪  an axis alone, with its own power and heat
        p.override = {}
    else:
        ok = a["cost"] <= r_all
        if ok and not p.override.get("setpoint"):
            # a new pull-down only if the bone can carry it for th

↪ e cooling's own reaction time: one granted and taken
            # back a decision later kicks the room's own controlle
↪ r and leaves it warm of native
            reach = int(math.ceil(reaction_steps(p)))
            if reach not in far:
                far[reach] = bone.room_for(reach)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                ok = a["cost"] <= far[reach][1] - used
            if ok:
                p.override = {"setpoint": a["x"]}
                r_all -= a["cost"]
            else:
                p.override = walk_room(p)                                #
    ↪  the pull-down waits for room, walked back
    room_guard(body, bone)


def compass_apply_v5(plant, knob, cfg, dt=1.0, tau=3.0):
    if cfg.dial == "max":
        return max_apply(plant, knob, cfg)
    lv = lever_v5(plant, knob, cfg)
    if lv is None:
        plant.override = {}
        return {}
    if not hasattr(plant, "_v5"):
        plant._v5_headroom = cfg.headroom
        plant._v5_band = cfg.band
        law = CompassLaw(Band(0.0, 1.0), dt=dt, tau=tau, kp=1.0, smoot
    ↪ h=0.3)
        law.kd *= 3.0
        plant._v5 = (law, Edge(plant, cfg, lv[0]))
        plant._v5_x = lv[1]
    law, edge = plant._v5
    p = v5_position(plant)
    edge.since = 0 if plant.override else getattr(edge, "since", 10 **
    ↪  9) + 1
    if plant.template == "motion_axis":
        blame = max(3.0, plant.P["deadline_s"] / plant.P["dt_dec"])
    ↪   # a late task was decided a deadline ago
    else:
        # a fall within the knob's own reaction/settling time of Omni
    ↪ holding back is Omni's doing: a power cap on a
        # serving pool shows up as latency a few decisions later (its
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ startup lag), a process loop's overshoot within its
        # three time constants. So the cap teaches that plant's cushio
    ↪ n floor even when the fall is not the same decision.
        blame = memory_horizon(plant)
    if cfg.learn_fall > 0 and plant.vhist and plant.vhist[-1] and edge
    ↪ .since <= blame:

        # a fall while, or soon after, Omni held something back: this
    ↪ plant needs more room than its statistics said
        edge.floor = min(1.0, max(edge.floor, edge.cushion) + cfg.lear
    ↪ n_fall)
    center = edge.update(raw_position(plant))
    if cfg.hybrid:

        # never behind what came before: the edge only moves the balan
    ↪ ce point and the wall further out; but a plant
        # that has fallen while Omni held something back has taught th
    ↪ e brain otherwise, and its own lesson decides
        base = cfg.base_center if edge.floor <= 0.0 else 0.0
        law.band.center = clamp(max(base, center), 0.0, 0.995)

        law.band.cushion = min(1.0 - cfg.base_wall, max(0.005, edge.re
    ↪ act_part))
    else:
        law.band.center = clamp(center, 0.0, 0.995)
        law.band.cushion = min(0.5, max(0.005, edge.react_part))
    ↪ # the wall moves with the reaction part

    if cfg.band and plant.template == "process_loop":
        # the band's own edge (1 is the edge). A loop faster than one
    ↪ decision is pushed about within the decision by its
        # disturbance alone, so it is read ahead: the setpoint's offse
    ↪ t from the band's middle plus the most the
        # disturbance has pushed it off its setpoint (mean plus z time

    ↪ s the spread over the window). A slower loop's
        # deviation from a moving setpoint is mostly its own lag, so i
    ↪ t is read as it stands (offset plus deviation) and
        # acts only at the wall. Either way, once the reading reaches
    ↪ the wall the law fails up; away from the edge the
        # law reads the plant as before.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        P = plant.P
        off = abs(plant.setpoint() - P["mid"]) / P["half"]
        if (3.0 * P.get("tau", 0.0) + P.get("theta", 0.0)) / P["dt"] <
    ↪ = 1.0:
            hist = getattr(plant, "_v5_band_h", None)
            if hist is None:

                hist = plant._v5_band_h = []
            hist.append(plant.dev)
            if len(hist) > cfg.window:
                hist.pop(0)
            md = sum(hist) / len(hist)
            sd = math.sqrt(sum((x - md) ** 2 for x in hist) / max(1, l

    ↪ en(hist) - 1)) if len(hist) > 1 else md
            p = max(p, off + md + cfg.z * sd)
        elif off + plant.dev >= law.band.wall_high:
            p = max(p, off + plant.dev)
    F = law.force(p)
    key, native, lo, hi, sign = lv

    if key == "release":
        ok = F < RELEASE and law.p < law.band.center and release_safe(
    ↪ plant)
        plant.override = {"release": 1.0} if ok else {}
        return plant.override
    span = hi - lo

    if key == "setpoint" and plant.template == "energy_storage":
        P = plant.P
        excess = plant.imp - P["p_lim_w"]
        coverable = 0.0 < excess <= P["p_batt_w"] * plant.override.get
    ↪ ("power", 1.0)
        x = lo if (law.p >= law.band.wall_high and (coverable or plant

    ↪ .imp >= 0.95 * P["p_lim_w"] and excess <= 0.0)) else native
        plant._v5_x = x
        plant.override = {} if abs(x - native) < 1e-9 else {key: x}
        return plant.override
    if law.p >= law.band.wall_high:
        # at the wall: the energy edge snaps straight back to native (
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ always free, never beyond it); the speed edge
        # and the hybrid fail up to full capacity at once, as the earl
    ↪ ier law did
        if cfg.spend_beyond or cfg.hybrid:
            x = hi if sign > 0 else lo
        elif cfg.snap:

            x = native
        else:
            x = clamp(plant._v5_x + sign * UP * span, lo, hi)
    ↪  # the law's full force up, smooth, never a snap
            x = min(x, native) if sign > 0 else max(x, native)
    else:

        g = UP if F > 0 else DOWN
        x = clamp(plant._v5_x + sign * g * F * span, lo, hi)
        if not (cfg.spend_beyond or cfg.hybrid):
            # the energy edge: away from the wall nothing is spent bey
    ↪ ond native (native is always free)
            x = min(x, native) if sign > 0 else max(x, native)

    if cfg.drop_guard and plant.template == "compute_pool" and key ==
    ↪ "power":
        x = max(x, drop_floor(plant, cfg))
    ↪  # no request turned away (keeps the history)
        x = max(x, latency_floor(plant, cfg))
    ↪  # no response pushed over the line

    if cfg.hole_guard and plant.template == "thermal_zone" and key ==
    ↪ "setpoint":
        x = min(x, cooling_hole_ceiling(plant, cfg, native))
    if cfg.motion_safe and plant.template == "motion_axis":
        # the edge read from the axis's own physics, at once: never sl
    ↪ ower than its queue and the next decision's burst

        # allow, never weaker than its next move needs
        x = max(x, safe_speed(plant, cfg, lo) if key == "capacity" els
    ↪ e effort_floor(plant))
    if cfg.loop_reach and plant.template == "process_loop" and key ==
    ↪ "setpoint":
        x = loop_clamp(plant, cfg, x, native)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    plant._v5_x = x
    plant.override = {} if abs(x - native) < 1e-9 else {key: x}
    return plant.override


# The tune-down setting (the dial turned from the max down to save): n
    ↪ ative's work on the least energy, no muscle giving up
# anything native holds on the modelled plants. The autoscaler's targe
    ↪ t held at the operator's; the step-to-step
# estimator; a fall while Omni held back raises that plant's cushion f
    ↪ loor; the hybrid never behind the earlier law; each
# plant remembers its own physics; motion speed and effort never below
    ↪  what the axis needs; a process loop read against
# its band's edge, its setpoint never closer to that edge than its own
    ↪  largest swing (generators included); a request pool
# never capped below the largest demand jump; a cooled zone never warm
    ↪ er than its cooling can recover; a power cap only on
# a pool whose response line outlasts a decision, never below the larg
    ↪ est demand jump or past the line; the battery shave
# and a cloud machine pool's hand-back held native.
V5SAVE = Cfg(dial="save", target_free=False, est=2, learn_fall=0.1, hy
    ↪ brid=True, physics_memory=True, motion_safe=True,
             band=True, drop_guard=True, hole_guard=True, loop_reach=T
    ↪ rue, power_cap=True)

# The engine's default: the max (the founder's order of 12 October: "W
    ↪ e're going to show a benchmark that shows it to the
# max. And we're going to show one native... anybody can tune it from
    ↪ the max down"). Every muscle pushed to its own limit
# for the most work, faster; the energy that takes is power given.
V5CFG = Cfg(dial="max", window=20, edge_util=0.95, line_z=3.09)


def apply_v5(plant, knob):
    """compass_apply_v5 with the engine's default v5 configuration (V5
    ↪ CFG, the max)."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return compass_apply_v5(plant, knob, V5CFG)


def apply_v5_save(plant, knob):
    """compass_apply_v5 turned down to save (V5SAVE)."""
    return compass_apply_v5(plant, knob, V5SAVE)
```

realms/gpu_card.py

262 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercializat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""A GPU card on its real physics, its own firmware, and the two-wire
    ↪ plug (evidence class S: a model, not a meter).

The card

  clock     f, a share of the top clock (1.0), moved by the firmware i
    ↪ n bins of 0.9% (about 15 MHz on a 1.7 GHz part)
  power     P = idle + leakage(T) + P_dyn x busy x f x V(f)^2, with V(
    ↪ f) = 0.6 + 0.4 f: dynamic power rises with the
            clock and with the square of the voltage the clock needs,
    ↪ so the top of the clock range costs the most

  heat      C dT/dt = P - (T - T_amb) / R_th; leakage rises with tempe
    ↪ rature
  work      requests arrive (a slow wave, bursts, noise, drawn from th
    ↪ e seed); the card serves f x mu per second;
            a request's response time is its wait plus its service tim
    ↪ e
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
The firmware (native, what ships on the card), 50 times a second
  boost     while there is work and room, raise the clock one bin, up
    ↪ to the clock ceiling
  hammer    while the draw is over the power limit, or the chip is ove
    ↪ r its slowdown temperature, drop three bins

  So the clock saws against the limit for as long as the work keeps co
    ↪ ming: up a bin, knocked down three, up again.


The work
  memb      the share of a request's time at the top clock spent waiti
    ↪ ng on memory, which does not speed up with the

            clock: 0 is compute-bound work (large matrix products, the
    ↪  bench's pinned workload), 0.85 is typical of AI
            token generation (each token streams the model's weights f
    ↪ rom memory). The card serves 1 / ((1 - memb) / f
            + memb) of its top speed

The arms: each base alone, and the same base with Omni-Compass on top
    ↪ (Omni never runs the card itself)
  native    the card as shipped: power limit 150 W, clock ceiling at t
    ↪ he top, firmware alone
  omni      native + Omni-Compass on top, through two wires (omnicompa
    ↪ ss/compass_law.py): the clock ceiling is the up wire (how

            high boost may push), the power limit is the down wire (th
    ↪ e lid, set just above what the ceiling draws,
            never under the card's own busy draw). The compass's readi
    ↪ ng is the response time as a position between the
            bare service time (0) and the service line (1); the brain
    ↪ pulls it to the center. The verdict

            (omnicompass/verdict.py) decides how far the ceiling may g
    ↪ o: a step down is allowed only after a paired
            trial shows it costs each request at most ALLOW of the car
    ↪ d's own time on it; where no step passes, the
            ceiling stays where the firmware has it. Both wires are re
    ↪ stored to their snapshot at 90% of the run
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  cap       a fixed power cap set by the operator and left (105 W, 70%
    ↪ ), firmware alone under it
  cap_omni  the cap + Omni-Compass on top: the same law, the lid never
    ↪  above the operator's cap
"""
from __future__ import annotations

import math
import random
from typing import Dict

from omnicompass.compass_law import Band, CompassLaw, Plug, clamp

from omnicompass.verdict import Verdict

TICK = 0.02                # firmware period, s
DECIDE = 1.0               # brain period, s
BIN = 0.009                # one clock bin, share of the top clock
F_MIN = 0.12

P_IDLE, P_DYN = 22.0, 165.0
LEAK0, LEAK_T = 8.0, 0.02   # leakage at 40 C, and its rise per C
T_AMB, R_TH, C_TH = 30.0, 0.33, 90.0     # C, C/W, J/C  (150 W -> abou
    ↪ t 80 C, time constant about 30 s)
T_SLOW = 87.0
MU = 100.0                 # requests per second at the top clock

LIMIT_DEFAULT, LIMIT_MIN = 150.0, 105.0
SLO_S = 10.0 / MU          # the service line: ten bare service times
    ↪  (as the GPU bench sets it)
# the law of omni_controller/gpu_compass.py (docs/GPU_PREREGISTRATION.
    ↪ md, amendment 8): up and down gains (share of the top
# clock per unit of force), the compass's center, the speed floor (a s

    ↪ hare of the card's own busy clock), the verdict's
# allowance (the most a step may add to the card's own time on a reque
    ↪ st) and how often it runs a trial (decisions)
UP, DOWN, CENTER, FLOOR, ALLOW, PROBE_EVERY = 0.10, 0.0125, 0.4, 1.0,
    ↪ 0.02, 8
OMNI = ("omni", "cap_omni")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
SATURATED = 0.95            # busy share over a decision at which work
    ↪  is waiting: race, never pace


def volt(f):
    return 0.6 + 0.4 * f

def power(f, busy, T):
    return P_IDLE + LEAK0 * (1.0 + LEAK_T * (T - 40.0)) + P_DYN * busy
    ↪  * f * volt(f) ** 2

class Card:
    def __init__(self, seed: int, duration: float, memb: float = 0.0):
        r = random.Random(seed)
        self.memb = memb
        n = int(duration / TICK)

        phase = r.uniform(0, 2 * math.pi)
        self.lam, left, amp, z = [], 0, 0.0, 0.0
        per = int(1.0 / TICK)
        for k in range(n):
            if k % per == 0:
                z = 0.85 * z + r.gauss(0, 0.05)

                if left <= 0 and r.random() < 0.02:
                    left, amp = r.randint(5, 25), r.uniform(0.1, 0.3)
                left -= 1
            wave = 0.45 + 0.15 * math.sin(2 * math.pi * k * TICK / 300
    ↪ .0 + phase)
            self.lam.append(max(0.0, MU * (wave + (amp if left > 0 els

    ↪ e 0.0)) * math.exp(z)))
        self.n = n
        self.k = 0
        self.f, self.T, self.Q = 0.5, 45.0, 0.0
        self.last_p, self.last_busy = P_IDLE, 0.0
        self.limit, self.ceiling = LIMIT_DEFAULT, 1.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.m = {"energy_j": 0.0, "served": 0.0, "arrived": 0.0, "ham
    ↪ mer": 0, "reversals": 0, "viol_s": 0.0,
                  "t_peak": 0.0, "t_sum": 0.0, "f_sum": 0.0, "f_sq": 0
    ↪ .0}
        self.resp = []           # (response time, requests) per tick,
    ↪  for the percentiles

        self.last_dir = 0
        self.window = []         # response times this decision period
        self.bwin = []           # busy shares this decision period
        self.swin = []           # the card's own time per request thi
    ↪ s decision period (the wait in the queue left out)

    def tick(self):
        k = self.k
        a = self.lam[k] * TICK
        sp = 1.0 / ((1.0 - self.memb) / self.f + self.memb)
        cap = sp * MU * TICK
        served = min(self.Q + a, cap)

        self.Q += a - served
        busy = served / cap if cap > 0 else 1.0
        P = power(self.f, busy, self.T)
        self.T += (P - (self.T - T_AMB) / R_TH) * TICK / C_TH
        w = self.Q / (sp * MU) + 1.0 / (sp * MU)
        self.resp.append((w, a))

        self.window.append(w)
        self.bwin.append(busy)
        if a > 0:
            self.swin.extend([1.0 / (sp * MU)] * max(1, int(round(a)))
    ↪ )
        m = self.m

        self.last_p, self.last_busy = P, busy
        m["energy_j"] += P * TICK; m["served"] += served; m["arrived"]
    ↪  += a
        m["t_peak"] = max(m["t_peak"], self.T); m["t_sum"] += self.T
        m["f_sum"] += self.f; m["f_sq"] += self.f * self.f
        if w > SLO_S:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            m["viol_s"] += TICK
        # the firmware: boost up a bin, or the hammer down three
        if P > self.limit or self.T > T_SLOW:
            d = -3
            m["hammer"] += 1
        elif busy > 0.05 and self.f + BIN <= self.ceiling + 1e-9:
            d = 1
        elif self.f > self.ceiling + 1e-9:
            d = -1
        else:
            d = 0
        if d and self.last_dir and (d > 0) != (self.last_dir > 0):
            m["reversals"] += 1
        if d:
            self.last_dir = d
        self.f = clamp(self.f + d * BIN, F_MIN, 1.0)
        self.k += 1

class CeilingPlug(Plug):
    """The up wire: the clock ceiling the firmware may boost to (nvidi
    ↪ a-smi -lgc on a real card; -rgc restores)."""
    def __init__(self, card):
        super().__init__(0.3, 1.0)
        self.card = card

    def _read_service(self):
        """The service as a position in its compass: response time onl
    ↪ y (bare service time 0, the line 1). A busy card is
        doing its work; being busy is not a breach and is not read as
    ↪ one."""
        w = self.card.window
        return (sum(w) / len(w) - 1.0 / MU) / (SLO_S - 1.0 / MU) if w
    ↪ else 0.0

    def _read_lever(self):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return self.card.ceiling

    def _send(self, v):
        self.card.ceiling = round(v / BIN) * BIN if v < 1.0 else 1.0

class LimitPlug(Plug):
    """The down wire: the power limit, the lid (nvidia-smi -pl on a re
    ↪ al card), whole watts."""
    def __init__(self, card, top=LIMIT_DEFAULT):
        super().__init__(LIMIT_MIN, top, tolerance=0.5)
        self.card = card

    def _read_service(self):
        return self.card.T

    def _read_lever(self):
        return self.card.limit

    def _send(self, v):
        self.card.limit = float(round(v))


def run(seed: int, arm: str, duration: float = 600.0, memb: float = 0.
    ↪ 0) -> Dict:
    card = Card(seed, duration, memb)
    per = int(DECIDE / TICK)
    kill = int(0.9 * card.n)
    restored = True
    up = down = brain = vd = None

    base_limit = LIMIT_MIN if arm in ("cap", "cap_omni") else LIMIT_DE
    ↪ FAULT
    card.limit = base_limit
    events = {"trials": 0, "allowed": 0, "refused": 0}
    if arm in OMNI:
        up, down = CeilingPlug(card), LimitPlug(card, top=base_limit)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    up.attach(); down.attach()
    brain = CompassLaw(Band(lo=0.0, hi=1.0, center=CENTER), dt=DEC
↪ IDE, tau=2.0, kp=1.0, authority=1.0, smooth=0.3)
    brain.kd *= 3.0                                  # the push: t
↪ hree times the damping that only stops the slosh,
                                                     # so a rising

↪  load is met before it reaches the wall
    vd = Verdict(tolerance=ALLOW, probe_every=PROBE_EVERY)
learn_f, learn_p = [], []          # the card under its base while
↪  busy, ceiling at the top: its clock and its draw
for k in range(card.n):
    if brain is not None and card.ceiling >= 1.0 and card.limit >=

↪  base_limit and card.last_busy >= 0.9:
        learn_f.append(card.f); learn_p.append(card.last_p)
    if brain is not None and k % per == 0 and k:
        if k >= kill:
            if k - per < kill:
                restored = up.restore() and down.restore()

        else:
            F = brain.force(up.read())
            # the speed floor: never under the clock the card reac
↪ hes under its base while busy (the top until 15
            # busy readings are in), so waiting work is never serv
↪ ed slower than the base

            f_nat = sorted(learn_f[-10000:])[len(learn_f[-10000:])
↪  // 2] if len(learn_f) >= 15 else 1.0
            p_nat = sorted(learn_p[-10000:])[int(0.9 * (len(learn_
↪ p[-10000:]) - 1))] if len(learn_p) >= 15 else base_limit
            b = card.bwin
            saturated = bool(b) and sum(b) / len(b) >= SATURATED

            # the verdict: what the last decision's requests cost
↪ the card at the step it stood at, then how far
            # the ceiling may go now (or the step a trial needs)
            vd.observe(card.swin)
            deepest, trial, ev = vd.tick(brain.p < brain.band.wall
↪ _high and not saturated)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            if ev:
                key = {"trial": "trials", "step allowed": "allowed
↪ "}.get(ev["verdict"], "refused" if "refused" in ev["verdict"] el
↪ se None)
                if key:
                    events[key] += 1

            at_limit = card.last_p >= 0.97 * card.limit
            if saturated and at_limit and len(learn_f) >= 15 and b
↪ ase_limit < LIMIT_DEFAULT:
                # saturated against an operator's cap: hold at the
↪  card's own busy clock under it (amendments 9, 12);
                # on the card's own factory limit the firmware's b

↪ oost serves the burst
                c = up.write(max(0.3, min(1.0, f_nat)))
            elif brain.p >= brain.band.wall_high or saturated:
                # fail up past the wall; and race while work waits
↪  (the card saturated: a queue is forming), so a
                # burst is always served at full speed; the compas

↪ s paces only the slack between bursts
                c = up.write(1.0)
            elif trial:
                c = up.write(1.0 - deepest * BIN)
            else:
                g = UP if F > 0 else DOWN                    # up

↪ fast (service first), down gently
                c_lo = max(min(1.0, f_nat * FLOOR), 1.0 - deepest
↪ * BIN)
                c = up.write(max(c_lo, card.ceiling + g * F))
            # the lid just above what the ceiling draws fully busy
↪ , never under the card's own busy draw

            lid = max(power(c, 1.0, card.T), p_nat) * 1.06
            down.write(lid)
        card.window, card.bwin, card.swin = [], [], []
    elif k % per == 0:
        card.window, card.bwin, card.swin = [], [], []
    card.tick()
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    m = dict(card.m)
    n = card.n
    rs = sorted(card.resp)
    tot = sum(a for _, a in rs) or 1.0

    def pct(q):
        acc = 0.0
        for w, a in rs:
            acc += a
            if acc >= q * tot:
                return w
        return rs[-1][0]
    mean_f = m["f_sum"] / n
    return {"energy_j": m["energy_j"], "served": m["served"], "work_pe
    ↪ r_kj": m["served"] / (m["energy_j"] / 1000.0),
            "p50_ms": 1000 * pct(0.5), "p95_ms": 1000 * pct(0.95), "p9
    ↪ 9_ms": 1000 * pct(0.99),
            "viol_share": m["viol_s"] / duration, "hammer_per_s": m["h
    ↪ ammer"] / duration,
            "reversals_per_s": m["reversals"] / duration, "clock_mean"
    ↪ : mean_f,
            "clock_jitter": math.sqrt(max(0.0, m["f_sq"] / n - mean_f
    ↪ ** 2)), "t_peak": m["t_peak"],
            "t_mean": m["t_sum"] / n, "backlog_end": card.Q, "restored
    ↪ ": restored,
            "writes": (up.writes + down.writes) if up else 0, "verdict
    ↪ _steps_allowed": vd.allowed if vd else 0,
            "verdict_events": events}
```

`realms/harness.py`

591 lines.

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Realm harness: every muscle native, watched and governed; every rea
    ↪ lm, and the whole tower, as one organism.

Arms, all on the same seed (the same demand, weather, disturbances):

  native  the plant and its native controller alone
  watch   the frozen governor reads the plant every period and writes
    ↪ nothing; must equal native exactly
  omni    the frozen governor holds the muscle's one knob; at 90% of t
    ↪ he run it is killed, the knob returns to the
          native controller, and the harness checks that it did

The governor is omnicompass.adapter.Governor, unchanged (the engine wi
    ↪ th u = 0, the stack law, the reset).

Single muscle: one plant, one governor reading that plant.
Organism: all the plants of a realm (or the whole tower) on one 15 s c

    ↪ lock, coupled: the electrical power of compute, motion
and process plants is heat in the realm's thermal zones; the organism'
    ↪ s load swing is load on its storage sites; the
zones' temperature is the ambient every other plant reports. One gover
    ↪ nor reads the organism's aggregate and its one
directive sets every muscle's knob.

Primary outcome per seed: work per energy, omni against native: (work_
    ↪ omni / work_native) / (energy_omni /
energy_native) - 1. For an organism, work is the mean over its plants
    ↪ of work_omni / work_native (their work units
differ) and energy is total joules. Guardrails: work not lower by more
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  than 1%; the share of periods in violation not
higher by more than 1 percentage point. Labels by rule (label()).
"""
from __future__ import annotations

import csv

import math
from pathlib import Path
from typing import Dict, List

from omnicompass.adapter import Governor, OBSERVE
from omnicompass.nervous_system import from_governor

from .plants import TEMPLATES, ThermalZone, EnergyStorage, pack
from .compass_arm import compass_apply
from .compass_arm_v5 import apply_v5, apply_v5_save, max_apply, max_bo
    ↪ dy_step, Bone, V5CFG, CARDS   # the v5 law: the max
                                                  # (arm v5, the de
    ↪ fault) and the tune-down (arm v5save)

from .presets import STEPS_SINGLE, ORGANISM_STEPS, CAL_SEED, params_fo
    ↪ r

ROOT = Path(__file__).resolve().parents[1]
LAWS = {"compass": compass_apply, "v5": lambda p, k: max_apply(p, k, V
    ↪ 5CFG), "v5save": apply_v5_save}

ARMS = ("native", "watch", "compass")   # native; Omni watching (write
    ↪ s nothing); the compass law on top (amendment, 2026-10-05)
# for a setpoint muscle, a fourth arm: the native controller with the
    ↪ setpoint simply fixed at the band's calm end.
# It shows how much of any Omni result on that muscle the band alone w
    ↪ ould give, with no governor.

FIXED = "fixed_calm"
KILL_AT = 0.8
WALK = 24         # decisions over which the lease walks every setting
    ↪  back to native after the brain goes silent (the
                  # plug's own reflex: a room warmed or a loop eased i
    ↪ s brought back slowly enough that the body repays it
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                # without a jump its lines must absorb at once); the
    ↪  security kill switch stays instant. The run keeps
                # going native after the walk, so every setting is p
    ↪ roven back at the operator's before it ends
CLIMB = (1, 2, 3, 2, 3, 4, 5, 6, 5, 4, 5, 6, 7, 8, 7, 6, 5, 4, 3, 4, 3
    ↪ , 2, 1, 2, 1)

# the climb: the load steps by one, up and down (1 2 3 2 3 4 ...), lev
    ↪ el 4 is the organism's own normal load and level
# 8 twice it; every muscle's work demand follows it (requests, the roo
    ↪ ms' IT heat, the axes' tasks, the loops' demand),
# so the organism is pushed past what native can carry and the most ea
    ↪ ch arm can do shows. A site's own base load stays

# its own: the climb reaches it through the body's power swing on its
    ↪ line


LINE = 0.25       # the line: work already waiting when the run starts
    ↪ , a quarter of the work the run itself brings (the

                # founder's order of 12 October: work waiting in lin
    ↪ e, so the most each arm can clear shows). A pool's
                # line is jobs submitted before the start (its machi
    ↪ nes take them from what the requests leave them),
                # an axis's is tasks queued, a site's is flexible lo
    ↪ ad held over; a room's heat and a loop's demand

                # cannot wait, so they have none. Both arms of a see
    ↪ d start with the same line. Fixed before any
                # preregistered run (docs/OMNI_V5.md, the max)


def climb_level(k: int, steps: int) -> float:

    """The climb's load multiplier at decision k of steps (level / 4).
    ↪ """
    return CLIMB[min(len(CLIMB) - 1, k * len(CLIMB) // steps)] / 4.0


def put_line(p):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """Put the line on one plant (in place): a quarter of its own run'
    ↪ s work, waiting when the run starts."""
    P = p.P
    if p.template == "compute_pool":
        p.B = p.line0 = LINE * sum(p.lam) * P["dt"]
    elif p.template == "motion_axis":

        n = int(round(LINE * sum(p.arrivals)))
        p.backlog += n
        p.waits = [0.0] * n + p.waits
        p.line_n = n
    elif p.template == "energy_storage":
        p.line_e = LINE * P["flex"] * sum(p.load) * P["dt"]

        p.deferred_j += p.line_e
    return p


def scale_load_plant(p, profile="climb"):
    """Put a load on one plant's work demand (in place): the climb, th

    ↪ e line, or a constant multiple."""
    if profile == "line":
        return put_line(p)
    steps = p.steps
    m = [climb_level(k, steps) for k in range(steps)] if profile == "c
    ↪ limb" else [float(profile)] * steps

    if p.template == "compute_pool":
        p.lam = [x * m[k] for k, x in enumerate(p.lam)]
    elif p.template == "thermal_zone":
        p.qit = [x * m[k] for k, x in enumerate(p.qit)]
    elif p.template == "motion_axis":
        p.arrivals = [int(round(x * m[k])) for k, x in enumerate(p.arr

    ↪ ivals)]
    elif p.template == "process_loop":
        p.d = [x * m[k] for k, x in enumerate(p.d)]
    return p
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def scale_load(body, profile="climb"):
    """Put a load on a body's work demand (in place; every arm of a se
    ↪ ed gets the same load)."""
    body.load = profile
    for p in body.plants:
        scale_load_plant(p, profile)

    return body
T95 = {1: 12.706, 2: 4.303, 3: 3.182, 4: 2.776, 5: 2.571, 6: 2.447, 7:
    ↪  2.365, 8: 2.306, 9: 2.262, 10: 2.228,
       11: 2.201, 12: 2.179, 13: 2.160, 14: 2.145, 15: 2.131, 19: 2.09
    ↪ 3, 29: 2.045}

def catalog(path=None) -> List[dict]:
    return list(csv.DictReader((Path(path) if path else ROOT / "realms
    ↪ " / "catalog.csv").open()))

# the six organisms: the four realms, the whole tower (every muscle on
    ↪ ce) and the stack (the four realms on one clock,
# every duplicate kept). Nothing is named by a count: the v1 names car
    ↪ ried one and are read as aliases.
TOWER, STACK = "tower", "stack"
ORGANISM_ALIAS = {"organism_656": TOWER, "tower_656": TOWER, "stack_12

    ↪ 26": STACK}


def organism_name(name: str) -> str:
    return ORGANISM_ALIAS.get(name, name)

def organism_sizes(rows=None) -> dict:
    """{organism: muscles} for the six, from the catalog."""
    rows = rows or catalog()
    realms = ("compute_ai_cloud", "physics_robotics_autonomous", "ener
    ↪ gy_facility_industrial", "distribution_specialized")

    sizes = {r: sum(1 for x in rows if r in x["realms"].split(";")) fo
    ↪ r r in realms}
    sizes[STACK] = sum(sizes.values())
    sizes[TOWER] = len(rows)
    return sizes
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def seed_for(muscle_id: str, seed: int) -> int:
    h = 0
    for ch in f"{muscle_id}:{seed}":
        h = (h * 1000003 + ord(ch)) % 2_147_483_647
    return h

def make_plant(row, seed, organism=False):
    steps = ORGANISM_STEPS if organism else STEPS_SINGLE[row["template
    ↪ "]]
    p = TEMPLATES[row["template"]](params_for(row, organism), seed_for
    ↪ (row["muscle_id"], seed), steps)
    if row["template"] == "compute_pool" and not organism:
        p.budget_w = 1.25 * native_mean_power(row)
    p._card = CARDS.get(row["muscle_id"])        # the muscle's own se
    ↪ ttings for the max (none: the global setting)
    return p

_CAL = {}


def native_mean_power(row):
    """A compute pool's declared power budget basis: its mean native d
    ↪ raw on the calibration seed."""
    key = row["muscle_id"]
    if key not in _CAL:
        c = TEMPLATES[row["template"]](params_for(row), seed_for(key,
    ↪ CAL_SEED), STEPS_SINGLE[row["template"]])
        tot = 0.0
        for _ in range(c.steps):
            c.step()
            tot += c.power_w
        _CAL[key] = tot / c.steps
    return _CAL[key]

def calibrate_organism(rows):
    """Each plant's mean native power in the organism on the calibrati
    ↪ on seed: the organism's declared budget and
    coupling basis (the same for every arm and every result seed)."""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    key = tuple(r["muscle_id"] for r in rows)
    if key not in _CAL:
        nat = run_organism_arm(rows, CAL_SEED, "native", nominal=None)
        _CAL[key] = nat["mean_power"]
    return _CAL[key]

def authority(g, obs, d, clean):
    """The nervous system's authority after the governor's step, as th
    ↪ e live controller computes it."""
    return from_governor(g, dict(obs, slo_clean=clean), d, mode="autop
    ↪ ilot")

def _apply(plant, knob, g, d, auth):
    """Set the plant's override from the directive and authority; retu
    ↪ rn it ({} when the knob is native)."""
    if g is None or not g.has_authority:

        plant.override = {}
        return {}
    plant.override = plant.omni_override(knob, d, g, auth)
    return plant.override

def _restored(plant, knob):
    return plant.override == {}


def _native_of(plant, key):
    """The operator's own value of an override key (what the snapshot

    ↪ holds); None: the key has no setting of its own
    (a floor, a release, a paced job, a battery's clip ceiling) and is
    ↪  simply let go."""
    P, t = plant.P, plant.template
    if key == "target":
        return P["target"]

    if key == "setpoint":
        return P["t_set"] if t == "thermal_zone" else P["reserve"] if
    ↪ t == "energy_storage" else P["sp"]
    if key in ("power",) or (key == "capacity" and t in ("motion_axis"
    ↪ , "process_loop")):
        return 1.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    if key == "floor":
        return float(P["n_min"])          # a floor walks down to the
    ↪ pool's least machines (the autoscaler governs)
    return None

def walk_back(plant, left):
    """One decision of the lease's walk back to native: every setting
    ↪ moves 1/left of the way to the operator's own;
    a key with no setting of its own is let go. left = 1 is the last s
    ↪ tep: everything native."""
    out = {}

    for key, x in plant.override.items():
        nat = _native_of(plant, key)
        if nat is None or left <= 1:
            continue
        if key == "floor" and getattr(plant, "_mx_guard", False):
            continue        # a floor that only held the pool at nativ

    ↪ e's own count (it added nothing) is let go at once:
                            # the autoscaler has the pool, and a walki
    ↪ ng floor would hold machines native has released
        y = x + (nat - x) / left
        if abs(y - nat) > 1e-9:
            out[key] = y

    plant.override = out
    return out


PACE_HIGH, PACE_LOW, PACE_HEAT = 0.95, 0.8, 0.96             # the liv
    ↪ e batch_pace defaults (omni_controller/muscles.py)

def pace(paced_plants, obs, auth):
    """The live batch_pace rule over the admission muscles: while hot,
    ↪  suspend the next running one; while calm, resume
    the first suspended one; one per decision either way. Band first:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ a job whose service is out of its line, or would
    leave it if held one more period, is never suspended, and if suspe
    ↪ nded it is resumed at once (fail up)."""
    if not paced_plants:
        return
    for p in paced_plants:

        if p.paced and not (p.slo_clean and p.can_hold()):
            p.paced = False
    hot = (obs["power_stress"] >= PACE_HIGH or obs["thermal"] >= PACE_
    ↪ HEAT
           or bool(auth and auth["organs"]["batch"].get("pause")))
    calm = obs["power_stress"] <= PACE_LOW and obs["thermal"] < PACE_H

    ↪ EAT - 0.06
    if hot:
        for p in paced_plants:
            if not p.paced and p.slo_clean and p.can_hold():
                p.paced = True
                return

    elif calm:
        for p in paced_plants:
            if p.paced:
                p.paced = False
                return

def line_left(plant):
    """The share of a plant's line still waiting at the end (0: cleare
    ↪ d; None: the plant had no line)."""
    if getattr(plant, "line_n", 0):
        return max(0, plant.line_n - plant.line_done) / plant.line_n

    if getattr(plant, "line_e", 0.0):
        return max(0.0, plant.deferred_j) / plant.line_e
    if plant.template == "compute_pool" and getattr(plant, "line0", 0.
    ↪ 0):
        return plant.B / plant.line0
    return None
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def run_muscle_arm(row, seed, arm, load=None):
    plant = make_plant(row, seed)
    if load is not None:
        scale_load_plant(plant, load)

    knob = row["knob"]
    if arm == FIXED:
        for k in range(plant.steps):
            plant.override = plant.fixed_calm()
            plant.step()
        plant.finalize()

        return dict(plant.m, writes=0, after_kill_writes=0, restore_ok
    ↪ =True)
    g = None if arm in ("native", FIXED, "compass", "v5", "v5save") el
    ↪ se Governor()
    if arm == "watch":
        g.set_mode(OBSERVE)

    kill_at = int(KILL_AT * plant.steps)
    writes = after_kill_writes = 0
    last = None
    restore_ok = True
    twin = make_plant(row, seed) if arm == "v5" else None            #
    ↪  the brain's model of native (the max's floor)

    if twin is not None and load is not None:
        scale_load_plant(twin, load)
    for k in range(plant.steps):
        if arm in ("compass", "v5", "v5save"):
            apply = LAWS[arm]
            if k < kill_at:

                if twin is not None:
                    twin.step()
                    v = max_apply(plant, knob, V5CFG, twin)
                else:
                    v = apply(plant, knob)
                if v and v != last:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                writes += 1
            else:
                v = walk_back(plant, kill_at + WALK - k)
                if k >= kill_at + WALK - 1:
                    restore_ok = restore_ok and _restored(plant, knob)
            last = v

        elif g is not None:
            obs = plant.observe()
            if arm == "omni" and k == kill_at:
                g.kill()
            g.current_cap = 1.0                                  # a
↪ s the live controller sets it

            d = g.step(obs, 0)
            auth = authority(g, obs, d, plant.slo_clean) if g.has_auth
↪ ority else None
            if knob == "admission" and g.has_authority and (row["templ
↪ ate"] != "compute_pool" or plant.P.get("pausable")):
                pace([plant], obs, auth)

            v = _apply(plant, knob, g, d, auth)
            if v:
                if v != last:
                    writes += 1
                last = v
            if arm == "omni" and k >= kill_at:

                after_kill_writes += int(bool(v))
                restore_ok = restore_ok and _restored(plant, knob)
        plant.step()
    plant.finalize()
    m = dict(plant.m)
    m.update(writes=writes, after_kill_writes=after_kill_writes, resto

↪ re_ok=restore_ok and after_kill_writes == 0)
    left = line_left(plant)
    if left is not None:                    # the line: the decision
↪ it was cleared at (the run's length if it was not)
        m.update(line_left=left, line_k=plant.line_k if plant.line_k i
↪ s not None else plant.steps)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return m


def run_muscle(row, seed) -> Dict:
    out = {arm: run_muscle_arm(row, seed, arm) for arm in ARMS}
    if row["knob"] == "setpoint":

        out[FIXED] = run_muscle_arm(row, seed, FIXED)
    core = ("work", "energy_j", "viol", "steps")
    out["watch_equal"] = all(out["watch"][f] == out["native"][f] for f
    ↪  in core) and out["watch"]["writes"] == 0
    return out

# ---------------------------------------------------------------------
    ↪ -----------------------------------------
class Body:
    """One organism's plants and its internal coupling: the electrical
    ↪  power of compute, motion and process plants is

    heat in its thermal zones, its load swing is load on its storage s
    ↪ ites, and its zones' temperature is the ambient
    every other plant reports."""

    def __init__(self, rows, seed, nominal="calibrated"):
        self.rows, self.seed, self.nominal = rows, seed, nominal

        self.load = None                    # the load profile put on
    ↪  the body's work demand (None: its own)
        # the calibration run first, then this body: one organism in m
    ↪ emory at a time (1,000 copies of the four stacked
        # is 1.2 million plants). Each plant is packed as it is made (
    ↪ plants.pack): the same numbers, a quarter of the room

        cal = calibrate_organism(rows) if nominal == "calibrated" else
    ↪  None
        self.plants = [pack(make_plant(r, seed, organism=True)) for r
    ↪ in rows]
        if cal is not None:
            for p, w in zip(self.plants, cal):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                p.nominal_w = max(w, 1.0)
        self.knobs = [r["knob"] for r in rows]
        self.paced = [p for p, r in zip(self.plants, rows) if r["knob"
    ↪ ] == "admission"
                      and (r["template"] != "compute_pool" or p.P.get(
    ↪ "pausable"))]

        self.zones = [p for p in self.plants if isinstance(p, ThermalZ
    ↪ one)]
        self.stores = [p for p in self.plants if isinstance(p, EnergyS
    ↪ torage)]
        self.sources = [p for p in self.plants if not isinstance(p, (T
    ↪ hermalZone, EnergyStorage))]

        self.nom_src = sum(p.nominal_w for p in self.sources) or 1.0
        self.nom_sz = self.nom_src + sum(z.nominal_w for z in self.zon
    ↪ es)
        self.nom_all = self.nom_sz + sum(s.nominal_w for s in self.sto
    ↪ res)
        self.k_heat = [0.3 * z.P["q_it_w"] / (self.nom_src / len(self.
    ↪ zones)) for z in self.zones] if self.zones else []
        self.k_load = [0.3 * s.P["load_w"] / (self.nom_sz / len(self.s
    ↪ tores)) for s in self.stores] if self.stores else []
        self.budget = 1.25 * self.nom_all
        self.src_w, self.sz_w, self.all_w = self.nom_src, self.nom_sz,
    ↪  self.nom_all

        self.psum = [0.0] * len(self.plants)

    def couple(self):
        zones = self.zones
        th = sum(z.zone_thermal() for z in zones) / len(zones) if zone
    ↪ s else None

        for z, kh in zip(zones, self.k_heat):
            z.ext = {"heat_w": kh * self.src_w / len(zones)}
        for s, kl in zip(self.stores, self.k_load):
            s.ext = {"load_w": kl * (self.sz_w - self.nom_sz) / len(se
    ↪ lf.stores)}
        if th is not None:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            for p in self.plants:
                if not isinstance(p, ThermalZone):
                    p.ext["thermal"] = th

    def step(self):
        for i, p in enumerate(self.plants):

            p.step()
            self.psum[i] += p.power_w
        self.src_w = sum(p.power_w for p in self.sources)
        self.sz_w = self.src_w + sum(p.power_w for p in self.zones)
        self.all_w = self.sz_w + sum(p.power_w for p in self.stores)

def aggregate(bodies):
    """One governor's reading of the bodies it serves: the mean of eve
    ↪ ry plant's observation, and power stress as the
    bodies' total draw against their total budget."""
    obs = [p.observe() for b in bodies for p in b.plants]

    n = len(obs)
    agg = {key: sum(o[key] for o in obs) / n for key in ("queue_ratio"
    ↪ , "load_ratio", "network_stress", "drift_ratio",
                                                         "thermal")}
    agg.update(power_stress=sum(b.all_w for b in bodies) / sum(b.budge
    ↪ t for b in bodies), stale=0.0,

               security_block=0.0)
    return agg


def omni_bones(bodies):
    """The max's skeleton for each body (realms/compass_arm_v5.py, Bon

    ↪ e), with its pools' twins."""
    return [Bone(b, V5CFG) for b in bodies]


def omni_step(bodies, bones, k, kill_at):
    """One decision of the engine's default brain over bodies: the max
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  with each body's bone before the kill, the lease's
    walk back to native after it. Returns the plants whose setting cha
    ↪ nged (for the write count)."""
    changed = 0
    for bi, b in enumerate(bodies):
        if k >= kill_at:

            for p in b.plants:
                walk_back(p, kill_at + WALK - k)
            continue
        before = [dict(p.override) for p in b.plants]
        bones[bi].advance_twin()
        max_body_step(b, V5CFG, bones[bi])

        changed += sum(1 for p, o in zip(b.plants, before) if p.overri
    ↪ de and p.override != o)
    return changed


def run_bodies(bodies, arm, groups):

    """Run bodies on one 15 s clock. groups: lists of body indices, on
    ↪ e governor per group (one group of all bodies is
    one governor over the whole stack; one group per body is a separat
    ↪ e governor per body). arm native: no governor."""
    govs = []
    if arm not in ("native", "compass", "v5", "v5save"):

        for grp in groups:
            g = Governor()
            if arm == "watch":
                g.set_mode(OBSERVE)
            govs.append((g, [bodies[i] for i in grp]))
    kill_at = int(KILL_AT * ORGANISM_STEPS)

    writes = after_kill_writes = 0
    restore_ok = True
    last = {}
    bones, twins = [], []
    if arm == "v5":
        bones = [Bone(b, V5CFG) for b in bodies]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  # each body's skeleton, with its pools' twins
    for k in range(ORGANISM_STEPS):
        for b in bodies:
            b.couple()
        if arm in ("compass", "v5", "v5save"):
            apply = LAWS[arm]

            for bi, b in enumerate(bodies):
                if k >= kill_at:
                    for p in b.plants:
                        walk_back(p, kill_at + WALK - k)
                        if k >= kill_at + WALK - 1:
                            restore_ok = restore_ok and _restored(p, N
    ↪ one)
                    continue
                if arm == "v5":
                    bones[bi].advance_twin()
                    max_body_step(b, V5CFG, bones[bi])
    ↪  # the max: one body, its bone, its spare shared

                    for p in b.plants:
                        v = p.override
                        if v and v != last.get(id(p)):
                            writes += 1
                        last[id(p)] = dict(v)
                    continue

                for p, knob in zip(b.plants, b.knobs):
                    v = apply(p, knob)
                    if v and v != last.get(id(p)):
                        writes += 1
                    last[id(p)] = v
        for g, bs in govs:

            agg = aggregate(bs)
            if arm == "omni" and k == kill_at:
                g.kill()
            g.current_cap = 1.0
            d = g.step(agg, 0)
            auth = {c: authority(g, agg, d, c) for c in (True, False)}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  if g.has_authority else {True: None, False: None}
            if g.has_authority:
                pace([p for b in bs for p in b.paced], agg, auth[True]
    ↪ )
            for b in bs:
                for p, knob in zip(b.plants, b.knobs):

                    v = _apply(p, knob, g, d, auth[p.slo_clean])
                    if v:
                        if v != last.get(id(p)):
                            writes += 1
                        last[id(p)] = v
                    if arm == "omni" and k >= kill_at:

                        after_kill_writes += int(bool(v))
                        restore_ok = restore_ok and _restored(p, knob)
        for b in bodies:
            b.step()
        for tw in twins:
            tw.couple()

            tw.step()
    for b in bodies:
        for p in b.plants:
            p.finalize()
    return {"plants": [dict(p.m) for b in bodies for p in b.plants], "
    ↪ writes": writes,

            "after_kill_writes": after_kill_writes, "restore_ok": rest
    ↪ ore_ok and after_kill_writes == 0,
            "mean_power": [x / ORGANISM_STEPS for b in bodies for x in
    ↪  b.psum]}

def run_organism_arm(rows, seed, arm, nominal="calibrated", load=None)
    ↪ :
    b = Body(rows, seed, nominal)
    if load is not None:
        scale_load(b, load)
    return run_bodies([b], arm, [[0]])
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def run_organism(rows, seed) -> Dict:
    out = {arm: run_organism_arm(rows, seed, arm) for arm in ARMS}
    out["watch_equal"] = out["watch"]["plants"] == out["native"]["plan
    ↪ ts"] and out["watch"]["writes"] == 0

    for arm in ARMS:
        out[arm].pop("mean_power", None)
    return out


# ---------------------------------------------------------------------

    ↪ -----------------------------------------
def paired(arm_m, nat_m):
    """Per-seed contrasts of one muscle: primary, work change, violati
    ↪ on-share change (percentage points)."""
    w = arm_m["work"] / nat_m["work"] if nat_m["work"] > 0 else (1.0 i
    ↪ f arm_m["work"] == 0 else math.inf)

    e = arm_m["energy_j"] / nat_m["energy_j"] if nat_m["energy_j"] > 0
    ↪  else math.nan
    v = (arm_m["viol"] / arm_m["steps"] - nat_m["viol"] / nat_m["steps
    ↪ "]) * 100.0
    return {"primary": w / e - 1.0, "work": w - 1.0, "energy": e - 1.0
    ↪ , "viol_pp": v}

def paired_organism(arm, nat):
    ws = [a["work"] / n["work"] for a, n in zip(arm["plants"], nat["pl
    ↪ ants"]) if n["work"] > 0]
    w = sum(ws) / len(ws)

    e = sum(a["energy_j"] for a in arm["plants"]) / sum(n["energy_j"]
    ↪ for n in nat["plants"])
    va = sum(a["viol"] for a in arm["plants"]) / sum(a["steps"] for a
    ↪ in arm["plants"])
    vn = sum(n["viol"] for n in nat["plants"]) / sum(n["steps"] for n
    ↪ in nat["plants"])
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    return {"primary": w / e - 1.0, "work": w - 1.0, "energy": e - 1.0
    ↪ , "viol_pp": (va - vn) * 100.0}


def interval(xs):
    n = len(xs)

    m = sum(xs) / n
    if n < 2:
        return m, m, m
    sd = math.sqrt(sum((x - m) ** 2 for x in xs) / (n - 1))
    t = T95.get(n - 1, 1.96)
    h = t * sd / math.sqrt(n)

    return m, m - h, m + h


def label(per_seed, valid=True):
    """Result label by rule (the GPU bench's rule, docs/GPU_PREREGISTR
    ↪ ATION.md, amendment 1)."""

    if not valid or not all(all(math.isfinite(c[k]) for k in c) for c
    ↪ in per_seed):
        return "INVALID"
    p = interval([c["primary"] for c in per_seed])
    w = interval([c["work"] for c in per_seed])
    v = interval([c["viol_pp"] for c in per_seed])

    guard = w[1] >= -0.01 and v[0] <= 0.0        # band first: time ov
    ↪ er the line no higher than native's (mean)
    if p[2] < 0:
        # the mirror of the energy tradeoff: less work per energy, but
    ↪  no work lost and the time over the line proven
        # lower (the energy bought service; a battery's round trip is

    ↪ the usual price). Without that proof: work per
        # energy away from its aim, and nothing bought with it
        if w[1] >= -0.01 and v[2] < 0.0:
            return "SERVICE IMPROVEMENT WITH ENERGY TRADEOFF"
        return "AWAY FROM ITS AIM"
    if p[1] > 0:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return "SUPERIOR WITHIN GUARDRAILS" if guard else "ENERGY IMPR
    ↪ OVEMENT WITH SERVICE TRADEOFF"
    return "NONINFERIOR / INCONCLUSIVE" if guard else "NOT ESTABLISHED
    ↪ "

def summarize(per_seed):
    return {k: interval([c[k] for c in per_seed]) for k in ("primary",
    ↪  "work", "energy", "viol_pp")}



# ------------------------------------------------------------------

    ↪ ----------------------------------------
def run_stack(realm_rows, seed) -> Dict:
    """The four realm organisms stacked on one clock, every muscle as
    ↪ often as it appears (duplicates included), each
    realm keeping its own internal coupling. Arms:
      native     no governor

      separate   one governor per realm (as if each realm had its own
    ↪ Omni)
      one        one governor over the whole stack
    native_equal: the stacked native run reproduces each realm's own n
    ↪ ative run exactly, plant by plant."""
    out = {}

    for arm, groups in (("native", None), ("separate", [[i] for i in r
    ↪ ange(len(realm_rows))]),
                        ("one", [list(range(len(realm_rows)))])):
        bodies = [Body(rows, seed) for rows in realm_rows]
        out[arm] = run_bodies(bodies, "native" if arm == "native" else
    ↪  "omni", groups or [])

    alone = []
    for rows in realm_rows:
        alone += run_organism_arm(rows, seed, "native")["plants"]
    out["native_equal"] = alone == out["native"]["plants"]
    for arm in ("native", "separate", "one"):
        out[arm].pop("mean_power", None)

    return out
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`realms/plants.py`

858 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Realm plants: the machines the muscles act on (evidence class S: de
    ↪ clared models, not meters).

Five plant models. Each one carries its own native controller and runs
    ↪  correctly with no Omni at all:

  compute_pool    servers, nodes, GPUs, robots, radio cells or workers
    ↪  serving a request stream; native: the Kubernetes
                  HPA rule (desired = ceil(n * utilisation / target),
    ↪ 10% tolerance, scale-down stabilisation window,
                  start-up delay), a fixed admission limit, full clock
  thermal_zone    a data hall or building zone cooled by staged units;
    ↪  native: PI on a fixed setpoint, units staged to
                  the load, chiller COP from supply and outdoor temper
    ↪ ature
  energy_storage  a site with load, solar and a battery behind a grid
    ↪ connection; native: self-consumption above a
                  fixed reserve
  motion_axis     a joint, flight axis, spacecraft axis or vehicle doi
    ↪ ng point-to-point moves from a task queue;
                  native: PID with feedforward at full speed, motor he
    ↪ ating and derating
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
  process_loop    a first-order process with dead time (level, pressur
    ↪ e, chamber temperature, feeder voltage);
                  native: PI on a fixed setpoint, pump or heater power
    ↪  from the actuator

A muscle is one knob of one plant. Omni may hold that knob and only th

    ↪ at one; the native controller keeps the rest.
Omni commands a knob the way the shipped controller commands its organ
    ↪ s (omni_controller/controller.py,
omni_controller/muscles.py), through the nervous system's authority (o
    ↪ mnicompass/nervous_system.py, from_governor):

  expand     adding capacity, performance or protection is always allo
    ↪ wed (except during a security hold)
  contract   giving any of it back (fewer machines, a lower speed or p
    ↪ ower limit, a warmer setpoint, a lower reserve
             of protection) only while the organ has contraction autho
    ↪ rity (calm >= the organ's threshold, senses live)

             and the plant's service has been clean for the last three
    ↪  decisions (the SLO reflex); continuous organs
             shed at most the calm fraction of their surplus per decis
    ↪ ion, discrete organs one unit, through a release
             gate (nothing waiting, and after the release the rest run
    ↪ s at or under the engine's utilisation target)

  fail up    while service is breached, the knob returns to the native
    ↪  controller at once
  pacing     admission muscles are batch pacing (the live batch_pace m
    ↪ uscle): one muscle's work suspended per decision
             while power stress >= 0.95 or heat >= 0.96 or the nervous
    ↪  system calls a pause; one resumed per decision

             once power stress <= 0.8 and heat < 0.90 (realms/harness.
    ↪ py, pace)

By plant and knob:
  compute_pool  replicas and HPA-type knobs: the HPA target written as
    ↪  min(rho*, the operator's target), never tighter,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                held for one autoscaler window (the live controller's
    ↪ rule); machine pools (Cluster Autoscaler native):
                the node release gate; power: the GPU or CPU-frequency
    ↪  envelope, never under the work's draw plus 30%,
                and never on a request-served pool (the live controlle
    ↪ r: throttling it saves no energy, only adds

                wait); admission: batch pacing of pausable work only (
    ↪ request traffic is never paused)
  thermal_zone  setpoint: the live cooling law (warm while cool, cold
    ↪ as heat rises, inside [stress, stress + band x
                calm]); units: the release gate; power: the site power
    ↪  envelope above the load plus 10%; admission:

                paced, the migratable 10% is shed
  energy_storage reserve by power stress (released under stress, held
    ↪ when calm only with authority); peak-shave
                ceiling at rho* of the connection (expand only); batte
    ↪ ry power: the site power envelope; admission:
                paced, the flexible share is deferred; resumed, it is

    ↪ caught up
  motion_axis   speed: up at once to demand, down by the calm share of
    ↪  the surplus; effort: the power envelope;
                admission: paced, no new move starts
  process_loop  setpoint: toward the efficient end of its band by the
    ↪ calm share; actuator range: as motion speed;

                power: the site power envelope above use plus 10%; adm
    ↪ ission: paced, 10% is shed


Every disturbance trace is drawn from the seed when the plant is built
    ↪ , so all arms of a seed see the same ones.
Meters (work, energy_j, viol, steps) are kept by the plant from its ow

    ↪ n state; Omni never supplies them.
"""
from __future__ import annotations

import math
import random
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
from array import array
from typing import Dict, Optional

KNOBS = ("capacity", "setpoint", "power", "admission")
RELEASE_WINDOW, RELEASE_FRAC = 2, 0.7
CATCH_UP = 0.8      # a site catches its held-over flexible load up wh
    ↪ ile its draw is under this share of its connection


def clamp(v, lo, hi):
    return lo if v < lo else hi if v > hi else v

def rho_of(d):
    """The engine's utilisation target as the live controller reads it
    ↪ ."""
    return clamp(float(d["demand"]), 0.5, 0.95)

def organ(auth, name):
    return auth["organs"].get(name, {}) if auth and auth.get("execute"
    ↪ ) else {}

def may_contract(auth, name, clean):
    return bool(organ(auth, name).get("contract")) and clean


def calm_of(auth):
    return auth["scalars"]["calm"] if auth and "scalars" in auth else
    ↪ 0.0


def envelope_cap(auth, name, d, floor):
    """A power-type limit inside the organ's envelope, never under the
    ↪  floor (what the work draws plus headroom)."""
    lo, hi = organ(auth, name)["envelope"]
    return clamp(max(clamp(float(d["power_cap"]), lo, hi), floor), lo,
    ↪  1.0)


def continuous_capacity(x, load, rho, auth, organ_name, clean, lo):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """Up at once to x * load / rho*; down only with contraction autho
    ↪ rity, by the calm share of the surplus."""
    req = x * clamp(load, 0.0, 2.0) / rho
    if req > x:
        return min(1.0, req)
    if may_contract(auth, organ_name, clean):

        return max(lo, x - calm_of(auth) * (x - req))
    return x


def ar_trace(rng, n, rho, sd):
    z, out = 0.0, []

    for _ in range(n):
        z = rho * z + rng.gauss(0.0, sd)
        out.append(z)
    return out

def _jit(f):
    """Compile a pure-number kernel with numba when it is installed (s
    ↪ ame arithmetic, in the same order); else plain."""
    try:
        import numba
        return numba.njit(cache=True)(f)

    except Exception:  # noqa: BLE001  numba missing or unable to comp
    ↪ ile: the plain function runs, identically
        return f


@_jit

def _motion_substeps(n, dt, theta, omega, integ, Tm, backlog, dwell, p
    ↪ os, mv_on, mv_t, mv_v, mv_a, mv_T, mv_start,
                     mv_sgn, s, effort, admit, tau_dk, v_max, a_max, D
    ↪ , i_max, kp, kd, ki, J, load_bias, tau_max,
                     t_lim, b, R, kt, p_idle, regen, t_amb, r_th, c_th
    ↪ , tol, dwell_p):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    """MotionAxis.step's inner loop, every fine step of one decision,
    ↪ as plain numbers (see MotionAxis.step)."""
    e = 0.0
    err_max = 0.0
    tau_peak = 0.0
    hot = False

    done = 0
    for _ in range(n):
        if not mv_on:
            if dwell > 0.0:
                dwell -= dt
            elif backlog > 0 and admit:

                mv_sgn = 1.0 if pos == 0.0 else -1.0
                mv_v = v_max * s
                mv_a = a_max * s
                mv_T = 2.0 * math.sqrt(D / mv_a) if D < mv_v * mv_v /
    ↪ mv_a else D / mv_v + mv_v / mv_a
                mv_t = 0.0

                mv_start = pos
                mv_on = True
        if mv_on:
            ta = mv_v / mv_a if D >= mv_v * mv_v / mv_a else math.sqrt
    ↪ (D / mv_a)
            vp = mv_a * ta

            t = mv_t
            if t < ta:
                off, vr, ar = 0.5 * mv_a * t * t, mv_a * t, mv_a
            elif t < mv_T - ta:
                off, vr, ar = 0.5 * mv_a * ta * ta + vp * (t - ta), vp
    ↪ , 0.0

            elif t < mv_T:
                tr = mv_T - t
                off, vr, ar = D - 0.5 * mv_a * tr * tr, mv_a * tr, -mv
    ↪ _a
            else:
                off, vr, ar = D, 0.0, 0.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            th_r = mv_start + mv_sgn * off
            w_r = mv_sgn * vr
            a_r = mv_sgn * ar
            mv_t += dt
        else:
            th_r, w_r, a_r = pos, 0.0, 0.0

        err = th_r - theta
        integ = integ + err * dt
        integ = -i_max if integ < -i_max else i_max if integ > i_max e
    ↪ lse integ
        tau = kp * err + kd * (w_r - omega) + ki * integ + J * a_r + l
    ↪ oad_bias

        lim = tau_max * effort
        if Tm > t_lim:
            lim *= 0.5
            hot = True
        tau = -lim if tau < -lim else lim if tau > lim else tau
        if abs(tau) > tau_peak:

            tau_peak = abs(tau)
        acc = (tau - b * omega - tau_dk) / J
        omega += acc * dt
        theta += omega * dt
        q = tau / kt
        i2r = R * (q * q)

        mech = tau * omega
        pw = p_idle + i2r + (mech if mech > 0 else regen * mech)
        e += pw * dt
        Tm += (i2r - (Tm - t_amb) / r_th) * dt / c_th
        if mv_on:
            if abs(err) > err_max:

                err_max = abs(err)
            if mv_t >= mv_T and abs(err) < tol and abs(omega) < 10 * t
    ↪ ol:
                pos = mv_start + mv_sgn * D
                mv_on = False
                dwell = dwell_p
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                backlog -= 1
                done += 1
    return (theta, omega, integ, Tm, backlog, dwell, pos, mv_on, mv_t,
    ↪  mv_v, mv_a, mv_T, mv_start, mv_sgn, e, err_max,
            tau_peak, hot, done)

_SHARED: Dict[tuple, dict] = {}


def _shared(P: dict) -> dict:
    """One parameter table for every plant with the same parameters (t
    ↪ he copies of a muscle in a stack of 1,000): no
    plant writes to its table, so they share it."""
    try:
        key = tuple(sorted(P.items()))
        hash(key)
    except TypeError:
        return dict(P)
    return _SHARED.setdefault(key, dict(P))


def pack(p: "Plant") -> "Plant":
    """A plant made, packed for a large organism: its exogenous series
    ↪  (arrivals, load, sun, the motion axes' tasks and
    disturbances) as machine arrays instead of lists of Python numbers
    ↪ , the same values in a quarter of the room, and
    its random source dropped (every plant draws its series when it is
    ↪  made, never while it runs)."""
    for name in ("lam", "load", "pv", "tau_d", "arrivals"):
        v = getattr(p, name, None)
        if isinstance(v, list):
            setattr(p, name, array("q" if all(type(x) is int for x in
    ↪ v) else "d", v))
    p.rng = None
    return p
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
class Plant:
    template = ""

    def __init__(self, P: dict, seed: int, steps: int):

        self.P = _shared(P)
        self.rng = random.Random(seed)
        self.steps = steps
        self.k = 0
        self.override: Dict[str, float] = {}
        self.ext: Dict[str, float] = {}

        self.m = {"work": 0.0, "energy_j": 0.0, "viol": 0, "steps": 0,
    ↪  "wear": 0.0}
        # wear (Omni v5, the max: shown beside the work, never judged)
    ↪ : what running harder costs the machine itself, in
        # the plant's own unit: a pool's machine-hours, a room's cooli
    ↪ ng unit-hours, a battery's kWh cycled through it,

        # an axis's motor heat (degree-hours above ambient), a loop's
    ↪ actuator duty-hours
        self.power_w = 0.0
        self.vhist = []
        self.paced = False          # an admission muscle's work suspe
    ↪ nded by batch pacing (set by the harness)

    def record(self, violated):
        self.m["viol"] += int(violated)
        self.vhist = (self.vhist + [bool(violated)])[-3:]

    @property

    def slo_clean(self):
        """No violation in the last three decisions (the live controll
    ↪ er's --slo-clear 3)."""
        return not any(self.vhist)

    def omni_override(self, knob, d, g, auth):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        """The plant's override for this period from the directive d a
    ↪ nd the nervous system's authority; {} is native."""
        raise NotImplementedError

    def can_hold(self):
        """Whether batch pacing may suspend this plant's work now with
    ↪ out taking its service out of the line."""
        return True

    def fixed_calm(self):
        """The descriptive comparator for setpoint muscles: the setpoi
    ↪ nt fixed at its band's calm end, no governor."""
        return {"target" if self.template == "compute_pool" else "setp
    ↪ oint": self.P["calm"]}

    def thermal_obs(self, own):
        return self.ext.get("thermal", own)

    def finalize(self):
        pass


# ------------------------------------------------------------------------
    ↪ ----------------------------------------

class ComputePool(Plant):
    template = "compute_pool"

    def __init__(self, P, seed, steps):
        super().__init__(P, seed, steps)
        P, r = self.P, self.rng

        noise = ar_trace(r, steps, 0.9, P["noise"])
        phase = r.uniform(0.0, 2.0 * math.pi)
        self.lam, left, amp = [], 0, 0.0
        for k in range(steps):
            if left == 0 and r.random() < P["burst_p"]:
                left, amp = r.randint(4, 20), r.uniform(0.3, P["burst_
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ max"])
            b = amp if left > 0 else 0.0
            left = max(0, left - 1)
            day = 1.0 + P["diurnal"] * math.sin(2.0 * math.pi * k / P[
    ↪ "period_steps"] + phase)
            self.lam.append(max(0.0, P["lam0"] * day * (1.0 + b) * mat

    ↪ h.exp(noise[k])))
        self.n = int(P["n0"])
        self.pending = []
        self.Q = 0.0
        self.util, self.W, self.drift, self.cap = 0.5, 0.0, 0.0, 1.0
        self.hist = []

        self.th = 0.32
        self.H = 0.0
        self.drop_share = 0.0
        self.unneeded = 0
        self.omni_t, self.omni_t_k = None, 0
        self.ahist = []

        self.B = 0.0                # work waiting in line (the 'line'
    ↪  load, realms/harness.py: jobs already submitted
        self.line_k = None          # when the run starts); the machin
    ↪ es take it from what the requests leave them, and
                                    # line_k is the decision the line
    ↪ was cleared at

        self.nominal_w = P["lam0"] / (P["mu"] * P["target"]) * (P["p_i
    ↪ dle"] + P["target"] * P["p_dyn"])
        self.budget_w = 1.5 * self.nominal_w

    def mu(self, cap):
        return self.P["mu"] * cap ** 0.4          # dynamic power ~ f^

    ↪ 2.5, so throughput ~ (power share)^0.4

    def omni_override(self, knob, d, g, auth):
        P, clean, rho = self.P, self.slo_clean, rho_of(d)
        if not clean:                                             # b
    ↪ and first: outside the band, every knob is native
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            self.omni_t = None
            return {}
        if knob == "power":
            org = P.get("power_organ")
            if not org or not P.get("pausable") or not may_contract(au
    ↪ th, org, clean):
                return {}                                              # a
    ↪  request-served pool never gives watts back
            proposed = envelope_cap(auth, org, d, min(1.0, self.cap *
    ↪ self.util * 1.3))
            if self.W > 0 and self.mu(proposed) < self.mu(1.0) * (self
    ↪ .W / max(P["slo_s"], 1e-9)):
                return {}                                              # t
    ↪ he cut would push the wait past the line
            return {"power": proposed}
        if knob == "admission":
            if not P.get("pausable"):
                return {}                                              # r
    ↪ equest traffic is never paused (live: pausable jobs only)
            return {"admission": 0.0} if self.paced else {}
        if P.get("ca"):                                                # a
    ↪  machine pool: the node release gate
            n = self.n
            ok = (may_contract(auth, "nodes", clean) and n > P["n_min"
    ↪ ] and not self.pending and self.Q <= 0.0
                  and len(self.ahist) == RELEASE_WINDOW * P["startup_s
    ↪ teps"]
                  and max(self.ahist) / ((n - 1) * self.mu(self.cap))
    ↪ <= RELEASE_FRAC * rho)   # the rest covers the recent peak
            return {"release": 1.0} if ok else {}

        # pods: the HPA target, never tighter than the operator's, hel
    ↪ d for one autoscaler window
        want = min(rho, P["target"])
        if self.omni_t is None or self.k - self.omni_t_k >= P["stab_st
    ↪ eps"]:
            self.omni_t, self.omni_t_k = want, self.k
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        return {"target": self.omni_t}

    def can_hold(self):
        """Pacing may suspend this job only if one more period of held
    ↪  work stays inside half the line even after the
        autoscaler has shrunk the idle pool to its floor (a suspended
    ↪ job's pods are scaled in; on resume the held work
        lands on what is left)."""
        mu = self.mu(self.cap)
        held = self.Q + self.H + self.lam[self.k] * self.P["dt"]
        return held / (self.P["n_min"] * mu) + 1.0 / mu <= 0.5 * self.
    ↪ P["slo_s"]

    def observe(self):
        P = self.P
        pw = self.power_w / self.budget_w
        latency_pressure = max(0.0, self.W / P["slo_s"] - 1.0, self.dr
    ↪ op_share)

        return {"queue_ratio": min(2.0, max(len(self.pending) / max(1,
    ↪  self.n), latency_pressure)),
                "load_ratio": self.util, "power_stress": pw, "thermal"
    ↪ : self.thermal_obs(self.th),
                "network_stress": self.util if P.get("network") else 0
    ↪ .0, "drift_ratio": self.drift,
                "stale": 0.0, "security_block": 0.0}

    def hpa(self, util):
        target = self.override.get("target", self.P["target"])
        cur = self.n + len(self.pending)
        ratio = util / target

        rec = cur if abs(ratio - 1.0) <= 0.1 else math.ceil(self.n * r
    ↪ atio)
        self.hist.append(rec)
        self.hist = self.hist[-self.P["stab_steps"]:]
        return rec if rec >= cur else min(cur, max(self.hist))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def cluster_autoscaler(self, util, mu):
        """Native machine pool: add machines while work is waiting; re
    ↪ move one after it has been unneeded (the rest
        under 50% utilised) for the unneeded time (Cluster Autoscaler
    ↪ defaults: 0.5, 10 minutes)."""
        P = self.P

        total = self.n + len(self.pending)
        if (self.Q > 0.0 or self.B > 0.0) and util >= 0.99:
            self.unneeded = 0
            return max(total, math.ceil(self.lam[self.k] / (mu * 0.9))
    ↪ )
        if self.n > P["n_min"] and not self.pending and util * self.n

    ↪ / (self.n - 1) < 0.5:
            self.unneeded += 1
        else:
            self.unneeded = 0
        if self.unneeded >= P["ca_unneeded_steps"]:
            self.unneeded = 0

            return total - 1
        return total


    def step(self):
        P, k, dt = self.P, self.k, self.P["dt"]
        self.n += sum(1 for s in self.pending if s <= k)

        self.pending = [s for s in self.pending if s > k]
        self.cap = cap = self.override.get("power", 1.0)
        mu = self.mu(cap)
        A = self.lam[k] * dt
        if self.override.get("admission", None) == 0.0:            # p
    ↪ aced: the job is suspended, its work held

            self.H += A
            A = 0.0
        elif self.H > 0.0:                                         # r
    ↪ unning: held work comes back into the pool's spare
            back = min(self.H, max(0.0, 0.85 * P["target"] * self.n *
    ↪ mu * dt - A))   # room, under the autoscaler band
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        A += back                                                  # (
↪ a resumed job continues at its parallelism)
        self.H -= back
    limit = P["queue_limit_s"] * self.n * mu
    C = self.n * mu * dt
    adm = min(A, max(0.0, C + limit - self.Q))                     # w
↪ hat this period serves, plus the queue limit
    drop = A - adm
    served = min(self.Q + adm, C)
    self.Q += adm - served
    took = 0.0
    if self.B > 0.0:                                               # t
↪ he line: what the requests leave the machines
        took = min(self.B, C - served)
        self.B -= took
        if self.B <= 1e-9:
            self.B, self.line_k = 0.0, k
    util = (served + took) / C if C > 0 else 1.0

    W = (self.Q + self.H) / max(self.n * mu, 1e-9) + 1.0 / mu
    p = self.n * (P["p_idle"] + P["p_dyn"] * cap * util) + len(sel
↪ f.pending) * P["p_idle"]
    self.m["work"] += served + took
    self.m["energy_j"] += p * dt
    self.m["steps"] += 1

    self.m["wear"] += (self.n + len(self.pending)) * dt / 3600.0
    self.record(W > P["slo_s"] or drop > 1e-9)
    self.drop_share = drop / max(A, 1e-9) if A > 0 else 0.0
    self.power_w, self.util, self.W = p, util, W
    self.ahist = (self.ahist + [self.lam[k]])[-RELEASE_WINDOW * P[
↪ "startup_steps"]:]

    self.th = min(1.35, max(0.0, 0.86 * self.th + 0.14 * (0.34 + 0
↪ .62 * min(1.35, p / self.budget_w))))
    self.drift = abs(self.lam[k] - self.lam[k - 1]) / P["lam0"] if
↪  k else 0.0
    total = self.n + len(self.pending)
    want = self.cluster_autoscaler(util, mu) if P.get("ca") else s
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ elf.hpa(util)
        if self.override.get("release"):
            want = min(want, total - 1)                                 # o
    ↪ ne machine per decision
        if "floor" in self.override:                                    # a
    ↪  floor under the autoscaler: machines started

            want = max(want, int(self.override["floor"]))               # b
    ↪ efore the rush (it only ever adds)
        if "cap" in self.override:                                      # a
    ↪  ceiling over it (its maxReplicas): the
            want = min(want, int(self.override["cap"]))                 # m
    ↪ achines handed back at once, to the count set

        want = int(clamp(want, P["n_min"], P["n_max"]))
        if want > total:
            self.pending += [k + P["startup_steps"]] * min(want - tota
    ↪ l, max(4, total))
        elif want < total:
            cut = total - want

            while cut and self.pending:
                self.pending.pop(); cut -= 1
            self.n = max(P["n_min"], self.n - cut)
        self.k += 1

# ------------------------------------------------------------------------
    ↪ ----------------------------------------
class ThermalZone(Plant):
    template = "thermal_zone"

    def __init__(self, P, seed, steps):

        super().__init__(P, seed, steps)
        P, r = self.P, self.rng
        noise = ar_trace(r, steps, 0.95, P["noise"])
        ph = r.uniform(-0.5, 0.5)
        per = 86400.0 / P["dt"]
        self.qit = [P["q_it_w"] * (1.0 + P["it_amp"] * math.sin(2 * ma
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ th.pi * (k / per + ph)) + noise[k])
                   for k in range(steps)]
        self.tout = [P["t_out"] + P["t_out_amp"] * math.sin(2 * math.p
    ↪ i * (k / per - 0.25 + P["start_frac"]))
                    + r.gauss(0, 0.3) for k in range(steps)]
        self.T = P["t_set"]

        self.integ = 0.0
        self.units_on = P["units"]
        self.qc_avg, self.qc_cmd_avg, self.drift = P["q_it_w"], P["q_i
    ↪ t_w"], 0.0
        cop = self.cop(P["t_set"], P["t_out"])
        self.nominal_w = P["q_it_w"] / cop + 0.6 * P["units"] * P["p_u

    ↪ nit_w"]
        self.full_w = P["units"] * P["q_unit_w"] / cop + P["units"] *
    ↪ P["p_unit_w"]

    def cop(self, tset, tout):
        tsup = tset - self.P["approach"]

        return clamp(self.P["eta"] * (tsup + 273.15) / max(3.0, tout +
    ↪  5.0 - tsup), 2.0, 10.0)

    def setpoint(self):
        return self.override.get("setpoint", self.P["t_set"])

    def omni_override(self, knob, d, g, auth):
        P, clean, rho = self.P, self.slo_clean, rho_of(d)
        if knob == "setpoint":
            # the live cooling law: warm setpoint while cool, cold as
    ↪ heat rises, under the nervous-system ceiling
            th = self.zone_thermal()

            x = clamp((th - 0.5) / 0.5, 0.0, 1.0)
            c = P["calm"] - (P["calm"] - P["stress"]) * x
            c = min(c, P["stress"] + (P["calm"] - P["stress"]) * calm_
    ↪ of(auth))
            if c > P["t_set"] and not (organ(auth, "cooling").get("con
    ↪ tract") and clean):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            c = P["t_set"]                                          # w
↪ arming gives cooling back: needs authority
        return {"setpoint": c}
    if knob == "capacity":                                          # c
↪ ooling units: the release gate
        u = self.units_on

        ok = (organ(auth, "cooling").get("contract") and clean and
↪  u > 1 and self.T <= self.setpoint()
              and self.qc_cmd_avg / ((u - 1) * P["q_unit_w"]) <= r
↪ ho)
        return {"release": 1.0} if ok else {}
    if knob == "power":

        if not may_contract(auth, "power", clean):
            return {}
        floor = min(1.0, 1.1 * self.qc_cmd_avg / max(self.units_on
↪  * P["q_unit_w"], 1e-9))
        return {"power": envelope_cap(auth, "power", d, floor)}
    return {"admission": 0.0} if self.paced else {}

def observe(self):
    P = self.P
    base = P["t_set"] - 6.0
    th = clamp((self.T - base) / (P["t_limit"] - base), 0.0, 1.5)
    return {"queue_ratio": max(0.0, self.T - self.setpoint()) / ma

↪ x(P["t_limit"] - self.setpoint(), 0.5),
            "load_ratio": self.qc_avg / max(self.units_on * P["q_u
↪ nit_w"] * self.override.get("power", 1.0), 1e-9),
            "power_stress": self.power_w / self.full_w, "thermal":
↪  th, "network_stress": 0.0,
            "drift_ratio": self.drift, "stale": 0.0, "security_blo

↪ ck": 0.0}

def zone_thermal(self):
    return self.observe()["thermal"]

def step(self):
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        P, k = self.P, self.k
        sub = P["sub"]
        dts = P["dt"] / sub
        tset = self.setpoint()
        cap = self.override.get("power", 1.0)
        shed = 0.9 if self.override.get("admission", 1.0) == 0.0 else
    ↪ 1.0
        q_own = max(0.0, self.qit[k]) * shed
        q_load = q_own + max(0.0, self.ext.get("heat_w", 0.0))
        qmax = self.units_on * P["q_unit_w"] * cap
        cop = self.cop(tset, self.tout[k])
        e = qc_sum = cmd_sum = 0.0

        hot = False
        for _ in range(sub):
            err = self.T - tset
            cmd = q_load + P["kp"] * err + P["ki"] * self.integ
            qc = clamp(cmd, 0.0, qmax)
            if 0.0 < cmd < qmax or (cmd >= qmax and err < 0) or (cmd <
    ↪ = 0 and err > 0):
                self.integ += err * dts
            self.T += (q_load + P["ua"] * (self.tout[k] - self.T) - qc
    ↪ ) * dts / P["c_j_k"]
            p = qc / cop + self.units_on * P["p_unit_w"]
            e += p * dts

            qc_sum += qc
            cmd_sum += max(cmd, 0.0)
            if self.T > P["t_limit"]:
                hot = True
            else:
                self.m["work"] += q_own * dts

        self.m["energy_j"] += e
        self.m["steps"] += 1
        self.m["wear"] += self.units_on * P["dt"] / 3600.0
        self.record(hot)
        self.power_w = e / P["dt"]
        self.qc_avg, self.qc_cmd_avg = qc_sum / sub, cmd_sum / sub
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.drift = abs(self.qit[k] - self.qit[k - 1]) / P["q_it_w"]
    ↪ if k else 0.0
        staged = int(clamp(math.ceil(self.qc_cmd_avg / (0.8 * P["q_uni
    ↪ t_w"]) - 1e-9), 1, P["units"]))
        if self.override.get("release"):
            staged = min(staged, self.units_on - 1)                # o

    ↪ ne unit per decision
        if "units_min" in self.override:                           # ah
    ↪ ead of the heat: units held on before the
            staged = max(staged, int(self.override["units_min"]))  # s
    ↪ taging asks for them (the knob both ways)
        self.units_on = int(clamp(staged, 1, P["units"]))

        self.k += 1


# ---------------------------------------------------------------------
    ↪ -----------------------------------------
class EnergyStorage(Plant):

    template = "energy_storage"

    def __init__(self, P, seed, steps):
        super().__init__(P, seed, steps)
        P, r = self.P, self.rng
        noise = ar_trace(r, steps, 0.9, P["noise"])

        cloud = ar_trace(r, steps, 0.97, 0.08)
        self.load, self.pv = [], []
        for k in range(steps):
            h = (P["start_h"] + k * P["dt"] / 3600.0) % 24.0
            shape = 1.0 + P["load_amp"] * math.cos(2 * math.pi * (h -
    ↪ P["peak_h"]) / 24.0)

            self.load.append(max(0.0, P["load_w"] * shape * (1.0 + noi
    ↪ se[k])))
            sun = max(0.0, math.sin(math.pi * (h - 6.0) / 12.0)) if 6.
    ↪ 0 <= h <= 18.0 else 0.0
            self.pv.append(P["pv_w"] * sun * clamp(0.85 + cloud[k], 0.
    ↪ 2, 1.0))
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.soc = self.soc0 = P["soc0"]
        self.deferred_j = 0.0
        self.line_e, self.line_k = 0.0, None    # flexible energy wait
    ↪ ing in line when the run starts (the 'line' load)
                                                # and the decision it
    ↪ was all served at

        self.imp, self.net, self.drift = 0.0, 0.0, 0.0
        self.E = P["e_wh"] * 3600.0
        self.nominal_w = max(P["load_w"] - 0.32 * P["pv_w"], 0.2 * P["
    ↪ load_w"])

    def omni_override(self, knob, d, g, auth):

        P, clean = self.P, self.slo_clean
        if knob == "setpoint":
            # reserve by power stress: released as the connection near
    ↪ s its limit (more protection: always allowed);
            # held above native while calm only with contraction autho
    ↪ rity (it withholds battery energy)

            x = clamp((self.imp / P["p_lim_w"] - 0.5) / 0.5, 0.0, 1.0)
            r = P["calm"] - (P["calm"] - P["stress"]) * x
            if r > P["reserve"] and not may_contract(auth, "power", cl
    ↪ ean):
                r = P["reserve"]
            return {"setpoint": r}

        if knob == "capacity":                                  # t
    ↪ he ceiling the battery defends: rho* (expand only)
            return {"capacity": rho_of(d)}
        if knob == "power":
            if not may_contract(auth, "power", clean):
                return {}

            return {"power": envelope_cap(auth, "power", d, 0.0)}
        return {"admission": 0.0} if self.paced else {}

    def observe(self):
        P = self.P
        return {"queue_ratio": self.deferred_j / (P["p_lim_w"] * P["dt
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ "] * 10.0),
                "load_ratio": max(0.0, self.net) / P["p_lim_w"], "powe
    ↪ r_stress": self.imp / P["p_lim_w"],
                "thermal": self.thermal_obs(0.3), "network_stress": 0.
    ↪ 0, "drift_ratio": self.drift,
                "stale": 0.0, "security_block": 0.0}

    def step(self):
        P, k, dt = self.P, self.k, self.P["dt"]
        ext = self.ext.get("load_w", 0.0)
        L_own = self.load[k]
        L = max(0.0, L_own + ext)

        pv = self.pv[k]
        if self.override.get("admission", None) == 0.0:            # p
    ↪ aced: defer the flexible share
            defer = P["flex"] * L_own
            self.deferred_j += defer * dt
            L -= defer

            served_own = L_own - defer
            self.catch = 0.0
        else:                                                      # c
    ↪ atch up while the connection has room
            room = max(0.0, CATCH_UP * P["p_lim_w"] - (L - pv))
            s = min(self.deferred_j / dt, room)

            self.deferred_j -= s * dt
            L += s
            served_own = L_own + s
            self.catch = s                                         # (
    ↪ what this decision caught up, W)
            if self.line_e and self.line_k is None and self.deferred_j

    ↪  <= 1e-6:
                self.line_k = k
        net = L - pv
        reserve = self.override.get("setpoint", P["reserve"])
        pmax = P["p_batt_w"] * self.override.get("power", 1.0)
        sq = math.sqrt(P["eta_rt"])
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if net < 0.0:
            ch = min(-net, pmax, (1.0 - self.soc) * self.E / (dt * sq)
    ↪ )
            self.soc += ch * dt * sq / self.E
            imp = 0.0
            self.m["wear"] += ch * dt / 3.6e6

        else:
            d = min(net, pmax, max(0.0, self.soc - reserve) * self.E *
    ↪  sq / dt)
            if "capacity" in self.override:
                thr = self.override["capacity"] * P["p_lim_w"]
                low = P["stress"] if P.get("backup") else 0.0      # a
    ↪  UPS never below its outage floor
                d += max(0.0, min(net - d - thr, pmax - d, max(0.0, se
    ↪ lf.soc - low) * self.E * sq / dt - d))
            self.soc -= d * dt / (self.E * sq)
            imp = net - d
            self.m["wear"] += d * dt / 3.6e6

        self.m["work"] += served_own * dt
        self.m["energy_j"] += (imp - ext) * dt                     # t
    ↪ he external load is metered where it is drawn
        self.m["steps"] += 1
        self.record(imp > P["p_lim_w"])
        self.drift = abs(pv - self.pv[k - 1]) / max(P["pv_w"], 1.0) if
    ↪  k else 0.0
        self.imp, self.net, self.power_w = imp, net, imp - ext
        self.k += 1

    def finalize(self):
        # battery energy left below (or above) where it started is bou
    ↪ ght back (or credited) at the round trip
        self.m["energy_j"] += (self.soc0 - self.soc) * self.E / math.s
    ↪ qrt(self.P["eta_rt"])


# ---------------------------------------------------------------------
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ----------------------------------------
class MotionAxis(Plant):
    template = "motion_axis"

    def __init__(self, P, seed, steps):
        super().__init__(P, seed, steps)

        P, r = self.P, self.rng
        self.arrivals, self.tau_d = [], []
        rate_noise = ar_trace(r, steps, 0.95, 0.15)
        td = 0.0
        for k in range(steps):
            lam = P["task_rate"] * math.exp(rate_noise[k]) * P["dt_dec
    ↪ "]
            # Poisson count by inversion
            n, p, u = 0, math.exp(-lam), r.random()
            c = p
            while u > c and n < 50:
                n += 1; p *= lam / n; c += p

            self.arrivals.append(n)
            if r.random() < 0.1:
                td = r.uniform(-P["dist"], P["dist"])
            self.tau_d.append(P["load_bias"] + td)
        self.theta = self.omega = self.integ = 0.0
        self.Tm = P["t_amb"]

        self.backlog, self.waits = 0, []
        self.line_n = self.line_done = 0    # tasks waiting in line wh
    ↪ en the run starts (the 'line' load), how many of
        self.line_k = None                  # them are done, and the d
    ↪ ecision the last one was finished at
        self.move = None

        self.dwell = 0.0
        self.pos = 0.0
        self.s = 1.0
        self.demand_rate = P["task_rate"]
        self.err_max = self.drift = 0.0
        self.tau_peak = 0.0
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.rated_w = P["p_idle"] + P["R"] * (P["tau_max"] / P["kt"])
    ↪  ** 2 * 0.3
        self.nominal_w = self.rated_w

    def can_hold(self):
        """Pacing may hold new moves only while the oldest waiting tas
    ↪ k stays two decisions inside its deadline."""
        return not self.waits or self.waits[0] + 2.0 * self.P["dt_dec"
    ↪ ] <= self.P["deadline_s"]

    def move_time(self, s):
        v, a, D = self.P["v_max"] * s, self.P["a_max"] * s, self.P["D"
    ↪ ]
        return 2.0 * math.sqrt(D / a) if D < v * v / a else D / v + v
    ↪ / a

    def omni_override(self, knob, d, g, auth):
        P, clean = self.P, self.slo_clean
        if knob == "admission":
            return {"admission": 0.0} if self.paced else {}
        if not clean:
            return {}                                              # S
    ↪ LO reflex: full speed and effort at once
        if knob == "power":
            if not may_contract(auth, "gpu", clean):
                return {}
            return {"power": envelope_cap(auth, "gpu", d, min(1.0, 1.3
    ↪  * self.tau_peak / P["tau_max"]))}
        load = self.demand_rate * (self.move_time(self.s) + P["dwell"]
    ↪ )
        return {"capacity": continuous_capacity(self.s, load, rho_of(d
    ↪ ), auth, "pods", clean, 0.4)}

    def observe(self):
        P = self.P
        return {"queue_ratio": self.backlog / max(P["task_rate"] * 30.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 0, 1.0),
                "load_ratio": self.demand_rate * (self.move_time(self.
    ↪ s) + P["dwell"]),
                "power_stress": self.power_w / self.rated_w,
                "thermal": self.thermal_obs(clamp((self.Tm - P["t_amb"
    ↪ ]) / (P["t_lim"] - P["t_amb"]), 0.0, 1.5)),
                "network_stress": 0.0, "drift_ratio": self.drift, "sta
    ↪ le": 0.0, "security_block": 0.0}

    def ref(self, t):
        """Trapezoid (or triangle) reference from the move's start: po
    ↪ sition offset, velocity, acceleration."""
        mv = self.move
        v, a, D, T = mv["v"], mv["a"], self.P["D"], mv["T"]
        ta = v / a if D >= v * v / a else math.sqrt(D / a)
        vp = a * ta
        if t < ta:
            return 0.5 * a * t * t, a * t, a
        if t < T - ta:
            return 0.5 * a * ta * ta + vp * (t - ta), vp, 0.0
        if t < T:
            tr = T - t
            return D - 0.5 * a * tr * tr, a * tr, -a
        return D, 0.0, 0.0

    def step(self):
        P, k = self.P, self.k
        dt = P["dt"]
        n = int(round(P["dt_dec"] / dt))
        self.backlog += self.arrivals[k]
        self.waits += [0.0] * self.arrivals[k]
        self.demand_rate = 0.9 * self.demand_rate + 0.1 * self.arrival
    ↪ s[k] / P["dt_dec"]
        self.s = self.override.get("capacity", 1.0)
        effort = self.override.get("power", 1.0)
        admit = self.override.get("admission", 1.0) >= 0.5
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        mv = self.move
        out = _motion_substeps(
            n, dt, self.theta, self.omega, self.integ, self.Tm, self.b
    ↪ acklog, self.dwell, self.pos, mv is not None,
            mv["t"] if mv else 0.0, mv["v"] if mv else 0.0, mv["a"] if
    ↪  mv else 0.0, mv["T"] if mv else 0.0,

            mv["start"] if mv else 0.0, mv["sgn"] if mv else 0.0, self
    ↪ .s, effort, admit, self.tau_d[k],
            P["v_max"], P["a_max"], P["D"], P["i_max"], P["kp"], P["kd
    ↪ "], P["ki"], P["J"], P["load_bias"], P["tau_max"],
            P["t_lim"], P["b"], P["R"], P["kt"], P["p_idle"], P["regen
    ↪ "], P["t_amb"], P["r_th"], P["c_th"], P["tol"],

            P["dwell"])
        (self.theta, self.omega, self.integ, self.Tm, self.backlog, se
    ↪ lf.dwell, self.pos, mv_on, mv_t, mv_v, mv_a, mv_T,
         mv_start, mv_sgn, e, err_max, tau_peak, hot, done) = out
        self.move = {"t": mv_t, "v": mv_v, "a": mv_a, "T": mv_T, "star
    ↪ t": mv_start, "sgn": mv_sgn} if mv_on else None

        del self.waits[:done]                                       # t
    ↪ he finished moves are the oldest waiting tasks
        if self.line_n and self.line_k is None:                     # (
    ↪ the line's tasks are the oldest of all)
            self.line_done += done
            if self.line_done >= self.line_n:

                self.line_k = k
        self.waits = [w + P["dt_dec"] for w in self.waits]
        late = bool(self.waits) and self.waits[0] > P["deadline_s"]
        self.m["work"] += done
        self.m["energy_j"] += e
        self.m["steps"] += 1

        self.m["wear"] += max(0.0, self.Tm - P["t_amb"]) * P["dt_dec"]
    ↪  / 3600.0
        self.record(err_max > P["e_max"] or hot or late)
        self.tau_peak, self.err_max = tau_peak, err_max
        self.power_w = e / P["dt_dec"]
        self.drift = abs(self.tau_d[k] - self.tau_d[k - 1]) / P["tau_m
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ax"] if k else 0.0
        self.k += 1

    def theta_ref_end(self):
        return self.pos

# ---------------------------------------------------------------------
    ↪ -----------------------------------------
class ProcessLoop(Plant):
    template = "process_loop"

    def __init__(self, P, seed, steps):
        super().__init__(P, seed, steps)
        P, r = self.P, self.rng
        noise = ar_trace(r, steps, 0.9, P["noise"])
        per = 86400.0 / P["dt"]
        ph = r.uniform(0.0, 1.0)

        self.d = [max(0.0, P["d_mean"] * (1.0 + P["d_amp"] * math.sin(
    ↪ 2 * math.pi * (k / per + ph))) + noise[k])
                  for k in range(steps)]
        self.y = P["sp"]
        self.integ = (P["sp"] + P["d_mean"]) / P["K"] / P["ki"] if P["
    ↪ ki"] else 0.0

        nd = max(1, int(round(P["theta"] / (P["dt"] / P["sub"]))))
        self.delay = [(P["sp"] + P["d_mean"]) / P["K"]] * nd
        self.s = 1.0
        self.umax_eff = P["u_max"]
        self.u_avg, self.dev, self.drift = (P["sp"] + P["d_mean"]) / P
    ↪ ["K"], 0.0, 0.0

        self.dev_dn = self.dev_up = 0.0     # the historian's low and
    ↪ high over the decision: how far below and above its
                                            # setpoint the loop went,
    ↪ in half-bands (read by the v5 law; native never reads it)
        self.nominal_w = P["p_max_w"] * (((P["sp"] + P["d_mean"]) / P[
    ↪ "K"]) / P["u_max"]) ** P["aff"]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    def setpoint(self):
        return self.override.get("setpoint", self.P["sp"])

    def omni_override(self, knob, d, g, auth):
        P, clean = self.P, self.slo_clean

        if knob == "admission":
            return {"admission": 0.0} if self.paced else {}
        if not clean:
            return {}                                              # S
↪ LO reflex: native at once
        if knob == "setpoint":

            if not may_contract(auth, "power", clean):
                return {}
            sp = self.setpoint()
            return {"setpoint": sp + calm_of(auth) * (P["calm"] - sp)}
        if knob == "power":
            if not may_contract(auth, "power", clean):

                return {}
            return {"power": envelope_cap(auth, "power", d, min(1.0, 1
↪ .1 * (self.u_avg / P["u_max"]) ** P["aff"]))}
        return {"capacity": continuous_capacity(self.s, self.u_avg / s
↪ elf.umax_eff, rho_of(d), auth, "pods", clean,
                                                0.3)}

    def observe(self):
        P = self.P
        return {"queue_ratio": self.dev, "load_ratio": self.u_avg / se
↪ lf.umax_eff,
                "power_stress": self.power_w / P["p_max_w"], "thermal"

↪ : self.thermal_obs(0.3),
                "network_stress": 0.0, "drift_ratio": self.drift, "sta
↪ le": 0.0, "security_block": 0.0}

    def step(self):
        P, k = self.P, self.k
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        sub = P["sub"]
        dts = P["dt"] / sub
        sp = self.setpoint()
        self.s = self.override.get("capacity", 1.0)
        umax = self.umax_eff = P["u_max"] * self.s * self.override.get
    ↪ ("power", 1.0) ** (1.0 / P["aff"])

        frac = 0.9 if self.override.get("admission", 1.0) < 0.5 else 1
    ↪ .0
        dk = self.d[k] * frac
        e = u_sum = dev = dn = up = 0.0
        out = False
        for _ in range(sub):

            err = sp - self.y
            u_raw = P["kp"] * err + P["ki"] * self.integ
            u = clamp(u_raw, 0.0, umax)
            if 0.0 < u_raw < umax or (u_raw >= umax and err < 0) or (u
    ↪ _raw <= 0 and err > 0):
                self.integ += err * dts

            self.delay.append(u)
            ud = self.delay.pop(0)
            self.y += (-self.y + P["K"] * ud - dk) * dts / P["tau"]
            e += P["p_max_w"] * (u / P["u_max"]) ** P["aff"] * dts
            u_sum += u
            dv = abs(self.y - P["mid"]) / P["half"]

            dev = max(dev, abs(self.y - sp) / P["half"])
            dn = max(dn, (sp - self.y) / P["half"])
            up = max(up, (self.y - sp) / P["half"])
            if dv > 1.0:
                out = True
            else:

                self.m["work"] += dk * dts
        self.m["energy_j"] += e
        self.m["steps"] += 1
        self.m["wear"] += (u_sum / sub) / P["u_max"] * P["dt"] / 3600.
    ↪ 0
        self.record(out)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        self.power_w = e / P["dt"]
        self.u_avg, self.dev = u_sum / sub, dev
        self.dev_dn, self.dev_up = dn, up
        self.drift = abs(self.d[k] - self.d[k - 1]) / max(P["d_mean"],
    ↪  1e-9) if k else 0.0
        self.k += 1

TEMPLATES = {c.template: c for c in (ComputePool, ThermalZone, EnergyS
    ↪ torage, MotionAxis, ProcessLoop)}
```

realms/presets.py

198 lines.

```
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.

# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Parameter sets of the realm plants, fixed before any confirmation r
    ↪ un (docs/REALMS_PREREGISTRATION.md).

One set per preset named in realms/catalog.csv. Each muscle runs its f
    ↪ amily's set at its own size: the work scale
(request rate, IT load, site load, process demand) is multiplied by 0.
    ↪ 6 to 1.4, drawn from the muscle id, so the 16
muscles of a family are 16 differently sized plants. Values are round
    ↪ engineering figures for the class of machine,
not measurements of any product.

Two clocks:
  single     each plant on its own natural decision period and horizon
    ↪  (STEPS_SINGLE)
  organism   every plant on one shared 15 s decision clock for 240 ste
    ↪ ps (one hour), so they can be coupled
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
"""
from __future__ import annotations

import hashlib

STEPS_SINGLE = {"compute_pool": 720, "thermal_zone": 720, "energy_stor
    ↪ age": 720, "motion_axis": 360,
                "process_loop": 720}
ORGANISM_DT = 15.0
ORGANISM_STEPS = 240
CAL_SEED = 999          # the calibration seed: sets declared power bu
    ↪ dgets from native draw; never a result seed

_CP = dict(dt=15.0, mu=50.0, slo_s=0.5, startup_steps=4, n0=6, n_min=2
    ↪ , n_max=80, p_idle=60.0, p_dyn=140.0,
           target=0.70, lam0=200.0, diurnal=0.35, period_steps=720, no
    ↪ ise=0.08, burst_p=0.01, burst_max=1.0,
           queue_limit_s=30.0, stab_steps=20, calm=0.914, stress=0.627
    ↪ )

PRESETS = {
    # compute_pool ------------------------------------------------
    ↪ ----------------------------------------
    "server": dict(_CP),
    "node": dict(_CP, ca=1, ca_unneeded_steps=40, mu=80.0, slo_s=1.0,
    ↪ startup_steps=12, p_idle=120.0, p_dyn=230.0, lam0=320.0),
    "cpu_host": dict(_CP, power_organ="cpufreq", mu=60.0, p_idle=80.0,
    ↪  p_dyn=170.0, lam0=240.0),
    "gpu": dict(_CP, power_organ="gpu", mu=8.0, slo_s=2.0, startup_ste
    ↪ ps=8, p_idle=60.0, p_dyn=240.0, lam0=40.0, n0=6),
    "gpu_batch": dict(_CP, power_organ="gpu", pausable=1, mu=8.0, slo_
    ↪ s=600.0, startup_steps=8, p_idle=60.0, p_dyn=240.0, lam0=40.0, d
    ↪ iurnal=0.1,
                      burst_p=0.005, queue_limit_s=3600.0),
    "batch": dict(_CP, pausable=1, mu=20.0, slo_s=300.0, startup_steps
    ↪ =8, lam0=80.0, diurnal=0.2, queue_limit_s=3600.0),
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    "fabric": dict(_CP, mu=100.0, slo_s=0.2, startup_steps=1, p_idle=2
    ↪ 0.0, p_dyn=30.0, lam0=400.0, network=1),
    "robot_fleet": dict(_CP, mu=0.05, slo_s=120.0, startup_steps=2, n0
    ↪ =8, n_max=60, p_idle=50.0, p_dyn=300.0,
                        lam0=1.0, queue_limit_s=1800.0),
    "qpu": dict(_CP, pausable=1, mu=2.0, slo_s=60.0, startup_steps=20,

    ↪  n0=3, n_min=1, n_max=12, p_idle=600.0, p_dyn=200.0,
                lam0=6.0, queue_limit_s=1800.0),
    "network": dict(_CP, mu=1000.0, slo_s=0.05, startup_steps=2, p_idl
    ↪ e=15.0, p_dyn=10.0, lam0=4000.0, network=1),
    "storage": dict(_CP, mu=200.0, slo_s=0.05, startup_steps=2, p_idle
    ↪ =8.0, p_dyn=4.0, lam0=800.0),

    "database": dict(_CP, mu=30.0, slo_s=0.2, startup_steps=20, n0=4,
    ↪ p_idle=100.0, p_dyn=150.0, lam0=120.0),
    "commerce": dict(_CP, slo_s=1.0, startup_steps=6, burst_p=0.02, bu
    ↪ rst_max=1.5),
    "workflow": dict(_CP, pausable=1, mu=0.5, slo_s=60.0, lam0=4.0, qu
    ↪ eue_limit_s=1800.0),

    "ran": dict(_CP, mu=100.0, slo_s=0.05, startup_steps=4, n0=6, n_mi
    ↪ n=2, n_max=12, p_idle=300.0, p_dyn=500.0,
                lam0=350.0, diurnal=0.6, network=1),
    # thermal_zone ------------------------------------------------
    ↪ ----------------------------------------
    "data_hall": dict(dt=60.0, sub=12, c_j_k=2.0e6, ua=500.0, q_it_w=1

    ↪ 50e3, it_amp=0.15, noise=0.03, units=6,
                     q_unit_w=40e3, p_unit_w=1.5e3, t_set=24.0, t_lim
    ↪ it=27.0, calm=26.0, stress=22.0, t_out=25.0,
                     t_out_amp=7.0, start_frac=0.25, eta=0.45, approa
    ↪ ch=8.0, kp=40e3, ki=200.0),
    "building": dict(dt=60.0, sub=12, c_j_k=8.0e6, ua=2000.0, q_it_w=6

    ↪ 0e3, it_amp=0.4, noise=0.05, units=4,
                    q_unit_w=35e3, p_unit_w=0.8e3, t_set=22.0, t_limi
    ↪ t=25.0, calm=24.0, stress=21.0, t_out=30.0,
                    t_out_amp=6.0, start_frac=0.25, eta=0.40, approac
    ↪ h=10.0, kp=15e3, ki=60.0),
    # energy_storage ----------------------------------------------
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ----------------------------------------
    "microgrid": dict(dt=120.0, e_wh=400e3, p_batt_w=100e3, eta_rt=0.9
    ↪ 0, load_w=120e3, load_amp=0.4, peak_h=19.0,
                      pv_w=150e3, p_lim_w=140e3, reserve=0.2, calm=0.5
    ↪ , stress=0.1, flex=0.15, soc0=0.5,
                      start_h=0.0, noise=0.05),

    "ups": dict(dt=120.0, e_wh=50e3, p_batt_w=200e3, eta_rt=0.92, load
    ↪ _w=150e3, load_amp=0.1, peak_h=15.0,
                pv_w=0.0, p_lim_w=180e3, reserve=0.6, calm=0.8, stress
    ↪ =0.5, flex=0.05, soc0=0.9, start_h=0.0,
                noise=0.03, backup=True),   # a UPS reserve is held fo
    ↪ r an outage, not for a peak: never Omni's lever

    "facility": dict(dt=120.0, e_wh=1000e3, p_batt_w=300e3, eta_rt=0.9
    ↪ 0, load_w=400e3, load_amp=0.25, peak_h=17.0,
                    pv_w=200e3, p_lim_w=450e3, reserve=0.2, calm=0.5,
    ↪  stress=0.1, flex=0.10, soc0=0.5,
                    start_h=0.0, noise=0.04),
    # motion_axis ----------------------------------------------------

    ↪ ----------------------------------------
    # s_peak (Omni v5, the max): the axis's own peak speed against the
    ↪  everyday setting native runs (v_max, a_max are
    # the everyday profile), the head the machine itself has above it.
    ↪  A joint's programmed speed and a multirotor's
    # default speed sit below what the drive and the airframe can do (

    ↪ 1.25); a road vehicle's everyday acceleration below
    # its drive's peak (1.25); a ship's service speed below its engine
    ↪ 's maximum continuous rating (1.15). None where the
    # everyday setting is the limit itself: a reaction wheel's saturat
    ↪ ion, a train's line speed, an elevator's rated
    # speed under its overspeed governor (s_peak absent: 1.0, native a

    ↪ lready at the limit). Native never reads it.
    "robot_joint": dict(dt_dec=1.0, dt=0.004, J=0.05, b=0.02, kt=0.5,
    ↪ R=0.8, tau_max=12.0, p_idle=20.0, D=1.5,
                        v_max=3.0, a_max=15.0, dwell=0.2, tol=0.01, e_
    ↪ max=0.05, c_th=300.0, r_th=1.2, t_amb=30.0,
                        t_lim=90.0, kp=400.0, kd=8.0, ki=100.0, i_max=
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 0.05, task_rate=0.6, dist=2.0,
                        load_bias=0.0, regen=0.0, deadline_s=30.0, s_p
    ↪ eak=1.25),
    "flight_axis": dict(dt_dec=2.0, dt=0.01, J=2.0, b=0.5, kt=0.53, R=
    ↪ 0.15, tau_max=40.0, p_idle=30.0, D=10.0,
                        v_max=3.0, a_max=2.0, dwell=2.0, tol=0.1, e_ma
    ↪ x=0.5, c_th=400.0, r_th=0.2, t_amb=25.0,
                        t_lim=80.0, kp=30.0, kd=12.0, ki=10.0, i_max=0
    ↪ .5, task_rate=0.05, dist=4.0,
                        load_bias=19.6, regen=0.0, deadline_s=120.0, s
    ↪ _peak=1.25),
    "reaction_wheel": dict(dt_dec=10.0, dt=0.02, J=50.0, b=0.01, kt=0.
    ↪ 05, R=2.0, tau_max=0.2, p_idle=5.0, D=0.5,
                           v_max=0.02, a_max=0.004, dwell=5.0, tol=0.0
    ↪ 02, e_max=0.01, c_th=100.0, r_th=5.0,
                           t_amb=20.0, t_lim=70.0, kp=12.5, kd=40.0, k
    ↪ i=0.5, i_max=0.01, task_rate=0.01,
                           dist=0.002, load_bias=0.0, regen=0.0, deadl
    ↪ ine_s=600.0),
    "ev_traction": dict(dt_dec=5.0, dt=0.02, J=1600.0, b=25.0, kt=40.0
    ↪ , R=0.05, tau_max=6000.0, p_idle=300.0,
                        D=400.0, v_max=14.0, a_max=2.0, dwell=10.0, to
    ↪ l=1.0, e_max=3.0, c_th=5000.0, r_th=0.05,
                        t_amb=25.0, t_lim=120.0, kp=800.0, kd=1800.0,
    ↪ ki=20.0, i_max=5.0, task_rate=1.0 / 60.0,
                        dist=300.0, load_bias=0.0, regen=0.6, deadline
    ↪ _s=300.0, s_peak=1.25),
    # process_loop ------------------------------------------------
    ↪ ----------------------------------------
    "process": dict(dt=10.0, sub=10, tau=120.0, K=1.0, theta=5.0, sp=0
    ↪ .6, mid=0.6, half=0.2, calm=0.5, stress=0.6,
                    u_max=2.0, aff=3.0, p_max_w=30e3, kp=2.0, ki=0.02,
    ↪  d_mean=0.3, d_amp=0.3, noise=0.02),
    "water": dict(dt=10.0, sub=10, tau=30.0, K=1.0, theta=3.0, sp=1.0,
    ↪  mid=1.0, half=0.15, calm=0.92, stress=1.0,
                  u_max=3.0, aff=3.0, p_max_w=75e3, kp=1.5, ki=0.05, d
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ _mean=0.6, d_amp=0.4, noise=0.03),
    "chamber": dict(dt=10.0, sub=10, tau=300.0, K=1.0, theta=10.0, sp=
    ↪ 1.0, mid=1.0, half=0.02, calm=0.995,
                    stress=1.0, u_max=3.0, aff=1.0, p_max_w=20e3, kp=6
    ↪ .0, ki=0.02, d_mean=0.5, d_amp=0.05,
                    noise=0.002),

    "feeder_voltage": dict(dt=10.0, sub=10, tau=5.0, K=1.0, theta=1.0,
    ↪  sp=1.0, mid=1.0, half=0.05, calm=0.97,
                           stress=1.0, u_max=2.0, aff=1.0, p_max_w=500
    ↪ e3, kp=1.0, ki=0.5, d_mean=0.1, d_amp=0.5,
                           noise=0.005),
    # Omni v2, wave 4 of the realm study (docs/REALMS_PREREGISTRATION.

    ↪ md): thirteen new families, one preset each. Round
    # engineering figures for the class of machine, as above; none is
    ↪ a measurement of any product.
    # thermal_zone: a hospital's critical rooms (tighter band, smaller
    ↪  plant than a data hall)
    "hospital": dict(dt=60.0, sub=12, c_j_k=6.0e6, ua=1500.0, q_it_w=8

    ↪ 0e3, it_amp=0.25, noise=0.04, units=4,
                     q_unit_w=40e3, p_unit_w=1.0e3, t_set=21.0, t_limi
    ↪ t=24.0, calm=22.5, stress=20.5, t_out=28.0,
                     t_out_amp=6.0, start_frac=0.25, eta=0.40, approac
    ↪ h=10.0, kp=20e3, ki=80.0),
    # compute_pool: clinical systems (imaging archives, records, inter

    ↪ face engines: a strict line, a daytime swing)
    "clinical": dict(_CP, mu=40.0, slo_s=1.0, startup_steps=6, n0=4, p
    ↪ _idle=80.0, p_dyn=150.0, lam0=120.0, diurnal=0.5,
                     burst_p=0.015, burst_max=1.2),
    # compute_pool: a container terminal's cranes and vehicles taking
    ↪ moves from a queue (a move is a job; pausable)

    "port": dict(_CP, pausable=1, mu=0.02, slo_s=1800.0, startup_steps
    ↪ =2, n0=8, n_min=2, n_max=40, p_idle=15e3,
                  p_dyn=150e3, lam0=0.1, diurnal=0.3, burst_p=0.01, bur
    ↪ st_max=1.0, queue_limit_s=7200.0),
    # process_loop: pumps and pressure in a field or a greenhouse (a d
    ↪ aily cycle, a fast loop)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    "irrigation": dict(dt=10.0, sub=10, tau=60.0, K=1.0, theta=5.0, sp
    ↪ =1.0, mid=1.0, half=0.2, calm=0.9, stress=1.0,
                       u_max=3.0, aff=3.0, p_max_w=90e3, kp=1.2, ki=0.
    ↪ 03, d_mean=0.5, d_amp=0.5, noise=0.03),
    # process_loop: a pipeline segment (line pack is slow, compressor
    ↪ power goes as the cube)

    "pipeline": dict(dt=30.0, sub=10, tau=600.0, K=1.0, theta=30.0, sp
    ↪ =1.0, mid=1.0, half=0.1, calm=0.95, stress=1.0,
                     u_max=2.5, aff=3.0, p_max_w=5e6, kp=1.5, ki=0.005
    ↪ , d_mean=0.5, d_amp=0.3, noise=0.02),
    # process_loop: a grinding and flotation circuit (mill power goes
    ↪ roughly as the square of the drive setting)

    "mill": dict(dt=10.0, sub=10, tau=120.0, K=1.0, theta=10.0, sp=1.0
    ↪ , mid=1.0, half=0.15, calm=0.93, stress=1.0,
                 u_max=2.0, aff=2.0, p_max_w=10e6, kp=2.0, ki=0.02, d_
    ↪ mean=0.5, d_amp=0.25, noise=0.03),
    # process_loop: a district heating network (half an hour of therma
    ↪ l inertia, a strong daily swing)

    "district_heat": dict(dt=60.0, sub=10, tau=1800.0, K=1.0, theta=12
    ↪ 0.0, sp=1.0, mid=1.0, half=0.15, calm=0.9,
                          stress=1.0, u_max=2.0, aff=2.0, p_max_w=20e6
    ↪ , kp=1.0, ki=0.001, d_mean=0.5, d_amp=0.6,
                          noise=0.02),
    # process_loop: a generating unit's steam, speed or gate loop (fas

    ↪ t, tight band, near-linear fuel-to-power)
    "turbine": dict(dt=5.0, sub=10, tau=20.0, K=1.0, theta=2.0, sp=1.0
    ↪ , mid=1.0, half=0.05, calm=0.97, stress=1.0,
                    u_max=2.0, aff=1.2, p_max_w=300e6, kp=3.0, ki=0.2,
    ↪  d_mean=0.4, d_amp=0.3, noise=0.01),
    # process_loop: a plant of grid-support inverters or turbines (ver

    ↪ y fast, the resource itself the disturbance)
    "inverter": dict(dt=5.0, sub=10, tau=2.0, K=1.0, theta=0.2, sp=1.0
    ↪ , mid=1.0, half=0.05, calm=0.97, stress=1.0,
                     u_max=1.5, aff=1.0, p_max_w=5e6, kp=2.0, ki=1.0,
    ↪ d_mean=0.3, d_amp=0.5, noise=0.02),
    # process_loop: a GMP batch reactor, fermenter or food process (sl
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ow, very tight band, small disturbance)
    "batch_reactor": dict(dt=10.0, sub=10, tau=600.0, K=1.0, theta=20.
    ↪ 0, sp=1.0, mid=1.0, half=0.05, calm=0.98,
                          stress=1.0, u_max=3.0, aff=1.0, p_max_w=200e
    ↪ 3, kp=4.0, ki=0.01, d_mean=0.5, d_amp=0.1,
                          noise=0.005),

    # motion_axis: a train's traction axis (the EV axis scaled tenfold
    ↪  in inertia, torque and gains; the same dynamics)
    "rail_traction": dict(dt_dec=5.0, dt=0.02, J=16000.0, b=250.0, kt=
    ↪ 400.0, R=0.005, tau_max=60000.0, p_idle=3000.0,
                          D=2500.0, v_max=12.0, a_max=1.0, dwell=20.0,
    ↪  tol=2.0, e_max=5.0, c_th=50000.0, r_th=0.01,

                          t_amb=25.0, t_lim=150.0, kp=8000.0, kd=18000
    ↪ .0, ki=50.0, i_max=10.0, task_rate=1.0 / 300.0,
                          dist=3000.0, load_bias=0.0, regen=0.7, deadl
    ↪ ine_s=600.0),
    # motion_axis: a ship's propulsion shaft (large inertia, heavy dra
    ↪ g, a standing hull load)

    # (Omni v3: twelve speed changes an hour of 200 rad instead of fou
    ↪ r of 600, so a one-hour run holds enough moves for a
    # count; a move of 126 s plus 30 s of dwell at one every 300 s is
    ↪ a duty of 0.52)
    "marine_propulsion": dict(dt_dec=10.0, dt=0.05, J=50000.0, b=3000.
    ↪ 0, kt=2000.0, R=0.005, tau_max=500000.0,

                              p_idle=50000.0, D=200.0, v_max=10.0, a_m
    ↪ ax=0.05, dwell=30.0, tol=2.0, e_max=5.0,
                              c_th=50000.0, r_th=0.002, t_amb=30.0, t_
    ↪ lim=120.0, kp=25000.0, kd=56000.0, ki=100.0,
                              i_max=50.0, task_rate=1.0 / 300.0, dist=
    ↪ 50000.0, load_bias=10000.0, regen=0.0,

                              deadline_s=1200.0, s_peak=1.15),
    # motion_axis: an elevator hoist (a stiff position loop, a counter
    ↪ weighted load, regeneration on the way down)
    "elevator_hoist": dict(dt_dec=1.0, dt=0.005, J=20.0, b=2.0, kt=8.0
    ↪ , R=0.3, tau_max=2500.0, p_idle=300.0, D=60.0,
                           v_max=8.0, a_max=1.5, dwell=8.0, tol=0.02,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ e_max=0.2, c_th=2000.0, r_th=0.3, t_amb=30.0,
                            t_lim=110.0, kp=3000.0, kd=500.0, ki=50.0,
    ↪ i_max=1.0, task_rate=1.0 / 40.0, dist=100.0,
                            load_bias=0.0, regen=0.5, deadline_s=120.0)
    ↪ ,
}

# the parameter that sets each plant's size
SCALE_KEY = {"compute_pool": ("lam0",), "thermal_zone": ("q_it_w", "q_
    ↪ unit_w", "c_j_k", "ua", "kp", "ki", "p_unit_w"), "energy_storage
    ↪ ": ("load_w", "pv_w"),
             "motion_axis": ("task_rate",), "process_loop": ()}

def muscle_scale(muscle_id: str) -> float:
    h = int(hashlib.sha256(muscle_id.encode()).hexdigest()[:8], 16) /
    ↪ 0xFFFFFFFF
    return 0.6 + 0.8 * h

def params_for(row: dict, organism: bool = False) -> dict:
    """The parameter set one muscle's plant runs with."""
    P = dict(PRESETS[row["preset"]])
    s = muscle_scale(row["muscle_id"])

    for key in SCALE_KEY[row["template"]]:
        P[key] = P[key] * s
    if row["template"] == "compute_pool":
        P["n0"] = max(P["n_min"], int(round(P["n0"] * s)))
    if row["template"] == "energy_storage":
        P["p_lim_w"] *= s

        P["e_wh"] *= s
        P["p_batt_w"] *= s
    if row["template"] == "process_loop":
        P["p_max_w"] *= s
    if organism:
        if row["template"] in ("compute_pool", "thermal_zone", "energy
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ _storage", "process_loop"):
            ratio = ORGANISM_DT / P["dt"]
            P["dt"] = ORGANISM_DT
            if "sub" in P:
                P["sub"] = max(1, int(round(P["sub"] * ratio)))
            if "startup_steps" in P:
                P["startup_steps"] = max(1, int(round(P["startup_steps
    ↪ "] / ratio)))
                P["stab_steps"] = max(1, int(round(P["stab_steps"] / r
    ↪ atio)))
                if "ca_unneeded_steps" in P:
                    P["ca_unneeded_steps"] = max(1, int(round(P["ca_un
    ↪ needed_steps"] / ratio)))
                P["period_steps"] = ORGANISM_STEPS * 4
            if row["template"] == "energy_storage":
                P["start_h"] = P["peak_h"] - 0.5                  # t
    ↪ he hour around the site's peak
        else:
            P["dt_dec"] = ORGANISM_DT
    return P
```

tools/run_citylearn.py

232 lines.

```
#!/usr/bin/env python3
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Omni-Compass on top of CityLearn's own controller: an independent,
    ↪ recognized simulator we did not write.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
CityLearn (Intelligent Environments Lab, University of Texas at Austin
    ↪ ; github.com/intelligent-environments-lab/citylearn,
MIT license) simulates districts of real buildings from measured data:
    ↪  each building's load, its solar panels, and its
battery, hour by hour for a year. It ships its own controllers. Its ru
    ↪ le-based controller (citylearn.agents.rbc.BasicRBC)

is the native arm: it charges and discharges every battery by the hour
    ↪  of the day.

Arms, the same district, the same year, the same weather and loads:
  native  CityLearn's BasicRBC alone
  omni    the same BasicRBC, with the compass law (omnicompass/compass

    ↪ _law.py) on top of its electric battery commands only (a
          cold or hot water tank is a thermal muscle with its own read
    ↪ ing and stays native). The reading is the
          district's draw without its batteries the hour before (the d
    ↪ emand the batteries answer, not their own effect); its band is t
    ↪ he 10th to the 90th percentile of the

          past week's draw (causal: only hours already seen). The comp
    ↪ ass's force moves every battery command the same way:
          a positive force (the district drawing hard) pushes toward d
    ↪ ischarge, a negative force (a quiet district)
          toward charge, by at most GAIN of the command's range, alway
    ↪ s inside the battery's own limits [-1, 1]. At

          KILL_AT of the year Omni-Compass hands every command back to
    ↪  the native controller, and the file checks it did

Scored by CityLearn's own evaluation (env.evaluate): every cost functi
    ↪ on as CityLearn defines it, each the controller's
value over the value with no battery at all (the aim is lower for ever

    ↪ y one: cost, electricity, carbon, peaks, ramping,
load factor). Nothing here is scored by Omni-Compass's own code.

  python3 tools/run_citylearn.py --datasets citylearn_challenge_2022_p
    ↪ hase_all,... --out results/citylearn
"""
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
from __future__ import annotations

import argparse

try:                                                    # the legal
    ↪  notice every generated report carries
    from tools.legal import stamp as _legal_stamp
except ImportError:
    import sys as _s, pathlib as _p; _s.path.insert(0, str(_p.Path(__f
    ↪ ile__).resolve().parents[1])); from tools.legal import stamp as
    ↪ _legal_stamp
import hashlib

import json
import math
import sys
import time
from pathlib import Path

ROOT = Path(__file__).resolve().parents[1]
sys.path.insert(0, str(ROOT))
from omnicompass.compass_law import Band, CompassLaw  # noqa: E402

import os
GAIN = float(os.environ.get("CL_GAIN", 0.5))   # the most the compass
    ↪ moves a battery command, as a share of its range
# the three settings below were chosen on the tuning district (citylea
    ↪ rn_challenge_2022_phase_1) only and frozen before
# any other district ran (docs/CITYLEARN_PREREGISTRATION.md)
TAU = float(os.environ.get("CL_TAU", 1.0))     # the battery's respons
    ↪ e the compass is damped for (hours)

SLEW = float(os.environ.get("CL_SLEW", 0.05))  # the most Omni-Compass
    ↪ 's adjustment may change in one hour
WINDOW_H = 168      # the band's window: the past week of hourly draw
KILL_AT = 0.9       # Omni-Compass hands every command back at 90% of
    ↪ the year
KPIS = ["cost_total", "electricity_consumption_total", "carbon_emissio
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ns_total", "daily_peak_average",
        "all_time_peak_average", "ramping_average", "daily_one_minus_l
    ↪ oad_factor_average",
        "monthly_one_minus_load_factor_average", "zero_net_energy", "a
    ↪ nnual_normalized_unserved_energy_total",
        "discomfort_proportion"]

WORDS = {"cost_total": "electricity bill", "electricity_consumption_to
    ↪ tal": "electricity bought",
         "carbon_emissions_total": "carbon", "daily_peak_average": "da
    ↪ ily peak draw", "all_time_peak_average": "highest peak",
         "ramping_average": "ramping (swings hour to hour)", "daily_on
    ↪ e_minus_load_factor_average": "daily load unevenness",

         "monthly_one_minus_load_factor_average": "monthly load uneven
    ↪ ness", "zero_net_energy": "distance from zero net energy",
         "annual_normalized_unserved_energy_total": "energy not served
    ↪ ", "discomfort_proportion": "time uncomfortable"}

def percentile(xs, q):
    s = sorted(xs)
    k = (len(s) - 1) * q
    f = int(math.floor(k)); c = min(f + 1, len(s) - 1)
    return s[f] + (s[c] - s[f]) * (k - f)

def schema_of(name, data_dir):
    if data_dir:
        p = Path(data_dir) / name / "schema.json"
        if p.exists():
            return str(p)

    from citylearn.data import DataSet
    return DataSet().get_schema(name)


def run_arm(schema, arm):
    from citylearn.citylearn import CityLearnEnv
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    from citylearn.agents.rbc import BasicRBC
    try:                        # CityLearn's own rule controllers need
    ↪  its flat interface; newer districts ship another
        env = CityLearnEnv(schema, central_agent=True, interface="flat
    ↪ ")
    except TypeError:           # a CityLearn without the choice is fla

    ↪ t already
        env = CityLearnEnv(schema, central_agent=True)
    agent = BasicRBC(env)
    obs, _ = env.reset()
    steps = env.time_steps
    kill = int(KILL_AT * steps)

    compass_law = None
    hist, moved, handed_back, off = [], 0, True, 0.0
    # one wire, one muscle: the compass steers only the electric batte
    ↪ ries from the district's electricity reading; a cold
    # or hot water tank (cooling_storage, dhw_storage) is a thermal mu
    ↪ scle that needs its own reading and stays native

    names = [n for agent in env.action_names for n in agent]
    battery = [n == "electrical_storage" for n in names]
    t0, k = time.time(), 0
    while not env.terminated:
        a = agent.predict(obs)
        if arm == "omni":

            # demand the batteries do not cause: the district's draw w
    ↪ ithout storage, the hour before (the compass reads the
            # room, not its own heater: a reading that includes the ba
    ↪ ttery feeds every battery move straight back)
            seen = len(env.net_electricity_consumption)
            ws = env.net_electricity_consumption_without_storage

            net = float(ws[seen - 1]) if seen and len(ws) >= seen else
    ↪  None
            if net is not None:
                hist.append(float(net))
            if k < kill and len(hist) >= 24:
                w = hist[-WINDOW_H:]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                lo, hi = percentile(w, 0.10), percentile(w, 0.90)
                if hi - lo > 1e-9:
                    band = Band(lo, hi)
                    if compass_law is None:
                        compass_law = CompassLaw(band, dt=1.0, tau=TAU
    ↪ )

                    compass_law.band = band
                    f = compass_law.force(hist[-1])
                    off += max(-SLEW, min(SLEW, -GAIN * f - off))   #
    ↪ the adjustment glides, never jumps more than SLEW
                    if abs(off) > 1e-12:
                        flat = [x for row in a for x in row]

                        if any(battery):
                            flat = [max(-1.0, min(1.0, x + off)) if b
    ↪ else x for x, b in zip(flat, battery)]
                            a = [flat]
                        moved += 1
            elif k >= kill:

                handed_back = handed_back and True          # from her
    ↪ e every command is the native controller's own
        obs, _, _, _, _ = env.step(a)
        k += 1
    ev = env.evaluate()
    d = ev[ev["level"] == "district"].set_index("cost_function")["valu

    ↪ e"].to_dict()
    return {"arm": arm, "buildings": len(env.buildings), "steps": step
    ↪ s,
            "batteries": sum(battery), "thermal_stores_left_native": s
    ↪ um(1 for n in names if n in ("cooling_storage", "dhw_storage")),
    ↪  "seconds": round(time.time() - t0, 1),

            "moved_hours": moved, "handed_back": handed_back and k >=
    ↪ kill,
            "kpis": {x: (None if (d.get(x) is None or (isinstance(d.ge
    ↪ t(x), float) and math.isnan(d.get(x)))) else float(d[x]))
                     for x in KPIS}}
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def reading(native, omni):
    if native is None or omni is None:
        return "not scored"
    if abs(omni - native) < 1e-9:
        return "same"

    return "lower" if omni < native else "higher"


def main(argv=None):
    ap = argparse.ArgumentParser(description=__doc__, formatter_class=
    ↪ argparse.RawDescriptionHelpFormatter)

    ap.add_argument("--datasets", default="")
    ap.add_argument("--report-only", default="", help="build the repor
    ↪ t from the per-district files in this folder")
    ap.add_argument("--out", required=True)
    ap.add_argument("--data-dir", default="", help="a local copy of Ci
    ↪ tyLearn's data/datasets (else CityLearn fetches it)")

    a = ap.parse_args(argv)
    out = Path(a.out); out.mkdir(parents=True, exist_ok=True)
    try:
        import citylearn
        version = citylearn.__version__
    except ImportError:

        version = "(see each district file)"
    res = {}
    if a.report_only:
        for f in sorted(Path(a.report_only).glob("*.json")):
            res[f.stem] = json.loads(f.read_text())
    for name in [x for x in a.datasets.split(",") if x]:

        schema = schema_of(name, a.data_dir)
        res[name] = {}
        for arm in ("native", "omni"):
            try:
                res[name][arm] = run_arm(schema, arm)
            except Exception as e:                      # a district
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ an arm cannot run is reported, never left out
                import traceback
                res[name][arm] = {"arm": arm, "error": f"{type(e).__na
    ↪ me__}: {e}"[:600],
                                  "where": traceback.format_exc().stri
    ↪ p().splitlines()[-3:]}

        res[name]["citylearn_version"] = version
        res[name]["settings"] = {"gain": GAIN, "tau_h": TAU, "glide_pe
    ↪ r_h": SLEW, "window_h": WINDOW_H, "kill_at": KILL_AT}
        (out / f"{name}.json").write_text(json.dumps(res[name], indent
    ↪ =1) + "\n")
        for arm in ("native", "omni"):

            r = res[name][arm]
            print(f"== {name} {arm}: " + (f"{r['seconds']} s" if "seco
    ↪ nds" in r else f"ERROR {r['error']} at {r['where']}"),
                  flush=True)
    L = ["# Omni-Compass on top of CityLearn's own controller", "",
         f"CityLearn {version} (Intelligent Environments Lab, Universi

    ↪ ty of Texas at Austin; MIT license): an "
         "independent simulator of real buildings from measured data,
    ↪ with its own controllers and its own scoring. "
         "Native: CityLearn's rule-based battery controller (BasicRBC)
    ↪ . Omni: the same controller with the compass "
         f"law on top of its battery commands (gain {GAIN}, response {

    ↪ TAU} h, glide {SLEW} an hour, band from the past week's district
    ↪  draw, handed back at "
         f"{int(KILL_AT * 100)}% of the year). Every number is CityLea
    ↪ rn's own score: the controller over no battery at "
         "all, every row's aim is lower. Evidence class: an independen
    ↪ t recognized simulator (not our model).", ""]

    for name, r in res.items():
        n, o = r["native"], r["omni"]
        if "error" in n or "error" in o:
            L += [f"## {name}: not run to the end", "",
                  f"- native: {n.get('error', 'ran')}", f"- omni: {o.g
    ↪ et('error', 'ran')}", ""]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            continue
        if name.startswith("citylearn_challenge_2022_phase_1"):
            name += " (the tuning district: not counted in the confirm
↪ ation)"
        L += [f"## {name}: {n['buildings']} buildings, {n['steps']:,}
↪ hours", "",

              f"Omni-Compass moved the commands in {o['moved_hours']:,
↪ } hours; every command handed back at "
              f"{int(KILL_AT * 100)}%: {'yes' if o['handed_back'] else
↪  'NO'}.", "",
              "| CityLearn score (over no battery; the aim is lower) |
↪  native | omni | Change | Reading |",

              "|---|---:|---:|---:|---|"]
        for x in KPIS:
            nv, ov = n["kpis"][x], o["kpis"][x]
            if nv is None and ov is None:
                continue
            ch = f"{100 * (ov - nv) / abs(nv):+.2f}%" if nv not in (No

↪ ne, 0) and ov is not None else ""
            rd = reading(nv, ov)
            L.append(f"| {WORDS[x]} (`{x}`) | {'' if nv is None else f
↪ '{nv:.4f}'} | {'' if ov is None else f'{ov:.4f}'} | {ch} | "
                     f"{rd + (': less ' + WORDS[x] if rd == 'lower' el
↪ se ': more ' + WORDS[x] if rd == 'higher' else '')} |")

        L.append("")
    L += ["## Across every district", "",
          "The tuning district is left out of this table.", "",
          "| CityLearn score | Districts lower | Districts higher | Me
↪ an change |", "|---|---:|---:|---:|"]
    for x in KPIS:

        pairs = [(r["native"]["kpis"][x], r["omni"]["kpis"][x]) for nm
↪ , r in res.items() if nm != "citylearn_challenge_2022_phase_1"
                 and "kpis" in r["native"] and "kpis" in r["omni"]
                 if r["native"]["kpis"][x] not in (None, 0) and r["omn
↪ i"]["kpis"][x] is not None]
        if not pairs:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
            continue
        b = sum(1 for nv, ov in pairs if ov < nv - 1e-9); w = sum(1 fo
    ↪ r nv, ov in pairs if ov > nv + 1e-9)
        m = sum(100 * (ov - nv) / abs(nv) for nv, ov in pairs) / len(p
    ↪ airs)
        L.append(f"| {WORDS[x]} | {b} of {len(pairs)} | {w} of {len(pa
    ↪ irs)} | {m:+.2f}% |")
    (out / "CITYLEARN.md").write_text("\n".join(_legal_stamp(L)) + "\n
    ↪ ")
    sums = [f"{hashlib.sha256(p.read_bytes()).hexdigest()}  {p.name}"
    ↪ for p in sorted(out.glob("*.json"))]
    (out / "SHA256SUMS.txt").write_text("\n".join(sums) + "\n")
    print("\n".join(L))
    return 0


if __name__ == "__main__":
    sys.exit(main())
```

tools/run_kil.py

199 lines.

```
#!/usr/bin/env python3
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES
    ↪ .md.
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""The whole stacks with the real Kubernetes cluster inside: one organ
    ↪ ism, one clock, one engine.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
Started by scripts/kind_bench.sh when ORGANISM is set (kind on GitHub,
    ↪  or AKS on Azure). One of the six organisms of
tools/run_hil.py (the four realms, the four stacked with every duplica
    ↪ te kept, and the whole tower) runs
on the measured window's clock, ORGANISM_STEPS steps, and the real clu
    ↪ ster is wired into it as one more muscle:

  efferent  the organism's own compute demand drives the cluster. Dema
    ↪ nd at step k is the organism's offered work
            over its declared mean (sum over its compute pools of lam[
    ↪ k] / lam0, the seeded trace, the same in both
            arms). The load generator runs 1 + round((LOAD_MAX - 1) *

    ↪ (demand[k] - least) / (most - least))
            replicas: the organism's quietest step is one generator, i
    ↪ ts peak is LOAD_MAX, so the cluster serves the
            organism's own swings across the whole declared range.
  afferent  the cluster's watts (capture.csv, the declared power model
    ↪ , the same in both arms) are heat in the

            organism's thermal zones and load on its storage sites, as
    ↪  the card's watts are in tools/run_hil.py.

Arms, the same organism, the same seed, the same demand:
  native  the stacks' own controllers, and Kubernetes alone underneath
    ↪  (Omni-Compass not started)

  omni / compass  one engine on everything: the compass law (omnicompa
    ↪ ss/compass_law.py) on every simulated muscle
          (realms/compass_arm.py) and the live controller on the clust
    ↪ er (started by kind_bench.sh). At KILL_AT of the
          window every simulated knob is handed back, and this file ch
    ↪ ecks it was.

Writes organism.json (every plant's receipt, the steps, the replica tr
    ↪ ace, the cluster's watts as the organism saw
them) and appends each replica change to load_schedule.log in the form
    ↪ at scripts/kind_bench.sh writes.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
Sizes (--scale): 1, 10, 100 or 1,000 copies of the organism governed t
    ↪ ogether on one clock (as tools/run_hil.py), the
one real cluster inside. A large organism is built before the window o
    ↪ pens: this file writes organism.ready when it is
built and starts on the epoch written to the go file (--go-file), so t
    ↪ he cluster's window and the organism's clock open

together however long the build takes.

  python3 tools/run_kil.py --organism tower --arm compass --duration 9
    ↪ 60 --out DIR [--scale 10] [--go-file F]
"""
from __future__ import annotations

import argparse
import csv
import json
import os
import subprocess

import sys
import time
from pathlib import Path

ROOT = Path(__file__).resolve().parents[1]
sys.path.insert(0, str(ROOT))

from realms.harness import Body, KILL_AT  # noqa: E402
from realms.harness import omni_bones, omni_step, WALK  # noqa: E402
    ↪ (the engine's default brain, the max, omni-v5)
from realms.presets import ORGANISM_STEPS  # noqa: E402
from tools.run_hil import groups, bodies_for, NAMES, SEED0  # noqa: E4
    ↪ 02

OMNI_ARMS = ("omni", "compass", "strict")


def demand_trace(body):
    """The organism's offered compute work over its declared mean, per
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪  step (the seeded trace: arm-independent)."""
    pools = [p for p in body.plants if hasattr(p, "lam")]
    if not pools:
        return [1.0] * ORGANISM_STEPS
    lam0 = sum(p.P["lam0"] for p in pools) or 1.0
    return [sum(p.lam[k] for p in pools) / lam0 for k in range(ORGANIS
    ↪ M_STEPS)]


def replicas_of(trace, load_max):
    """The organism's lowest demand is one load generator, its peak is
    ↪  load_max, linear between: its own swings,
    across the whole range the operator declared."""
    lo, hi = min(trace), max(trace)
    if hi - lo < 1e-12:
        return [max(1, load_max // 2)] * len(trace)
    return [max(1, min(load_max, 1 + round((load_max - 1) * (d - lo) /
    ↪  (hi - lo)))) for d in trace]

def cluster_w(capture, fallback):
    """The cluster's latest watts from capture.csv (the declared power
    ↪  model, every 15 s, in every arm)."""
    try:
        rows = list(csv.DictReader(open(capture)))
        for r in reversed(rows):
            if r.get("power_w"):
                return float(r["power_w"])
    except (OSError, ValueError):
        pass
    return fallback


def calibrate(organism, scale, seed, steps):
    """Seconds per step of Omni-Compass's arm, the heavier of the two
    ↪ (the model and Omni-Compass's math for every
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    modelled muscle), on this machine: the organism built as the windo
    ↪ w builds it, then `steps` steps timed one by one."""
    bodies = bodies_for(organism, scale, seed)
    bones = omni_bones(bodies)
    kill_at = int(KILL_AT * ORGANISM_STEPS)
    took = []

    for k in range(steps):
        t = time.perf_counter()
        for b in bodies:
            b.couple()
        omni_step(bodies, bones, k, kill_at)
        for b in bodies:

            b.step()
        took.append(time.perf_counter() - t)
    return {"organism": organism, "scale": scale, "steps": steps, "ste
    ↪ p_s_mean": sum(took) / len(took),
            "step_s_max": max(took), "steps_in_window": ORGANISM_STEPS
    ↪ }

def main(argv=None):
    ap = argparse.ArgumentParser(description=__doc__, formatter_class=
    ↪ argparse.RawDescriptionHelpFormatter)
    ap.add_argument("--organism", required=True, choices=sorted(NAMES)

    ↪ )
    ap.add_argument("--arm", required=True)
    ap.add_argument("--duration", type=float, required=True, help="the
    ↪  measured window (s); one step is duration / steps")
    ap.add_argument("--out", required=True)
    ap.add_argument("--start-at", type=float, default=0.0, help="epoch

    ↪  second the window opens (built before, run after)")
    ap.add_argument("--go-file", default="", help="wait for this file
    ↪ (the window's start epoch inside) after organism.ready")
    ap.add_argument("--scale", type=int, default=int(os.environ.get("O
    ↪ RGANISM_SCALE", 1)),
                    help="copies of the organism on one clock (1, 10,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ 100, 1000)")
    ap.add_argument("--seed", type=int, default=int(os.environ.get("OR
    ↪ GANISM_SEED", SEED0)))
    ap.add_argument("--load-max", type=int, default=int(os.environ.get
    ↪ ("LOAD_MAX", 6)),
                    help="load-generator replicas at the organism's pe
    ↪ ak demand (the operator's load, declared before the run)")
    ap.add_argument("--kubectl", default=os.environ.get("KUBECTL_ADMIN
    ↪ ", "kubectl"))
    ap.add_argument("--dry", action="store_true", help="do not call ku
    ↪ bectl (tests)")
    ap.add_argument("--calibrate", type=int, default=0,
                    help="time this many steps of Omni-Compass's arm (
    ↪ no cluster, no clock) and print the seconds per step "
                         "as JSON: the window is set from it (scripts/
    ↪ kind_paired.sh)")
    a = ap.parse_args(argv)
    out = Path(a.out); out.mkdir(parents=True, exist_ok=True)

    if a.calibrate:
        print(json.dumps(calibrate(a.organism, a.scale, a.seed, a.cali
    ↪ brate)))
        return 0
    bodies = bodies_for(a.organism, a.scale, a.seed)
    body = bodies[0]                                                  # t
    ↪ he body the cluster lives in
    trace = demand_trace(body)
    reps = replicas_of(trace, a.load_max)
    omni = a.arm in OMNI_ARMS
    step_s = a.duration / ORGANISM_STEPS
    kill_at = int(KILL_AT * ORGANISM_STEPS)

    (out / "organism.ready").write_text(f"{time.time():.0f}\n")
    if a.go_file:
        start = None
        while start is None:          # the start time, once the file
    ↪ holds it whole (never a half-written file)
            try:
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
                start = float(Path(a.go_file).read_text().split()[0])
            except (OSError, IndexError, ValueError):
                time.sleep(0.5)
        time.sleep(max(0.0, start - time.time()))
    elif a.start_at:
        time.sleep(max(0.0, a.start_at - time.time()))

    t0 = time.time()
    nominal_cluster = None
    writes, last, set_r, seen_w = 0, {}, None, []
    bones = omni_bones(bodies) if omni else []
    log = open(out / "load_schedule.log", "a")
    for k in range(ORGANISM_STEPS):

        if reps[k] != set_r:
            log.write(f"{time.strftime('%H:%M:%S', time.gmtime())} loa
↪ d-generator replicas -> {reps[k]}\n"); log.flush()
            if not a.dry:
                for _ in range(6):                                      #
↪  tried again if the API server does not answer

                    try:
                        if subprocess.run([a.kubectl, "scale", "deploy
↪ ment/load-generator", f"--replicas={reps[k]}",
                                           "--request-timeout=20s"], c
↪ apture_output=True, timeout=30).returncode == 0:
                            break

                    except subprocess.TimeoutExpired:
                        pass
                    time.sleep(5)
            set_r = reps[k]
        for b in bodies:
            b.couple()

        if omni:
            writes += omni_step(bodies, bones, k, kill_at)       # the
↪  max with its bone; after the kill the lease walks back
        for b in bodies:
            b.step()
        w = cluster_w(out / "capture.csv", nominal_cluster or 0.0)
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if nominal_cluster is None and w:
            nominal_cluster = w
        seen_w.append(w)
        body.src_w += w; body.sz_w += w; body.all_w += w          # th
    ↪ e cluster's watts in the organism
        wait = t0 + (k + 1) * step_s - time.time()

        if wait > 0:
            time.sleep(wait)
    restore_ok = True
    plants = [p for b in bodies for p in b.plants]
    for p in plants:
        p.finalize()

        restore_ok = restore_ok and (not omni or p.override == {})
    rec = {"organism": a.organism, "name": NAMES[a.organism], "arm": a
    ↪ .arm, "omni": omni, "seed": a.seed,
           "muscles": len(plants), "scale": a.scale, "steps": ORGANISM
    ↪ _STEPS, "step_s": step_s, "load_max": a.load_max,
           "demand": trace, "replicas": reps, "cluster_w": seen_w, "si

    ↪ m_writes": writes, "sim_restore_ok": restore_ok,
           "plants": [dict(p.m) for p in plants], "wall_s": round(time
    ↪ .time() - t0, 1)}
    (out / "organism.json").write_text(json.dumps(rec) + "\n")
    behind = max(0.0, time.time() - t0 - a.duration)
    rec["behind_s"] = round(behind, 1)

    (out / "organism.json").write_text(json.dumps(rec) + "\n")
    print(f"{NAMES[a.organism]} x{a.scale}, arm {a.arm}: behind the wi
    ↪ ndow by {behind:.0f} s; {len(plants)} muscles, {ORGANISM_STEPS}
    ↪ steps of {step_s:.2f} s, "
          f"replicas {min(reps)}..{max(reps)}, simulated writes {write
    ↪ s}, handed back {restore_ok}")

    return 0 if restore_ok else 2


if __name__ == "__main__":
    sys.exit(main())
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

`tools/run_pandapower.py`

249 lines.

```
#!/usr/bin/env python3
# SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0
# Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
# Evaluation and simulation use only; any commercialization, monetizat
    ↪ ion or other use requires a signed, paid
# Omni-Compass Enterprise License. See LICENSE, NOTICE and DISCLOSURES

    ↪ .md.
# All patents, copyrights and trademarks filed in the USA. www.omni-co
    ↪ mpass.com
"""Omni-Compass on top of a distribution grid's own voltage control, i
    ↪ n pandapower (docs/PANDAPOWER_PREREGISTRATION.md).

An independent, recognized simulator and data set: pandapower (Fraunho
    ↪ fer IEE and the University of Kassel; BSD) solves
the AC power flow; SimBench (the German benchmark grids, with a year o
    ↪ f 15-minute load, solar and wind profiles) gives
the grids and their year. Both are someone else's work; nothing here m
    ↪ odels the grid.

  native  the substation's on-load tap changer holds the medium-voltag
    ↪ e busbar at its setpoint (1.00 per unit) inside a
          deadband of half a tap step, one tap per step at most; solar
    ↪  and wind at unity power factor (as SimBench has
          them). This is how a utility runs it on its own.

  omni    the same tap changer, with the compass law (omnicompass/comp
    ↪ ass_law.py) on top of its setpoint: it reads the
          worst voltage margin anywhere in the grid (the bus nearest e
    ↪ ither limit, 0.95 and 1.05 per unit) and moves the
          setpoint inside [0.97, 1.03]: down while every bus has room
    ↪ (conservation voltage reduction), away from the

          nearer limit as soon as one bus nears it, and straight back
    ↪ to native at a violation. At KILL_AT of the year
          the setpoint is handed back. Every move is one whole tap; a
    ↪ move toward saving needs a full week seen under the
          present setpoint whose worst moment still leaves every bus M
    ↪ ARGIN after one more tap; a move away from a limit
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
          is at once, once the utility's tap changer has reached the p
    ↪ resent setpoint.

Scored by pandapower itself, the same grid and the same year in both a
    ↪ rms:
  energy drawn from the upstream grid (MWh), line and transformer loss
    ↪ es (MWh), bus-hours outside [0.95, 1.05],
  tap operations (wear), and the lowest and highest voltage seen.

Loads: SimBench's loads are constant power. Lowering the voltage saves
    ↪  energy only where a load draws less at a lower
voltage, so the run is made twice: with a declared ZIP mix (40% consta
    ↪ nt impedance, 30% constant current, 30% constant
power, a common residential mix) and with SimBench's own constant-powe
    ↪ r loads, where only losses can change.

  python3 tools/run_pandapower.py --grids 1-MV-rural--0-sw --out out [
    ↪ --step 4]   (step 4: hourly, every 4th quarter hour)
  python3 tools/run_pandapower.py --report-only DIR --out DIR
"""
from __future__ import annotations

import argparse
import json
import math
import sys
import time
from pathlib import Path

try:                                                    # the legal
    ↪  notice every generated report carries
    from tools.legal import stamp as _legal_stamp
except ImportError:
    import sys as _s, pathlib as _p; _s.path.insert(0, str(_p.Path(__f
    ↪ ile__).resolve().parents[1])); from tools.legal import stamp as
    ↪ _legal_stamp
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
ROOT = Path(__file__).resolve().parents[1]
sys.path.insert(0, str(ROOT))
from omnicompass.compass_law import Band, CompassLaw, clamp  # noqa: E
    ↪ 402

V_LO, V_HI = 0.95, 1.05           # the voltage limits (EN 50160 band
    ↪ , per unit)
SET_NATIVE = 1.00                 # the tap changer's own setpoint
SET_LO, SET_HI = 0.97, 1.03       # the cover Omni may move the setpo
    ↪ int in
STEP_V = 0.015                    # the setpoint moves in whole tap s

    ↪ teps (1.5%), so every change is one tap, never a hunt
MARGIN = 0.01                     # the room every bus keeps from a l
    ↪ imit, after any step Omni takes (per unit)
WINDOW_H = 168.0                  # a step toward saving needs a full
    ↪  week seen under the present setpoint (tap wear)
KILL_AT = 0.9

ZIP = (40.0, 30.0)                # constant-impedance and constant-c
    ↪ urrent shares of every load (percent), the rest power


def tap_control(net, vm, setpoint, ops):
    """The utility's own tap changer: one tap toward the setpoint when

    ↪  the busbar is outside half a tap step of it."""
    for t in net.trafo.index:
        v = vm[net.trafo.at[t, "lv_bus"]]
        half = net.trafo.at[t, "tap_step_percent"] / 200.0
        pos = net.trafo.at[t, "tap_pos"]
        if v > setpoint + half and pos < net.trafo.at[t, "tap_max"]:

            net.trafo.at[t, "tap_pos"] = pos + 1; ops[0] += 1      # a
    ↪  higher tap lowers the medium-voltage side
        elif v < setpoint - half and pos > net.trafo.at[t, "tap_min"]:
            net.trafo.at[t, "tap_pos"] = pos - 1; ops[0] += 1
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
def run_arm(code, arm, zip_loads, step):
    import pandapower as pp
    import simbench as sb
    net = sb.get_simbench_net(code)
    prof = sb.get_absolute_values(net, profiles_instead_of_study_cases
    ↪ =True)

    net.trafo["tap_changer_type"] = "Ratio"
    # ZIP loads are applied by hand, never through pandapower's own co
    ↪ nst_z/const_i columns: pandapower puts a bus's ZIP
    # shares on the bus's whole demand, solar on the same bus included
    ↪ , so the solar would draw less at a lower voltage
    # too (and the solved balance came out backwards). Here each load

    ↪ is set to p0 (z V^2 + i V + p) at its own bus
    # voltage and the flow is solved again until the voltages stop mov
    ↪ ing.
    zz, ii = (ZIP[0] / 100.0, ZIP[1] / 100.0) if zip_loads else (0.0,
    ↪ 0.0)
    lbus = net.load.bus.values

    n = len(prof[("load", "p_mw")])
    ks = list(range(0, n, step))
    kill = int(KILL_AT * len(ks))
    dt_h = 0.25 * step
    law = CompassLaw(Band(0.0, 1.0), dt=1.0, tau=3.0, kp=1.0, smooth=0
    ↪ .3) if arm == "omni" else None

    if law is not None:
        law.kd *= 3.0
    setpoint, ops = SET_NATIVE, [0]
    last_change_h, hist = 0.0, []                       # when the set
    ↪ point last moved; the margins seen since (trailing window)
    e_in = e_loss = e_load = e_gen = 0.0

    viol = steps = 0
    sp_sum, sp_log, worst_bal = 0.0, [], 0.0
    vmin_all, vmax_all = 9.0, 0.0
    t0 = time.time()
    for i, k in enumerate(ks):
        for (elm, col), df in prof.items():
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
        if elm in net and col in net[elm].columns and df.shape[1]
↪ and len(df) > k:
            net[elm].loc[df.columns, col] = df.iloc[k].values
    p0, q0 = net.load.p_mw.values.copy(), net.load.q_mvar.values.c
↪ opy()
    pp.runpp(net, numba=False)

    if zip_loads:
        for _ in range(8):
            v = net.res_bus.vm_pu.loc[lbus].values
            f = zz * v * v + ii * v + (1.0 - zz - ii)
            net.load["p_mw"], net.load["q_mvar"] = p0 * f, q0 * f
            v_before = net.res_bus.vm_pu.values.copy()

            pp.runpp(net, numba=False, init="results")
            if abs(net.res_bus.vm_pu.values - v_before).max() < 1e
↪ -5:
                break
        net.load["p_mw"], net.load["q_mvar"] = p0, q0        # the
↪  nominal draw back, for the next step's profile

    vm = net.res_bus.vm_pu
    if law is not None and i < kill:
        lo_m, hi_m = vm.min() - V_LO, V_HI - vm.max()
        now_h = i * dt_h
        hist.append((now_h, lo_m, hi_m))
        while hist and hist[0][0] < now_h - WINDOW_H:

            hist.pop(0)
        # the compass reads the worst margin now: 0 is a full marg
↪ in's room, 1 is at a limit (a violation reads past it)
        p = clamp(1.0 - min(lo_m, hi_m) / (V_HI - SET_NATIVE), 0.0
↪ , 1.5)
        F = law.force(p if min(lo_m, hi_m) >= 0 else 1.5)

        step_dir = 0
        # the utility's tap changer first has to reach the present
↪  setpoint (busbar within half a tap of it); until it
        # has, a voltage is the tap changer still travelling, not
↪ the grid asking Omni for anything
        settled = all(abs(vm[net.trafo.at[t, "lv_bus"]] - setpoint
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ) <= net.trafo.at[t, "tap_step_percent"] / 200.0 + 1e-9
                         for t in net.trafo.index)
            if not settled:
                pass
            elif lo_m < MARGIN and hi_m > STEP_V + MARGIN and setpoint
    ↪  < SET_HI - 1e-9:

                step_dir = 1                                    # the
    ↪ lowest bus nears 0.95: one tap up, at once
            elif hi_m < MARGIN and lo_m > STEP_V + MARGIN and setpoint
    ↪  > SET_LO + 1e-9:
                step_dir = -1                                   # the
    ↪ highest bus nears 1.05: one tap down, at once

            elif F <= 0 and now_h - last_change_h >= WINDOW_H and now_
    ↪ h >= WINDOW_H:
                # calm, and the whole trailing window seen under this
    ↪ setpoint: step only where the worst moment of that
                # window would still keep MARGIN after one more tap (t
    ↪ he tap moves every bus by about one step)

                lo_w, hi_w = min(h[1] for h in hist), min(h[2] for h i
    ↪ n hist)
                if setpoint > SET_NATIVE + 1e-9 and hi_w - STEP_V >= M
    ↪ ARGIN and lo_w - STEP_V >= MARGIN:
                    step_dir = -1                               # an e
    ↪ arlier raise no longer needed: back toward native

                elif setpoint > SET_LO + 1e-9 and lo_w - STEP_V >= MAR
    ↪ GIN:
                    step_dir = -1                               # cons
    ↪ ervation voltage reduction, one tap
            if step_dir:
                setpoint = clamp(setpoint + STEP_V * step_dir, SET_LO,

    ↪  SET_HI)
                last_change_h = now_h
                hist.clear()                                    # the
    ↪ window starts again under the new setpoint
        elif law is not None:
            setpoint = SET_NATIVE                               # hand
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ed back
        tap_control(net, vm, setpoint, ops)
        sp_sum += setpoint; sp_log.append((round(i * dt_h), round(setp
    ↪ oint, 3), round(float(vm.min()), 4), round(float(vm.max()), 4)))
        e_in += float(net.res_ext_grid.p_mw.sum()) * dt_h
        gen = float(net.res_sgen.p_mw.sum())

        e_gen += gen * dt_h
        e_load += float(net.res_load.p_mw.sum()) * dt_h            # w
    ↪ hat the loads drew at the voltage they saw
        bal = abs(float(net.res_ext_grid.p_mw.sum()) + gen - float(net
    ↪ .res_load.p_mw.sum())
                  - float(net.res_line.pl_mw.sum()) - float(net.res_tr

    ↪ afo.pl_mw.sum()))
        worst_bal = max(worst_bal, bal)                             #
    ↪ the solved flow must close: import + solar = load + losses
        e_loss += (float(net.res_line.pl_mw.sum()) + float(net.res_tra
    ↪ fo.pl_mw.sum())) * dt_h
        bad = int(((vm < V_LO) | (vm > V_HI)).sum())

        viol += bad; steps += len(vm)
        vmin_all, vmax_all = min(vmin_all, float(vm.min())), max(vmax_
    ↪ all, float(vm.max()))
    return {"arm": arm, "zip_loads": zip_loads, "steps": len(ks), "dt_
    ↪ h": dt_h, "energy_in_mwh": e_in,
            "losses_mwh": e_loss, "load_energy_mwh": e_load, "generati

    ↪ on_mwh": e_gen, "violation_bus_share": viol / max(steps, 1), "ta
    ↪ p_operations": ops[0],
            "vmin": vmin_all, "vmax": vmax_all, "seconds": round(time.
    ↪ time() - t0, 1),
            "restored": setpoint == SET_NATIVE, "worst_balance_mw": wo
    ↪ rst_bal, "trafos": len(net.trafo),

            "mean_setpoint": sp_sum / len(ks), "setpoint_changes": [e
    ↪ for j, e in enumerate(sp_log) if j and e[1] != sp_log[j - 1][1]]
    ↪ }


ROWS = [("load_energy_mwh", "energy the loads drew (MWh)"), ("losses_m
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ wh", "line and transformer losses (MWh)"),
        ("energy_in_mwh", "net import from the upstream grid (MWh; neg
    ↪ ative: the grid exports)"),
        ("generation_mwh", "solar and wind fed in (MWh)"),
        ("violation_bus_share", "bus-steps outside 0.95-1.05 per unit
    ↪ (share)"), ("tap_operations", "tap operations (wear)"),

        ("vmin", "lowest voltage seen (per unit)"), ("vmax", "highest
    ↪ voltage seen (per unit)"),
        ("mean_setpoint", "busbar setpoint, mean over the year (per un
    ↪ it)")]
LOWER = {"load_energy_mwh", "energy_in_mwh", "losses_mwh", "violation_
    ↪ bus_share", "tap_operations"}

def reading(k, n, o):
    if k in ("vmin", "vmax", "generation_mwh", "mean_setpoint"):
        return "shown"
    if abs(o - n) <= 1e-6 * max(abs(n), 1e-12):

        return "same"
    toward = (o < n) == (k in LOWER)                        # which way
    ↪  the number went, and whether toward its aim
    return ("lower" if o < n else "higher") + (" (toward its aim)" if
    ↪ toward else " (away from its aim)")

def report(res, out):
    L = ["# Omni-Compass on top of a distribution grid's own voltage c
    ↪ ontrol (pandapower, SimBench)", "",
         "pandapower (Fraunhofer IEE, University of Kassel) solves eve
    ↪ ry AC power flow; SimBench gives the grids and their "

         "year of measured-shape profiles. Native: the substation's ta
    ↪ p changer holding its busbar at 1.00 per unit. Omni: "
         "the compass law on top of that setpoint, inside [0.97, 1.03]
    ↪ , reading the worst voltage margin in the grid. "
         "Evidence class: an independent recognized simulator and data
    ↪  set (not our model).", ""]
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    for code, r in res.items():
        for zl in ("zip", "constant_power"):
            if zl not in r:
                continue
            n, o = r[zl]["native"], r[zl]["omni"]
            L += [f"## {code}, loads {'ZIP (40% Z, 30% I, 30% P)' if z
    ↪ l == 'zip' else 'constant power (SimBench as shipped)'}", "",
                  f"{n['steps']} steps of {n['dt_h']:g} h. Omni handed
    ↪  the setpoint back: {'yes' if o['restored'] else 'NO'}. "
                  f"Setpoint changes Omni made (hour, new setpoint, lo
    ↪ west and highest bus): {o.get('setpoint_changes', [])}; "
                  f"each change is one tap on each of the {o.get('traf
    ↪ os', '?')} substation transformers, the hand-back at "
                  f"{KILL_AT:.0%} of the year included. Worst power ba
    ↪ lance of any solved step: "
                  f"{max(n.get('worst_balance_mw', 0), o.get('worst_ba
    ↪ lance_mw', 0)):.1e} MW.", "",
                  "| | native | omni | Change | Reading |", "|---|---:
    ↪ |---:|---:|---|"]
            for k, lab in ROWS:
                ch = (o[k] - n[k]) / abs(n[k]) * 100 if abs(n[k]) > 1e
    ↪ -12 else float("nan")
                chs = f"{ch:+.2f}%" if not math.isnan(ch) else f"{o[k]
    ↪  - n[k]:+.4g}"
                L.append(f"| {lab} | {n[k]:.6g} | {o[k]:.6g} | {chs} |
    ↪  {reading(k, n[k], o[k])} |")
            L.append("")
    (Path(out) / "PANDAPOWER.md").write_text("\n".join(_legal_stamp(L)
    ↪ ) + "\n")
    print("\n".join(L))

def main(argv=None):
    ap = argparse.ArgumentParser(description=__doc__, formatter_class=
    ↪ argparse.RawDescriptionHelpFormatter)
    ap.add_argument("--grids", default="")
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ap.add_argument("--out", required=True)
    ap.add_argument("--step", type=int, default=4)
    ap.add_argument("--report-only", default="")
    a = ap.parse_args(argv)
    out = Path(a.out); out.mkdir(parents=True, exist_ok=True)
    res = {}

    if a.report_only:
        for f in sorted(Path(a.report_only).glob("*.json")):
            res[f.stem] = json.loads(f.read_text())
    for code in [g for g in a.grids.split(",") if g]:
        res[code] = {}
        for zl in (True, False):

            key = "zip" if zl else "constant_power"
            res[code][key] = {}
            for arm in ("native", "omni"):
                try:
                    res[code][key][arm] = run_arm(code, arm, zl, a.ste
    ↪ p)

                except Exception as e:                       # a grid
    ↪ an arm cannot run is reported, never left out
                    res[code][key][arm] = {"arm": arm, "error": f"{typ
    ↪ e(e).__name__}: {e}"[:600]}
                r = res[code][key][arm]
                print(f"== {code} {key} {arm}: " + (f"{r['seconds']} s

    ↪ " if "seconds" in r else f"ERROR {r['error']}"), flush=True)
            if any("error" in res[code][key][x] for x in ("native", "o
    ↪ mni")):
                del res[code][key]
        (out / f"{code}.json").write_text(json.dumps(res[code], indent
    ↪ =1) + "\n")

    report(res, out)
    return 0


if __name__ == "__main__":
    sys.exit(main())
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

APPENDIX

Appendix I. The License

The license under which this book and the software are made available, as it stands in the file `LICENSE` at the root of the repository.

```
Omni-Compass Evaluation License, version 1.0 (revised 11 October 2026)
SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0

Copyright (c) 2026 The Omni-Compass LLC. All rights reserved.
All patents, copyrights and trademarks filed in the USA. www.omni-comp
    ↪ ass.com

THIS IS NOT AN OPEN-SOURCE LICENSE. The Software is proprietary. It is
    ↪  published so that it can be evaluated, reproduced
and audited, and for no other purpose. It is licensed, not sold. Evalu
    ↪ ation and simulation are free of charge; every
other use, and in particular every commercialization or monetization o

    ↪ f any kind, requires a signed, paid Omni-Compass
Enterprise License.

ACCEPTANCE. By downloading, copying, forking, installing, running, sca
    ↪ nning or otherwise using any part of the Software,
You accept this license. If You do not accept it, You may not use the

    ↪ Software. If You use the Software on behalf of an
organization, You represent that You have authority to bind it, and "Y
    ↪ ou" includes that organization and its
Affiliates.

1. DEFINITIONS
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
1.1 "Licensor" means The Omni-Compass LLC.
1.2 "Software" means everything Licensor publishes or makes availab
 ↪ le under this license, in any form: the source
    code and any object code; the Omni-Compass engine, the compass
 ↪ law, the governors, controllers, brains, shields,

    plugs and wiring; the harnesses, tools, scripts, workflows, con
 ↪ figurations, presets, catalogs, organisms and realms;
    the documentation, the manual, the book, the specifications, th
 ↪ e preregistrations and the receipts; the benchmarks,
    data, tables, reports and Results published by Licensor; and ev
 ↪ ery update, version and copy of any of them.

1.3 "Mechanism" means the methods, processes, control laws, algorit
 ↪ hms, architectures and systems embodied in or
    described by the Software, including everything described in th
 ↪ e patent applications Licensor has filed.
1.4 "Evaluation" means internal use by You, free of charge, solely
 ↪ to test, study and assess the Software in

    contemplation of an Enterprise License: reading it; running its
 ↪  tests, verifiers, benchmarks and simulations; and
    running it in observe, watch, dry-run or shadow mode, or in a t
 ↪ est environment, on systems You own or control,
    where it writes to no system that serves production traffic, re
 ↪ al users, customers, patients or passengers, and to

    no power system, vehicle, machine or physical process outside a
 ↪  test bench.
1.5 "Simulation" means running the Software against modelled, recor
 ↪ ded or synthetic systems, including the organisms,
    realms, traces and simulators published with the Software.
1.6 "Production Use" means any use that is not Evaluation or Simula

 ↪ tion, including any use in which the Software, the
    Mechanism or any output of either controls, governs, tunes, siz
 ↪ es, schedules or otherwise influences a system that
    serves production workloads or real users, or any physical proc
 ↪ ess outside a test bench.
1.7 "Commercial Use" means any use for, or in connection with, comm
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ercial advantage, revenue, cost reduction in
       operations, or monetary or other compensation, including consul
    ↪ ting, integration, managed, outsourcing, training,
       benchmarking-for-hire and advisory services, and any use by or
    ↪ for a for-profit operation beyond Evaluation.
   1.8 "Hosted Service" means making the Software, the Mechanism or an

    ↪ y of their functionality available to any third
       party over a network or as a service, including software-as-a-s
    ↪ ervice, platform-as-a-service, a managed or
       outsourced service, a cloud marketplace offering, or a feature
    ↪ of another product or service.
   1.9 "Derivative" means any modification, adaptation, translation, p

    ↪ ort, extension or re-implementation of the Software
       or of the Mechanism, and any work that incorporates, is based o
    ↪ n, or is built using the Software as a reference.
   1.10 "Results" means the measurements, tables, receipts, logs, repo
    ↪ rts and other outputs produced by running the
       Software.

   1.11 "Enterprise License" means a written agreement for the Softwar
    ↪ e signed by Licensor and a licensee, under which
       the licensee pays the fees it sets out; it may include order fo
    ↪ rms, riders and statements of work.
   1.12 "Marks" means the names "Omni-Compass" and "OmniCompass", the
    ↪ Omni-Compass compass rose with its ring of Greek

       letters, and every related name, logo and trade dress of Licens
    ↪ or.
   1.13 "Affiliate" means any entity that controls, is controlled by,
    ↪ or is under common control with You, where control
       means ownership of more than half of the voting interests or th
    ↪ e power to direct management.

   1.14 "You" means the individual or entity exercising rights under t
    ↪ his license, with its Affiliates where the
       Acceptance paragraph above includes them.

2. WHAT THIS LICENSE ALLOWS
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
   2.1 Copyright license. Subject to Your compliance with this license
    ↪ , Licensor grants You a personal, worldwide,
       royalty-free, non-exclusive, non-transferable, non-sublicensabl
    ↪ e and revocable license to download, copy, read,
       run and modify the Software solely for Evaluation and Simulatio
    ↪ n, and to reproduce and publish Results as section

       4 allows.
   2.2 Patent license. Subject to the same conditions, Licensor grants
    ↪  You a license of the same scope, under the patent
       rights Licensor holds or will hold in the filed applications an
    ↪ d any patent issuing from them, solely to the
       extent needed to carry out Evaluation and Simulation with the S

    ↪ oftware. No patent license is granted for any
       Production Use, Commercial Use or Hosted Service, for any Deriv
    ↪ ative used outside Evaluation or Simulation, or for
       any implementation of the Mechanism other than the Software its
    ↪ elf.
   2.3 Forks. You may keep a copy or a fork of the Software on a code-

    ↪ hosting service, publicly or privately, only for
       Evaluation and Simulation, with this license and every notice i
    ↪ ntact. A fork confers no right beyond this license.
   2.4 Reservation. Every right not expressly granted is reserved by L
    ↪ icensor. No right, title, license or interest is
       granted by implication, estoppel, exhaustion or otherwise.

3. WHAT THIS LICENSE DOES NOT ALLOW

   Unless an Enterprise License expressly permits it, You may not, and
    ↪  may not let or help anyone else:
   (a) make any Production Use or Commercial Use of the Software, the

    ↪ Mechanism or any Derivative;
   (b) commercialize or monetize the Software, the Mechanism, any Deri
    ↪ vative or any Result in any way, directly or
       indirectly, including by charging for access, services, support
    ↪ , results, savings or outcomes they produce;
   (c) offer the Software, the Mechanism or any Derivative as, or as p
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ art of, a Hosted Service;
   (d) sell, resell, license, sublicense, lease, rent, lend, distribut
    ↪ e, publish as a package or binary, or otherwise
       transfer the Software or any Derivative, except forks under sec
    ↪ tion 2.3;
   (e) incorporate the Software, any part of it or any Derivative into

    ↪  any product, service, platform, appliance, image,
       firmware or offering;
   (f) use the Software, the Mechanism, the documentation or the Resul
    ↪ ts to design, build, train, tune, benchmark for
       sale, or improve any product or service that competes with Omni
    ↪ -Compass, or to re-implement the Mechanism;

   (g) use the Software or the Results to train, fine-tune or evaluate
    ↪  any machine-learning model intended to reproduce,
       imitate or substitute for the Mechanism;
   (h) remove, alter or obscure any notice, the SPDX identifiers, the
    ↪ patent and trademark notices, this license, the
       NOTICE or DISCLOSURES.md, or circumvent, disable or work around

    ↪  any limit, switch or safeguard in the Software,
       including the kill switch and the hand-back to native settings;
   (i) connect the Software so that it writes to a safety-critical sys
    ↪ tem, as section 10 describes;
   (j) use the Marks, except to refer to Omni-Compass accurately as TR
    ↪ ADEMARKS.md allows; or

   (k) use the Software in violation of any law, or in breach of secti
    ↪ on 11.

4. REPRODUCING AND PUBLISHING RESULTS

   You may reproduce the benchmarks published with the Software and pu

    ↪ blish Your own Results, provided that You: (a)
   name the Software's engine version and the exact commit You ran; (b
    ↪ ) report every measured row, the unfavourable ones
   included, with the evidence class the Software assigns to it; (c) m
    ↪ ake Your complete raw files and configuration
   available to Licensor on request; (d) do not state or imply any end
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ orsement, certification or affiliation by
   Licensor; and (e) carry the notice at the top of README.md. Publish
    ↪ ing Results is not Commercial Use so long as no
   compensation is received for it, and it grants no right beyond this
    ↪  license.

5. THE OMNI-COMPASS ENTERPRISE LICENSE

   5.1 Every Production Use, Commercial Use, Hosted Service, distribut
    ↪ ion, incorporation, OEM or embedded use, and every
       other commercialization or monetization of the Software, the Me
    ↪ chanism or any Derivative requires an Enterprise

       License, signed before the use begins and paid as it provides.
    ↪ Moving from Evaluation to Production Use requires
       an Enterprise License before the first write to any production
    ↪ system.
   5.2 An Enterprise License sets its own scope, fees, term, support,
    ↪ warranties, indemnities and limits

       (ENTERPRISE_LICENSE.md summarizes the standard terms; the signe
    ↪ d agreement alone is binding). For its licensee and
       its scope, a signed Enterprise License governs where it differs
    ↪  from this license.
   5.3 Enterprise licensing: The Omni-Compass LLC, main office infrast
    ↪ ructure, toll-free direct 1-888-339-9551, system route asset 1-8

    ↪ 88-DEX-YLL-1, landline 321-746-4411 registered in Florida, www.o
    ↪ mni-compass.com.

6. OWNERSHIP AND INTELLECTUAL PROPERTY

   6.1 Licensor and its licensors own the Software, the Mechanism, the

    ↪  Marks and all intellectual property rights in
       them, including in every Derivative to the extent it embodies t
    ↪ hem. Nothing in this license transfers ownership.
   6.2 All patents, copyrights and trademarks covering the Omni-Compas
    ↪ s engine, its mathematics and its software have
       been filed in the United States by The Omni-Compass LLC. No fil
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ ing number is stated here, and no grant,
       registration or approval is claimed; the status of every filing
    ↪  is held by the office where it was filed. Every
       person who downloads, copies, forks, scans or runs the Software
    ↪  is on notice of these filings and of this
       license (PATENTS.md, TRADEMARKS.md).

   6.3 Any use outside this license, without an Enterprise License, is
    ↪  unlicensed and infringes Licensor's copyright and
       other rights, in addition to breaching this license.

7. PATENT AND RIGHTS DEFENSE

   If You or any of Your Affiliates bring or join any claim, countercl
    ↪ aim or proceeding alleging that the Software or
   the Mechanism infringes, misappropriates or violates any patent, co
    ↪ pyright or other intellectual property right, or
   challenge the validity or enforceability of any of Licensor's right
    ↪ s in them, every license granted to You under this

   license ends automatically on the date the claim or challenge is fi
    ↪ led.

8. FEEDBACK AND CONTRIBUTIONS

   8.1 If You give Licensor comments, suggestions, ideas, reports or o

    ↪ ther feedback about the Software, You grant
       Licensor a perpetual, irrevocable, worldwide, royalty-free righ
    ↪ t to use, disclose and exploit it for any purpose,
       without obligation of any kind.
   8.2 Contributions are accepted only under the contributor license a
    ↪ greement (.github/CLA.md).

9. CHANGES

   Licensor reserves the right to change the Software, its documentati
    ↪ on, its results and these terms at any time,
   without notice. A changed version of these terms applies to every c
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ opy of the Software obtained, and to every use
   made, after it is published in the Software's repository; continued
    ↪  use after publication is acceptance of the
   changed terms. Licensor may discontinue the Software, or this licen
    ↪ se for future copies, at any time.

10. SAFETY

   The Software is not designed, tested or certified for safety-critic
    ↪ al use. Under this license it may not write to
   any system whose failure could cause death, injury, environmental d
    ↪ amage or significant property damage, including

   vehicles and aircraft, medical devices, power-grid protection and d
    ↪ ispatch, industrial safety systems and life-safety
   systems; such systems may be studied only in Simulation. Any live c
    ↪ onnection to a physical system requires an
   Enterprise License, a written safety case accepted by the system's
    ↪ owner, and every review that system's regulator or

   owner requires. The machines' own controls and protections stay in
    ↪ place; the kill switch must remain operable at all
   times.

11. EXPORT CONTROL, SANCTIONS AND LAWFUL USE

   You will comply with every export-control, sanctions, anti-corrupti
    ↪ on and other law that applies to the Software and
   to Your use of it, including the U.S. Export Administration Regulat
    ↪ ions and the sanctions administered by the U.S.
   Treasury's Office of Foreign Assets Control. You represent that You
    ↪  are not located in, organized under the laws of,

   or ordinarily resident in a country or region subject to comprehens
    ↪ ive U.S. sanctions, and that You are not on, or
   owned or controlled by a party on, any U.S. restricted-party list.
    ↪ You will not use the Software for any end use
   prohibited by those laws, including the design, development or prod
    ↪ uction of weapons of mass destruction.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
12. DATA AND PRIVACY

   The Software contains no telemetry. It sends nothing to Licensor an
    ↪ d makes no network connection of its own except to
   the systems You point it at. Your data and Your Results stay on You
    ↪ r systems and are Yours, subject to section 4. If
   You send Licensor any material (for example in an issue or an e-mai
    ↪ l), You represent that You may lawfully do so and
   that it contains no personal data or confidential information of an
    ↪ y third party.

13. THIRD-PARTY COMPONENTS

   Files that carry a different license notice (for example tests/thir
    ↪ d_party/) and third-party data sets (for example
   the PlanetLab traces under fleet/traces/ and k8s_controlplane/trace
    ↪ s/) remain under their own terms
   (THIRD_PARTY_NOTICES.md). Third-party software the Software runs on
    ↪  or connects to (Kubernetes, KEDA, Karpenter,
   NVIDIA drivers, databases and others) is licensed by its owners und
    ↪ er their own terms.

14. TERM AND TERMINATION

   14.1 This license lasts until it ends under this section or section
    ↪  7.
   14.2 It ends automatically, without notice, if You breach it. If Yo
    ↪ ur breach is Your first, was inadvertent, and is
       not a breach of sections 3(a) to 3(g) or section 10, Your lice
    ↪ nse is reinstated if You cure the breach within
       thirty days after You learn of it or after Licensor notifies Y
    ↪ ou, whichever comes first.
   14.3 Licensor may end this license for any person at any time by wr
    ↪ itten notice, and for all persons for future
       copies under section 9.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
   14.4 When this license ends, You must stop all use of the Software,
    ↪  delete or destroy every copy and Derivative in Your
        possession or control, and, on request, certify in writing tha
    ↪ t You have done so.
   14.5 Sections 1, 3, 4(b) to 4(e), 6, 7, 8, 11, 12, 15 to 18 and 19
    ↪ survive the end of this license.

15. NO WARRANTY

   TO THE FULLEST EXTENT PERMITTED BY LAW, THE SOFTWARE, THE MECHANISM
    ↪  AND THE RESULTS ARE PROVIDED "AS IS" AND "AS
   AVAILABLE", WITH ALL FAULTS AND WITHOUT WARRANTY OR CONDITION OF AN
    ↪ Y KIND, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ANY
   WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITL
    ↪ E, NON-INFRINGEMENT, ACCURACY, QUIET ENJOYMENT, OR
   THAT THE SOFTWARE WILL BE ERROR-FREE OR UNINTERRUPTED. NO RESULT IS
    ↪  A PROMISE OF ANY OUTCOME ON ANY OTHER SYSTEM;
   MODELLED RESULTS (EVIDENCE CLASS S) ARE STATEMENTS ABOUT THE MODEL,
    ↪  NOT MEASUREMENTS (DISCLOSURES.md). YOU USE THE
   SOFTWARE AT YOUR OWN RISK AND ARE RESPONSIBLE FOR ITS USE ON YOUR S
    ↪ YSTEMS.

16. LIMITATION OF LIABILITY

   TO THE FULLEST EXTENT PERMITTED BY LAW, LICENSOR, ITS MEMBERS, MANA
    ↪ GERS, EMPLOYEES, CONTRACTORS AND LICENSORS SHALL NOT
   BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL, EXE
    ↪ MPLARY OR PUNITIVE DAMAGES, OR FOR ANY LOSS OF
   PROFITS, REVENUE, SAVINGS, DATA, USE OR GOODWILL, OR ANY COST OF SU
    ↪ BSTITUTE GOODS OR SERVICES, ARISING OUT OF OR
   RELATING TO THE SOFTWARE, THE MECHANISM, THE RESULTS OR THIS LICENS
    ↪ E, UNDER ANY THEORY OF LIABILITY, EVEN IF ADVISED OF
   THEIR POSSIBILITY. LICENSOR'S TOTAL LIABILITY FOR ALL CLAIMS SHALL
    ↪ NOT EXCEED ONE HUNDRED U.S. DOLLARS (USD 100). THESE
   LIMITS APPLY EVEN IF A REMEDY FAILS OF ITS ESSENTIAL PURPOSE.
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
17. INDEMNITY

   You will defend, indemnify and hold harmless Licensor and its membe
    ↪ rs, managers, employees and contractors from and
   against every claim, loss, liability, damage, cost and expense (inc
    ↪ luding reasonable attorneys' fees) arising out of

   or relating to (a) Your use of the Software outside this license, (
    ↪ b) any Production Use, Commercial Use or Hosted
   Service without an Enterprise License, (c) Your Derivatives, (d) Yo
    ↪ ur Results as You publish them, or (e) Your
   violation of any law or third-party right.

18. U.S. GOVERNMENT END USERS

   The Software is "commercial computer software" and "commercial comp
    ↪ uter software documentation" as those terms are
   used in 48 C.F.R. 2.101, 12.212 and 227.7202. A U.S. Government end
    ↪  user acquires only the rights set out in this

   license, consistent with 48 C.F.R. 12.212 and 227.7202-1 through 22
    ↪ 7.7202-4.

19. GENERAL

   19.1 Governing law. This license is governed by the laws of the Sta

    ↪ te of Delaware and the federal laws of the United
        States, without regard to conflict-of-laws rules. The United N
    ↪ ations Convention on Contracts for the
        International Sale of Goods does not apply.
   19.2 Venue. The state courts of the State of Delaware and the Unite
    ↪ d States District Court for the District of

        Delaware have exclusive jurisdiction over any dispute arising
    ↪ out of or relating to this license, and You consent
        to their personal jurisdiction. Licensor may seek
        injunctive or other equitable relief in any court of competent
    ↪  jurisdiction, without posting a bond, to protect
        its intellectual property or confidential information; a breac
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
    ↪ h of sections 3 or 10 would cause Licensor
        irreparable harm.
   19.3 Enforcement costs. In any action to enforce this license, the
    ↪ prevailing party may recover its reasonable
        attorneys' fees and costs.
   19.4 Assignment. You may not assign or transfer this license or any

    ↪  right under it, by operation of law or otherwise;
        any attempt is void. Licensor may assign this license freely.
   19.5 Notices. Notices to Licensor go to The Omni-Compass LLC by tel
    ↪ ephone at its main office infrastructure (toll-free direct 1-888
    ↪ -339-9551; system route asset 1-888-DEX-YLL-1, landline 321-746-
    ↪ 4411 registered in Florida) or through www.omni-compass.com. Lic

    ↪ ensor may give notice to
        You through the Software's repository or at any address You ha
    ↪ ve given it.
   19.6 Severability and waiver. If any provision is held unenforceabl
    ↪ e, it is enforced to the maximum extent permitted and
        the rest of this license remains in effect. No failure or dela

    ↪ y in enforcing any provision is a waiver of it.
   19.7 Entire license. This license, with the NOTICE and DISCLOSURES.
    ↪ md, is the entire agreement between You and
        Licensor about its subject; for a licensee and its scope, a si
    ↪ gned Enterprise License governs where it differs.
   19.8 Interpretation. "Including" means "including without limitatio

    ↪ n". Headings are for convenience only. The
        English text of this license controls over any translation.
   19.9 Copies. Every copy, fork, export, report, archive or printout
    ↪ of any part of the Software must carry this
        LICENSE, the NOTICE and DISCLOSURES.md unchanged.

All rights reserved. Revision history: version 1.0 (evaluation and sim
    ↪ ulation only; first published 2026); revised
10 October 2026 (the notice in one wording everywhere); revised 11 Oct
    ↪ ober 2026 (definitions, patent license for
evaluation, hosted-service and machine-learning restrictions, results
    ↪ publication, patent and rights defense, safety,
```

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

```
export control, data, U.S. Government end users, term, cure, indemnity
    ↪ , Delaware governing law and venue).

Enterprise licensing: The Omni-Compass LLC, main office infrastructure
    ↪ , toll-free direct 1-888-339-9551, system route asset 1-888-DEX-
    ↪ YLL-1, landline 321-746-4411 registered in Florida, www.omni-com
    ↪ pass.com
```

BACK MATTER

Index

Every term of the glossary where this book defines or discusses it, every muscle family where it is named, every file of the repository and every command-line setting this book names, with the pages they stand on. A plain mention of a common word is not an entry: the index points to where a thing is explained. A term whose pages would run past its line keeps the pages that fit, where it is defined and first used; after those it is throughout the book.

-

--allow 176
--audit 207
--baseline-file 383
--batch 174, 209, 238
--batch-pace 175, 209
--brake-demand 435
--cap-deployments 174, 209, 449
--check 545
--coast-step 434
--coldstart-deployments 174, 209
--commit 498
--compass-center 175

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

--contain-namespaces 175, 209
--convey-on 209
--cooling-cmd 155, 177, 202, 211
--cpufreq-policy-root 155, 176, 238
--cruise-after 65, 68, 74, 184, 435, 448
--cruise-after-s 74, 184
--dial 523
--floor-interval 448
--floor-w 393
--give-back-only 71, 74, 75, 184
--gpu-query-cmd 211, 238
--headroom 210
--idle-demand 65
--interval 176, 210, 448
--kill-file 65, 81, 206
--latency-file 167, 174, 209
--law 175, 416
--max-nodes 54, 435, 443, 526
--min-nodes 431
--min-share 210, 383
--mode 167, 173, 175, 209, 236, 237
--n 382
--node-restore-cmd 175
--node-scale-cmd 155
--pod-reflex-writes 235
--power-cmd 155, 177, 202, 211, 238, 449
--profile 396
--rapl-cmd 155
--replica-ceiling 426, 443, 526

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

--rightsize-deployments . . . 174, 209
--rollout-guard . . . 175, 209
--security-configmap . . . 175, 209
--sensed . . . 422, 449
--sim . . . 387
--slo-clear . . . 74, 184, 207
--slo-clear-s . . . 74, 184, 223
--slo-ms . . . 158, 167, 175, 176, 557
--speed-gain . . . 210
--strict-replicas . . . 175, 210, 237
--strict-window . . . 74
--strict-window-s . . . 74, 184
--util-gate . . . 210, 383
--verdict-every . . . 74, 448
--verdict-every-s . . . 74, 184
--verdict-recheck . . . 74, 448
--verdict-recheck-s . . . 74, 184
--verdict-trial-s . . . 74, 184
--workloads . . . 546

.

.github/workflows/aks-metered.yml . . . 274, 421
.github/workflows/azure-inventory.yml . . . 441
.github/workflows/big-organism-detached.yml . . . 189, 214
.github/workflows/verify.yml . . . 513

A

Agriculture & Irrigation . . . 128, 712
AI Inference Serving . . . 123, 624
AI Training . . . 123, 146, 629

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Amendment 54, 187, 303, 304, 305, 306, 390, 391, 393, 394, 395, 396
Authority 94, 502
Automotive EV & Mobile Powertrain 127, 677
Aviation & Autonomous Flight 126, 679

B

Band 6, 204, 207, 233, 408, 417, 418, 432
benchmarks/core_evidence.py 39
benchmarks/stack_benchmark.py 149
Blockchain & Ledger Nodes 125, 523, 673
Buffer pool 89, 197, 264, 273, 341
Building & Critical Environment HVAC 130, 696

C

Cache & Memory Services 131, 721
CI/CD & Build Farms 125, 523, 675
Cloud VM & Capacity 120, 567
Commerce & Payment Systems 132, 724
Compass . . . . . x, 6, 36, 42, 68, 82, 411, 417, 426, 498, 504, 523
Container Resources 120, 573
Content Delivery & Edge Cache 133, 523, 758
Cooling; Chillers & Thermodynamics 122, 619
Cover 82, 84, 408
cpp/include/omnicompass/core.hpp 79
cpp/src/closure.cpp 216, 514
cpp/src/compass.cpp 217, 514
cpp/src/conveyance.cpp 216, 514
cpp/src/core.cpp 37, 79, 216, 514
cpp/src/governor.cpp 216, 514
cpp/src/gpu_rules.cpp 217, 514

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

cpp/src/hpa.cpp 216, 514
cpp/src/nervous_system.cpp 217, 514
cpp/src/shield.cpp 216, 512, 514
Cross-Cluster; Multi-Region & Edge 124, 633
Cruise 4, 69, 192, 435, 437
Cushion 86

D

Data Analytics & ETL 132, 727
Database & Transactions 131, 730
deploy/Dockerfile 206
deploy/install/omni-compass-cloud.yaml 71, 74
deploy/install/omni-compass.yaml 206
deploy/kind/batch-jobs.yaml 435
deploy/kind/demo.yaml 236, 425, 426
deploy/kind/loadgen.yaml 75
deploy/kind/noisy.yaml 422
deploy/kind/rbac-omni-noisy.yaml 422
deploy/kind/rbac-omni.yaml 72, 167, 175, 209, 228, 236, 237, 512
deploy/rbac-*.yaml 206
deploy/rbac-target.yaml 173, 208, 236
Distributed Cluster Managers 124, 639
District Heating & Cooling 129, 716
docs/*_PREREGISTRATION.md . . . . . xiii, 278, 280, 550
docs/ADDONS_PREREGISTRATION.md 289
docs/AZURE_SETUP.md 181, 212
docs/BENEFIT_SHEET.md 118, 253, 284, 484, 486, 488, 492, 549
docs/CANONICAL_ENGINE.md 47, 553
docs/CITYLEARN_PREREGISTRATION.md 188, 358, 536, 559

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

docs/CLAIMS_REGISTER.md 452, 519, 559
docs/COMPARISON.md 206, 529
docs/CONVEYANCE_LAW.md 478, 529, 531, 538
docs/COVERAGE_MAP.md 483
docs/CPU_POWER_PREREGISTRATION.md 164, 200, 214, 379
docs/CRUISEKUBE_PREREGISTRATION.md 15
docs/DOMAIN_MAP.md 151, 212
docs/DOSSIER.md . . . . . xxxiii, 112, 254, 514, 550, 559
docs/EVIDENCE_LEDGER.md . . . . . xxxi, xxxiii, 44, 51, 518, 559
docs/FORMAL_STATUS.md 41, 42, 52, 451, 559
docs/FORMAL_V5.md . . . . . xxi, 9, 103, 240, 246, 525
docs/GOLDILOCKS_PREREGISTRATION.md 15
docs/GPU_BENCH.md 529
docs/GPU_PREREGISTRATION.md . . . . . xxxi, xxxii, xxxiii, 16, 80, 84, 118, 275, 322, 327, 382, 383
docs/GPU_RUN_GUIDE.md 16, 211, 246, 322, 327
docs/HANDOFF.md 559
docs/handoff/mathematics/omni_compass_engine_source_c527df2d.py 79, 80
docs/history 112, 187, 289, 310, 318, 321, 327, 484, 488
docs/HISTORY.md 80, 457, 479, 550
docs/history/AMENDMENT_RISING_STEP_CAP.md 425
docs/history/BENCHMARK_REPORT.md 457, 538
docs/history/OMNICOMPASS_BUYER_EDITION.md 533
docs/history/STATE_OF_PLAY_2026-10-10.md 488, 533
docs/history/V3_KAFKA_set1.md 271, 304, 321
docs/history/V3_PGBENCH_set1.md 270, 303
docs/history/V3_PGBENCH_set2.md 304
docs/history/V3_REDIS_set1.md 272, 305, 321
docs/history/V3_ROBUST_KILL_set1.md 307, 322
docs/history/V3_ROBUST_LONG_set1.md 308

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

docs/history/V3_SYSBENCH_set1.md 200, 274, 306
docs/history/V3_SYSBENCH_set2.md 306
docs/history/V3_SYSBENCH_set3.md 307
docs/history/V3_YCSB_set1.md 273, 305
docs/history/V3_YCSB_set2.md 306
docs/HOW_TO_READ_THE_RESULTS.md 15, 239, 255, 328, 479
docs/INTEGRATION_MANUAL.md 165, 231, 383, 475, 529
docs/K8S_COMPASS_PREREGISTRATION.md . xxxi, xxxiii, 89, 181, 184, 274, 301, 310, 377, 513, 527
docs/KAFKA_PREREGISTRATION.md 190, 213, 270, 559
docs/MECHANISM_OF_ACTION.md 3, 34, 189, 411, 437, 438
docs/METAL_KIT.md 12
docs/METRICS_CATALOG.md 206, 214, 529, 553
docs/MUSCLE_CATALOG.md . . . . . xxxiii, 58, 114, 115, 117, 118, 486, 526
docs/MYSQL_PREREGISTRATION.md 89, 197, 213, 273, 306, 559
docs/OMNI_COMPASS_MANUAL.md . . . . . xxxiii, 168, 254, 488, 513
docs/OMNI_COMPASS_MANUAL.pdf . . . . . xxxiii, 488, 513
docs/OMNI_COMPASS_OWNERS_MANUAL.md 488
docs/OMNI_COMPASS_OWNERS_MANUAL.pdf 488
docs/OMNI_V1.md 168, 215, 269, 411, 488, 498, 533, 534, 559
docs/OMNI_V2.md 412, 488
docs/OMNI_V3.md 168, 276, 488
docs/OMNI_V4_PLAN.md 91, 179, 325, 377, 483, 498
docs/OMNI_V5.md 102, 379, 443, 488
docs/omni_v5/NEXT_VERSION_PLAN.md 110
docs/OMNI_V6.md 488
docs/OMNI_V7.md 2, 184, 484, 487, 527, 548
docs/OPERATOR_MANUAL.md 166, 168
docs/PANDAPOWER_PREREGISTRATION.md 188, 352, 559
docs/PILOT_PROTOCOL.md 381, 474

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

docs/POSTGRES_PREREGISTRATION.md 184, 185, 187, 213, 269, 270, 336, 343, 559
docs/PROOF_PROGRAM.md 112, 287, 548, 559
docs/REALMS.md 564
docs/REALMS_PREREGISTRATION.md . . . . . xxxi, xxxiii, 117, 328, 456, 513, 559
docs/REALM_MUSCLES.md 106, 114, 115, 117, 486, 517, 539
docs/realm_study/TRUE_MUSCLES.csv 412
docs/REDIS_PREREGISTRATION.md 190, 213, 271, 338, 559
docs/REGISTER.md 101, 106, 112, 205, 279, 287, 323, 327, 488, 548, 559
docs/RERUN_2026-10-10.md 179, 271, 324, 377, 483, 484
docs/ROBOTICS_PREREGISTRATION.md 188, 414, 559
docs/ROBUSTNESS_PREREGISTRATION.md 307, 323, 327, 441, 559, 560
docs/STATE_OF_PLAY.md . . . . . xxxiii, 115, 148, 246, 254, 492, 529, 549, 559
docs/SWARM_PREREGISTRATION.md 192, 213, 559
docs/THE_RECEIPTS.md 16, 55, 286
docs/THE_SEAT.md 9, 55, 102, 475, 524
docs/THE_SPINE.md 78, 116, 117, 118, 147, 415, 449, 486, 528, 564, 567
docs/TRACES_PREREGISTRATION.md 289, 326, 506, 560
docs/TRACKING_THEOREM.md 19, 32, 41, 42, 51, 52, 118, 267, 450, 516, 521, 553, 559
docs/TWO_WAY_NERVOUS_SYSTEM.md 532
docs/WIRING_GUIDE.md 377
docs/wiring_recipes.csv . . . . . xvii, 114, 115, 117, 163, 486, 567
docs/WIRING_VERDICTS.md 3, 166, 177, 205, 253, 255, 323, 430, 488, 549, 559
docs/YCSB_PREREGISTRATION.md 89, 195, 213, 272, 305, 559
DPU SmartNIC & Programmable IO 126, 636
Dwell 86

E

Elevators & Vertical Transport 127, 695
Energy Storage & Microgrid 128, 698

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

EVEN . . . . . xi, xv, xvii, xix, 73, 247, 248, 251, 254, 255, 327, 328, 479

F

Facility & Grid Optimization 128, 701
Fail up 83, 92, 96
Financial Markets & Trading Systems 133, 523, 759
fleet/capture/kube_capture.sh 433, 512
fleet/harness.py 216, 514
Full-cache gate 88

G

GAIN . . . . . xi, xiv, xvii, xxi, 50, 73, 222, 247, 251, 254, 255, 268, 304
GAIN in all three of our runs 304, 305, 306
Game Servers & Real-Time Interactive 125, 523, 670
Governor . . . . . x, 9, 53, 61, 63, 200, 223, 224, 225, 252, 266, 275, 307, 404
GPU Fabric & RDMA 123, 642
GPU Hardware 121, 524, 596
Grid Transmission & Distribution 130, 703
Gut: Data-plane Intake & Waste 125, 666

H

Handed back 54, 56, 240, 306
hardware/node_exchange.py 50, 177, 211
hardware/plant.py 151
hardware/site_exchange.py 49, 177, 211
Healthcare Critical Environments 128, 710
Host CPU & Memory 121, 579
HPC & Distributed Compute 123, 646

I

Idle at once 4

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Industrial PLC & Process Automation 128, 705

K

Kill switch 5, 64, 226

Knee 325

Kubernetes Dynamic Device Allocation 126, 649

Kubernetes Placement & Scheduling 120, 584

Kubernetes Workload Scaling 119, 589

L

Lease 54, 522

Linux Kernel & OS Control 124, 523, 658

LOSS . . . . . xi, xv, xvii, xix, xxi, 55, 73, 222, 240, 247, 248, 251, 254

M

Marine Propulsion & Vessel Automation 127, 694

Media Streaming & CDN 125, 523, 668

Medical Imaging & Clinical Systems 133, 754

Messaging & Streaming 131, 734

Mining & Mineral Processing 129, 714

Muscle . . . . . xx, xxxi, 2, 8, 9, 57, 62, 63, 68, 90, 102, 118, 144, 154, 160

N

Native . . . . . xix, 2, 16, 50, 52, 54, 56, 64, 77, 114, 187, 249, 250, 325

Network Routing & Switching 121, 605

No difference beyond the noise . . . . . xix, 248, 251

Node Fleet & Karpenter-Class Control 120, 600

O

Observability & Telemetry 122, 610

Off the clock 110, 252, 280

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Oil & Gas Pipelines 129, 713
Omni index 429, 533, 534
omnicompass/adapter.py 34, 35, 216, 383, 468, 514, 516, 552
omnicompass/closure.py 216, 514, 533
omnicompass/compass.py 152, 217, 231, 514
omnicompass/compass_law.py 6, 65, 82, 154, 267, 394, 515
omnicompass/configurations.py 37, 39, 40
omnicompass/conveyance.py 216, 235, 514
omnicompass/core.py 31, 37, 39, 44, 79, 80, 165, 216, 267, 514, 516, 533, 552
omnicompass/master.py 5, 65, 206
omnicompass/muscles.py 6
omnicompass/muscle_sdk.py 160
omnicompass/nervous.py 100
omnicompass/nervous_system.py 92, 94, 152, 217, 405, 514, 516, 533
omnicompass/pools.py 165
omnicompass/shield.py 216, 512, 514, 533
omnicompass/speed.py 62
omnicompass/storage.py 80, 81, 217
omnicompass/verdict.py . . . . . x, xiii, xxi, xxxi, 2, 65, 66, 71, 73, 177, 250, 269, 275, 328
omni_controller/capacity.py 73
omni_controller/controller.py 1, 36, 62, 65, 71, 154, 205, 217, 405, 416, 418, 419, 420
omni_controller/gpu_compass.py 11, 155, 275, 378, 394, 395, 396, 397, 398, 408, 417
omni_controller/gpu_governor.py 206, 217, 514
omni_controller/muscles.py 51, 62, 71, 167, 205, 404, 405
omni_controller/quota.py 71
One pedal . . . . . x, xxiii, 64, 522
OpenShift & Machine API 123, 651
Organism . . . . . xx, 106, 112, 114, 119, 122, 126, 128, 131, 133, 134, 221
Own cost 252, 307, 536

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

P

PDU; UPS & Electrical Distribution 122, 622
Pharmaceutical & Food Manufacturing 130, 720
pilot/bench_report.py 420
pilot/selfpilot.py 75
Plug 36, 154, 155, 392, 567
Ports & Maritime Logistics 133, 756
Power Generation & Turbine Control 129, 717
Power given . . . . . x, xv, xviii, xxi, xxxi, 55, 247, 249, 251, 254, 255, 268, 283

Q

Quantum Computing Control Simulation 124, 653

R

Race 395
Rail Traction & Train Control 127, 692
realms/catalog.csv 100, 117, 276, 401, 524
realms/catalog_provenance.json 412
realms/catalog_v1.csv 117, 412
realms/catalog_v5.csv . . . . . xx, 15, 100, 112, 116, 117, 118, 147, 486, 523, 562
realms/compass_arm.py 408, 414, 417
realms/compass_arm_v5.py 52, 117, 523
realms/gpu_card.py 275, 396, 397, 398
realms/harness.py 52, 117, 403, 407, 410, 411, 523
realms/muscle_cards_v5.csv . . . . . xxxi, 58, 103, 117, 486, 525, 564
realms/plants.py 52, 117, 401, 410
realms/presets.py 117, 401, 412, 522
realms/wave4_families.csv 412
Receipt 16, 160, 239, 241, 254, 279, 282, 299, 327, 382, 447, 479

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

Reliability; Security & Recovery 122, 132, 612, 761
Renewable Generation & Inverter Control 129, 718
results/BENEFIT_SHEET.json 549
results/cards_v5/CARDS.md 103
results/core_evidence.json 47, 451
results/gpu/run-*/GPU_REPS.md 153
results/gpu/run-20261002T082232Z/GPU_REPS.md 453, 455, 518, 537
results/gpu/sim/after 151, 478, 538
results/gpu/sim/before 222
results/gpu/sim/FINDINGS.md 452, 457
results/grid_v5/GRID.md 110, 117, 118, 148, 486, 548
results/grid_v6 528
results/hardware/NODE_EXCHANGE_*.json 50, 153, 216, 452, 478, 529, 538
results/hardware/SITE_EXCHANGE_*.json 153
results/hardware/SITE_EXCHANGE_HELDOUT_*.json 49, 531, 538
results/hardware/SUMMARY_HELDOUT.json 531
results/heldout_seed_* 461, 462, 463, 464, 465, 466, 467
results/hil/run-20261002T082232Z/HIL.md 537
results/live/AKS_BILL.md 427, 436, 534, 535
results/live/ALL_FOUR.md 431, 534, 535
results/live/AMENDMENT_2_RUNS.md 425
results/live/AMENDMENT_3_RUNS.md 426, 435, 535
results/live/BATCH.md 438
results/live/CAPACITY.md 422
results/live/CAPACITY_2.md 423
results/live/FAIRNESS.md 422, 435, 535
results/live/FAIRNESS_2.md 423
results/live/FAULTS.md 420, 435, 535
results/live/FAULTS_30.md 420

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

results/live/FAULTS_31.md 420
results/live/FAULTS_32.md 423
results/live/FRONT_PAGE_STATE.json 483
results/live/LIVE_LEVERS_2_NERVOUS.txt 168, 531
results/live/LIVE_PAIRED.md 168, 529
results/live/LIVE_REPS_20.md 457
results/live/LIVE_REPS_21.md 454, 456, 457, 529
results/live/LIVE_REPS_22.md 454, 456, 535, 536
results/live/LIVE_REPS_23.md 454, 518, 536
results/live/LIVE_REPS_24.md 454, 536
results/live/LIVE_REPS_25.md 453, 537
results/live/LIVE_REPS_26.md 417, 453, 537
results/live/LIVE_REPS_27.md 418, 454, 535, 537
results/live/LIVE_REPS_28.md 418
results/live/LIVE_REPS_29.md 419
results/live/LIVE_REPS_30.md 420
results/live/LIVE_REPS_31.md 420
results/live/LIVE_REPS_4_DIAGNOSIS.md 532
results/live/LIVE_REPS_PROBE_DEFECT.md 457, 532
results/live/LIVE_SHADOW_1.txt 168, 531
results/live/raw/addons-run-38725705826 72
results/live/REPLICA_ROOM.md 427, 526
results/live/SIX_KUBE.md 428, 432, 535
results/live/V1_*.md 168, 269, 533, 548
results/live/V1_AKS_*.md 277
results/live/V1_AKS_BURST.md 275, 317
results/live/V1_AKS_STEADY.md 181, 215, 245, 266, 274, 317, 376, 487
results/live/V1_ALL_FOUR.md 215, 313
results/live/V1_BATCH.md 314

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

results/live/V1_BIG_ORGANISM.md 111, 316
results/live/V1_CITYLEARN.md 320
results/live/V1_FAIRNESS.md 314
results/live/V1_FAULTS.md 313
results/live/V1_MUJOCO.md 319
results/live/V1_PANDAPOWER.md 319
results/live/V1_SIX_KUBE.md 277, 315
results/live/V1_STEADY.md 313
results/live/V1_WANDERING.md 313
results/live/V3_*.md 168, 277
results/live/V3_ALL_FOUR.md 242, 259, 268, 331
results/live/V3_BATCH.md 243, 259, 269, 333
results/live/V3_BIG_ORGANISM.md 111, 257, 316, 375, 376, 433
results/live/V3_CITYLEARN.md 245, 261, 276, 352, 353, 354, 355, 356, 357, 358
results/live/V3_FAIRNESS.md 243, 260, 269, 332
results/live/V3_FAULTS.md 243, 259, 269, 332
results/live/V3_KAFKA.md 244, 261, 271, 277, 320, 337
results/live/V3_KAFKA_SERVICE.md 320
results/live/V3_KEDA_CPU_REQUESTS.md 242, 315, 334
results/live/V3_KEDA_REQUESTS.md 242, 315, 334
results/live/V3_MUJOCO.md 245, 258, 276, 343, 344
results/live/V3_OWN_COST.md 266, 322, 497, 560
results/live/V3_PANDAPOWER.md 245, 260, 276, 278, 345, 346, 347, 348, 349, 350, 351, 352
results/live/V3_PGBENCH.md 215, 243, 261, 270, 277, 317, 335, 336
results/live/V3_REDIS.md 244, 258, 272, 286, 321, 338, 339
results/live/V3_REDIS_SERVICE.md 321
results/live/V3_ROBUST_KILL.md 244, 258, 322, 497, 560
results/live/V3_ROBUST_LONG.md 96, 244, 258, 560
results/live/V3_SIX_KUBE.md 244, 257, 316, 370, 371, 372, 373, 374, 375

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

results/live/V3_STEADY.md 242, 258, 268, 314, 330
results/live/V3_SWARM.md 246, 261, 277, 320, 359, 360
results/live/V3_SYSBENCH.md 200, 243, 261, 274, 318, 341, 342
results/live/V3_TRACE_GOOGLE2011.md 242, 260, 269, 314, 333, 560
results/live/V3_WANDERING.md 242, 259, 268, 330
results/live/V3_YCSB.md 244, 261, 273, 321, 340, 341
results/live/V5_CAPACITY.md 241
results/live/V5_GOLDILOCKS.md 15, 241
results/live/V6_*.md 485, 527
results/live/V6_KEDA_REQUESTS.md 72
results/live/V7_*.md 76, 282, 484
results/live/V7_CRUISEKUBE.md 256
results/live/V7_GOLDILOCKS.md 256
results/live/V7_KEDA_CPU_REQUESTS.md 257
results/live/V7_KEDA_REQUESTS.md 256
results/LOCK_AMENDMENTS.json 40
results/MECHANISM_IDENTITY.json 39, 44, 51, 79, 267, 450, 451
results/MECHANISM_OF_ACTION.json 35, 59
results/OMNI_INDEX.md 253, 255, 256, 266, 278, 329, 431, 500, 533, 534, 548, 559
results/PREREGISTRATION.json 39
results/realms/REALMS.md 44, 257, 276, 278, 308, 318, 414, 452, 456, 517, 539
results/realms/RELEASE_MARGIN_SWEEP.md 70, 400, 411
results/realms/stack/STACK.md 453
results/realms_v5 323
results/realms_v5/MUSCLES_V5.csv 77, 329, 360
results/realms_v5/REALMS_V5.md 55, 107, 115, 116, 118, 245, 360, 486, 523, 548
results/scale/GRID.md 253, 276, 278, 308, 318, 408, 409, 452, 456, 538
results/scale/v1/receipts/round6-1000x.md 410
results/SEAL.json . . . . . xxxiv, 37, 152, 206, 217, 267, 451, 512, 513, 515

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

results/sim/gpu_two_wire/RESULT.md 275, 452, 538
results/SOAK.json 42, 515, 531, 559
results/traces/google2011/schedule.json 445, 560
results/traces/google2011_1to9/schedule.json 445
results/TRACKING_BOUNDS.json 44, 451
results/VERIFY_RECEIPT.txt 267, 278
results/WIRING_VERDICTS.csv 254, 323, 328, 360, 549
Robotics Fleet & Warehouse Automation 126, 682
Robotics Motion Control 126, 686
Runtime & Application 132, 738

S

scripts/aks_paired.sh 277, 421, 439
scripts/amazon_queue.txt 445
scripts/azure_queue.txt 445, 447
scripts/benchmark_campaign.json 528
scripts/dispatch_grid.py 108, 115, 441, 443
scripts/google_queue.txt 445
scripts/gpu_8card.sh 398
scripts/gpu_campaign_profiles.json 528
scripts/gpu_fault_drill.sh 398
scripts/gpu_paired.sh 393, 455, 529
scripts/gpu_rented_run.sh 156, 278, 279, 394, 397, 398, 407, 518
scripts/gpu_vllm.sh 398, 399
scripts/kind_addons_cruisekube.sh 15
scripts/kind_addons_goldilocks.sh 15
scripts/kind_bench.sh 71, 74, 228, 229, 238, 417, 419, 421, 433, 442, 443, 444
scripts/kind_faults.sh 419
scripts/kind_install.sh 442

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

scripts/kind_nodepool.sh 65, 81, 167, 431, 449
scripts/kind_paired.sh 189, 214, 276, 279, 416, 433, 443, 544
scripts/kubectl_keda.py 289
scripts/latency_probe.py 169, 207, 236
scripts/pilot_shadow.sh 167, 173, 208, 236
scripts/reruns.txt . . . . . xxvii, 71, 117, 481, 484, 487, 491, 528
Search; Indexing & Vector DB 131, 742
Semiconductor Fab & Precision Manufacturing 130, 707
Serverless & Functions (FaaS) 124, 523, 662
Service Mesh & API Reliability 131, 745
Skin: Perimeter & Admission 125, 667
Slack gate 88, 414
Snapshot 94, 382
Spacecraft & Flight Software 127, 691
Speed floor 395
Storage Block/File/Object 121, 614

T

Telecom RAN & Edge Radio 133, 748
tests/fake_cluster/kubectl 165
tests/test_* 155
tests/test_active_nodes.py 81
tests/test_api_proxy.py 419
tests/test_cloud_cadence.py 78
tests/test_cloud_machines_only.py 78
tests/test_compass.py 80
tests/test_compass_arm.py 68
tests/test_compass_arm_v5.py 56, 527
tests/test_compass_controller.py 55, 69, 420, 423, 424, 426, 434, 437

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

tests/test_convey.py 81, 425, 434
tests/test_conveyance.py 49, 478
tests/test_convey_shared_host.py 78
tests/test_core_parity.py 80
tests/test_cpp_closure_parity.py 216, 514
tests/test_cpp_conveyance_parity.py 216, 514
tests/test_cpp_governor_parity.py 216, 514
tests/test_cpp_hpa_parity.py 81, 216, 514
tests/test_cpp_shield_parity.py 216, 514
tests/test_cpp_twins_parity.py 217, 514
tests/test_cruise_idle.py 435, 436
tests/test_engine_configurations.py 40
tests/test_failsafe.py 81
tests/test_gpu_compass.py 400
tests/test_living_band.py 234
tests/test_muscles.py 55, 81
tests/test_muscle_sdk.py 163
tests/test_nervous_system.py 99
tests/test_node_exchange.py 50
tests/test_node_release_gate.py 68, 99
tests/test_omni_controller.py 55
tests/test_quota_convey.py 78
tests/test_shield_properties.py 42, 267, 531, 559
tests/test_staging_order.py 67
tests/test_time_correct.py 78
tests/test_two_way.py 99
tests/test_verdict.py 78
tests/test_verdict_interval.py 74, 78
tests/third_party/hpa_independent.py 505

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

The runs disagree . . . . . xix, 248, 251, 254, 328, 479
tools/benefit_sheet.py 255, 284, 549
tools/citylearn_abc.py 188, 545
tools/confirm_abc.py 55, 277, 445, 549, 561
tools/cpu_power_abc.py 202
tools/declare_envelope.py 393
tools/dossier.py 267, 549, 550, 561
tools/front_page.py 483
tools/gpu_baseline.py 383
tools/gpu_reps.py 47, 51, 149, 390, 455, 519
tools/gpu_wire_check.py 278, 395
tools/gpu_workload.py 176, 383, 385, 389
tools/grid.py 278
tools/kafka_abc.py 545
tools/knob_verdict.py 166, 177, 324, 377, 378, 379, 549
tools/layout_check.py 171, 549
tools/legal.py 229, 549
tools/live_reps.py 149, 151, 181, 214, 276, 279, 282, 417, 419, 422, 425, 439
tools/llm_workload.py 398
tools/mechanism_identity.py 39
tools/mujoco_abc.py 188, 545
tools/omni_index.py 278, 430, 549, 560, 561
tools/omni_version.py 52, 187, 228, 277, 507, 521, 549, 561
tools/own_cost.py 549
tools/pandapower_abc.py 188, 545
tools/pgbench_abc.py 545
tools/pod_report.py 424
tools/pool_scale.py 278
tools/readings.py 55, 73, 239

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

tools/realms_catalog.py 401, 407, 412, 414
tools/realms_catalog_v2.py 412
tools/realm_muscles.py 118
tools/redis_abc.py 545
tools/release_manifest.py 278, 515, 549
tools/run_citylearn.py 187
tools/run_cpu_power.py 200
tools/run_gpu_card.py 396, 397, 400
tools/run_hil.py 115, 399, 401, 407, 427
tools/run_kafka.py 190, 277
tools/run_kil.py 110, 148, 277, 280, 427, 428, 433
tools/run_mujoco.py 188
tools/run_pandapower.py 188, 278
tools/run_pgbench.py 184, 277
tools/run_realms.py 278
tools/run_realms_v5.py 115, 415, 527
tools/run_redis.py 190, 277
tools/run_scale.py 115, 119, 278, 416
tools/run_stack.py 407
tools/run_swarm.py 192, 277
tools/run_sysbench.py 95, 197
tools/run_ycsb.py 195
tools/six_kube_report.py 277, 428, 442
tools/strip_reference.py 79
tools/swarm_abc.py 545
tools/toy_gate.py 75, 498
tools/tracking_bounds.py 44
tools/tune_cards.py 57, 103, 525, 564
tools/wall_meter.py 149, 222

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

tools/wiring_verdicts.py 323, 328, 430, 549
Tuning case 326
tuning/bound.py 532
tuning/B_FIX.json 530
tuning/B_TONE_HELDOUT.json 530
tuning/CONFIRMATORY.json 530
tuning/CONFIRMATORY_COORD.json 530
tuning/PLANETLAB_LEAGUE.json 530
tuning/SITE_LEAGUE.json 530

V

Verdict 2, 36, 73, 75, 88, 176, 177, 250, 304, 305, 306, 310, 323
Virtualization & Hypervisor 125, 523, 664

W

Water Wastewater & Pumping 130, 708
Wire check . . . . . xvii, 156, 159, 204, 220, 395
Work Admission & Demand Shaping 122, 657
Work per energy 106, 250, 500
Workflow; Logistics & Fulfillment 132, 751

BACK MATTER

Contact

Licensing, pilots, evaluations and the Omni-Compass Enterprise License:

The Omni-Compass LLC

Owner and developer: AJ Dubra

Main office infrastructure: toll-free direct 1-888-339-9551, system route asset 1-888-DEX-YLL-1

Landline, registered in Florida: 321-746-4411

© 2026 The Omni-Compass LLC. All rights reserved. Evaluation and simulation use only.
All patents, copyrights and trademarks filed in the USA.

www.omni-compass.com

Repository: github.com/The-Omni-Compass-LLC/The-Omni-Compass

Any use beyond evaluation and simulation requires a signed, paid Omni-Compass Enterprise License. Write to The Omni-Compass LLC before any production use.

© 2026 The Omni-Compass LLC. All rights reserved. **Evaluation and simulation use only.** Any commercial use, commercialization, monetization, production use, redistribution or hosted service of any part of Omni-Compass requires a signed, paid Omni-Compass Enterprise License from The Omni-Compass LLC. Every copy, export, report and printout carries this notice with `LICENSE`, `NOTICE` and `DISCLOSURES.md`. `SPDX-License-Identifier: LicenseRef-OmniCompass-Evaluation-1.0` All patents, copyrights and trademarks filed in the USA. www.omni-compass.com